
MILITARY SPECIFICATION SHEET

KNOBS, CONTROL, ROUND, EDGE LIGHTED AND NON-EDGE LIGHTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the knobs described herein shall consist of this specification and the latest issue of MIL-K-3926.

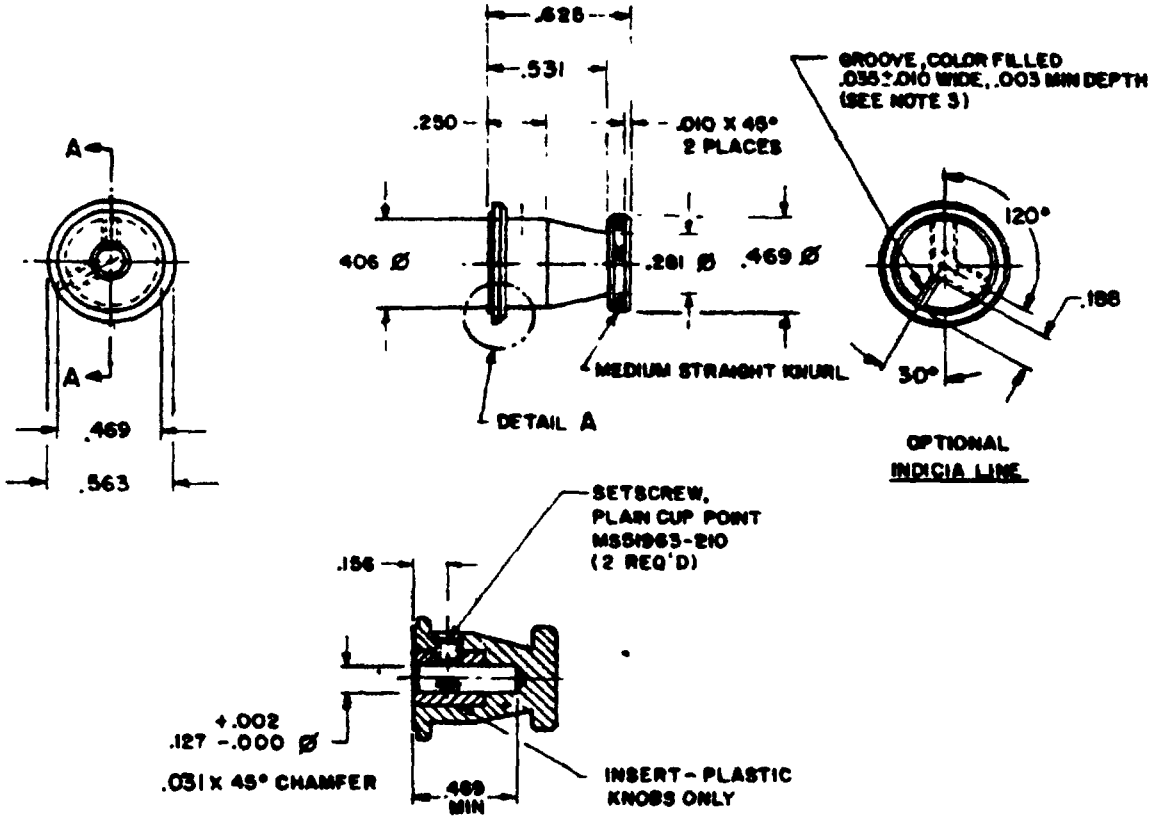


SECTION A-A

FIGURE 1. DIMENSIONS AND CONFIGURATIONS.


FSC 5355

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.

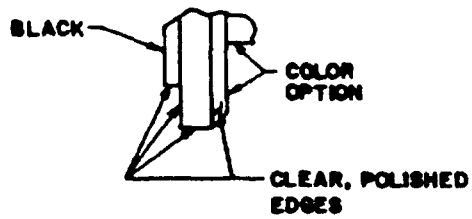

FOR EDGE LIGHTED

DIMENSIONALLY THE SAME AS NON EDGE LIGHTED PRIOR TO FINISH. (SEE REQUIREMENTS 2 AND 3)

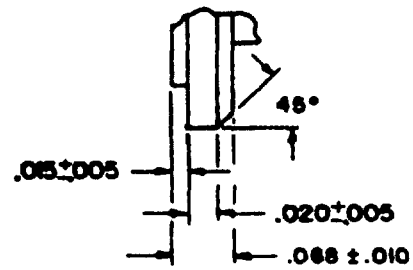

FOR NON EDGE LIGHTED

DETAIL A

FIGURE 1. DIMENSIONS AND CONFIGURATIONS. - CONTINUED

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016, angles ±0° 30'.
3. Radii in groove corners are .016 max.

TABLE I. PART DESCRIPTION CODE LETTERS.

MATERIAL CODE	STYLE CODE	COLOR CODE	INDICIA CODE
A - Aluminum P - Plastic and Aluminum	1 - Edge lighted 2 - Non-edge lighted	B - Black G - Gray M - Metal, natural	0 - No marking 1 - White line 2 - Black line
A	2	B	0 OR 1
		G	
		M	0 OR 2
P	1	B	0 OR 1
	2	B	0 OR 1
		G	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Insert: Metal
   Knob: Aluminum alloy or thermoplastic
   Setscrews: Alloy steel

2. Construction Options. The non-edge lighted style may be of an all aluminum, all plastic, or of an aluminum/plastic combination construction. The edge lighted style may be of an all plastic construction or may have an aluminum body with an inseparable plastic skirt. Knobs with plastic bodies must have molded-in metal inserts.


3. Finish. Unless otherwise specified, protective finishes and coatings shall be in accordance with MIL-F-7179, Type I.
   Knob, plastic, edge lighted: Black coating over white with clear edges polished to transmit 20% ±25% of the light emitted from a .531 inch diameter light source.

4. Color. Unless otherwise specified, colors shall be in accordance with FED-STD-595.
   Black lusterless, color number 37038
   Gray lusterless, color number 36231
   White lusterless, color number 37875

5. Qualification shall be restricted to parts tested in accordance with MIL-K-3926.

6. Part Number. The part number consists of the letter "M", the basic number of this specification sheet, followed by material, style, color and indicia codes from Table I.

Example; M3926/4-P1BO

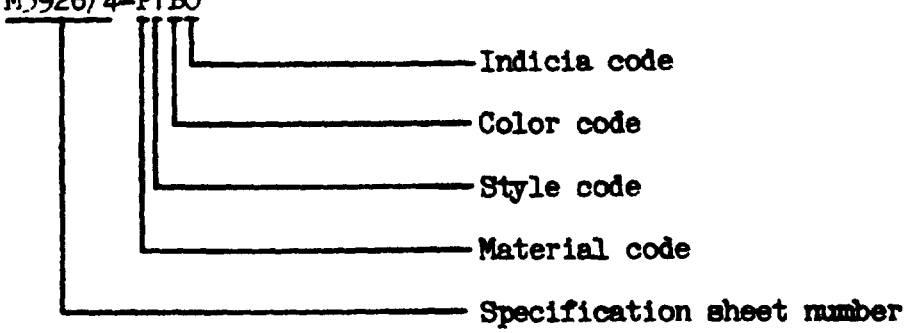

M3926/4-P1BO = Knob, control, round, plastic skirt and aluminum body, edge lighted, black, no marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AR, AT, AV, EA, ME
Navy - AS, SH
Air Force - 82, 99
DLA - IS

User activities:
Army - AR
Navy - CG, MC, OS

Agent:
DLA - IS

Preparing activity:
Air Force - 11

(Project 5355-0161)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.