MIL-STD-1132A
23 March 1976
SUPERSEDING
MIL-STD-1132
5 June 1968

MILITARY STANDARD

SWITCHES AND ASSOCIATED HARDWARE, SELECTION AND USE OF

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE

Washington, DC 20301

Switches and Associated Hardware, Selection and Use of

MIL-STD-1132A

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to Commander, Naval Electronic Systems Command, Attn: ELEX 5043, Department of the Navy, Washington, DC 20360.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard provides selected standard switches and associated hardware which are mandatory for use in the design of military equipment.

The application information contained in this standard is offered for guidance only and is not to be considered as mandatory. Additional application information will be added when coordinated with the three military departments.

Additional sections of this standard will be developed as the standard switches and associated hardware of a given specification family are selected and coordinated with the three military departments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph 1.		SCOPE	1
	1.1	Scope	1
	1.2	Purpose of standard	1
2.		REFERENCED DOCUMENTS	2
3.		DEFINITIONS	3
4.		GENERAL REQUIREMENTS	6
	4.1	Choice of switch types and associated hardware	6
	4.2	Conflict of requirements	6
	4.3	Criteria for inclusion in this standard	6
5.		DETAILED REQUIREMENTS	7
6.		APPLICATION INFORMATION	8
	6.1	General	8
	6.2	Principal applications	8
	6.3	Switch selection	9
	6.4	Switch parameters	10
	6.5	Environmental considerations	11
7.		SUPPLEMENTARY INFORMATION	13
	7.1	Drawing notes	13

SECTIONS

Section 100	SWITCHES	100.1
200	ASSOCIATED SWITCH HARDWARE	200.1

CROSS REFERENCE
(Section number to specification number)

Switches

Section		Applicable specification(s)
101	(Reed)	MIL-S-55433
102	(Push button, Illuminated)	MIL-S-22885
103	(Interlock)	MIL-S-8805
104	(Multistation)	MIL-S-24317
105	(Pressure)	MIL-S-9395
106	(Push Button)	MIL-S-8805
107	(Rotary)	MIL-S-3786, MIL-S-6807, and MIL-S-15291
108	(Rotary, Electro-Mechanical Actuated, Solenoid Type)	MIL-S-3786
109	(Rotary, Printed Circuit, Thumbwheel and Pushbutton)	MIL-S-22710
110	(Sensitive)	MIL-S-8805
111	(Thermostatic)	MIL-S-24236
112	(Toggle)	MIL-S-3950, MIL-S-8834, and MIL-S-8805
113	(Modular Switch Assemblies)	MIL-S-22885

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

CROSS REFERENCE
(Section number to specification number)

Associated Switch Hardware

Section		Applicable specification(s)
201	(Actuators)	MIL-S-8805
202	(Boots and Panel Seals)	MIL-B-5423 and MIL-S-22885
203	(Color Filters)	MIL-S-22885
204	(Guards)	MIL-G-7703

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard establishes requirements for selection of switches and their associated hardware, shown in detail in sections 100 and 200, for use in military equipment. Included are the following:

(a) Selected standard switch types and associated hardware chosen jointly by the Departments of the Army, the Navy, and the Air Force for use in the design and manufacture of military equipment under the jurisdiction of the Department of Defense.

(b) Guides for the choice and application of switches and associated hardware for use in military equipment.

Complete detailed requirements for switches and associated hardware listed in this standard are covered in the applicable specification sheets or MS sheets (see 4.2). (The complete part number or type designation, and the number of the applicable specification sheet or MS sheet should be referenced in procurement documents for the switches or associated hardware.) When it has been determined that circuit requirements cannot be met by using the switch styles or characteristics listed in this standard, the design engineer with the approval of the cognizant military activity should select from the applicable switch specification, styles or characteristics not listed herein.

1.2 Purpose of standard. The purpose of this standard is to:

(a) Provide the equipment designer with a list of switches and their associated hardware that are considered to be the most flexible for military applications.

(b) Control and minimize the variety of switches used in military equipment in order to facilitate logistic support of the equipment in the field.

(c) Establish criteria pertinent to the choice, application, and use of switches and their associated hardware in military equipment.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the currentversion before use.

2. REFERENCED DOCUMENTS

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-3786	-	Switches, Rotary (Circuit Selector, Low-Current Capacity), General Specification For.
MIL-S-3950	-	Switches, Toggle, Environmentally Sealed, General Specification For.
MIL-B-5423	-	Boots, Dust and Water Seal (For Toggle and Pushbutton Switches, Circuit Breakers, and Rotary-Actuated Parts), General Specification For.
MIL-S-6807	-	Switches, Rotary, Selector Power, General Specification For.
MIL-G-7703	-	Guard, Switch, General Specification For.
MIL-S-8805	-	Switches and Switch Assemblies, Sensitive and Push (Snap Action), General Specification For.
MIL-S-8834	-	Switches, Toggle, Positive Break, General Specification For.
MIL-S-9395	-	Switches, Pressure, (Absolute, Gauge and Differential) General Specification For.
MIL-S-15291	-	Switches, Rotary, Snap Action.
MIL-S-22710	-	Switches, Rotary, (Printed Circuit), (Thumbwheel, Inline, and Pushbutton), General Specification For.
MIL-S-22885	-	Switch, Push Button, Illuminated, General Specification For.
MIL-S-24236	-	Switches, Thermostatic, (Metallic and Bimetallic) General Specification For.
MIL-S-24317	-	Switches, Multistation, Pushbutton, (Illuminated and Non-Illuminated), General Specification For.
MIL-S-55433	-	Switches, Reed, General Specification For.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 A list of terms used in this standard which are commonly used in switch engineering practice and generally accepted by the electrical and electronic industries are as follows:

(a) Actuating force. The force applied to the actuator to operate the contacts.

(b) Ambient temperature. The temperature of the air or liquid surrounding any object, neglecting small localized variations.

(c) Angle of throw. The number of degrees of rotation through which the shaft travels in moving from one position of the switch to the next consecutive position.

(d) Bent contact (clip 1/). A contact whose terminal lug is bent at an angle away from the stator.

(e) Insulated contacts (clips 1/). Contacts mounted back to back on opposite sides of the stator by the same fastener but electrically insulated from each other. This is usually accomplished by the use of special contacts and an insulating washer.

(f) Long contact (clip 1/). Normally used to contact the inner level of the rotor contact and function as a common to all other contacts for any one pole.

(g) Reverse bend contact (clip 1/). A contact whose terminal lug is bent toward the opposite side of the stator from the side on which the contact is mounted.

(h) Short contact (clip 1/). Normally used to contact the outer level of the rotor contact and thereby complete an electrical circuit of any one pole in a specified position of the switch.

(i) Stator contact (clip 1/). A stationary conducting member mounted on the stator. Normally the terminal is an integral part of the contact and has a solder lug termination.

(j) Straight contact (clip 1/). A contact whose terminal lug extends on the plane of the stator.

(k) Bi-directional rotation. Switch shaft may be operated either clockwise or counterclockwise.

(l) Break-before-make contact (nonshorting). Contact which interrupts one circuit before establishing another.

(m) Make-before-break contact (shorting). Contact which establishes the new circuit first, before interrupting the previous one.

(n) Common contact or collector. Also called "pole terminal". The contact which is common to all other contacts in any one pole throughout the full travel of the switch actuator.

(o) Contact arrangement. The circuitry of the switch; also the arrangement of terminals and contacts on a switch section.

(p) Contact resistance. The resistance of a pair of closed contacts as measured from terminal to terminal. This includes the circuit resistance of the individual contact members.

(q) Contact voltage drop. The voltage drop across a pair of closed contacts as measured from terminal to terminal.

1/ Clips applicable only to open construction switches.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

(r) Cycle of operation. A cycle of operation is the movement of the actuating means through the entire range of its travel, causing the switch contacts to change from one position to all other positions and then return to their original position.

(s) Dummy lug. A tie-point lug insulated from the switching contacts.

(t) Dusttight. An enclosure which prevents entry of dust. No ventilation or other openings are permitted in the enclosure.

(u) Enclosed switch. Switch having all contacting surfaces enclosed by some type of housing. (This does not necessarily imply an hermetic seal.)

(v) Hermetic seal. Hermetic seal results from fusing metal-to-metal, ceramic-to-metal, or glass-to-metal only.

(w) Movement differential. The distance or angle which the actuator travels from the operating position to the releasing position.

(x) Overtravel. The distance in inches or degrees between the operating position and the extreme position to which the actuator may be moved.

(y) Pole. An individual electrical circuit within a switch (the common contact plus the selected contacts). The portion of the switch that controls one line of one circuit.

(z) Pole terminal. See (n).

(aa) Pretravel. The distance or angle through which the actuator moves from free position to operating position.

(ab) Releasing force or torque. The value to which the force or torque on the actuator must be reduced to permit the contacts to return to the unoperated position after operation.

(ac) Resilient seal. An enclosure seal, other than hermetic seal, whose leakage rate shall not exceed a specified value.

(ad) Rotor. The moving insulating portion of the switch section.

(ae) Rotor contact or rotor blade or rotor wiper. The moving conducting member, mounted on the rotor.

(af) Section. That part of a switch complete in itself except for means of operating it, and consisting of a rotor and stator assembled as a unit with stationary and moving contacts.

(ag) Sensitive switch. A switch having a snap action, microgap mechanism which is operated directly by a defined force through a definite travel. The resultant contacting action shall be such that the speed of the moving contacts is independent of the speed of the actuator.

(ah) Shaft. A journaled member which drives the rotating members of the switch. This shaft may be made of one or more pieces so arranged as to operate essentially as one piece.

(ai) Shelf life. That period of time after manufacture that the switch may remain in storage without deteriorating beyond certain predetermined limits.

(aj) Shorting type switch. Also called make-before-break. When switching from one position to the next, the second contact is made before breaking contact with the first.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

(ak) Non-shorting type switch. Also called break-before-make. When switching from one position to the next, the first contact fully breaks before the second contact is made.

(al) Spring force. The force which the actuating mechanism exerts at the maximum pre-travel position. (The minimum spring force permissible will be equal to the maximum actuating force permitted for the push or sensitive switch used.)

(am) Stator. The stationary insulating portion of the switch section.

(an) Switch life. The number of cycles of operation during which the electrical and mechanical performance will meet predetermined and stated life-limiting criteria.

(ao) Switch rating. The load-carrying-and-breaking ability of a switch. (The current rating in the title is usually the resistive load rating at the lowest dc voltage.)

(ap) Terminal lug. The lug extending outward from the switch used for attaching the external connections.

(aq) Watertight. An enclosure which prevents leakage when water strikes or covers enclosure. No ventilation or other openings are permitted in the enclosure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Choice of switch types and associated hardware. The equipment designer should consider the following characteristics and parameters in choosing the most suitable switch design and associated hardware design:

(a) Application (type of switch).
(b) Flexibility of circuitry.
(c) Type of action.
(d) Electrical data (contact ratings, etc.).
(e) Type of contacts.
(f) Environmental capabilities such as shock and vibration.
(g) Mechanical data and safety features.
(h) Panel layout.
(i) Quality and reliability.
(j) Economics.

4.1.1 Procurement information. After a preliminary selection of the desired switch or associated hardware has been made, reference should be made to the applicable specification and qualified products list. Procurement documents for switches or associated hardware shall reference the applicable specification sheet or MS sheet, and the complete part number, style, or type designation.

4.2 Conflict of requirements. After selection of a particular switch type or associated hardware from this document, the design engineer should refer to the applicable specification sheet or MS sheet for any technical conflicts. In the event of a conflict between the technical requirements described in this standard and those of the applicable specification sheet or MS sheet, the latter shall govern.

4.3 Criteria for inclusion in this standard. The criteria for the inclusion of switch types and associated hardware in this standard are as follows:

(a) The switch and associated hardware shall be the best type available for general use in military equipment.
(b) Switches and associated hardware shall be covered by military specifications (see 2.1).
(c) Switches and associated hardware shall be listed on a qualified products list.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for standard switch types and associated hardware are contained in the applicable specification, and in the applicable section of this standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

6. APPLICATION INFORMATION

6.1 General. The application information in this standard is intended to help the engineer select the switches and associated hardware he will specify. (The application information pertaining to specific switch types is contained in the applicable section of this standard.) The most important thing a user must decide is which of the numerous types of switches and associated hardware will be the most suitable for use in the particular military equipment he is designing. Proper selection, in its broadest sense, is the first step in building reliable equipment. To effectively and properly select the switches and associated hardware to be used, the user must know as much as possible about the types from which he can choose. He should know the advantages and disadvantages, the behavior under various environmental conditions, construction, the effect upon the circuit, and the effect of the circuit upon the switch. He should know what causes switches to fail. He should have also an intimate working knowledge of the applicable military specification.

6.1.1 Switch types. All switches of the types widely used in electronic equipment can be grouped into one of three general basic types. They are rotary, non-rotary, and sensing types. These basic types differ from each other in size, cost, actuation, construction, and general characteristics. Some are better than others for a particular purpose; no one type has all of the best characteristics. The choice among them, therefore, depends on the requirements, both initial and long-term, the environment in which they must exist, and numerous other factors which the designer must understand. The designer must realize that the summaries of the following general characteristics and cost are relative, not absolute, and that all the requirements of a particular application must be taken into consideration and compared with the advantages and drawbacks of each of the several types, before a final choice is made.

6.2 Principal applications:

(a) MIL-S-3786 - Switches, Rotary. Used primarily for low-power, alternating current (ac) or direct current (dc) switching applications (capable of making and breaking a resistive load of 2 amperes or less). Includes both manually and solenoid actuated switches.
(b) MIL-S-3950 - Switches, Toggle, Environmentally Sealed. Used where simple make-and-break actions are required, and are suitable for use on ac and dc circuits.
(c) MIL-B-5423 - Boots, Dust and Water Seal. Used on toggle, push-button, and rotary switches to protect the switch-actuating mechanism from sand, dust, water, and other contaminants, and to seal the panel on which the switches are mounted.
(d) MIL-S-6807 - Switches, Rotary, Selector Power. Used in power circuits capable of making, carrying, and breaking electrical loads of 10 amperes or less.
(e) MIL-S-8805 - Switches and Switch Assemblies, Sensitive and Push (Snap Action). Used in ac and dc applications, where predetermined small and accurately controlled characteristics are required. Various means of actuation by toggle levers, pushbuttons, cams, and other light pressure devices. These switches have snap-action which eliminates teasing.
(f) MIL-S-8834 - Switches, Toggle, Positive Break. Used in ac and dc circuits where a positive make-and-break action is required. Positive break actuation causes minimum contact "tease".
(g) MIL-S-9395 - Switches, Pressure. Used primarily to detect changes in pressure, liquid and gas applications.
(h) MIL-S-15291 - Switches, Rotary, Snap Action. Used in high current circuitry capable of making and breaking 10 - 200 amperes, 120 - 250 volts dc, 125 - 500 volts ac, utilizing snap action positioning mechanism.
(i) MIL-S-22710 - Switches, Rotary, (Printed Circuit), (Thumbwheel, Inline, and Pushbutton). Used primarily for low power ac or dc switching applications. Thumbwheel switches provide a numerical or other legend readout tied to a particular switch position. Also provided for is logic circuitry for computer operation.
(j) MIL-S-22885 - Switch, Push Button, Illuminated. Used as panel displays and switching devices in ac and dc applications. Panel displays include various combinations of colors and legends.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

(k) MIL-S-24236 - Switches, Thermostatic (Metallic and Bimetallic). Used primarily in ac and dc applications where temperature protection or accurate temperature control of an enclosure is required.
(l) MIL-S-24317 - Switches, Multistation, Pushbutton (Illuminated and Non-Illuminated). Used as panel displays and switching devices in ac and dc applications.
(m) MIL-S-55433 - Switches, Reed. Used in circuits as a separate element where magnetically-actuated, hermetically sealed switch contacts are required. These reed switches are capable of millions of operations and operations with low-level (dry circuit) loads.

6.3 Switch selection. The designer, in selecting a switch type for a particular function to be performed, must weigh numerous factors before coming to a final decision. Selection normally starts with the most important characteristic for the application, then selecting and compromising other characteristics.

6.3.1 Selection factors. Some of the most important of these factors are noted below:

(a) Design and construction:

(1) Open or enclosed construction.
(2) Sealed (hermetically, environmentally (resilient), dust-tight, water-tight, explosion).
(3) Mounting (bushing, multihole, mounting bracket, mounting plate).
(4) Illuminated or non-illuminated.

(b) Operating characteristics:

(1) Actuation - pushbutton, toggle, rotary, sensing.
(2) Switching action - momentary action, maintained action, alternate action, snap action.

(c) Contacts:

(1) Type of contacts and contact arrangement.
(2) Contact ratings - resistive, inductive, lamp, motor, low-level (dry circuit), and frequency.
(3) Contact bounce time.
(4) Contact resistance.
(5) Make-before-break, break-before-make; shorting or non-shorting contacts.

(d) Environmental considerations:

(1) Temperature range.
(2) Moisture.
(3) Altitude.
(4) Shock and vibration.
(5) Acceleration.
(6) Sand and dust.
(7) Explosion.

(e) Insulation requirements:

(1) Insulation resistance.
(2) Breakdown voltage.

(f) Switching speed:

(1) Actuation speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

(g) Life:

(1) Mechanical.
(2) Electrical at elevated temperature.

(h) Terminals:

(1) Solder.
(2) Screw.
(3) Wire.
(4) Plug-in termination.
(5) Integrated wire termination.
(6) Printed-circuit board terminations.

6.4 Switch parameters.

6.4.1 Design and construction.

(a) Design. Design of the switch, related to available space, mounting dimensions, handling of the actuating element, type of connections to the switch, and aspects relating to ruggedness and safety, is an important selection factor.
(b) Construction. Many types of enclosures are available to protect the switch from external conditions, particularly high humidity and dirt. Switches may be classified according to the degree of protection offered by the enclosure. Such classifications include the following: Open, sealed, enclosed, environmentally (resilient), and hermetically sealed. With the open construction switch, no effort is made to protect the switch or its parts from atmospheric conditions. The enclosed switch is one in which the contacts are enclosed in a closed case made of plastic or metal and plastic. The environmentally (resilient) sealed switch is one in a completely sealed case where any portion of the seal is a resilient material such as a gasket or a seal in the bushing of a panel-mounted switch. The hermetically sealed switch is made airtight by a sealing process which involves fusing or soldering and does not use a gasket. The hermetically sealed enclosure offers the greatest protection because it insulates against such elements as moisture, harmful gases, and dirt. It also eliminates the increased arcing by low atmospheric pressures at high altitudes.

6.4.2 Contacts. The contacts which carry the electrical load can be classified by function, current-carrying capacity, and application. The contact arrangements vary in complexity from a simple make or break, through make-before-break, break-before-make, make-make, break-break, etc, and from single throw to multiple throw, and single pole to multipole and various combinations of these features.

6.4.2.1 Contact ratings. Contacts are usually given multiple ratings dependent on the type of load being switched. These ratings consist of resistive, low-level (dry circuit), lamp, motor, or inductive loads. Most switches are given the resistive load rating and in most instances at least one additional of the above ratings.

6.4.2.2 Contact operate and bounce times. In many applications, critical operate and bounce times of the contacts are important. Operate time in a double-throw switch is defined as the time it takes the moving contact to separate from the normally closed contact, travel to the normally open contact and make the circuit (this does not include bounce time). Bounce time is the interval between first make of the contact until the uncontrolled making and breaking of the contact ceases. In many electronic circuits, a millisecond is a long time and operate and bounce times become critical parameters.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the currentversion before use.

6.4.2.3 Contact resistance. Contact resistance is the resistance between two electrical contacts in contact with each other, when measured at their external terminals and is a measure of the power that will be dissipated through the contacts. Contact resistance includes the resistance of the contact material, of any oxide or other film on the surface of the contacts, and the resistance of the elements on which the contacts are mounted (eg, springs, mounting, and the terminals and their connections).

6.4.2.3.1 Low-level (dry circuit) applications. These applications require switch contact resistance ratings based on testing, which uses an open-circuit voltage of 30 millivolts maximum and a test current of 10 milliamperes maximum, such as in method 311 of MIL-STD-202. In order to achieve low-level load capability to meet such test requirements, switch suppliers either use contact materials such as gold, platinum, or palladium (or their alloys) to minimize formation of insulating films on the contacts, or they design the switch contacts so that they wipe across each other to remove such films. Other considerations which switch suppliers observe are to provide internal designs which do not allow rubbing of insulated parts against metal, which generates dust particles internally; and to adequately seal the switch contacts from external dust and foreign matter. Either of these phenomena can cause switch failures due to foreign particles being deposited on the switch contacts. These are design details which should not be specified in selecting switches. Instead, the proper test and performance requirements before and after life tests, should be the basis for selection of switches.

6.4.3 Insulation resistance. Insulation resistance is important in high impedance circuits. Low insulation resistance in a high voltage circuit may result in excessive dissipation within the dielectric leading to ultimate failure. For applications where arc-over is a problem, switches should be selected which have a high insulation resistance (1,000 megohms or more and 5 megohms or more immediately after the moisture resistance test, while still wet). Such rated insulating materials will not form a conducting surface film, which may build up after repeated arcs on making and breaking of contacts, and lead to eventual flashover.

6.4.4 Life operations for total life. A careful analysis of the required life of the switch or total number of operations should be made. In some equipment, the operational life of the switch can be comparatively short.

6.5 Environmental considerations.

6.5.1 Temperature.

(a) Variations of temperature must be considered, as moisture condensation within the switch could develop. In choosing a switch for a wide range of temperature, the entire temperature range must be carefully considered rather than only one extreme.
(b) Exposure to low temperature may cause certain materials of a switch to contract, thus causing cracking, permitting moisture or other foreign matter to enter the switch causing short circuit, voltage breakdown, or corona.
(c) Chemical action to which switches are subjected is accelerated by high temperatures. Insulation resistance between the switch contacts and ground decreases as the temperature increases. In high resistance circuits with 3 megohms in parallel with a circuit impedance of 1 megohm, the circuit impedance will change to a point where operational failure of the equipment may occur. High temperature may also affect the insulation from the standpoint of voltage breakdown due to a change in dielectric strength. Also, the increased speed of corrosion of contacts and switching mechanism is affected by high temperatures.

6.5.2 Moisture. Moisture in the dielectric will decrease the dielectric strength, life, and insulation resistance and cause corrosion by increasing the galvanic action between dissimilar metals. In general, switches which operate in high humidities should be hermetically sealed, or if this is not practical, the use of accessories, such as boots, "O" rings, or diaphragms placed over switch openings, is recommended to decrease moisture entry diaphragms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

6.5.3 Altitude. With a decrease of atmospheric pressure, the spacings required to prevent flashover increase substantially. Small switches, because of their very close contact spacings, are partially susceptible to malfunction at high altitudes. Since arc-over occurs more readily at higher altitudes, contact life decreases substantially with operation at these altitudes. To compensate for increased arcing at high altitudes, users must derate the current rating given by the manufacturer. To compensate for increased flashover, the user must derate voltage ratings.

6.5.4 Shock and vibration. Switches should be selected which meet shock and vibration requirements. Those with contact chatter requirements will cover low-frequency vibration and shock applications. High-frequency vibration will determine the effects of fatigue and resonance on the mechanical construction of the switch contact elements. When contact bounce at the time of closing of switch contacts is important, this requirement should be a consideration to be specified. Contact bounce causes arcing which will materially shorten contact life and may generate electrical noise.

6.5.5 Acceleration. Switches which are subject to acceleration forces due to applications arising from high-speed vehicles or aircraft should be selected from those having acceleration requirements. Failures are usually due to internal construction design which allows normally closed contacts to open and normally open contacts to close under acceleration conditions.

6.5.6 Sand and dust. A combination of dust and small amounts of moisture will materially increase the possibility of voltage breakdown of the insulation between closely spaced terminals. Where low insulation resistance or high leakage currents may cause circuit malfunction, the switch must be capable of passing sand and dust test requirements.

6.5.7 Explosion. Explosion resistance requires that switches operate in a volatile atmosphere without causing explosion. Wherever possible, switches to be used in an explosive atmosphere should be sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

7. SUPPLEMENTAL INFORMATION

7.1 Drawing notes. The following notes are applicable to each figure contained in Sections 100 and 200 of this standard:

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy -
Air Force - 85, 17
DSA - ES

User activities:
Army -
Navy - CG
Air Force -

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0997)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 100

SWITCHES

Section

101 Switches, Reed

102 Switches, Push Button, Illuminated

103 Switches, Interlock

104 Switches, Multistation

105 Switches, Pressure

106 Switches, Push Button

107 Switches, Rotary

108 Switches, Rotary, Electro-Mechanical Actuated (Solenoid Type)

109 Switches, Rotary, Printed Circuit (Thumbwheel and Pushbutton)

110 Switches, Sensitive

111 Switches, Thermostatic

112 Switches, Toggle

113 Switch Assemblies, Modular

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 101

SWITCHES, REED

(Applicable specification: MIL-S-55433)

NOTE: As of this date, no selected standard switches have been selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 102

SWITCHES, PUSH BUTTON, ILLUMINATED

(Applicable specification: MIL-S-22885)

TABLE 102.I. Switches, push button, illuminated characteristics.

Figure number	Applicable specification sheet	Operation	Circuit	Electrical ratings (28 Vdc resistive) (amperes)	General remarks
102-1	MIL-S-22885/8	Momentary and push-pull	Two circuit	5	Single lamp drip-proof seal
102-2	MIL-S-22885/9 and MIL-S-22885/10	Momentary and alternate	2PDT and 4PDT	5	Four lamp, rectangular
			4-circuit 8-circuit	10	
102-3	MIL-S-22885/15 and MIL-S-22885/16	Momentary and alternate	2PDT and 4PDT	5	Four lamp, rectangular, clip mounted
			4-circuit 8-circuit	10	
102-4	MIL-S-22885/18	Momentary and alternate	2PDT and two-circuit	2	Single lamp, drip-proof seal
102-5	MIL-S-22885/27	Momentary and alternate	4-circuit 8-circuit	10	Single lamp
102-6	MIL-S-22885/45	Momentary and alternate	SPDT	15	Single lamp
102-7	MIL-S-22885/46	Momentary and alternate	SPDT	5	Single lamp
102-8	MIL-S-22885/47	Momentary and alternate	2PDT	5	Single lamp
102-9	MIL-S-22885/56	Momentary and alternate	2PDT and 4PDT	2	4-lamp, square, RFI shielding option
102-10	MIL-S-22885/62	Momentary	2-circuit	3	Single lamp
102-11	MIL-S-22885/67	Momentary and alternate	2PDT and 3PDT	7	4-lamp, square, RFI shielding option
102-12	MIL-S-22885/74	Momentary and alternate	2PDT and 4PDT	5	4-lamp, square, integrated wire termination system
102-13	MIL-S-22885/75	Momentary and alternate	2PDT, 3PDT and 4PDT	7	4-lamp, square, RFI shielding option
102-14	MIL-S-22885/77	Momentary, alternate and magnetic hold	2PDT, 3PDT and 4PDT	7.5	4-lamp, square, RFI shielding option, integrated wire termination system
102-15	MIL-S-22885/79	Momentary	SPDT	7 (silver) or 1 (gold)	Single lamp, drip-proof seal option


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102. II. Lenses, illuminated - general characteristics.

Figure number	Applicable specification sheet	Type	Outside dimension of lens	Switch accomodation
102-16	MIL-S-22885/1	Screw-in	.81 dia .75 dia .67 dia .62 dia .88 sq	MIL-S-22885/8 (figure 102-1)
102-17	MIL-S-22885/19	Snap-in	.625 sq .67 dia .75 sq	MIL-S-22885/18 (figure 102-4)
102-18	MIL-S-22885/22	Screw-in	.812 dia .625 sq .625 dia .675 dia	MIL-S-22885/18 (figure 102-4)
102-19	MIL-S-22885/28	Snap-in	.62 dia .75 dia .81 dia 1.12 dia .62 sq .75 sq	MIL-S-22885/27 (figure 102-5)
102-20	MIL-S-22885/48	Snap-in	.62 dia .75 sq .75 dia .62 sq	MIL-S-22885/45 (figure 102-6) MIL-S-22885/46 (figure 102-7) MIL-S-22885/47 (figure 102-8) MIL-S-22885/62 (figure 102-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

INCHES	MM
.25	6.35
.312	7.92
.38	9.65
.39	9.91
.44	11.18
.625	15.88
.75	19.05
.94	23.88
2.27	57.66

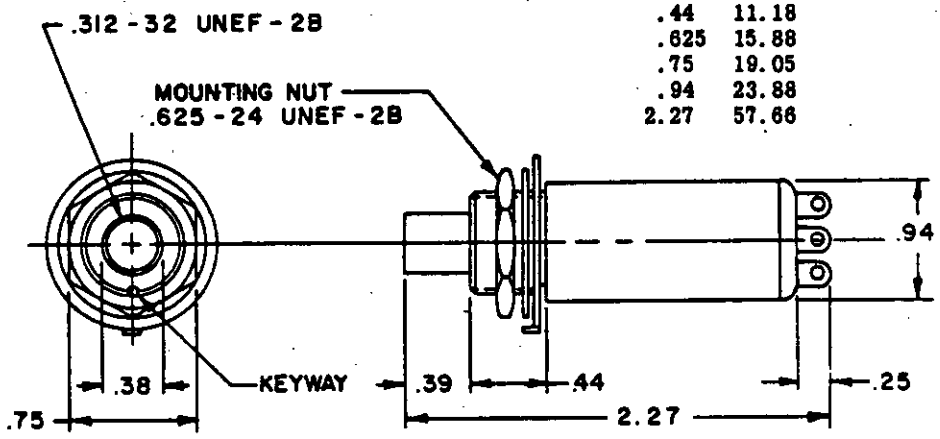

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-1. Switch housing (less lens), push button, illuminated, momentary and push-pull.

Electrical ratings.

Load	28 Vdc (amps)	115 Vac (amps)
Resistive	5	5
Inductive	3	3

Intended use: To accommodate midget-flange-base T-1-3/4 incandescent lamp when mated with lens in accordance with MIL-S-22885/1 (see figure 102-16).

Procurement document: MIL-S-22885/8.

Part number: See table 102. III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102. III. Part number and characteristics.

Part number M22885/8-	Lens M22885/1-	Circuit characteristic	Operation	Lens type
01 1/	---	Two circuit	Momentary	Screw-in
02 1/	---	1 NO	Push-Pull	Screw-in
03	01 (Yellow)		Momentary	Screw-in
04	02 (White)			
05	03 (Red)			
06	04 (Green)			
07	05 (Blue)			
08	06 (Yellow)			
09	07 (White)			
10	08 (Red)			
11	09 (Green)			
12	10 (Blue)			
13	11 (Yellow)			
14	12 (White)			
15	13 (Red)			
16	14 (Green)			
17	15 (Blue)			
18	16 (Yellow)			
19	17 (White)			
20	18 (Red)			
21	19 (Green)			
22	20 (Blue)			
23	21 (Yellow)			
24	22 (White)			
25	23 (Red)			
26	24 (Green)		Momentary	
27	25 (Blue)		Push-Pull	
28	01 (Yellow)			
29	02 (White)			
30	03 (Red)			
31	04 (Green)			
32	05 (Blue)			
33	06 (Yellow)			
34	07 (White)			
35	08 (Red)			
36	09 (Green)			
37	10 (Blue)			
38	11 (Yellow)			
39	12 (White)			
40	13 (Red)			
41	14 (Green)			
42	15 (Blue)			
43	16 (Yellow)			
44	17 (White)			
45	18 (Red)			
46	19 (Green)			
47	20 (Blue)			
48	21 (Yellow)			
49	22 (White)			
50	23 (Red)			
51	24 (Green)	Two circuit		
52	25 (Blue)	1 NO	Push-Pull	Screw-in

1/ These are switch housings that do not contain lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

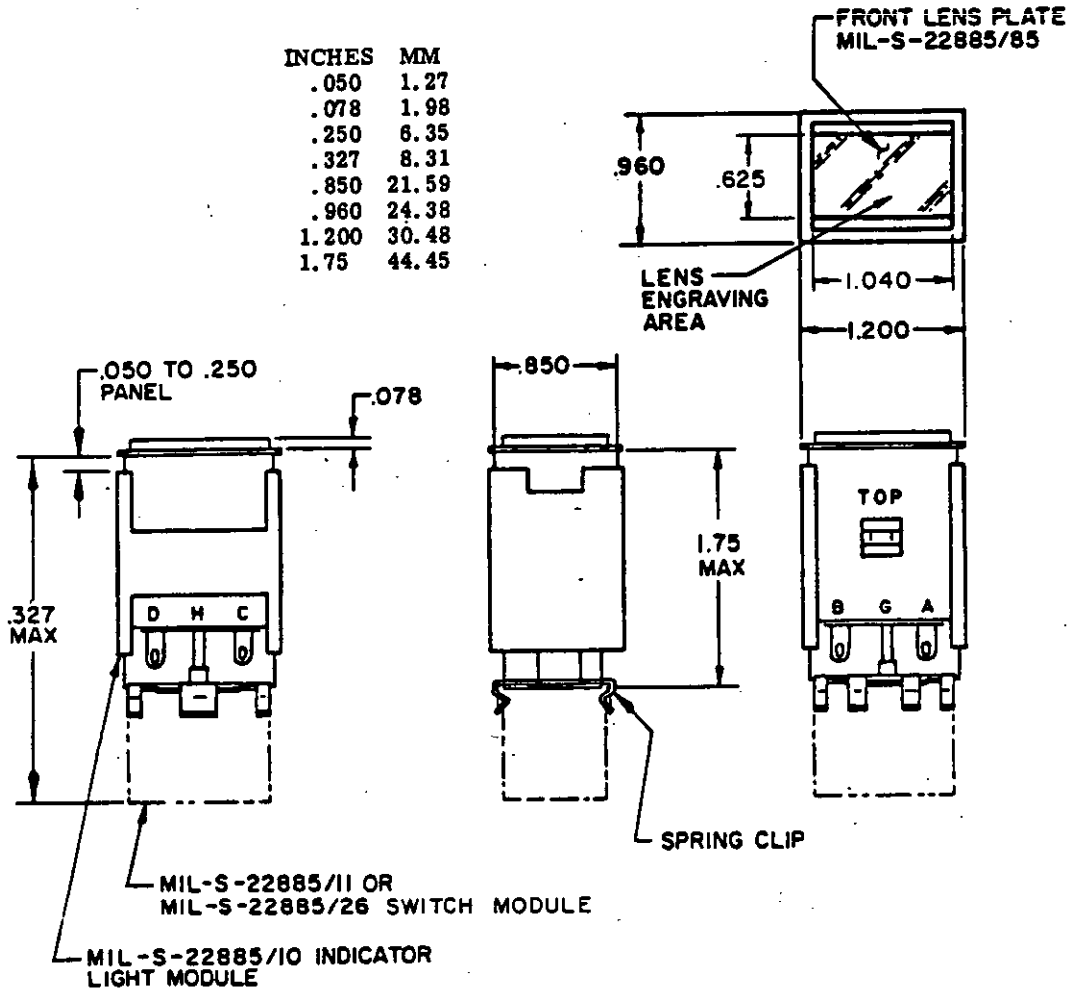

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.




FIGURE 102-2. Switch, push button, illuminated, 4-lamp, solid mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Lens style.

CODE	LENS STYLE (DIFFUSER CONFIGURATION)
A	SOLID
B	SPLIT VERTICALLY
C	SPLIT HORIZONTALLY

Lamp wiring code.

CODE	SCHEMATIC AND LAMP TERMINAL IDENTIFICATION
1	
2	
3	

Electrical rating when MIL-S-22885/11 is used.

Load	Sea level		50,000 feet
	28 Vdc (amps)	115 Vac (amps)	28 Vdc (amps)
Resistive	5.0	5.0	5.0
Inductive	3.0	5.0	2.5
Lamp	2.4	1.5	2.4

Electrical rating when MIL-S-22885/26 is used.

Load	Sea level		70,000 feet
	28 Vdc	115 Vac	28 Vdc
	(amps)	(amps)	(amps)
Resistive	10.0	5.0	10.0
Inductive	5.0	5.0	2.0
Lamp	3.0	1.5	---

Complete switch shall consist of the following:

1 - Modulator indicator light, MIL-S-22885/10 (with narrow or extended face lens per MIL-S-22885/85).
1 - Switch assembly, MIL-S-22885/11 or MIL-S-22885/26 (see section 113).

Additional parts shall be ordered, if required, as follows:

4 - Color filters MIL-S-22885/12 as specified (see section 203).
1 - Panel seal MIL-S-22885/13 (see section 202).
4 - Lamps (T-1-3/4 midget-flange-base incandescent type) as specified.

Procurement document: MIL-S-22885/9 and MIL-S-22885/10.

Part numbers: See table 102.IV.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102. IV. Part number and characteristics.

Part number 1/ M22885/9-	M22885/10-	Indicator Lens style code	Lamp wiring code	Circuit	Operation	Switch assembly M22885/11-
	Narrow lens					
01(XXXX)	01(XXXX)	A	1	2PDT	Mom	01
02(XXXX)	01(XXXX)	A	1	4PDT	Mom	02
03(XXXX)	01(XXXX)	A	1	2PDT	Alt	03
04(XXXX)	01(XXXX)	A	1	4PDT	Alt	04
09(XXXX)	03(XXXX)	B	1	2PDT	Mom	01
10(XXXX)	03(XXXX)	B	1	4PDT	Mom	02
11(XXXX)	03(XXXX)	B	1	2PDT	Alt	03
12(XXXX)	03(XXXX)	B	1	4PDT	Alt	04
13(XXXX)	04(XXXX)	B	2	2PDT	Mom	01
14(XXXX)	04(XXXX)	B	2	4PDT	Mom	02
15(XXXX)	04(XXXX)	B	2	2PDT	Alt	03
16(XXXX)	04(XXXX)	B	2	4PDT	Alt	04
17(XXXX)	05(XXXX)	C	1	2PDT	Mom	01
18(XXXX)	05(XXXX)	C	1	4PDT	Mom	02
19(XXXX)	05(XXXX)	C	1	2PDT	Alt	03
20(XXXX)	05(XXXX)	C	1	4PDT	Alt	04
21(XXXX)	06(XXXX)	C	3	2PDT	Mom	01
22(XXXX)	06(XXXX)	C	3	4PDT	Mom	02
23(XXXX)	06(XXXX)	C	3	2PDT	Alt	03
24(XXXX)	06(XXXX)	C	3	4PDT	Alt	04
25(XXXX)	07(XXXX)	A	3	2PDT	Mom	01
26(XXXX)	07(XXXX)	A	3	4PDT	Mom	02
27(XXXX)	07(XXXX)	A	3	2PDT	Alt	03
28(XXXX)	07(XXXX)	A	3	4PDT	Alt	04
	Extended lens					
29(XXXX)	09(XXXX)	A	1	2PDT	Mom	01
30(XXXX)	09(XXXX)	A	1	4PDT	Mom	02
31(XXXX)	09(XXXX)	A	1	2PDT	Alt	03
32(XXXX)	09(XXXX)	A	1	4PDT	Alt	04
33(XXXX)	10(XXXX)	B	1	2PDT	Mom	01
34(XXXX)	10(XXXX)	B	1	4PDT	Mom	02
35(XXXX)	10(XXXX)	B	1	2PDT	Alt	03
36(XXXX)	10(XXXX)	B	1	4PDT	Alt	04
37(XXXX)	11(XXXX)	B	2	2PDT	Mom	01
38(XXXX)	11(XXXX)	B	2	4PDT	Mom	02
39(XXXX)	11(XXXX)	B	2	2PDT	Alt	03
40(XXXX)	11(XXXX)	B	2	4PDT	Alt	04
41(XXXX)	12(XXXX)	C	1	2PDT	Mom	01
42(XXXX)	12(XXXX)	C	1	4PDT	Mom	02
43(XXXX)	12(XXXX)	C	1	2PDT	Alt	03
44(XXXX)	12(XXXX)	C	1	4PDT	Alt	04
45(XXXX)	13(XXXX)	C	3	2PDT	Mom	01
46(XXXX)	13(XXXX)	C	3	4PDT	Mom	02
47(XXXX)	13(XXXX)	C	3	2PDT	Alt	03
48(XXXX)	13(XXXX)	C	3	4PDT	Alt	04
49(XXXX)	14(XXXX)	A	3	2PDT	Mom	01
50(XXXX)	14(XXXX)	A	3	4PDT	Mom	02
51(XXXX)	14(XXXX)	A	3	2PDT	Alt	03
52(XXXX)	14(XXXX)	A	3	4PDT	Alt	04

1/ Part numbers shown are for units without color filters. When color filters are required, add the color symbols of MIL-S-22885 in place of "(XXXX)" with location as shown in MIL-S-22885/10.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

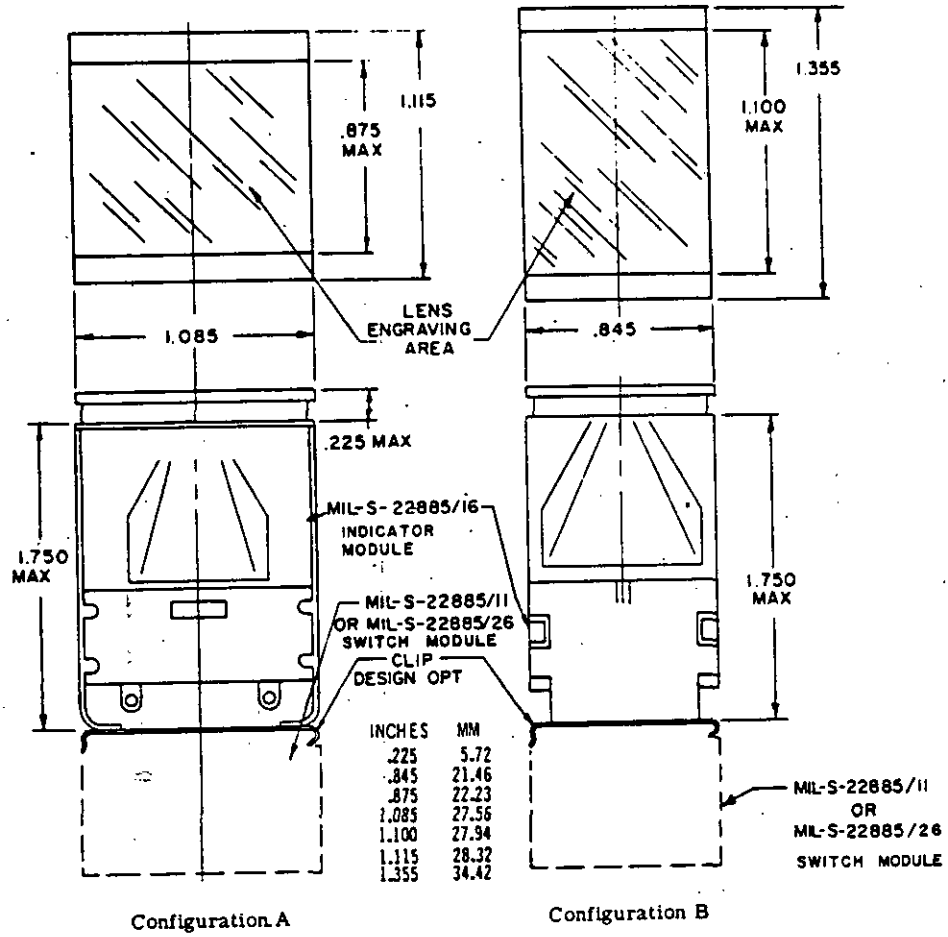

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.





FIGURE 102-3. Switch push button, illuminated, 4-lamp, clip mounted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Lens style

CODE	LENS STYLE (DIFFUSER CONFIGURATION)
A	SOLID
B	SPLIT VERTICALLY
C	SPLIT HORIZONTALLY

Lamp wiring code

CODE	SCHEMATIC AND LAMP TERMINAL IDENTIFICATION
1	
2	
3	
4	

Electrical rating when MIL-S-22885/11 is used.

Load	Sea level		50,000 feet
	28 Vdc (amps)	115 Vac (amps)	28 Vdc (amps)
Resistive	5.0	5.0	5.0
Inductive	3.0	5.0	2.5
Lamp	2.4	1.5	2.4

Electrical rating when MIL-S-22885/26 is used.

Load	Sea level		70,000 feet
	28 Vdc	115 Vac	28 Vdc
	(amps)	(amps)	(amps)
Resistive	10.0	5.0	10.0
Inductive	5.0	5.0	2.0
Lamp	3.0	1.5	---

Complete switch shall consist of the following:

1 - Modulator indicator light, MIL-S-22885/16.
1 - Switch assembly, MIL-S-22885/11 or MIL-S-22885/26 (see section 113).

Additional parts shall be ordered, if required, as follows:

4 - Color filters MIL-S-22885/12 as specified (see section 203).
4 - Lamps (T-1-3/4 midget-flange-base incandescent type) as specified.

Procurement document: MIL-S-22885/15 and MIL-S-22885/16.

Part numbers: See table 102.V.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the currentversion before use.

TABLE 102. V. Part number and characteristics.

Part number 1/ M22885/15-	Configuration	M22885/16-	Indicator Lens style code	Lamp wiring code	Circuit	Operation	Switch assembly M22885/11-
01(XXXX)	A	01(XXXX)	A	1	2PDT	Mom	01
02(XXXX)		01(XXXX)	A	1	4PDT	Mom	02
03(XXXX)		01(XXXX)	A	1	2PDT	Alt	03
04(XXXX)		01(XXXX)	A	1	4PDT	Alt	04
05(XXXX)		05(XXXX)	B	1	2PDT	Mom	01
06(XXXX)		05(XXXX)	B	1	4PDT	Mom	02
07(XXXX)		05(XXXX)	B	1	2PDT	Alt	03
08(XXXX)		05(XXXX)	B	1	4PDT	Alt	04
09(XXXX)		07(XXXX)	B	2	2PDT	Mom	01
10(XXXX)		07(XXXX)	B	2	4PDT	Mom	02
11(XXXX)		07(XXXX)	B	2	2PDT	Alt	03
12(XXXX)		07(XXXX)	B	2	4PDT	Alt	04
13(XXXX)		09(XXXX)	C	1	2PDT	Mom	01
14(XXXX)		09(XXXX)	C	1	4PDT	Mom	02
15(XXXX)		09(XXXX)	C	1	2PDT	Alt	03
16(XXXX)		09(XXXX)	C	1	2PDT	Alt	04
17(XXXX)		11(XXXX)	C	3	2PDT	Mom	01
18(XXXX)		11(XXXX)	C	3	4PDT	Mom	02
19(XXXX)		11(XXXX)	C	3	2PDT	Alt	03
20(XXXX)		11(XXXX)	C	3	4PDT	Alt	04
21(XXXX)		13(XXXX)	A	3	2PDT	Mom	01
22(XXXX)		13(XXXX)	A	3	4PDT	Mom	02
23(XXXX)		13(XXXX)	A	3	2PDT	Alt	03
24(XXXX)	A	13(XXXX)	A	3	4PDT	Alt	04
25(XXXX)	B	02(XXXX)	A	1	2PDT	Mom	01
26(XXXX)		02(XXXX)	A	1	4PDT	Mom	02
27(XXXX)		02(XXXX)	A	1	2PDT	Alt	03
28(XXXX)		02(XXXX)	A	1	4PDT	Alt	04
29(XXXX)		06(XXXX)	B	1	2PDT	Mom	01
30(XXXX)		06(XXXX)	B	1	4PDT	Mom	02
31(XXXX)		06(XXXX)	B	1	2PDT	Alt	03
32(XXXX)		06(XXXX)	B	1	4PDT	Alt	04
33(XXXX)		08(XXXX)	B	2	2PDT	Mom	01
34(XXXX)		08(XXXX)	B	2	4PDT	Mom	02
35(XXXX)		08(XXXX)	B	2	2PDT	Alt	03
36(XXXX)		08(XXXX)	B	2	4PDT	Alt	04
37(XXXX)		10(XXXX)	C	1	2PDT	Mom	01
38(XXXX)		10(XXXX)	C	1	4PDT	Mom	02
39(XXXX)		10(XXXX)	C	1	2PDT	Alt	03
40(XXXX)		10(XXXX)	C	1	4PDT	Alt	04
41(XXXX)		12(XXXX)	C	3	2PDT	Mom	01
42(XXXX)		12(XXXX)	C	3	4PDT	Mom	02
43(XXXX)		12(XXXX)	C	3	2PDT	Alt	03
44(XXXX)		12(XXXX)	C	3	4PDT	Alt	04
45(XXXX)		14(XXXX)	A	3	2PDT	Mom	01
46(XXXX)		14(XXXX)	A	3	4PDT	Mom	02
47(XXXX)		14(XXXX)	A	3	2PDT	Alt	03
48(XXXX)	B	14(XXXX)	A	3	4PDT	Alt	04

1/ See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.V. Part number and characteristics - Continued.

Part number 1/ M22885/15-	Configuration	M22885/16-	Indicator Lens style code	Lamp wiring code	Circuit	Operation	Switch assembly M22885/11-
49(XXXX)	A	15(XXXX)	A	4	2PDT	Mom	01
50(XXXX)	↑	15(XXXX)	A	4	4PDT	Mom	02
51(XXXX)	↑	15(XXXX)	A	4	2PDT	Alt	03
52(XXXX)	↑	15(XXXX)	A	4	4PDT	Alt	04
53(XXXX)	↑	17(XXXX)	B	4	2PDT	Mom	01
54(XXXX)	↑	17(XXXX)	B	4	4PDT	Mom	02
55(XXXX)	↑	17(XXXX)	B	4	2PDT	Alt	03
56(XXXX)	↑	17(XXXX)	B	4	4PDT	Alt	04
57(XXXX)	↑	19(XXXX)	C	4	2PDT	Mom	01
58(XXXX)	↑	19(XXXX)	C	4	4PDT	Mom	02
59(XXXX)	↓	19(XXXX)	C	4	2PDT	Alt	03
60(XXXX)	A	19(XXXX)	C	4	4PDT	Alt	04
61(XXXX)	B	16(XXXX)	A	4	2PDT	Mom	01
62(XXXX)	↑	16(XXXX)	A	4	4PDT	Mom	02
63(XXXX)	↑	16(XXXX)	A	4	2PDT	Alt	03
64(XXXX)	↑	16(XXXX)	A	4	4PDT	Alt	04
65(XXXX)	↑	18(XXXX)	B	4	2PDT	Mom	01
66(XXXX)	↑	18(XXXX)	B	4	4PDT	Mom	02
67(XXXX)	↑	18(XXXX)	B	4	2PDT	Alt	03
68(XXXX)	↑	18(XXXX)	B	4	4PDT	Alt	04
69(XXXX)	↑	20(XXXX)	C	4	2PDT	Mom	01
70(XXXX)	↑	20(XXXX)	C	4	4PDT	Mom	02
71(XXXX)	↓	20(XXXX)	C	4	2PDT	Alt	03
72(XXXX)	B	20(XXXX)	C	4	4PDT	Alt	04

1/ Part numbers shown are for units without color filters. When color filters are required, add the color symbols of MIL-S-22885 in place of "(XXXX)" with location as shown in MIL-S-22885/16. EXAMPLE: M22885/15-1ORGGR.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

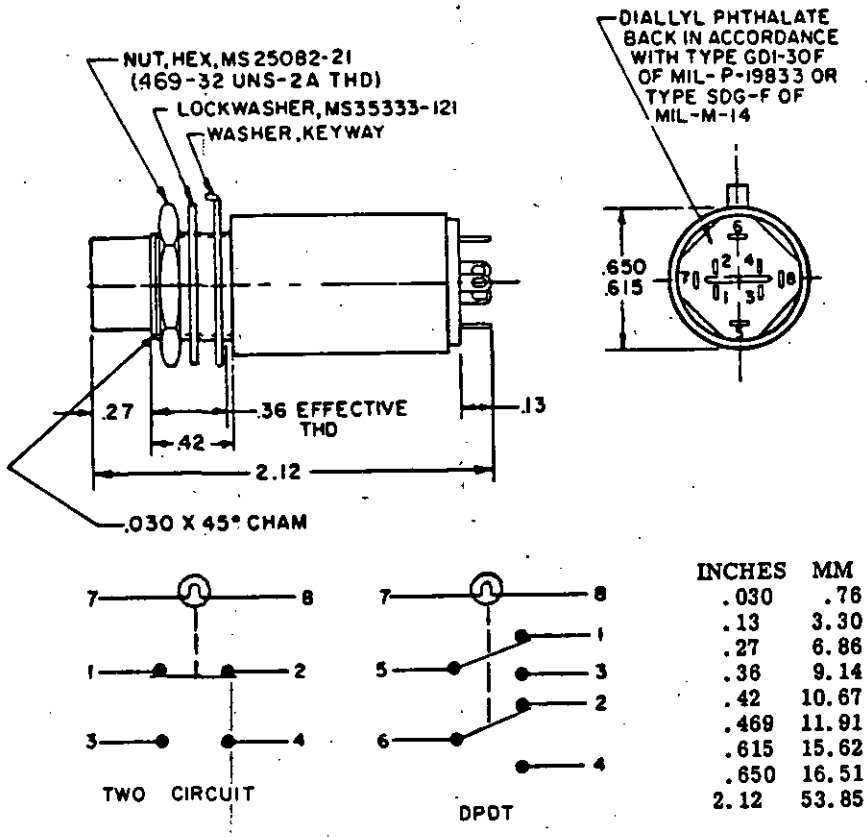

INCHES	MM
.030	.76
.13	3.30
.27	6.86
.36	9.14
.42	10.67
.469	11.91
.615	15.62
.650	16.51
2.12	53.85

Momentary and alternate action

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-4. Switch housing (less lens), push button, illuminated, drip proof seal.

Electrical ratings.

Load	28 Vdc	115 Vac (60/400 Hz)
	(amps)	(amps)
Resistive	2.0	2.0
Inductive	1.5	1.5
Lamp	0.5	0.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Intended use: To accommodate midget-flange-base T-1-3/4 incandescent lamp when mated with lens in accordance with MIL-S-22885/19 and MIL-S-22885/22 (see figures 102-17 and 102-18).

Procurement document: MIL-S-22885/18.

Part number: See table 102.VI.

TABLE 102 VI. Part number and characteristics.

Part number M22885/18-	Lens M22885/	Circuit characteristic	Operation	Lens type
01 1/	---	DPDT	Momentary	Threaded
02 1/	---	DPDT	Alternate Action	↓
03 1/	---	Two circuit	Momentary	Threaded
04 1/	---	Two circuit	Alternate Action	Snap-in
05 1/	---	DPDT	Momentary	↓
06 1/	---	DPDT	Alternate Action	Snap-in
07 1/	---	Two circuit	Momentary	Threaded
08 1/	---	Two circuit	Alternate Action	↓
09	22-01 (Yellow)	DPDT	Momentary	↓
10	22-02 (White)	↓	↓	↓
11	22-03 (Red)	↓	↓	↓
12	22-04 (Green)	↓	↓	↓
13	22-05 (Blue)	↓	↓	↓
14	22-06 (Yellow)	↓	↓	↓
15	22-07 (White)	↓	↓	↓
16	22-08 (Red)	↓	↓	↓
17	22-09 (Green)	↓	↓	↓
18	22-10 (Blue)	↓	↓	↓
19	22-11 (Yellow)	↓	↓	↓
20	22-12 (White)	↓	↓	↓
21	22-13 (Red)	↓	↓	↓
22	22-14 (Green)	↓	↓	↓
23	22-15 (Blue)	↓	↓	↓
24	22-16 (Yellow)	↓	↓	↓
25	22-17 (White)	↓	↓	↓
26	22-18 (Red)	↓	↓	↓
27	22-19 (Green)	↓	↓	↓
28	22-20 (Blue)	↓	Momentary	↓
29	22-01 (Yellow)	↓	Alternate Action	↓
30	22-02 (White)	↓	↓	↓
31	22-03 (Red)	↓	↓	↓
32	22-04 (Green)	↓	↓	↓
33	22-05 (Blue)	↓	↓	↓
34	22-06 (Yellow)	↓	↓	↓
35	22-07 (White)	↓	↓	↓
36	22-08 (Red)	↓	↓	↓
37	22-09 (Green)	↓	↓	↓
38	22-10 (Blue)	↓	↓	↓
39	22-11 (Yellow)	↓	↓	↓
40	22-12 (White)	↓	↓	↓
41	22-13 (Red)	↓	↓	↓
42	22-14 (Green)	↓	↓	↓
43	22-15 (Blue)	↓	↓	↓
44	22-16 (Yellow)	↓	↓	↓
45	22-17 (White)	↓	↓	↓
46	22-18 (Red)	↓	↓	↓
47	22-19 (Green)	↓	↓	↓
48	22-20 (Blue)	DPDT	Alternate Action	↓

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102. VI. Part number and characteristics - Continued.

Part number M22885/18-	Lens M22885/	Circuit characteristic	Operation	Lens type
49	22-01 (Yellow)	Two circuit	Momentary	Threaded
50	22-02 (White)			
51	22-03 (Red)			
52	22-04 (Green)			
53	22-05 (Blue)			
54	22-06 (Yellow)			
55	22-07 (White)			
56	22-08 (Red)			
57	22-09 (Green)			
58	22-10 (Blue)			
59	22-11 (Yellow)			
60	22-12 (White)			
61	22-13 (Red)			
62	22-14 (Green)			
63	22-15 (Blue)			
64	22-16 (Yellow)			
65	22-17 (White)			
66	22-18 (Red)			
67	22-19 (Green)			
68	22-20 (Blue)		Momentary Alternate Action	
69	22-01 (Yellow)			
70	22-02 (White)			
71	22-03 (Red)			
72	22-04 (Green)			
73	22-05 (Blue)			
74	22-06 (Yellow)			
75	22-07 (White)			
76	22-08 (Red)			
77	22-09 (Green)			
78	22-10 (Blue)			
79	22-11 (Yellow)			
80	22-12 (White)			
81	22-13 (Red)			
82	22-14 (Green)			
83	22-15 (Blue)			
84	22-16 (Yellow)			
85	22-17 (White)			
86	22-18 (Red)			
87	22-19 (Green)			
88	22-20 (Blue)	Two circuit DPDT	Alternate Action Momentary	Threaded Snap-in
89	19-01 (Yellow)			
90	19-02 (White)			
91	19-03 (Red)			
92	19-04 (Green)			
93	19-05 (Blue)			
94	19-06 (Yellow)			
95	19-07 (White)			
96	19-08 (Red)			
97	19-09 (Green)			
98	19-10 (Blue)			
99	19-11 (Yellow)			
100	19-12 (White)			
101	19-13 (Red)			
102	19-14 (Green)			
103	19-15 (Blue)	DPDT	Momentary	Snap-in

See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102. VI. Part number and characteristics - Continued.


Part number M22885/18-	Lens M22885/	Circuit characteristic	Operation	Lens type
104	19-01 (Yellow)	DPDT	Alternate Action	Snap-in
105	19-02 (White)			
106	19-03 (Red)			
107	19-04 (Green)			
108	19-05 (Blue)			
109	19-06 (Yellow)			
110	19-07 (White)			
111	19-08 (Red)			
112	19-09 (Green)			
113	19-10 (Blue)			
114	19-11 (Yellow)			
115	19-12 (White)			
116	19-13 (Red)			
117	19-14 (Green)			
118	19-15 (Blue)	DPDT Two circuit	Alternate Action Momentary	
119	19-01 (Yellow)			
120	19-02 (White)			
121	19-03 (Red)			
122	19-04 (Green)			
123	19-05 (Blue)			
124	19-06 (Yellow)			
125	19-07 (White)			
126	19-08 (Red)			
127	19-09 (Green)			
128	19-10 (Blue)			
129	19-11 (Yellow)			
130	19-12 (White)			
131	19-13 (Red)			
132	19-14 (Green)			
133	19-15 (Blue)		Momentary Alternate Action	
134	19-01 (Yellow)			
135	19-02 (White)			
136	19-03 (Red)			
137	19-04 (Green)			
138	19-05 (Blue)			
139	19-06 (Yellow)			
140	19-07 (White)			
141	19-08 (Red)			
142	19-09 (Green)			
143	19-10 (Blue)			
144	19-11 (Yellow)			
145	19-12 (White)			
146	19-13 (Red)			
147	19-14 (Green)			
148	19-15 (Blue)	Two circuit	Alternate Action	Snap-in


1/ These are switch housings that do not contain lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

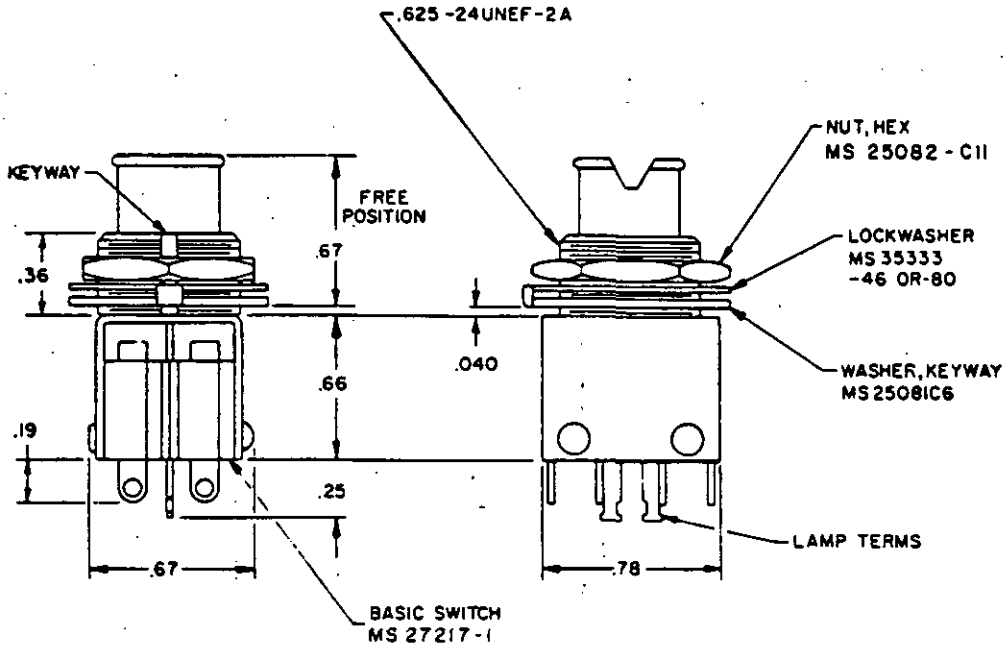

INCHES	MM	INCHES	MM
.040	1.02	.625	15.88
.09	2.29	.66	16.76
.19	4.83	.67	17.02
.25	6.35	.75	19.05
.36	9.14	.78	19.81






SCHEMATIC DIAGRAM
MOMENTARY ACTION


M22885/27-01


FIGURE 102-5. Switch housing (less lens), push button, illuminated, double break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

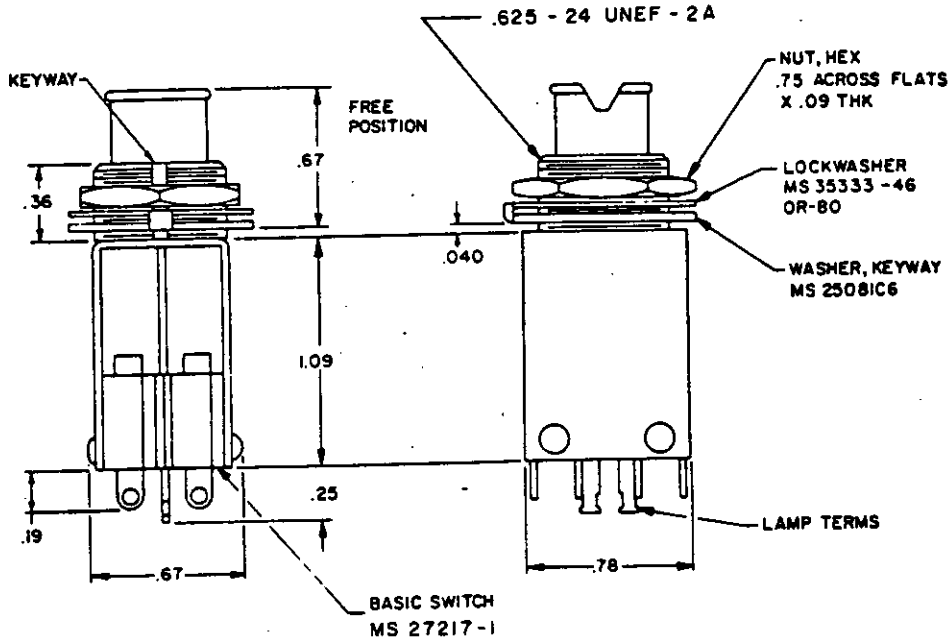

INCHES	MM	INCHES	MM
.040	1.02	.625	15.88
.09	2.29	.67	17.02
.19	4.83	.75	19.05
.25	6.35	.78	19.81
.36	9.14	1.09	27.69






M22885 / 27-02

FIGURE 102-5. Switch housing (less lens), push button, illuminated, double break - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

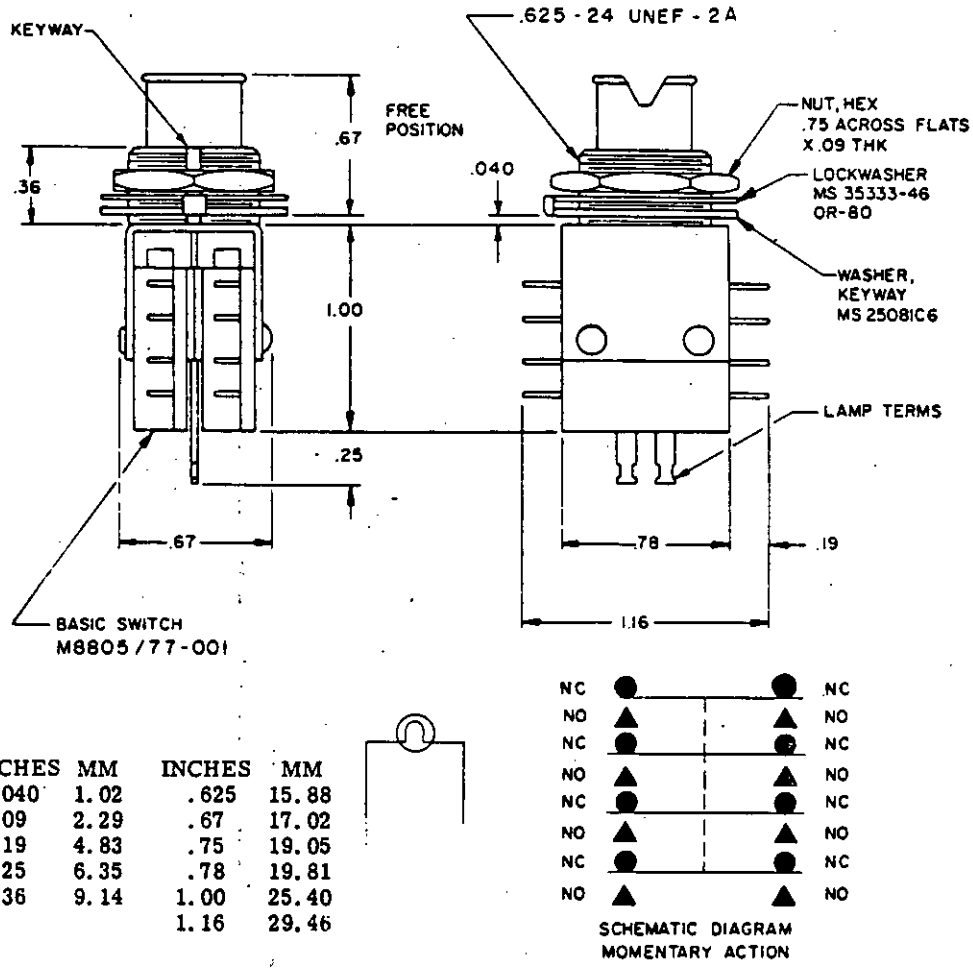


INCHES	MM	INCHES	MM
.040	1.02	.625	15.88
.09	2.29	.67	17.02
.19	4.83	.75	19.05
.25	6.35	.78	19.81
.36	9.14	1.00	25.40
		1.16	29.46


M22885/27-03


FIGURE 102-5. Switch housing (less lens), push button, illuminated, double break - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

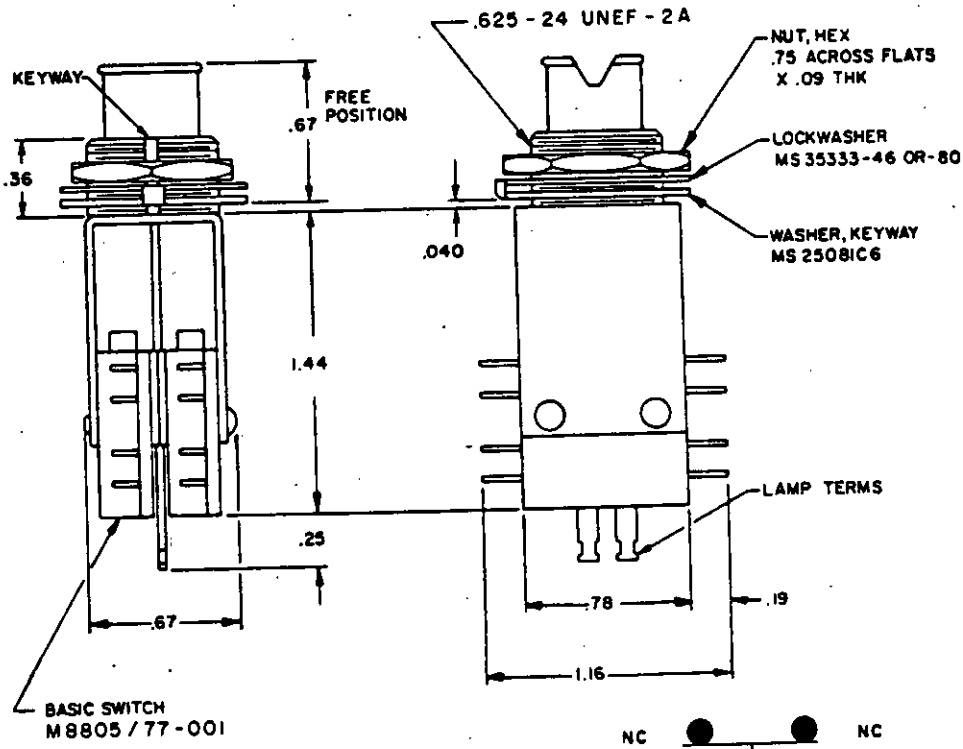

INCHES	MM	INCHES	MM
.040	1.02	.625	15.88
.09	2.29	.67	17.02
.19	4.83	.75	19.05
.25	6.35	.78	19.81
.36	9.14	1.16	29.46
		1.44	36.58



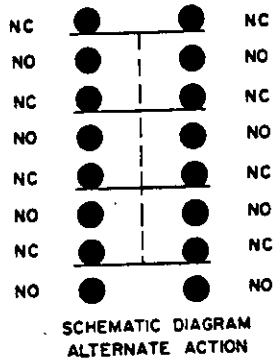

M22885/27-04

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-5. Switch housing (less lens), push button, illuminated, double break - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		70,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amps)	(amps)	(amps)
Resistive	10.0	5.0	10.0
Inductive	5.0	5.0	2.0
Lamp	3.0	1.5	---

Intended use: To accommodate midget-flange-base T-1-3/4 incandescent lamp when mated with lens in accordance with MIL-S-22885/28 (see figure 102-19).


Procurement document: MIL-S-22885/27.

Part numbers: See table 102.VII.


TABLE 102.VII. Part number and characteristics.

Part number M22885/27-	Circuit characteristic	Operation	Basic switch	
			Part number	Specification number
01	4 circuit	Momentary	MS27217-1	MIL-S-8805/7
02	4 circuit	Alternate	MS27217-1	MIL-S-8805/7
03	8 circuit	Momentary	M8805/77-001	MIL-S-8805/77
04	8 circuit	Alternate	M8805/77-001	MIL-S-8805/77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

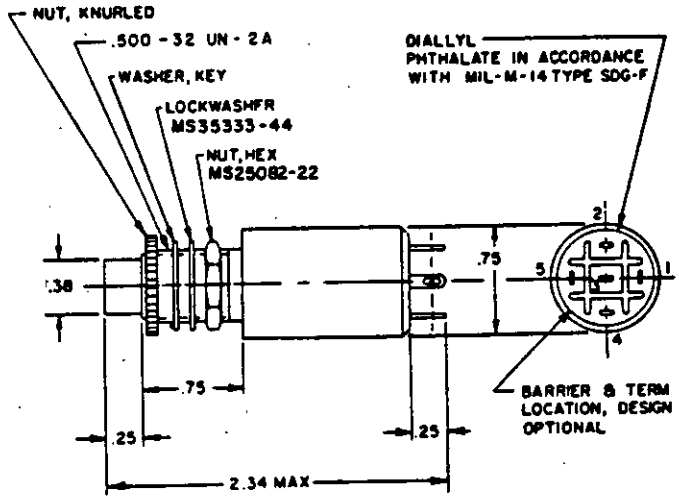

INCHES	MM
.25	6.35
.38	9.65
.500	12.70
.75	19.05
2.34	59.44



SCHEMATIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-6. Switch housing (less lens), push button, illuminated, SPDT, momentary and alternate action, 15 amperes.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	15	15
Inductive	10	10
Lamp	7	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Intended use: To accommodate one midget-flange-base T-1-3/4 incandescent lamp when mated with snap-in lens in accordance with MIL-S-22885/48 (see figure 102-20) or MIL-S-22885/61.

Procurement document: MIL-S-22885/45.


Part numbers: See table 102. VIII.

TABLE 102. VIII. Part number and characteristics.


Part number M22885/45-	Lens M22885/48-	Circuit characteristics	Operation	Lens type
01 1/	-	SPDT	Momentary	Snap-in
02 1/	-		Alternate action	
03	01 (yellow)		Momentary	
04	02 (white)			
05	03 (red)			
06	04 (green)			
07	05 (blue)			
08	06 (yellow)			
09	07 (white)			
10	08 (red)			
11	09 (green)			
12	10 (blue)			
13	11 (yellow)			
14	12 (white)			
15	13 (red)			
16	14 (green)			
17	15 (blue)			
18	16 (yellow)			
19	17 (white)			
20	18 (red)			
21	19 (green)			
22	20 (blue)		Momentary	
23	01 (yellow)		Alternate action	
24	02 (white)			
25	03 (red)			
26	04 (green)			
27	05 (blue)			
28	06 (yellow)			
29	07 (white)			
30	08 (red)			
31	09 (green)			
32	10 (blue)			
33	11 (yellow)			
34	12 (white)			
35	13 (red)			
36	14 (green)			
37	15 (blue)			
38	16 (yellow)			
39	17 (white)			
40	18 (red)			
41	19 (green)			
42	20 (blue)	SPDT	Alternate action	Snap-in

1/ These are switch housings that do not contain lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

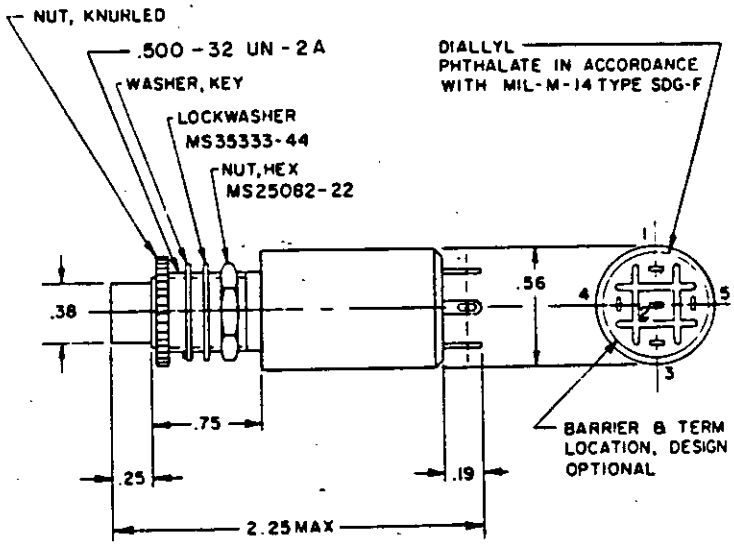

INCHES	MM
.19	4.83
.25	6.35
.38	9.65
.500	12.70
.56	14.22
.75	19.05
2.25	57.15



SCHEMATIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-7. Switch housing (less lens), push button, illuminated, SPDT, momentary and alternate action, 5 amperes.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	5.0	5.0
Inductive	3.5	3.5
Lamp	2.5	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Intended use: To accommodate one midget-flange-base T-1-3/4 incandescent lamp when mated with snap-in lens in accordance with MIL-S-22885/48 (see figure 102-20) or MIL-S-22885/61.

Procurement document: MIL-S-22885/46.


Part numbers: See table 102. IX.

TABLE 102. IX. Part number and characteristics.


Part number M22885/46-	Lens M22885/48-	Circuit characteristics	Operation	Lens type
01 1/	-	SPDT	Momentary	Snap-in
02 1/	-		Alternate action	
03	01 (yellow)		Momentary	
04	02 (white)			
05	03 (red)			
06	04 (green)			
07	05 (blue)			
08	06 (yellow)			
09	07 (white)			
10	08 (red)			
11	09 (green)			
12	10 (blue)			
13	11 (yellow)			
14	12 (white)			
15	13 (red)			
16	14 (green)			
17	15 (blue)			
18	16 (yellow)			
19	17 (white)			
20	18 (red)			
21	19 (green)			
22	20 (blue)		Momentary	
23	01 (yellow)		Alternate action	
24	02 (white)			
25	03 (red)			
26	04 (green)			
27	05 (blue)			
28	06 (yellow)			
29	07 (white)			
30	08 (red)			
31	09 (green)			
32	10 (blue)			
33	11 (yellow)			
34	12 (white)			
35	13 (red)			
36	14 (green)			
37	15 (blue)			
38	16 (yellow)			
39	17 (white)			
40	18 (red)			
41	19 (green)			
42	20 (blue)	SPDT	Alternate action	Snap-in

1/ These are switch housings that do not contain lens.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

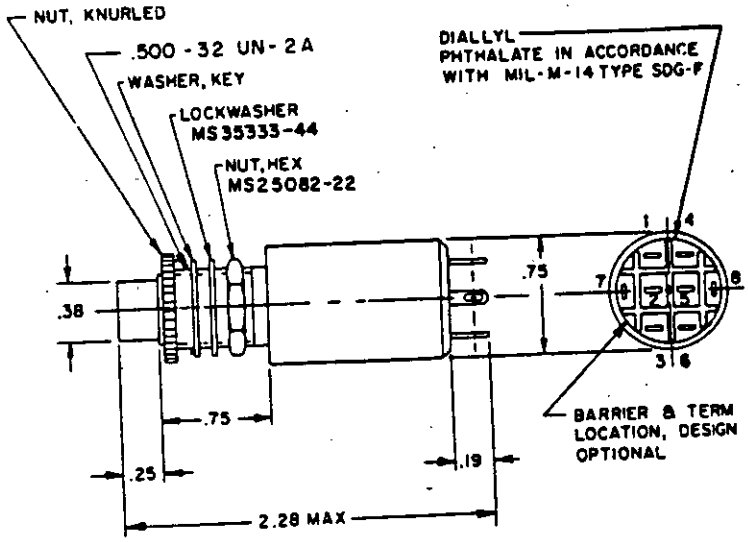

INCHES	MM
.19	4.83
.25	6.35
.38	9.65
.500	12.70
.75	19.05
2.28	57.91



SCHEMATIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-8. Switch housing (less lens), push button, illuminated, DPDT, momentary and alternate action, 5 amperes.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	5.0	5.0
Inductive	3.5	3.5
Lamp	2.5	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Intended use: To accommodate one midget-flange-base T-1-3/4 incandescent lamp when mated with snap-in lens in accordance with MIL-S-22885/48 (see figure 102-20) or MIL-S-22885/61.

Procurement document: MIL-S-22885/47.


Part numbers: See table 102.X.

TABLE 102.X. Part number and characteristics.

Part number M22885/47-	Lens M22885/48-	Circuit characteristics	Operation.	Lens type
01 1/	-	DPDT	Momentary	Snap-in
02 1/	-		Alternate action	
03	01 (yellow)		Momentary	
04	02 (white)			
05	03 (red)			
06	04 (green)			
07	05 (blue)			
08	06 (yellow)			
09	07 (white)			
10	08 (red)			
11	09 (green)			
12	10 (blue)			
13	11 (yellow)			
14	12 (white)			
15	13 (red)			
16	14 (green)			
17	15 (blue)			
18	16 (yellow)			
19	17 (white)			
20	18 (red)			
21	19 (green)			
22	20 (blue)		Momentary	
23	01 (yellow)		Alternate action	
24	02 (white)			
25	03 (red)			
26	04 (green)			
27	05 (blue)			
28	06 (yellow)			
29	07 (white)			
30	08 (red)			
31	09 (green)			
32	10 (blue)			
33	11 (yellow)			
34	12 (white)			
35	13 (red)			
36	14 (green)			
37	15 (blue)			
38	16 (yellow)			
39	17 (white)			
40	18 (red)			
41	19 (green)			
42	20 (blue)	DPDT	Alternate action	Snap-in

1/ These are switch housings that do not contain lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

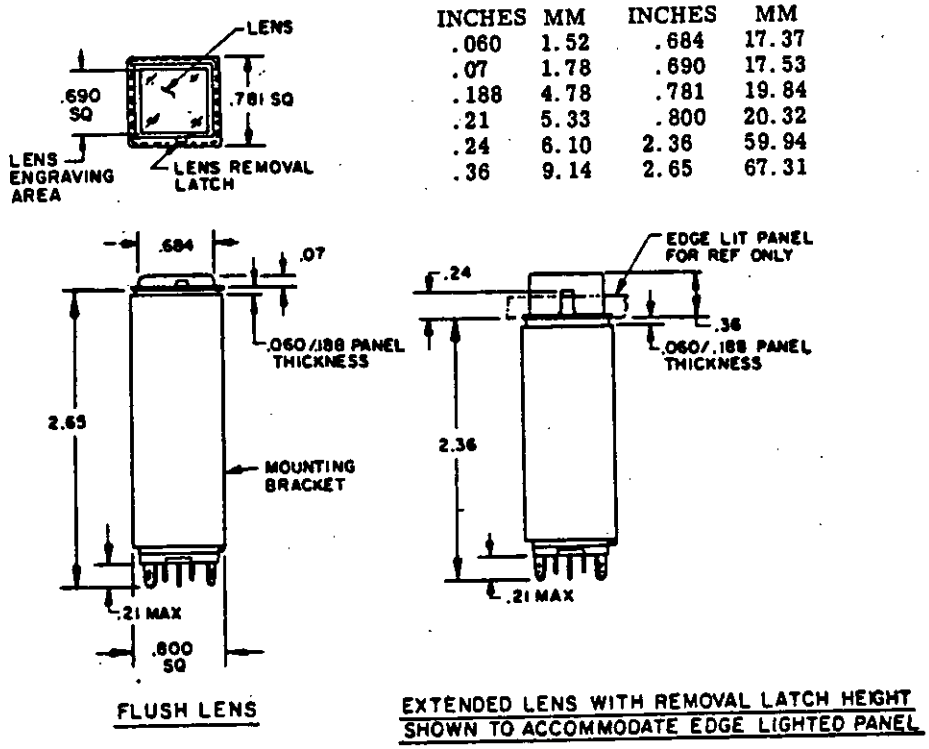

INCHES	MM	INCHES	MM
.060	1.52	.684	17.37
.07	1.78	.690	17.53
.188	4.78	.781	19.84
.21	5.33	.800	20.32
.24	6.10	2.36	59.94
.36	9.14	2.65	67.31

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-9. Switch (with or without RFI shielding), push button, illuminated, 4-lamp, solid mounting, 2 and 4 pole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LENS CODE	LENS STYLE	COLOR SYMBOL POSITION
A	4 - WAY SPLIT	
B	3 - WAY SPLIT	
C	SPLIT HORIZONTALLY	
D	SOLID	
E	3 - WAY SPLIT	
F	SPLIT VERTICALLY	
G	3 - WAY SPLIT	
H	3 - WAY SPLIT	

Lens code sequence, style, and position.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	2.0	2.0
Inductive	1.0	1.0
Lamp	0.75	0.75

Complete switch shall consist of the following:

1 lamp module in accordance with MIL-S-22885/52 or MIL-S-22885/53.
1 switching module (housing with mounting bracket).

Additional parts shall be ordered, if required, as follows:

4 lamps (T-1-3/4 midget flange base incandescent type).

Procurement document: MIL-S-22885/56.

Part number: See table 102.XI.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XI. Part number and characteristics.

Part number 1/ M22885/56-	Circuit description	Lens code	Lens height	RFI shielded
001	4 PDT momentary	-	extended	no
002	4 PDT alternate	-	extended	no
003	4 PDT momentary	-	flush	no
004	4 PDT alternate	-	flush	no
005(XXXX)	4 PDT momentary	A	extended	no
006(XXX)	4 PDT momentary	B	extended	no
007(XX)	4 PDT momentary	C	extended	no
008(X)	4 PDT momentary	D	extended	no
009(XXX)	4 PDT momentary	E	extended	no
010(XX)	4 PDT momentary	F	extended	no
011(XXX)	4 PDT momentary	G	extended	no
012(XXX)	4 PDT momentary	H	extended	no
013(XXXX)	4 PDT alternate	A	extended	no
014(XXX)	4 PDT alternate	B	extended	no
015(XX)	4 PDT alternate	C	extended	no
016(X)	4 PDT alternate	D	extended	no
017(XXX)	4 PDT alternate	E	extended	no
018(XX)	4 PDT alternate	F	extended	no
019(XXX)	4 PDT alternate	G	extended	no
020(XXX)	4 PDT alternate	H	extended	no
021(XXXX)	2 PDT momentary	A	extended	no
022(XXX)	2 PDT momentary	B	extended	no
023(XX)	2 PDT momentary	C	extended	no
024(X)	2 PDT momentary	D	extended	no
025(XXX)	2 PDT momentary	E	extended	no
026(XX)	2 PDT momentary	F	extended	no
027(XXX)	2 PDT momentary	G	extended	no
028(XXX)	2 PDT momentary	H	extended	no
029(XXXX)	2 PDT alternate	A	extended	no
030(XXX)	2 PDT alternate	B	extended	no
031(XX)	2 PDT alternate	C	extended	no
032(X)	2 PDT alternate	D	extended	no
033(XXX)	2 PDT alternate	E	extended	no
034(XX)	2 PDT alternate	F	extended	no
035(XXX)	2 PDT alternate	G	extended	no
036(XXX)	2 PDT alternate	H	extended	no
037(XXXX)	4 PDT momentary	A	flush	no
038(XXX)	4 PDT momentary	B	flush	no
039(XX)	4 PDT momentary	C	flush	no
040(X)	4 PDT momentary	D	flush	no
041(XXX)	4 PDT momentary	E	flush	no
042(XX)	4 PDT momentary	F	flush	no
043(XXX)	4 PDT momentary	G	flush	no
044(XXX)	4 PDT momentary	H	flush	no
045(XXXX)	4 PDT alternate	A	flush	no
046(XXX)	4 PDT alternate	B	flush	no
047(XX)	4 PDT alternate	C	flush	no
048(X)	4 PDT alternate	D	flush	no
049(XXX)	4 PDT alternate	E	flush	no
050(XX)	4 PDT alternate	F	flush	no
051(XXX)	4 PDT alternate	G	flush	no
052(XXX)	4 PDT alternate	H	flush	no

2/ 001, 002, 003, 004

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XI. Part number and characteristics - Continued.

Part number 1/ M22885/56-	Circuit description	Lens code	Lens height	RFI shielded
053(XXXX)	2 PDT momentary	A	flush	no
054(XXX)	2 PDT momentary	B	flush	no
055(XX)	2 PDT momentary	C	flush	no
056(X)	2 PDT momentary	D	flush	no
057(XXX)	2 PDT momentary	E	flush	no
058(XX)	2 PDT momentary	F	flush	no
059(XXX)	2 PDT momentary	G	flush	no
060(XXX)	2 PDT momentary	H	flush	no
061(XXXX)	2 PDT alternate	A	flush	no
062(XXX)	2 PDT alternate	B	flush	no
063(XX)	2 PDT alternate	C	flush	no
064(X)	2 PDT alternate	D	flush	no
065(XXX)	2 PDT alternate	E	flush	no
066(XX)	2 PDT alternate	F	flush	no
067(XXX)	2 PDT alternate	G	flush	no
068(XXX)	2 PDT alternate	H	flush	no
069(XXXX)	4 PDT momentary	A	extended	yes
070(XXX)	4 PDT momentary	B	extended	yes
071(XX)	4 PDT momentary	C	extended	yes
072(X)	4 PDT momentary	D	extended	yes
073(XXX)	4 PDT momentary	E	extended	yes
074(XX)	4 PDT momentary	F	extended	yes
075(XXX)	4 PDT momentary	G	extended	yes
076(XXX)	4 PDT momentary	H	extended	yes
077(XXXX)	4 PDT alternate	A	extended	yes
078(XXX)	4 PDT alternate	B	extended	yes
079(XX)	4 PDT alternate	C	extended	yes
080(X)	4 PDT alternate	D	extended	yes
081(XXX)	4 PDT alternate	E	extended	yes
082(XX)	4 PDT alternate	F	extended	yes
083(XXX)	4 PDT alternate	G	extended	yes
084(XXX)	4 PDT alternate	H	extended	yes
085(XXXX)	2 PDT momentary	A	extended	yes
086(XXX)	2 PDT momentary	B	extended	yes
087(XX)	2 PDT momentary	C	extended	yes
088(X)	2 PDT momentary	D	extended	yes
089(XXX)	2 PDT momentary	E	extended	yes
090(XX)	2 PDT momentary	F	extended	yes
091(XXX)	2 PDT momentary	G	extended	yes
092(XXX)	2 PDT momentary	H	extended	yes
093(XXXX)	2 PDT alternate	A	extended	yes
094(XXX)	2 PDT alternate	B	extended	yes
095(XX)	2 PDT alternate	C	extended	yes
096(X)	2 PDT alternate	D	extended	yes
097(XXX)	2 PDT alternate	E	extended	yes
098(XX)	2 PDT alternate	F	extended	yes
099(XXX)	2 PDT alternate	G	extended	yes
100(XXX)	2 PDT alternate	H	extended	yes

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XI. Part number and characteristics - Continued.

Part number 1/ M22885/56-	Circuit description	Lens code	Lens height	RFI shielded
101(XXXX)	4 PDT momentary	A	flush	yes
102(XXX)	4 PDT momentary	B	flush	yes
103(XX)	4 PDT momentary	C	flush	yes
104(X)	4 PDT momentary	D	flush	yes
105(XXX)	4 PDT momentary	E	flush	yes
106(XX)	4 PDT momentary	F	flush	yes
107(XXX)	4 PDT momentary	G	flush	yes
108(XXX)	4 PDT momentary	H	flush	yes
109(XXXX)	4 PDT alternate	A	flush	yes
110(XXX)	4 PDT alternate	B	flush	yes
111(XX)	4 PDT alternate	C	flush	yes
112(X)	4 PDT alternate	D	flush	yes
113(XXX)	4 PDT alternate	E	flush	yes
114(XX)	4 PDT alternate	F	flush	yes
115(XXX)	4 PDT alternate	G	flush	yes
116(XXX)	4 PDT alternate	H	flush	yes
117(XXXX)	2 PDT momentary	A	flush	yes
118(XXX)	2 PDT momentary	B	flush	yes
119(XX)	2 PDT momentary	C	flush	yes
120(X)	2 PDT momentary	D	flush	yes
121(XXX)	2 PDT momentary	E	flush	yes
122(XX)	2 PDT momentary	F	flush	yes
123(XXX)	2 PDT momentary	G	flush	yes
124(XXX)	2 PDT momentary	H	flush	yes
125(XXXX)	2 PDT alternate	A	flush	yes
126(XXX)	2 PDT alternate	B	flush	yes
127(XX)	2 PDT alternate	C	flush	yes
128(X)	2 PDT alternate	D	flush	yes
129(XXX)	2 PDT alternate	E	flush	yes
130(XX)	2 PDT alternate	F	flush	yes
131(XXX)	2 PDT alternate	G	flush	yes
132(XXX)	2 PDT alternate	H	flush	yes

1/ Part numbers shown are for units without color filters. When color filters are required, replace the X(s) with the desired filter symbol for color plates (in accordance with MIL-S-22885/54) or color caps (in accordance with MIL-S-22885/55) in the position sequence shown above.


EXAMPLE: M22885/56-010G1R1

Color filter symbols.


Color	Color plate	Color cap
Blue	B1	B2
Green	G1	G2
Red	R1	R2
White	W1	W2
Yellow	Y1	Y2

2/ These are switch housings that do not contain lamp module.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

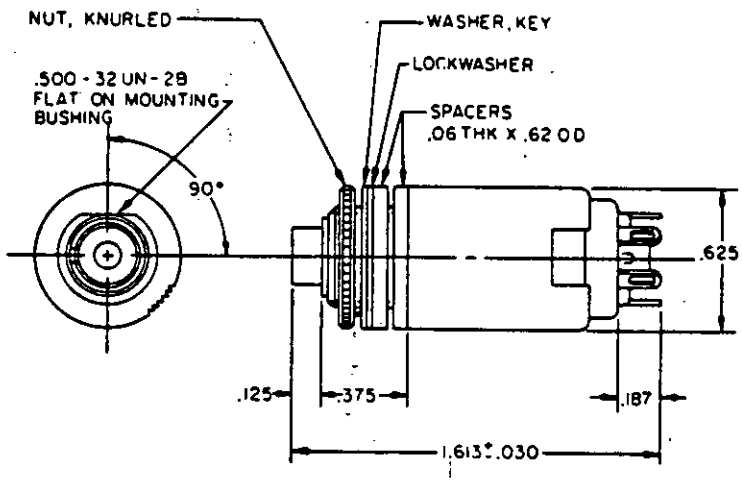

INCHES	MM
.030	.76
.06	1.52
.125	3.18
.187	4.75
.375	9.53
.500	12.70
.62	15.75
.625	15.88
1.613	40.97



SCHEMATIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-10. Switch housing (less lens), push button, illuminated, 2 circuit, momentary action.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	3	3
Inductive	2	2
Lamp	1-1/2	1-1/2

Intended use: To accommodate one midget-flange-base T-1-3/4 incandescent lamp when mated with snap-in lens in accordance with MIL-S-22885/48 (see figure 102-20) or MIL-S-22885/61.

Procurement document: MIL-S-22885/62.


Part numbers: See table 102.XII.

TABLE 102.XII. Part number and characteristics.

Part number M22885/62-	Lens M22885/48-	Circuit characteristic	Operation
01 1/	---	Two circuit	Momentary
02	01 (Yellow)		
03	02 (White)		
04	03 (Red)		
05	04 (Green)		
06	05 (Blue)		
07	06 (Yellow)		
08	07 (White)		
09	08 (Red)		
10	09 (Green)		
11	10 (Blue)		
12	11 (Yellow)		
13	12 (White)		
14	13 (Red)		
15	14 (Green)		
16	15 (Blue)		
17	16 (Yellow)		
18	17 (White)		
19	18 (Red)		
20	19 (Green)		
21	20 (Blue)		
22	21 (Yellow)		
23	22 (White)		
24	23 (Red)		
25	24 (Green)		
26	25 (Blue)	Two circuit	Momentary

1/ This is a switch housing that does not contain a lens.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

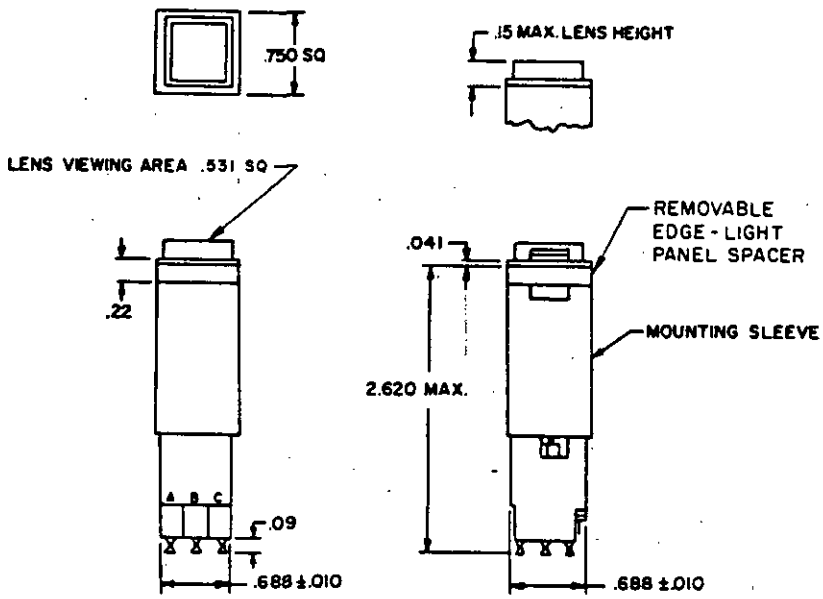

INCHES	MM
.010	.25
.041	1.04
.09	2.29
.15	3.81
.22	5.59
.531	13.49
.688	17.48
.750	19.05
2.620	66.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-11. Switch (with or without RFI shielding), push button, illuminated, 4-lamp, solid mount.

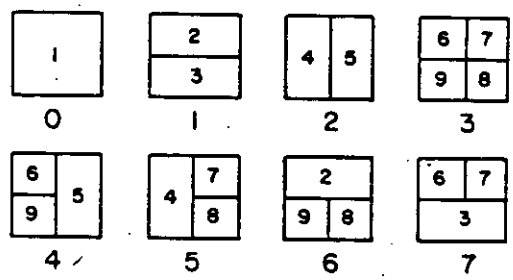

Lens configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amps)	(amps)	(amps)
Resistive	7	7	4
Inductive	4	7	2.5
Lamp	2.5	2	2.5

Complete switch shall consist of the following:

1 lens assembly (color filters in accordance with MIL-S-22885/70).
1 switch housing (with mounting sleeve and panel spacer).

Additional parts shall be ordered, if required, as follows:

4 lamps (T-1-3/4 midget-flange-base incandescent type).

Procurement document: MIL-S-22885/67.

Part numbers: See table 102.XIII.

TABLE 102.XIII. Part number and characteristics.

1/ Part number M22885/67-	Switch		Lens configuration	Lens EMI A-Applicable N-Nonapplicable	Design 2/ R-Removable N-Nonremovable
	Operation	Characteristics			
009	Momentary	2PDT	0	N	N
010			1		
011			2		
012			3		
013			4		
014			5		
015			6		
016	Momentary	2PDT	7	N	N
017	Momentary	3PDT	0	N	N
018			1		
019			2		
020			3		
021			4		
022			5		
023			6		
024	Momentary	3PDT	7	N	N
033	Alternate	2PDT	0	N	N
034			1		
035			2		
036			3		
037			4		
038			5		
039			6		
040	Alternate	2PDT	7	N	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XIII. Part number and characteristics - Continued.

1/ Part number M22885/67-	Switch		Lens configuration	Lens EMI A-Applicable N-Nonapplicable	Design 2/ R-Removable N-Nonremovable
	Operation	Characteristics			
041	Alternate	3PDT	0	N	N
042	↕	↕	1	↕	↕
043			2		
044			3		
045			4		
046			5		
047			6		
048	Alternate	3PDT	7	N	N
049	Momentary	2PDT	0	N	R
050	↕	↕	1	↕	↕
051			2		
052			3		
053			4		
054			5		
055			6		
056	Momentary	2PDT	7	N	R
057	Momentary	3PDT	0	N	R
058	↕	↕	1	↕	↕
059			2		
060			3		
061			4		
062			5		
063			6		
064	Momentary	3PDT	7	N	R
065	Alternate	2PDT	0	N	R
066	↕	↕	1	↕	↕
067			2		
068			3		
069			4		
070			5		
071			6		
072	Alternate	2PDT	7	N	R
073	Alternate	3PDT	0	N	R
074	↕	↕	1	↕	↕
075			2		
076			3		
077			4		
078			5		
079			6		
080	Alternate	3PDT	7	N	R
081	Momentary	2PDT	0	A	R
082	↕	↕	1	↕	↕
083			2		
084			3		
085			4		
086			5		
087			6		
088	Momentary	2PDT	7	A	R

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XIII. Part number and characteristics - Continued.

1/ Part number M22885/67-	Switch		Lens configuration	Lens EMI A-Applicable N-Nonapplicable	Design 2/ R-Removable N-Nonremovable
	Operation	Characteristics			
089	Momentary	3PDT	0	A	R
090	↕	↕	1	↕	↕
091			2		
092			3		
093			4		
094			5		
095			6	↓	↓
096	Momentary	3PDT	7	A	R
097	Alternate	2PDT	0	A	R
098	↕	↕	1	↕	↕
099			2		
100			3		
101			4		
102			5		
103			6	↓	↓
104	Alternate	2PDT	7	A	R
105	Alternate	3PDT	0	A	R
106	↕	↕	1	↕	↕
107			2		
108			3		
109			4		
110			5		
111			6	↓	↓
112	Alternate	3PDT	7	A	R

1/ Part numbers shown are for units without color filter requirements. When color filters are required, use the military part number plus the segment placement number as indicated above (see example).


EXAMPLE:

M22885/67-004 6B 7G 8R 9Y

- 9Y — Yellow (9th position)
- 8R — Red (8th position)
- 7G — Green (7th position)
- 6B — Blue (6th position)

2/ Removable lens assembly shall be capable of being removed from the switch housing. Non-removable lens assembly shall be capable of having lamps removed but is restricted in complete removal from the switch housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

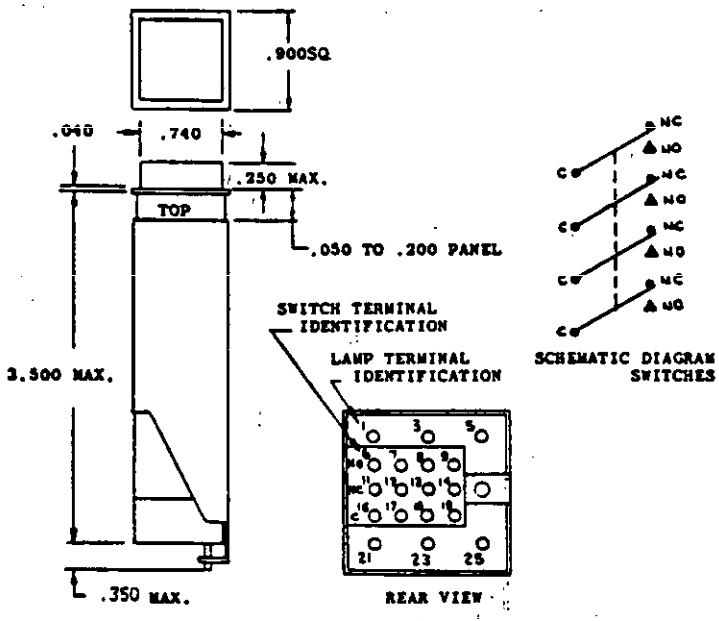

INCHES	MM
.040	1.02
.050	1.27
.200	5.08
.250	6.35
.350	8.89
.740	18.80
.900	22.86
3.500	88.90

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-12. Switch (conforming to integrated wire termination system), push, illuminated, 4-lamp, solid mount.

Lens assembly.

Code	Lens style		Lamp schematic
A	Solid - common ground		1 3 5 21 25
B	Split horizontally - horizontal split ground	(1) (2)	1 3 5 21 23 25
C	Split vertically - vertical split ground	(1) (2)	1 3 5 21 23 25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	28 Vdc	115 Vac
	(amps)	(amps)
Resistive	5	5
Inductive	2.5	2.5
Lamp	1.5	1.5

Complete switch shall consist of the following:

1 lens assembly.
1 switch housing (terminal junction module in accordance with MIL-T-81714) with mounting sleeve.

Additional parts shall be ordered, if required, as follows:
4 lamps (T-1-3/4 midget-flange-base indandescent type).
Crimp contacts, M39029/1-16-20.

Procurement document: MIL-S-22885/74.


Part numbers: See table 102.XIV.

TABLE 102.XIV. Part number and characteristics.

Part number M22885/74-	Lens place code	Circuit characteristics and operation
01 (X) 1/	A	2 PDT Momentary
02 (X) 1/	A	4 PDT Momentary
03 (X) 1/	A	2 PDT Alternate
04 (X) 1/	A	4 PDT Alternate
05 (XX) 2/	B	2 PDT Momentary
06 (XX) 2/	B	4 PDT Momentary
07 (XX) 2/	B	2 PDT Alternate
08 (XX) 2/	B	4 PDT Alternate
09 (XX) 2/	C	2 PDT Momentary
10 (XX) 2/	C	4 PDT Momentary
11 (XX) 2/	C	2 PDT Alternate
12 (XX) 2/	C	4 PDT Alternate

1/ Part numbers shown are for units without color filters. When color filters are required, add the color symbols of MIL-S-22885 in place of (X).
2/ Part numbers shown are for units without color filters. When color filters are required, add the color symbols of MIL-S-22885 in place of (XX) with location as shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

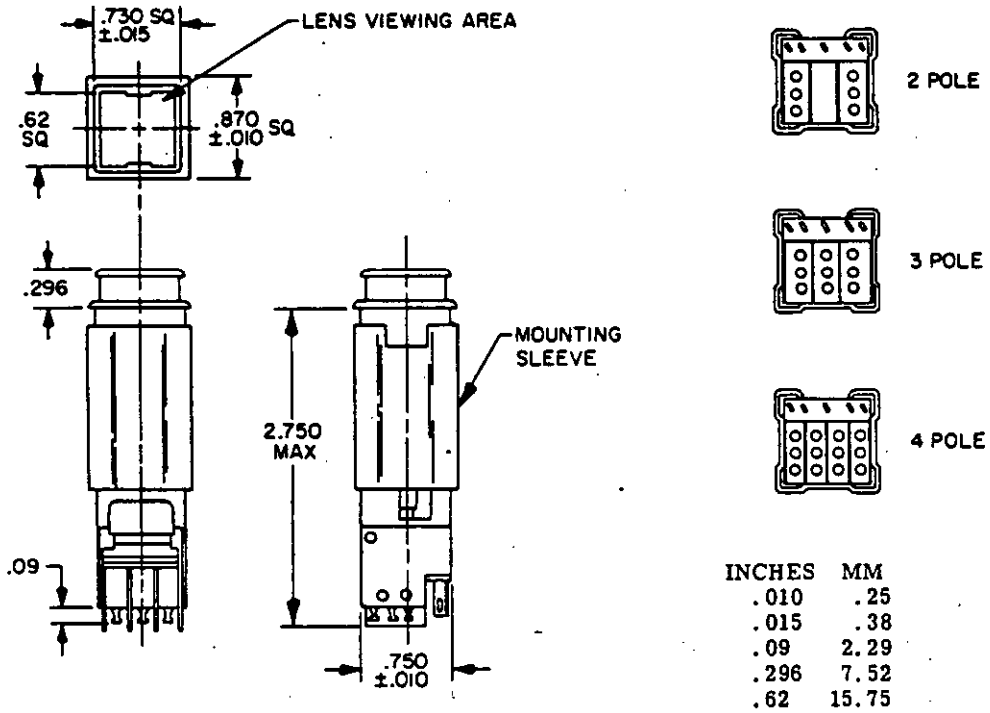


INCHES	MM
.010	.25
.015	.38
.09	2.29
.296	7.52
.62	15.75
.730	18.54
.750	19.05
.870	22.10
2.750	69.85

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-13. Switch (with or without RFI shielding), push button, illuminated, 4-lamp, momentary or alternate action.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

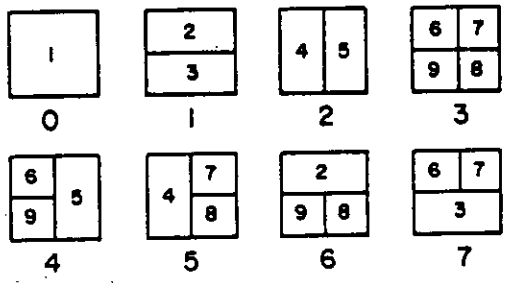

Lens configuration

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amps)	(amps)	(amps)
Resistive	7	7	4
Inductive	4	7	2.5
Lamp	2.5	2	2.5

Complete switch shall consist of the following:

1 lens assembly (color filters in accordance with MIL-S-22885/70).
1 switch housing (with mounting sleeve).

Additional parts shall be ordered, if required, as follows:

4 lamps (T-1-3/4 midget-flange-base incandescent type).

Procurement document: MIL-S-22885/75.

Part numbers: See table 102.XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XV. Part number and characteristics.

Part number 1/ M22885/75-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non-app.	Design 2/ R-Removable N-Non-removable
009	Momentary	2PDT	0	N	N
010	↕	↕	1	↕	↕
011			2		
012			3		
013			4		
014			5		
015			6		
016	Momentary	2PDT	7	N	N
017	Momentary	3PDT	0	N	N
018	↕	↕	1	↕	↕
019			2		
020			3		
021			4		
022			5		
023			6		
024	Momentary	3PDT	7	N	N
025	Momentary	4PDT	0	N	N
026	↕	↕	1	↕	↕
027			2		
028			3		
029			4		
030			5		
031			6		
032	Momentary	4PDT	7	N	N
041	Alternate	2PDT	0	N	N
042	↕	↕	1	↕	↕
043			2		
044			3		
045			4		
046			5		
047			6		
048	Alternate	2PDT	7	N	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XV. Part number and characteristics - Continued.

Part number 1/ M22885/75-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non-app.	Design 2/ R-Removable N-Non-removable
049	Alternate	3PDT	0	N	N
050	↕	↕	1	↕	↕
051			2		
052			3		
053			4		
054			5		
055			6		
056	Alternate	3PDT	7	N	N
057	Alternate	4PDT	0	N	N
058	↕	↕	1	↕	↕
059			2		
060			3		
061			4		
062			5		
063			6		
064	Alternate	4PDT	7	N	N
065	Momentary	2PDT	0	N	R
066	↕	↕	1	↕	↕
067			2		
068			3		
069			4		
070			5		
071			6		
072	Momentary	2PDT	7	N	R
073	Momentary	3PDT	0	N	R
074	↕	↕	1	↕	↕
075			2		
076			3		
077			4		
078			5		
079			6		
080	Momentary	3PDT	7	N	R
081	Momentary	4PDT	0	N	R
082	↕	↕	1	↕	↕
083			2		
084			3		
085			4		
086			5		
087			6		
088	Momentary	4PDT	7	N	R
089	Alternate	2PDT	0	N	R
090	↕	↕	1	↕	↕
091			2		
092			3		
093			4		
094			5		
095			6		
096	Alternate	2PDT	7	N	R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XV. Part number and characteristics - Continued.

Part number 1/ M22885/75-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non-app.	Design 2/ R-Removable N-Non-removable
097	Alternate	3PDT	0	N	R
098	↕	↕	1	↕	↕
099			2		
100			3		
101			4		
102			5		
103			6		
104	Alternate	3PDT	7	N	R
105	Alternate	4PDT	0	N	R
106	↕	↕	1	↕	↕
107			2		
108			3		
109			4		
110			5		
111			6		
112	Alternate	4PDT	7	N	R
113	Momentary	2PDT	0	A	R
114	↕	↕	1	↕	↕
115			2		
116			3		
117			4		
118			5		
119			6		
120	Momentary	2PDT	7	A	R
121	Momentary	3PDT	0	A	R
122	↕	↕	1	↕	↕
123			2		
124			3		
125			4		
126			5		
127			6		
128	Momentary	3PDT	7	A	R
129	Momentary	4PDT	0	A	R
130	↕	↕	1	↕	↕
131			2		
132			3		
133			4		
134			5		
135			6		
136	Momentary	4PDT	7	A	R
137	Alternate	2PDT	0	A	R
138	↕	↕	1	↕	↕
139			2		
140			3		
141			4		
142			5		
143			6		
144	Alternate	2PDT	7	A	R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XV. Part number and characteristics - Continued.

Part number 1/ M22885/75-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non-app.	Design 2/ R-Removable N-Non-removable
145	Alternate	3PDT	0	A	R
146			1		
147			2		
148			3		
149			4		
150			5		
151			6		
152	Alternate	3PDT	7	A	R
153	Alternate	4PDT	0	A	R
154			1		
155			2		
156			3		
157			4		
158			5		
159			6		
160	Alternate	4PDT	7	A	R

1/ Part numbers shown are for units without color filter requirements. When color filters are required, use the military part number plus the segment placement number as indicated above (see example).


EXAMPLE:

M22885/75-012 6B 7G 8R 9Y

- 9Y — Yellow (9th position)
- 8R — Red (8th position)
- 7G — Green (7th position)
- 6B — Blue (6th position)

2/ Removable lens assembly shall be capable of being removed from the switch housing. Nonremovable lens assembly shall be capable of having lamps removed but is restricted in complete removal from the switch housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

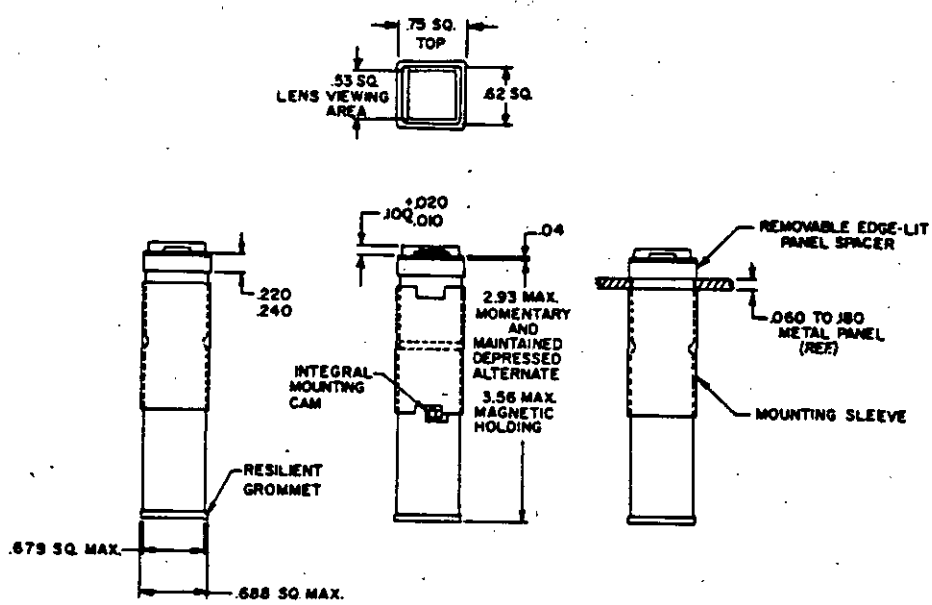


INCHES	MM	INCHES	MM
.010	.25	.53	13.47
.020	.51	.62	15.74
.04	1.02	.679	17.26
.060	1.52	.688	17.48
.100	2.54	.75	19.05
.180	4.57	2.93	74.42
.220	5.59	3.56	90.42
.240	6.10		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-14. Switch (with or without RFI shielding), 4-lamp, solid mount, insertable crimp termination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

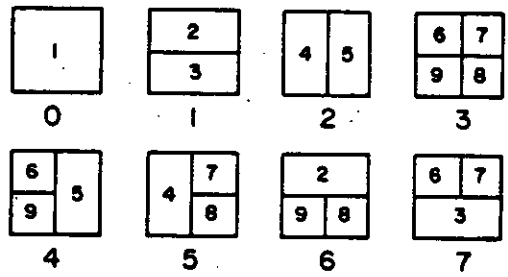

Lens configuration

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amps)	(amps)	(amps)
Resistive	7.5	7.5	4
Inductive	5.0	5.0	2.5
Lamp 1/	1.0	1.0	1.0

1/ Inrush, 10:1 for 20 milliseconds maximum.

Complete switch shall consist of the following:

1 lens assembly (color filters in accordance with MIL-S-22885/78).
1 switch housing (with mounting sleeve and panel spacer).

Additional parts shall be ordered, if required, as follows:
4 lamps (T-1-3/4 midget-flange-base incandescent type).
Crimp contacts, M39029/1-16-20.

Procurement document: MIL-S-22885/77.

Part numbers: See table 102.XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVI. Part number and characteristics.

Part numbers M22885/77-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non app.	Design 2/ R-Removable N-Non-removable
001	Momentary	2 PDT	0	N	N
002	↕	↕	1	↕	↕
003			2		
004			3		
005			4		
006			5		
007			6		
008	Momentary	2 PDT	7	N	N
009	Momentary	3 PDT	0	N	N
010	↕	↕	1	↕	↕
011			2		
012			3		
013			4		
014			5		
015			6		
016	Momentary	3 PDT	7	N	N
017	Momentary	4 PDT	0	N	N
018	↕	↕	1	↕	↕
019			2		
020			3		
021			4		
022			5		
023			6		
024	Momentary	4 PDT	7	N	N
025	D 1/	2 PDT	0	N	N
026	↕	↕	1	↕	↕
027			2		
028			3		
029			4		
030			5		
031			6		
032	D 1/	2 PDT	7	N	N
033	D 1/	3 PDT	0	N	N
034	↕	↕	1	↕	↕
035			2		
036			3		
037			4		
038			5		
039			6		
040	D 1/	3 PDT	7	N	N
041	D 1/	4 PDT	0	N	N
042	↕	↕	1	↕	↕
043			2		
044			3		
045			4		
046			5		
047			6		
048	D 1/	4 PDT	7	N	N

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVI. Part number and characteristics - Continued.

Part numbers M22885/77-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non app.	Design 2/ R-Removable N-Non-removable
049	Mag. hold	2 PDT	0	N	N
050	↕	↕	1	↕	↕
051			2		
052			3		
053			4		
054			5		
055			6	↕	↕
056	Mag. hold	2 PDT	7	N	N
057	Mag. hold	3 PDT	0	N	N
058	↕	↕	1	↕	↕
059			2		
060			3		
061			4		
062			5		
063			6	↕	↕
064	Mag. hold	3 PDT	7	N	N
065	Mag. hold	4 PDT	0	N	N
066	↕	↕	1	↕	↕
067			2		
068			3		
069			4		
070			5		
071			6	↕	↕
072	Mag. hold	4 PDT	7	N	N
073	Momentary	2 PDT	0	N	R
074	↕	↕	1	↕	↕
075			2		
076			3		
077			4		
078			5		
079			6	↕	↕
080	Momentary	2 PDT	7	N	R
081	Momentary	3 PDT	0	N	R
082	↕	↕	1	↕	↕
083			2		
084			3		
085			4		
086			5		
087			6	↕	↕
088	Momentary	3 PDT	7	N	R
089	Momentary	4 PDT	0	N	R
090	↕	↕	1	↕	↕
091			2		
092			3		
093			4		
094			5		
095			6	↕	↕
096	Momentary	4 PDT	7	N	R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVI. Part number and characteristics - Continued.

Part numbers M22885/77-	Switch		Configuration	Lens	
	Operation	Characteristics		EMI A-Appl. N-Non-appl.	Design 4/ R-Removable* N-Non-removable
097	D 1/	2 PDT	0	N	R
098	↕	↕	1	↕	↕
099			2		
100			3		
101			4		
102			5		
103			6		
104	D 1/	2 PDT	7	N	R
105	D 1/	3 PDT	0	N	R
106	↕	↕	1	↕	↕
107			2		
108			3		
109			4		
110			5		
111			6		
112	D 1/	3 PDT	7	N	R
113	D 1/	4 PDT	0	N	R
114	↕	↕	1	↕	↕
115			2		
116			3		
117			4		
118			5		
119			6		
120	D 1/	4 PDT	7	N	R
121	Mag. hold	2 PDT	0	N	R
122	↕	↕	1	↕	↕
123			2		
124			3		
125			4		
126			5		
127			6		
128	Mag. hold	2 PDT	7	N	R
129	Mag. hold	3 PDT	0	N	R
130	↕	↕	1	↕	↕
131			2		
132			3		
133			4		
134			5		
135			6		
136	Mag. hold	3 PDT	7	N	R
137	Mag. hold	4 PDT	0	N	R
138	↕	↕	1	↕	↕
139			2		
140			3		
141			4		
142			5		
143			6		
144	Mag. hold	4 PDT	7	N	R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVI. Part number and characteristics - Continued.

Part numbers M22885/77-	Switch		Configuration	Code	
	Operation	Characteristics		EMI A-App. N-Non app.	Design 2/ R-Removable N-Non-removable
145	Momentary	2 PDT	0	A	R
146	↕	↕	1	↕	↕
147			2		
148			3		
149			4		
150			5		
151			6		
152	Momentary	2 PDT	7	A	R
153	Momentary	3 PDT	0	A	R
154	↕	↕	1	↕	↕
155			2		
156			3		
157			4		
158			5		
159			6		
160	Momentary	3 PDT	7	A	R
161	Momentary	4 PDT	0	A	R
162	↕	↕	1	↕	↕
163			2		
164			3		
165			4		
166			5		
167			6		
168	Momentary	4 PDT	7	A	R
169	D 1/	2 PDT	0	A	R
170	↕	↕	1	↕	↕
171			2		
172			3		
173			4		
174			5		
175			6		
176	D 1/	2 PDT	7	A	R
177	D 1/	3 PDT	0	A	R
178	↕	↕	1	↕	↕
179			2		
180			3		
181			4		
182			5		
183			6		
184	D 1/	3 PDT	7	A	R
185	D 1/	4 PDT	0	A	R
186	↕	↕	1	↕	↕
187			2		
188			3		
189			4		
190			5		
191			6		
192	D 1/	4 PDT	7	A	R

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVI. Part number and characteristics - Continued.


Part numbers M22885/77-	Switch		Lens		
	Operation	Characteristics	Configuration	EMI A-App. N-Non app.	Design 2/ R-Removable N-Non-removable
193	Mag. hold	2 PDT	0	A	R
194	↕	↕	1	↕	↕
195			2		
196			3		
197			4		
198			5		
199			6		
200	Mag. hold	2 PDT	7	A	R
201	Mag. hold	3 PDT	0	A	R
202	↕	↕	1	↕	↕
203			2		
204			3		
205			4		
206			5		
207			6		
208	Mag. hold	3 PDT	7	A	R
209	Mag. hold	4 PDT	0	A	R
210	↕	↕	1	↕	↕
211			2		
212			3		
213			4		
214			5		
215			6		
216	Mag. hold	4 PDT	7	A	R

1/ Maintained Depressed Alternate action
2/ Removable lens assembly shall be capable of being removed from the switch housing. Non-removable lens assembly shall be capable of having lamps removed but is restricted in complete removal from the switch housing.


Notes:


1. Part numbers shown are for units without color filter requirements. When color filters are required, use the military part number plus the segment placement number as indicated above (see example). In no case shall the color filter part number be stamped or marked on the switch.

   EXAMPLE:

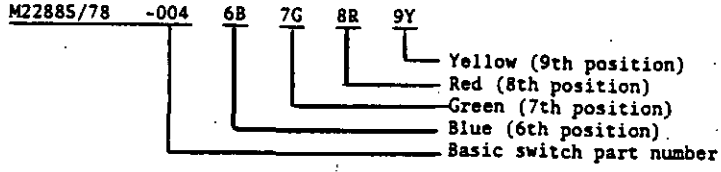


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

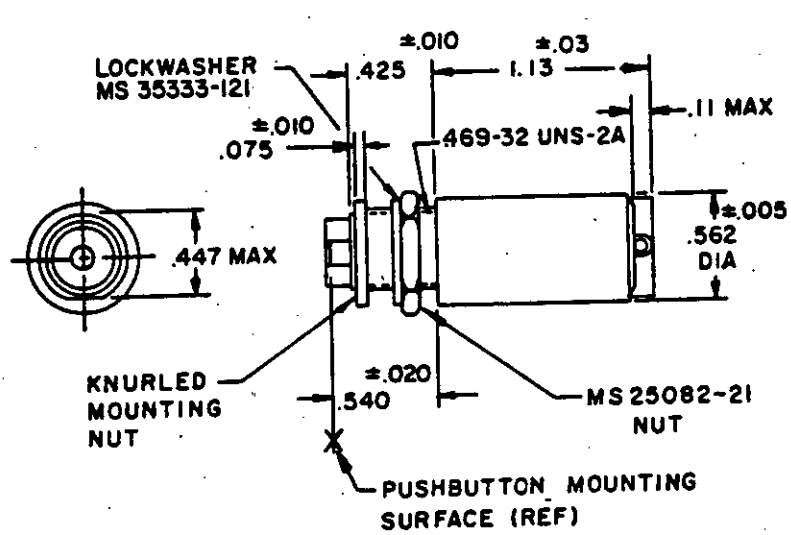



SCHEMATIC DIAGRAM

INCHES	MM
.005	.13
.010	.25
.020	.51
.03	.76
.075	1.91
.11	2.79
.25	6.35
.358	9.09
.375	9.53
.408	10.36
.425	10.80
.44	11.18
.447	11.35
.469	11.91
.50	12.70
.505	12.83
.540	13.72
.56	14.22
.562	14.27
.608	15.44
.625	15.88
.656	16.66
.75	19.05
.858	21.79
1.00	25.40
1.13	28.70

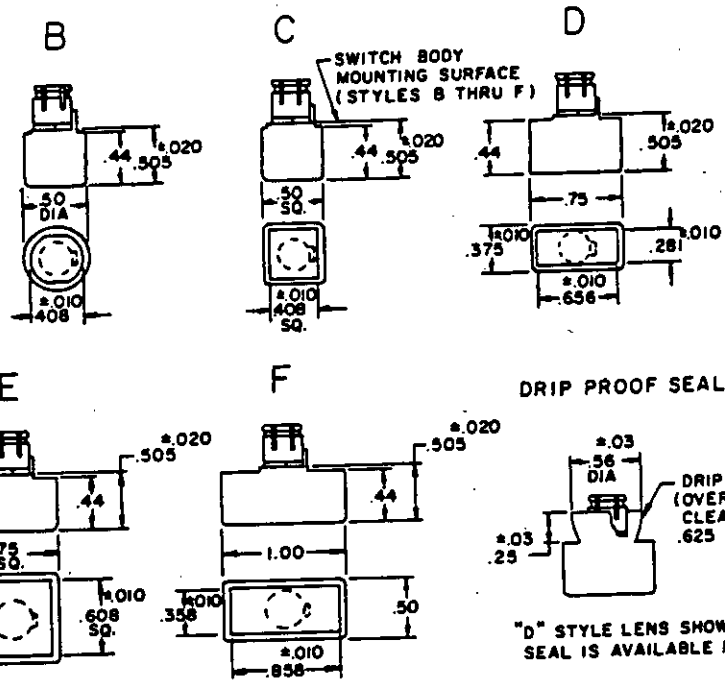

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-15. Switch body and lens (with or without drip proof seal), push button, illuminated, 1-lamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Silver contacts per MS24547-1.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amps)	(amps)	(amps)
Resistive	7	7	4
Inductive	4	7	2.5
Lamps	2.5	2	2.5

Gold contacts per MS24547-2 filled or diffused.

Load	Sea level 28 Vdc	50,000 feet 28 Vdc
	(amps)	(amps)
Resistive	1	1
Inductive	.5	.5

Complete switch shall consist of:

1. Push button lens assembly.
2. Lamp, one T-1-3/4 midget-flange-based incandescent lamp #387, 28 volts (long life).
3. Switch body.

Procurement document: MIL-S-22885/79.

Part numbers: See table 102.XVII.

TABLE 102.XVII. Part number and characteristics.

Part number 1/ M22885/79-	Switch contacts	Lens style (snap-in)	Color code	Drip proof seal A-Applicable N-Nonapplicable
001	MS24547-1	B	G	N
002	↑	↑	R	↑
003		↕	W	
004		↓	Y	
005		B	B	
006		C	G	
007		↑	R	
008		↕	W	
009		↓	Y	
010		C	B	
011		D	G	
012		↑	R	
013		↕	W	
014		↓	Y	
015		D	B	
016		E	G	
017		↑	R	
018		↕	W	
019	↓	↓	Y	↓
020	MS24547-1	E	B	N

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVII. Part number and characteristics - Continued.

Part number 1/ M22885/79-	Switch contacts	Lens style (snap-in)	Color code	Drip proof seal A-Applicable N-Nonapplicable
021	MS24547-1	F	G	N
022			R	
023			W	
024			Y	
025		F	B	
026	MS24547-2	B	G	
027			R	
028			W	
029			Y	
030		B	B	
031		C	G	
032			R	
033			W	
034			Y	
035		C	B	
036		D	G	
037			R	
038			W	
039			Y	
040		D	B	
041		E	G	
042			R	
043			W	
044			Y	
045		E	B	
046		F	G	
047			R	
048			W	
049			Y	
050	MS24547-2	F	B	N
051	MS24547-1	B	G	A
052			R	
053			W	
054			Y	
055		B	B	
056		C	G	
057			R	
058			W	
059			Y	
060		C	B	
061		D	G	
062			R	
063			W	
064			Y	
065		D	B	
066		E	G	
067			R	
068			W	
069			Y	
070	MS24547-1	E	B	A

See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVII. Part number and characteristics - Continued.


Part number 1/ M22885/79-	Switch contacts	Lens style (snap-in)	Color code	Drip proof seal A-Applicable N-Nonapplicable
071	MS24547-1	F	G	A
072	↑	↑	R	↑
073	↕	↕	W	↕
074	↕	↕	Y	↕
075	MS24547-1	F	B	↕
076	MS24547-2	B	G	↕
077	↑	↑	R	↕
078	↕	↕	W	↕
079	↕	↕	Y	↕
080	↕	B	B	↕
081	↕	C	G	↕
082	↕	↑	R	↕
083	↕	↕	W	↕
084	↕	↕	Y	↕
085	↕	C	B	↕
086	↕	D	G	↕
087	↕	↑	R	↕
088	↕	↕	W	↕
089	↕	↕	Y	↕
090	↕	D	B	↕
091	↕	E	G	↕
092	↕	↑	R	↕
093	↕	↕	W	↕
094	↕	↕	Y	↕
095	↕	E	B	↕
096	↕	F	G	↕
097	↕	↑	R	↕
098	↕	↕	W	↕
099	↕	↕	Y	↕
100	MS24547-2	F	B	A
101	MS24547-1	None	Not applicable	N
102	MS24547-2	None		N

1/ Part numbers M22885/79-001 through -100 are for complete switch assembly including push button lens. Part numbers M22885/79-101 and -102 are for basic switch body less lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

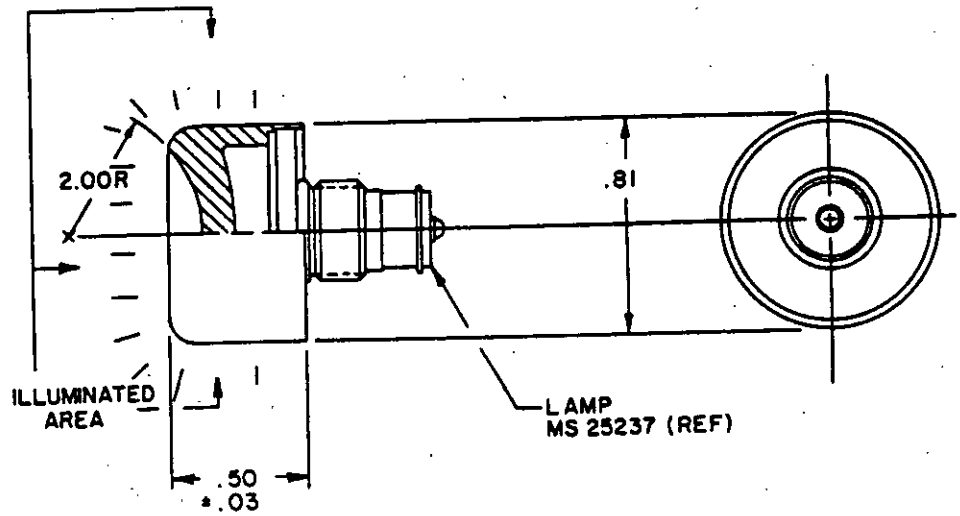


Configuration A

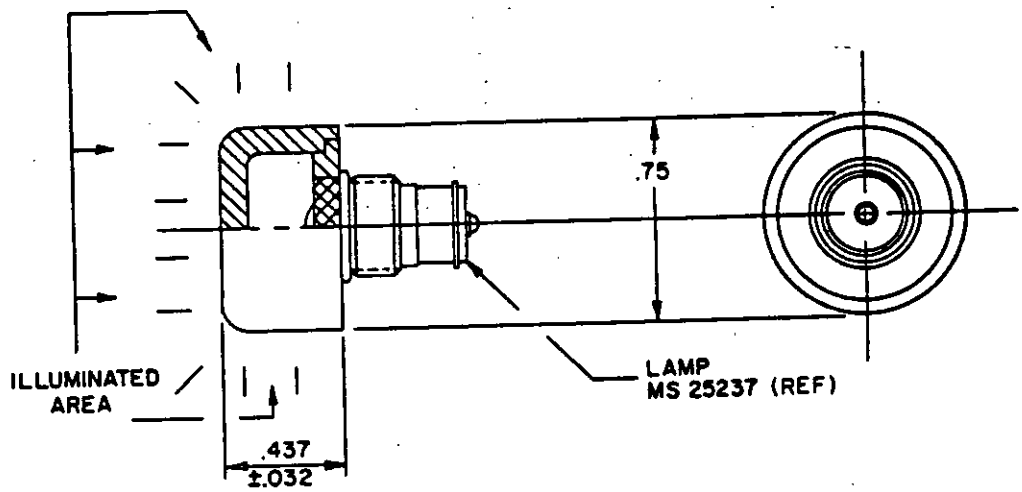


Configuration B

FIGURE 102-16. Screw-in lenses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

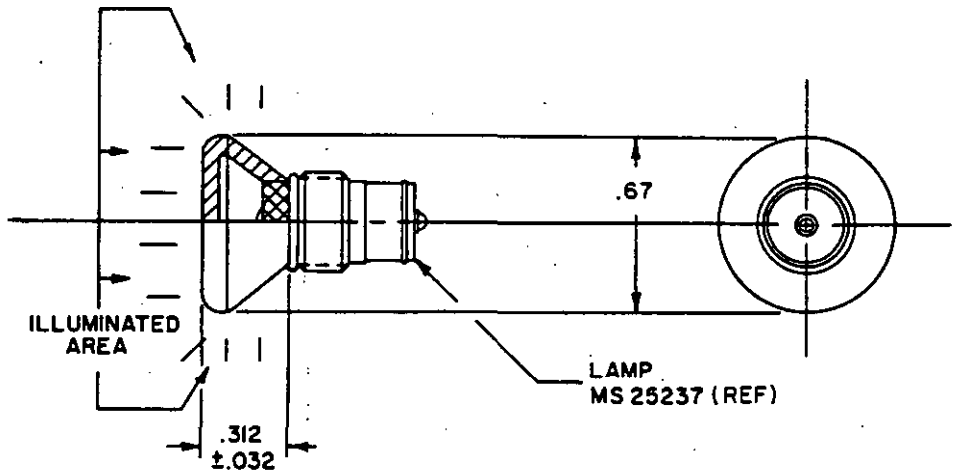


Configuration C

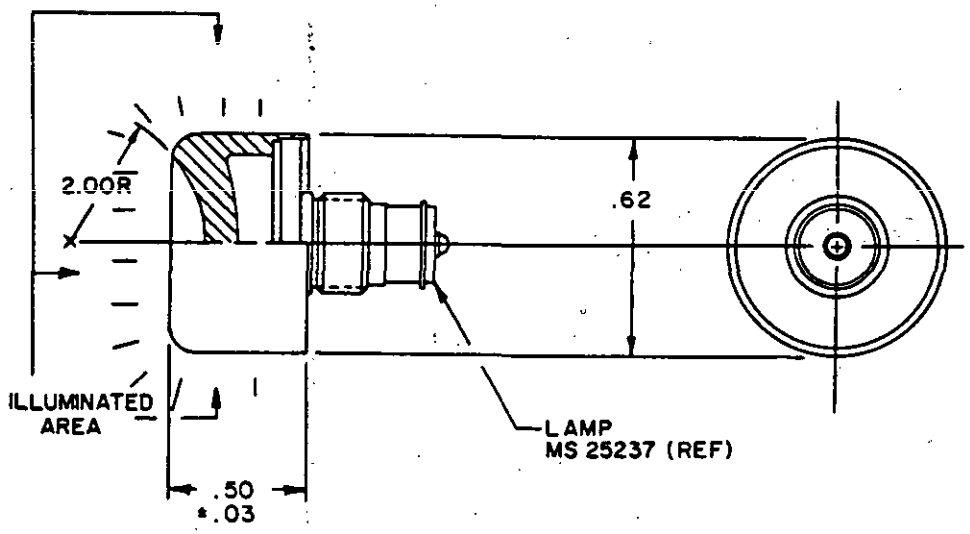

Configuration D

FIGURE 102-16. Screw-in lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

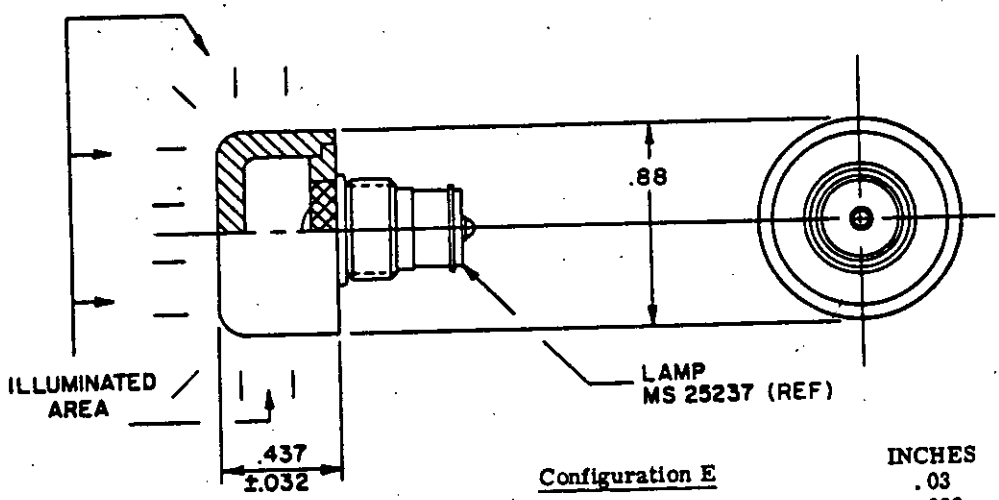

Configuration E

INCHES	MM
.03	.76
.032	.81
.312	7.92
.437	11.10
.50	12.70
.62	15.75
.67	17.02
.75	19.05
.81	20.57
.88	22.35
2.00	50.80

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-16. Screw-in lenses - Continued.

Color coordinates.

Color coordinates ± .02		
Color	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.183	.589
Blue	.127	.288

Intended use: Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/7 and MIL-S-22885/8 (see figure 102-1).

Procurement document: MIL-S-22885/1.

Part number: See table 102.XVIII.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XVIII. Part number and characteristics.


Part number 1/ M22885/1-	Configuration	Color	Brightness 2/ (3/4 face)	Material
01	A	Yellow	225 ft L	L-P-349
02	A	White	250 ft L	L-P-349
03	A	Red	20 ft L	L-P-349
04	A	Green	11 ft L	L-P-349
05	A	Blue	7 ft L	L-P-380
06	B	Yellow	150 ft L	L-P-349
07	B	White	200 ft L	L-P-349
08	B	Red	15 ft L	L-P-349
09	B	Green	18 ft L	L-P-349
10	B	Blue	4 ft L	L-P-380
11	C	Yellow	300 ft L	L-P-349
12	C	White	300 ft L	L-P-349
13	C	Red	25 ft L	L-P-349
14	C	Green	40 ft L	L-P-349
15	C	Blue	10 ft L	L-P-380
16	D	Yellow	150 ft L	L-P-349
17	D	White	200 ft L	L-P-349
18	D	Red	15 ft L	L-P-349
19	D	Green	18 ft L	L-P-349
20	D	Blue	4 ft L	L-P-380
21	E	Yellow	120 ft L	L-P-349
22	E	White	135 ft L	L-P-349
23	E	Red	14 ft L	L-P-349
24	E	Green	14 ft L	L-P-349
25	E	Blue	2 ft L	L-P-380

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate at 2,100° ±50° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

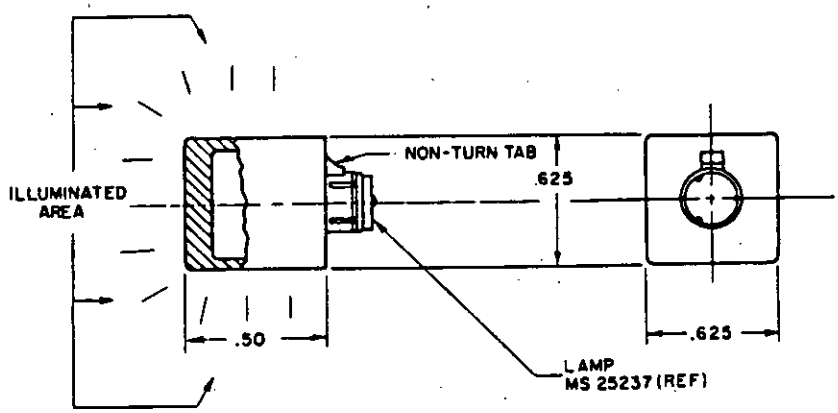


Configuration A

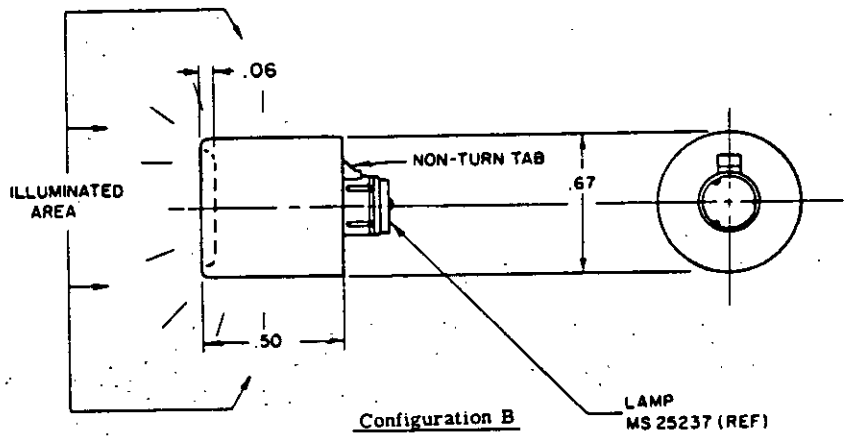

Configuration B

FIGURE 102-17. Snap-in push button lenses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

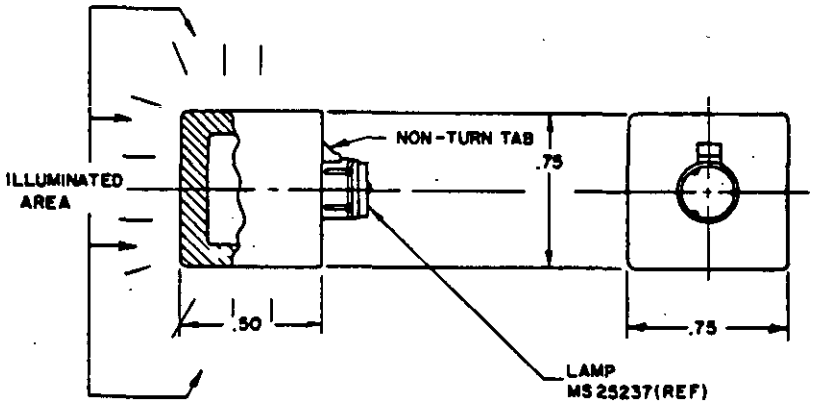

INCHES	MM
.50	12.70
.625	15.88
.67	17.02
.75	19.05

Configuration C

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-17. Snap-in push button lenses - Continued.

Color coordinates.

Color coordinates ±.05		
Color	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.320	.520
Blue	.112	.248

Intended use: Configurations A, B, and C. Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/18 (see figure 102-4).

Procurement document: MIL-S-22885/19.

Part numbers: See table 102.XIX.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 102.XIX. Part number and characteristics.


Part number 1/ M22885/19-	Configuration	Color	Brightness 2/ (3/4 face)
01	A	Yellow	150 ft. L
02	A	White	200 ft. L
03	A	Red	15 ft. L
04	A	Green	20 ft. L
05	A	Blue	5 ft. L
06	B	Yellow	150 ft. L
07	B	White	200 ft. L
08	B	Red	15 ft. L
09	B	Green	20 ft. L
10	B	Blue	5 ft. L
11	C	Yellow	150 ft. L
12	C	White	200 ft. L
13	C	Red	15 ft. L
14	C	Green	20 ft. L
15	C	Blue	5 ft. L

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate, at 2,100 ±50° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

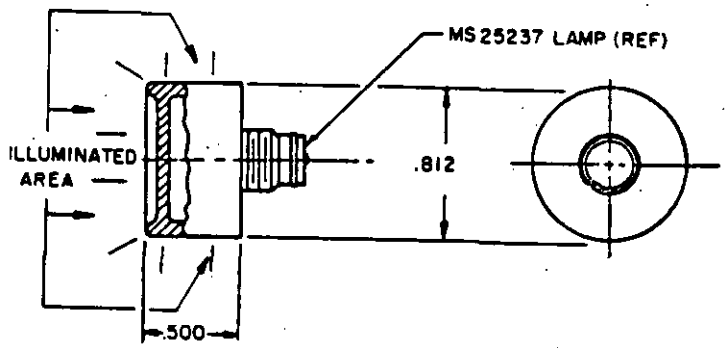


Configuration A

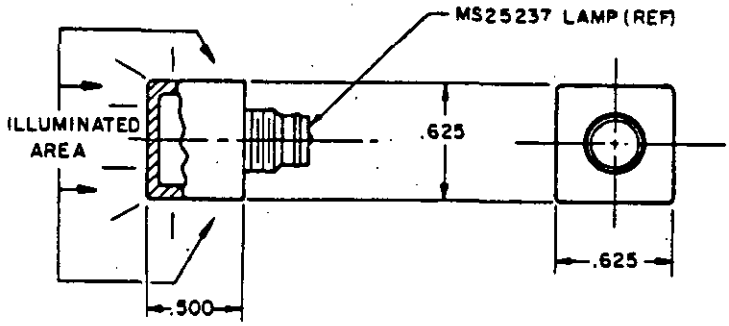


Configuration B

FIGURE 102-18. Screw-in push button lenses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

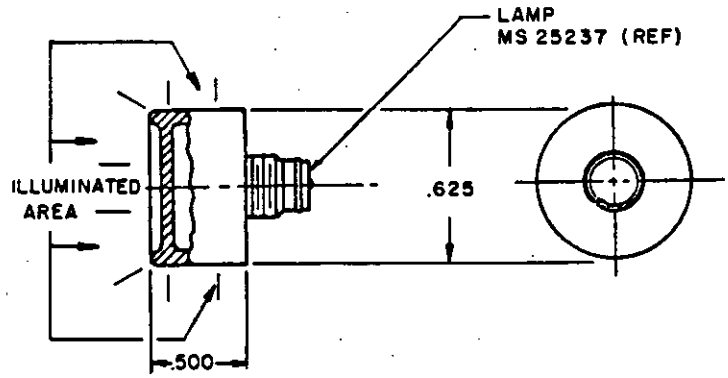

Configuration C

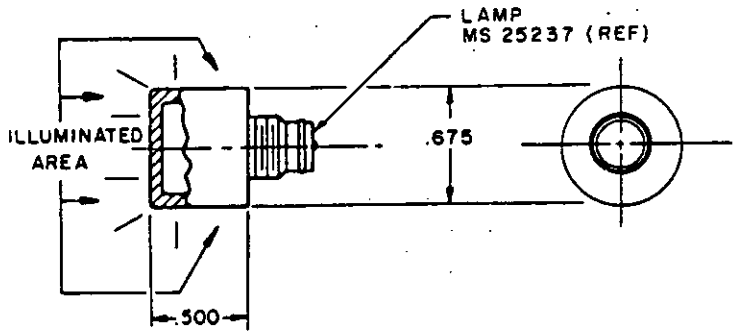

INCHES	MM
.500	12.70
.625	15.88
.675	17.15
.812	20.62

Configuration D

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-18. Screw-in push button lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Color coordinates.

Color coordinates ±.05		
Color	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.320	.520
Blue	.112	.248

Intended use: Configuration A, B, C, and D. Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/14 and MIL-S-22885/18 (see figure 102-4).

Procurement document: MIL-S-22885/22.


Part numbers: See table 102.XX.

TABLE 102.XX. Part number and characteristics.


Part number 1/ M22885/22-	Configuration	Color	Brightness 2/ (3/4 face)
01	A	Yellow	350 ft. L
02	A	White	300 ft. L
03	A	Red	100 ft. L
04	A	Green	75 ft. L
05	A	Blue	20 ft. L
06	B	Yellow	350 ft. L
07	B	White	300 ft. L
08	B	Red	100 ft. L
09	B	Green	75 ft. L
10	B	Blue	20 ft. L
11	C	Yellow	350 ft. L
12	C	White	300 ft. L
13	C	Red	100 ft. L
14	C	Green	75 ft. L
15	C	Blue	20 ft. L
16	D	Yellow	350 ft. L
17	D	White	300 ft. L
18	D	Red	100 ft. L
19	D	Green	75 ft. L
20	D	Blue	20 ft. L

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate, at 2,200° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

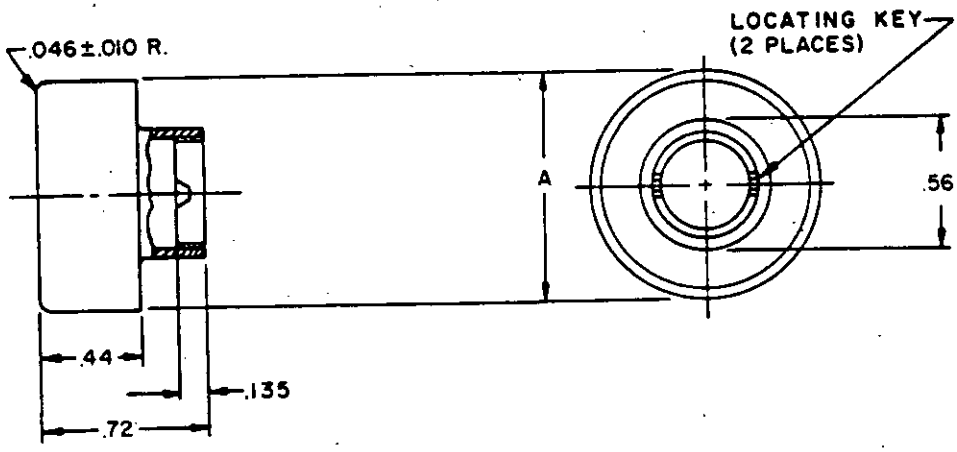

Round lens.

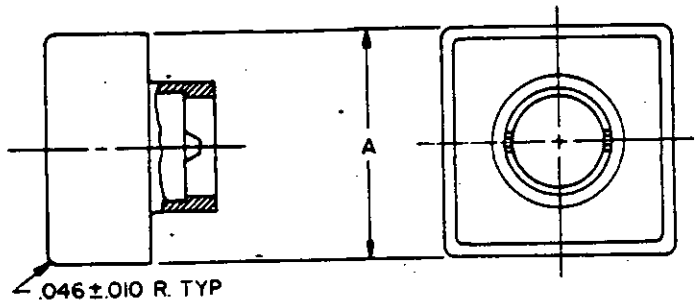

INCHES	MM
.010	.25
.046	1.17
.135	3.43
.44	11.18
.56	14.22
.72	18.29

Square lens.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-19. Lenses for illuminated push button switch.

Color coordinates			Brightness 1/
Color	"x"	"y"	
Blue	.113 ± .050	.200 ± .050	7 ftL
Green	.210 ± .050	.658 ± .050	30 ftL
Red	.696 ± .020	.302 ± .020	60 ftL
Yellow	.565 ± .020	.425 ± .020	160 ftL
White	.527 ± .030	.413 ± .030	190 ftL

1/ Brightness values are approximate, based on center 1/4" dia of lens, at 2,200° K.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Intended use: Lens shall be capable of mating with switch housing in accordance with MIL-S-22885/27 (see figure 102-5).

Procurement document: MIL-S-22885/28.


Part numbers: See table 102.XXI.

TABLE 102.XXI. Part number and lens characteristics.


Part number 1/ M22885/28-	Color	Dimension A ±.02 (.51 mm)	Material specification	Lens style
		inches 2/		
01	Blue	.62 (15.75)	L-P-380	Round
02	Green	.62 (15.75)	L-P-349	
03	Red	.62 (15.75)	L-P-349	
05	Yellow	.62 (15.75)	L-P-349	
06	White	.62 (15.75)	L-P-349	
07	Blue	.75 (19.05)	L-P-380	
08	Green	.75 (19.05)	L-P-349	
09	Red	.75 (19.05)	L-P-349	
11	Yellow	.75 (19.05)	L-P-349	
12	White	.75 (19.05)	L-P-349	
13	Blue	.81 (20.57)	L-P-380	
14	Green	.81 (20.57)	L-P-349	
15	Red	.81 (20.57)	L-P-349	
17	Yellow	.81 (20.57)	L-P-349	
18	White	.81 (20.57)	L-P-349	
19	Blue	1.12 (28.45)	L-P-380	
20	Green	1.12 (28.45)	L-P-349	
21	Red	1.12 (28.45)	L-P-349	
23	Yellow	1.12 (28.45)	L-P-349	
24	White	1.12 (28.45)	L-P-349	
25	Blue	.62 (15.75)	L-P-380	Square
26	Green	.62 (15.75)	L-P-349	
27	Red	.62 (15.75)	L-P-349	
29	Yellow	.62 (15.75)	L-P-349	
30	White	.62 (15.75)	L-P-349	
31	Blue	.75 (19.05)	L-P-380	
32	Green	.75 (19.05)	L-P-349	
33	Red	.75 (19.05)	L-P-349	
35	Yellow	.75 (19.05)	L-P-349	
36	White	.75 (19.05)	L-P-349	

1/ Part numbers listed are for lenses without legends.
2/ Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

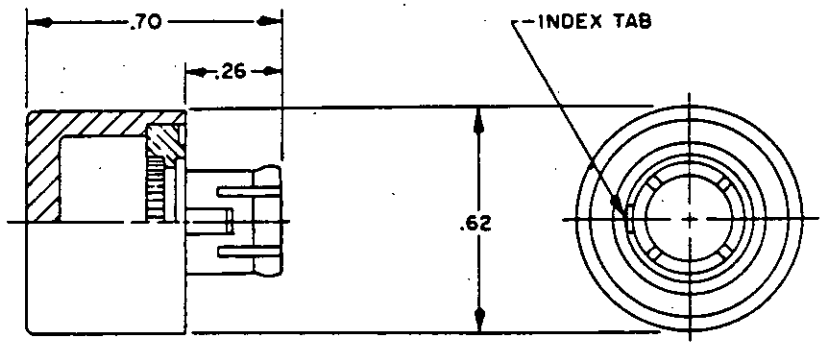


Configuration A

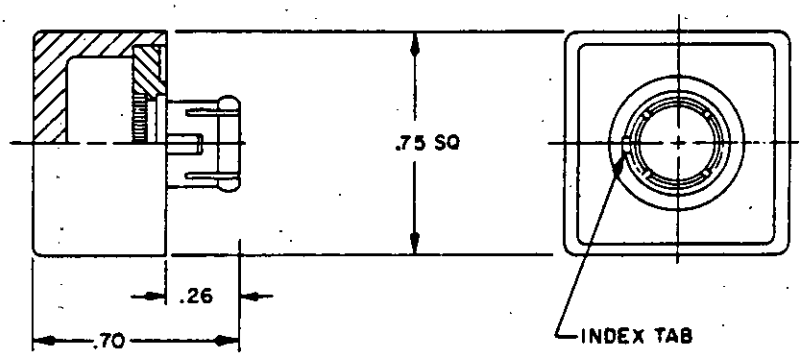


Configuration B

FIGURE 102-20. Snap-in push button lens, direct view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

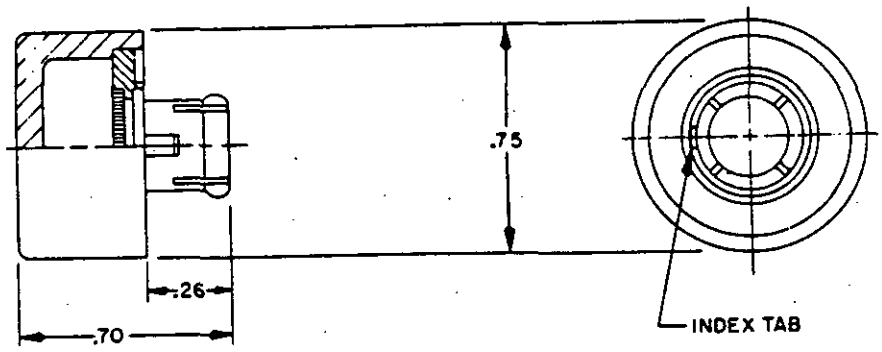

Configuration C

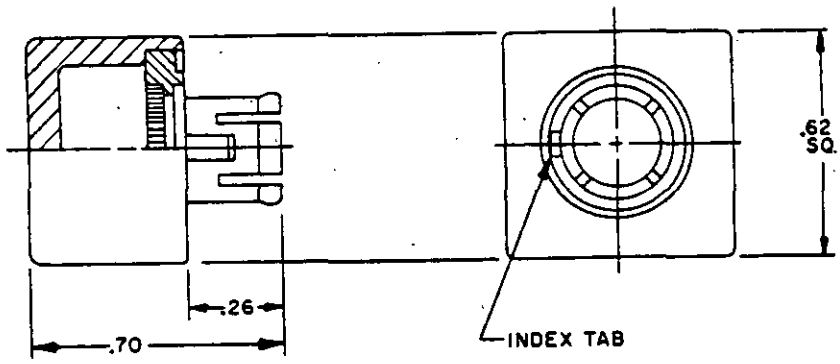

INCHES	MM
.26	6.60
.62	15.75
.70	17.78
.75	19.05

Configuration D

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 102-20. Snap-in push button lens, direct view - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Color coordinates.

Color coordinates ± .050		
Color	"x"	"y"
Yellow	.564	.431
White	.515	.413
Red	.711	.287
Green	.242	.638
Blue	.127	.280

Intended use: Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/45, MIL-S-22885/46, MIL-S-22885/47, and MIL-S-22885/62 (see figures 102-6, 102-7, 102-8, and 102-10).

Procurement document: MIL-S-22885/48.

Part numbers: See table 102.XXII.

TABLE 102.XXII. Part number and characteristics.

Part number 1/ M22885/48-	Configuration	Color	Brightness 2/ (3/4 face)
01	A	yellow	310 ft. L
02	A	white	350 ft. L
03	A	red	26 ft. L
04	A	green	20 ft. L
05	A	blue	42 ft. L
06	B	yellow	310 ft. L
07	B	white	350 ft. L
08	B	red	26 ft. L
09	B	green	20 ft. L
10	B	blue	42 ft. L
11	C	yellow	310 ft. L
12	C	white	350 ft. L
13	C	red	26 ft. L
14	C	green	20 ft. L
15	C	blue	42 ft. L
16	D	yellow	310 ft. L
17	D	white	350 ft. L
18	D	red	26 ft. L
19	D	green	20 ft. L
20	D	blue	42 ft. L

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate at 2,200° Kelvin, utilizing a T-1-3/4 MFB Lamp with a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 103


SWITCHES, INTERLOCK

(Applicable specification: MIL-S-8805)


TABLE 103.I Switches, interlock, parameters and characteristics.

Figure number	Applicable specification sheet	Part number	Operating characteristics				Shock	Vibration	Temperature
			Switch action	Approximate plunger travel		Switch circuit			
				Push	Pull				
				(inch)	(inch)		(G)	(Hz)	(° C)
103-1	MIL-S-8805/56	MS16106-1	Push-pull	.250	.187	SPDT	50	10 to 500	-55 to +85
		MS16106-2	Push-pull	.250	.187	DPDT			
		MS16106-3	Push-pull	.250	.188	4PDT			
		MS16106-4	Push-pull	.156	.156	SPDT			
		MS16106-5	Push-pull	.250	.187	DPDT			


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

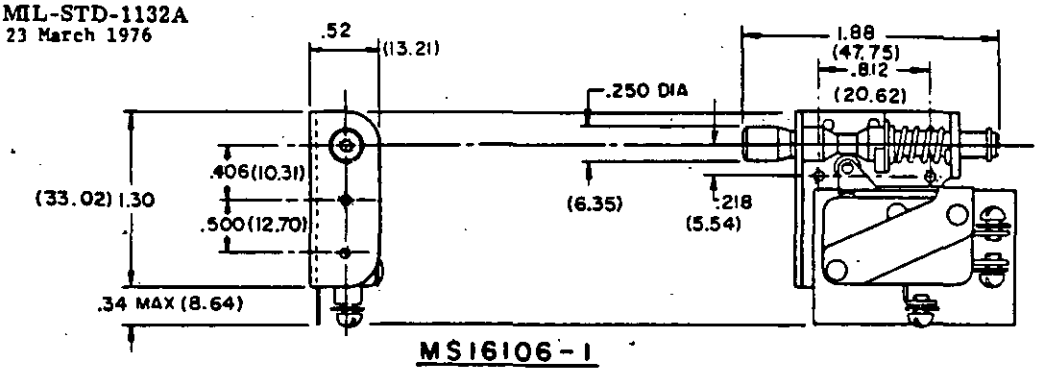

MS16106-1

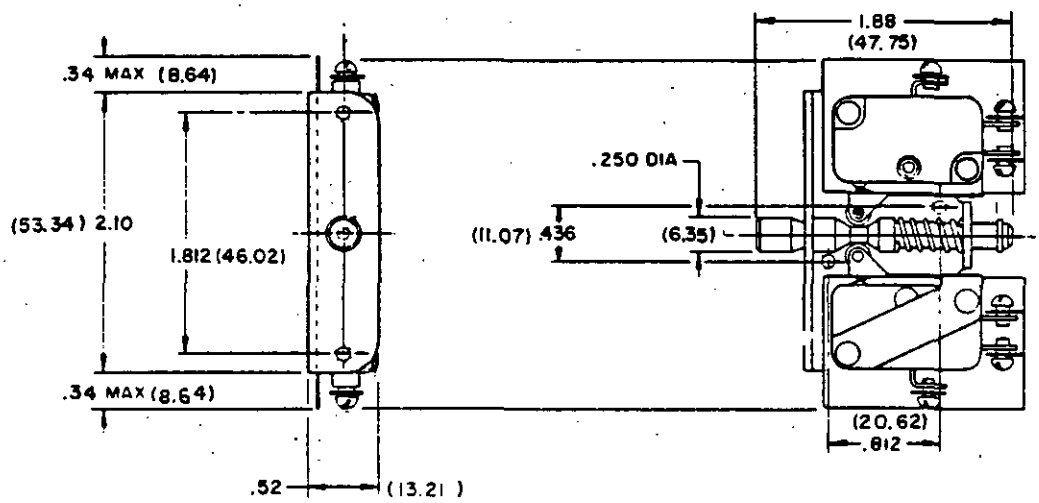


MS16106-2

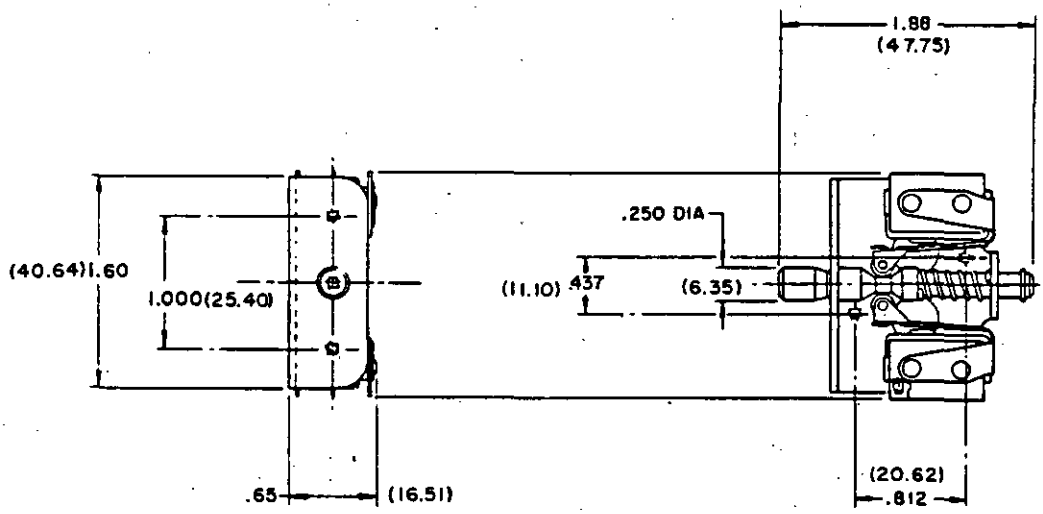


MS16106-3

FIGURE 103-1. Switch assemblies, sensitive, interlock.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

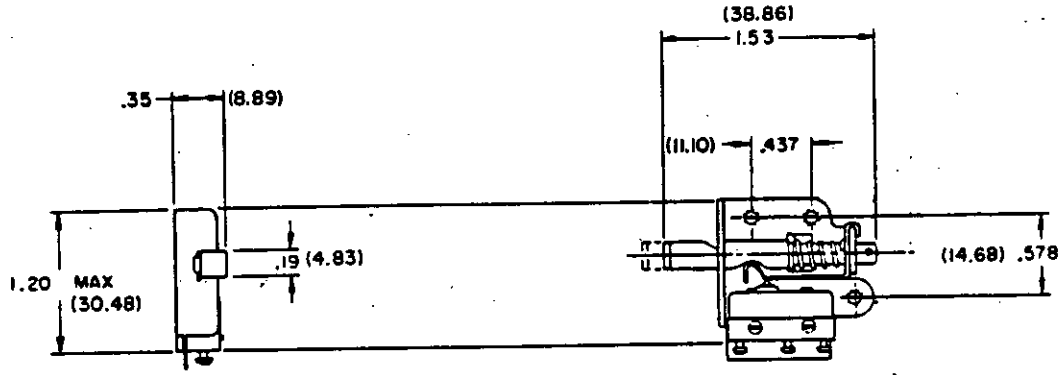

MS16106-4

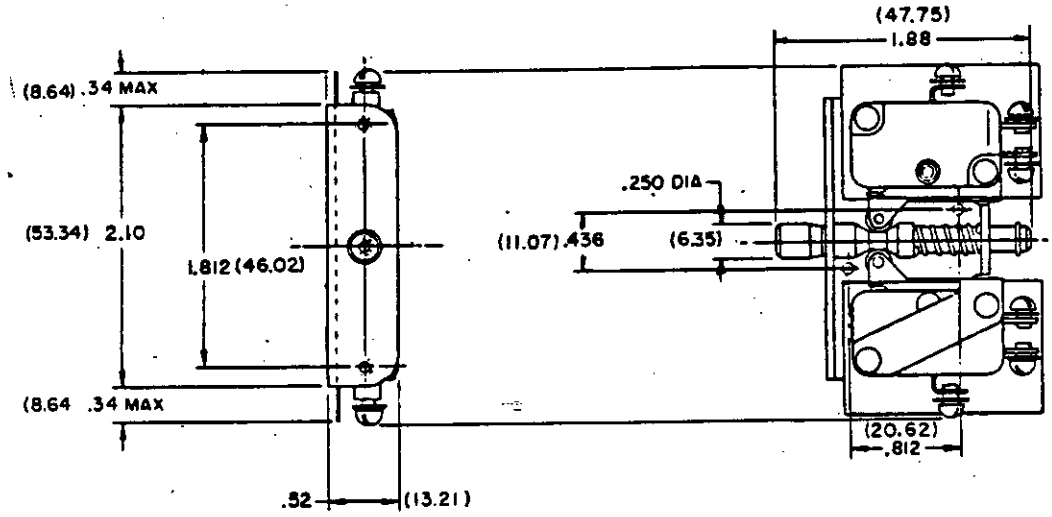

MS16106-5

FIGURE 103-1. Switch assemblies, sensitive, interlock. – Continued.

Electrical ratings.

Part number	Sea level			
	Resistive load		Inductive load	
	28 vdc (amps)	125 vdc (amps)	28 vdc (amps)	125 vdc (amps)
MS16106-1, MS16106-2	10	10	10	10
MS16106-3, MS16106-4	3	5	3	5
MS16106-5	10	10	10	10

Procurement document: MIL-S-8805/56.

Part numbers: See above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 104

SWITCHES, MULTISTATION

(Applicable specification: MIL-S-24317)

NOTE: As of this date, no selected standard switches have been selected.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 105

SWITCHES, PRESSURE
(Applicable specification: MIL-S-9395)

FIGURE AND SPEC SHEET NO.	SWITCH CHARACTERISTICS					PAGE
	Type	Electrical rating at 28 Vdc (amperes)	System pressure	Proof pressure	Pressure medium	
105-1 - MIL-S-9395/1	Gauge	3 resistive	3100 psig	4500 psig	Hydraulic fluid	105.2
105-2 - MIL-S-9395/2	Gauge	4 resistive	3000 psig	4500 psig	Hydraulic fluid	105.3
105-3 - MIL-S-9395/5	Gauge	5 resistive	3000 psig	4500 psig	Hydraulic fluid	105.4
105-4 - MIL-S-9395/6	Absolute	3 resistive	100 psia	150 psia	Fuel	105.5
105-5 - MIL-S-9395/10	Gauge	10 resistive	500 psig	800 psig	Oil	105.6
105-6 - MIL-S-9395/26	Absolute	3 resistive	60 psia	120 psia	Dry air, nitrogen, fuel, lube oil, or hydraulic fluid	105.8
105-7 - MIL-S-9395/27	Gauge	3 resistive	60 psig	120 psig	Dry air, nitrogen, fuel, lube oil, or hydraulic fluid	105.10
105-8 - MIL-S-9395/29	Differential	4 resistive	125 psig high over low and simultaneously	250 psig high over low and simultaneously	Dry air, nitrogen, fuel, lube oil, or hydraulic fluid	105.12
105-9 - MIL-S-9395/30	Gauge	5 inductive	3000 psig	4500 psig	Hydraulic fluid	105.14
105-10 - MIL-S-9395/31	Gauge	5 resistive	3000 psig	4500 psig	Hydraulic fluid, fuel, or lube oil	105.18
105-11 - MIL-S-9395/32	Differential	4 resistive	125 psig high over low and simultaneously	250 psig high over low and simultaneously	Dry air, nitrogen, fuel, oil, or hydraulic fluid	105.22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

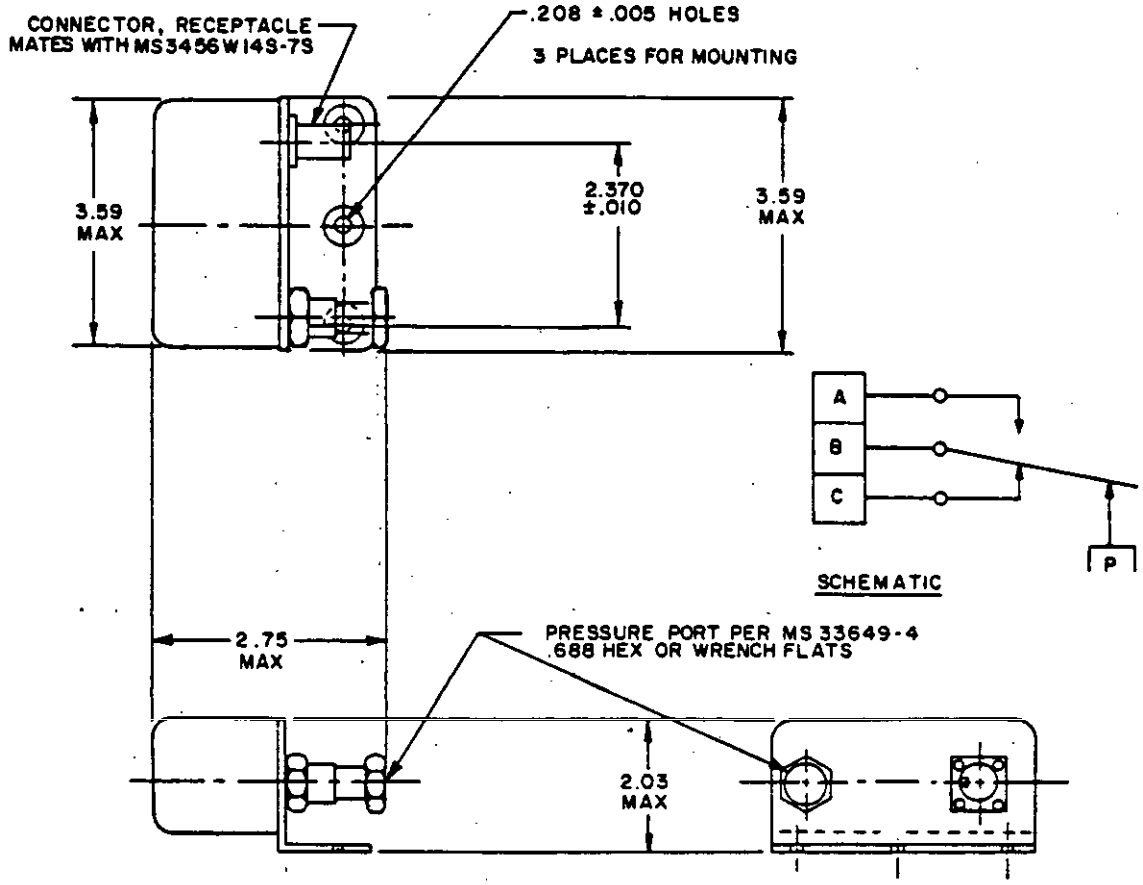


Part number	Switch setting on increasing pressure (psig)	Switch setting on decreasing pressure (psig)	Burst pressure (psig)
M9395/1-01	1500 ±50	1300 ±100	7500
-02	Before 700	350 ±50	7500
-03	2850 ±100	2550 $^{+100}_{-50}$	7500


INCHES	MM
.005	.13
.010	.25
.208	5.28
.688	17.48
2.03	51.56
2.370	60.20
2.75	69.85
3.59	91.19

FIGURE 105-1. Gauge switches (MIL-S-9395/1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

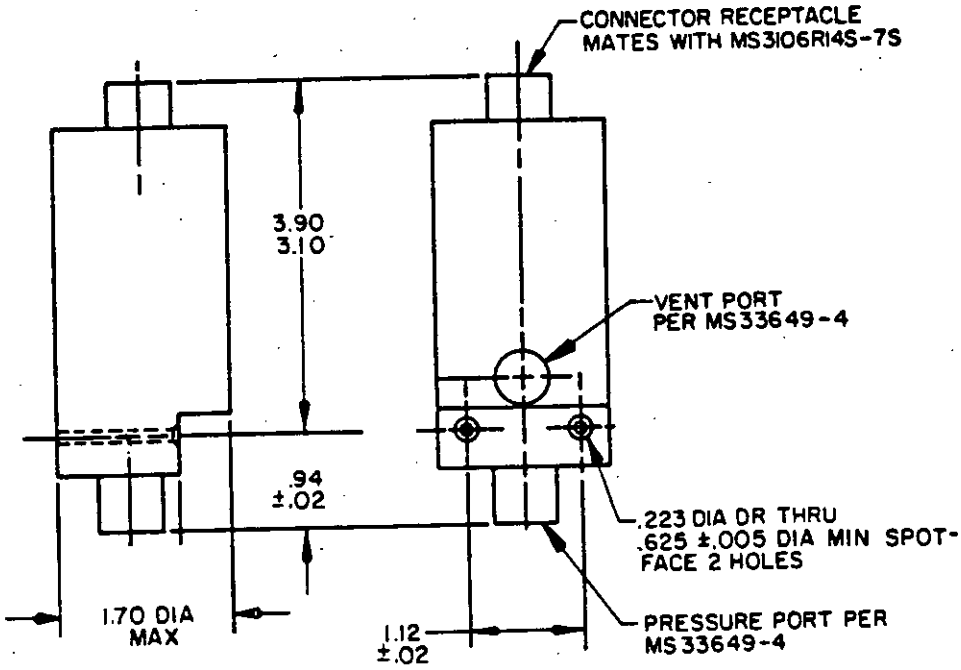

INCHES	MM
.005	.13
.02	.51
.223	5.66
.625	15.88
.94	23.88
1.12	28.45
1.70	43.18
3.10	78.74
3.90	99.06




SCHEMATIC


ELECTRICAL-PRESSURE
P_G = GAUGE PRESSURE
(ILLUSTRATED AT SEA LEVEL BAROMETRIC PRESSURE 29.92 IN. (759.97 mm Hg).)

Part number	Switch setting on increasing pressure (psig)	Switch setting on decreasing pressure (psig)	Burst pressure (psig)
M9395/2-01	1200 ±250	By 700	7500
-02	2900 ±150	By 2400	7500

FIGURE 105-2. Gauge switches (MIL-S-9395/2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

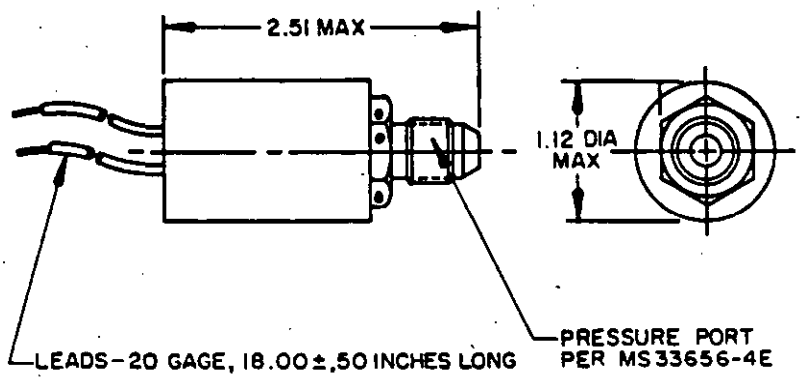



SCHEMATIC


(ILLUSTRATED AT SEA LEVEL BAROMETRIC PRESSURE 29.92 IN. (759.97 mm Hg).)


INCHES	MM
.50	12.70
1.12	28.45
2.51	63.75
18.00	457.20

Part number	Switch setting on increasing pressure (psig)	Switch setting on decreasing pressure (psig)	Burst pressure (psig)
M9395/5-01	900 ±50	675 min	7500

FIGURE 105-3. Gauge switch (MIL-S-9395/5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

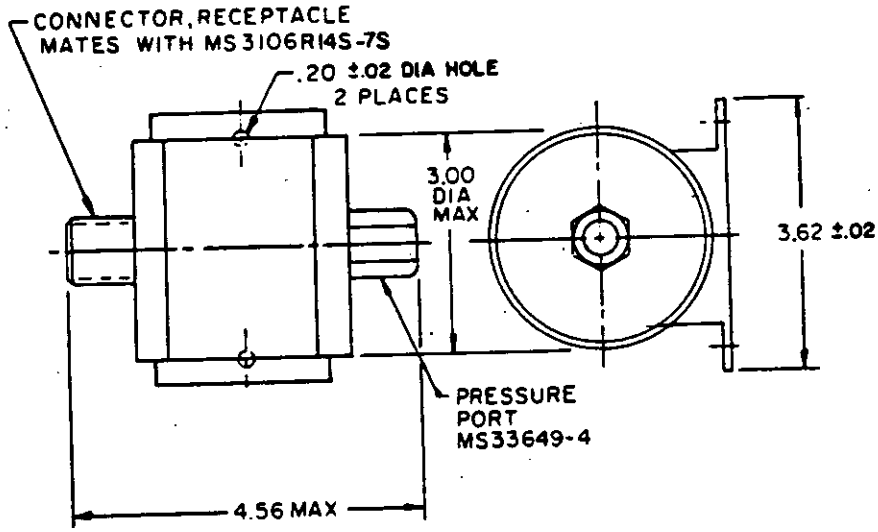

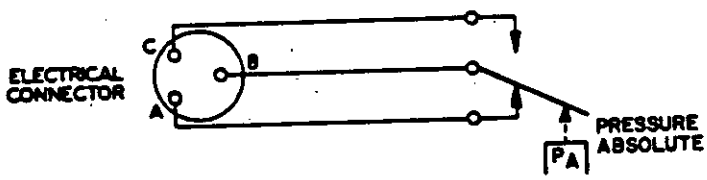

INCHES	MM
.02	.51
.06	1.52
.20	5.08
3.00	76.20
3.62	91.95
4.56	115.82

WIRING SCHEMATIC

Part number	Switch setting on increasing pressure (psia)	Switch setting on decreasing pressure (psia)	Burst pressure (psia)
M9395/6-01	$72\ ^{+0}_{-1}$	70 ±1	260
-02	$52\ ^{+0}_{-1}$	50 ±1	260

FIGURE 105-4. Absolute switches (MIL-S-9395/6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

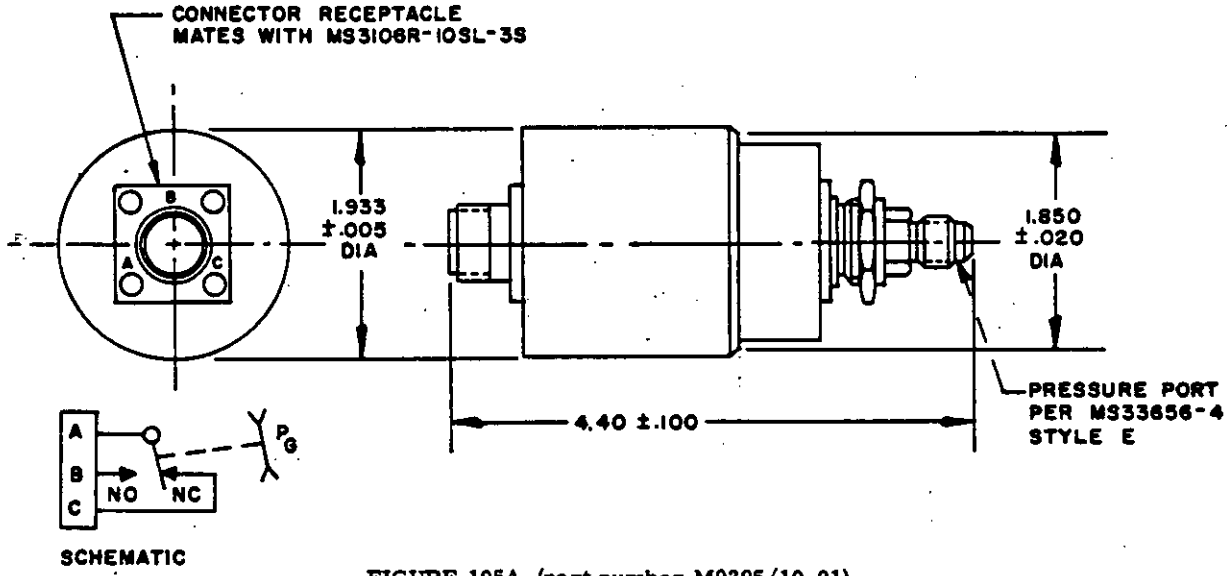


FIGURE 105A (part number M9395/10-01).

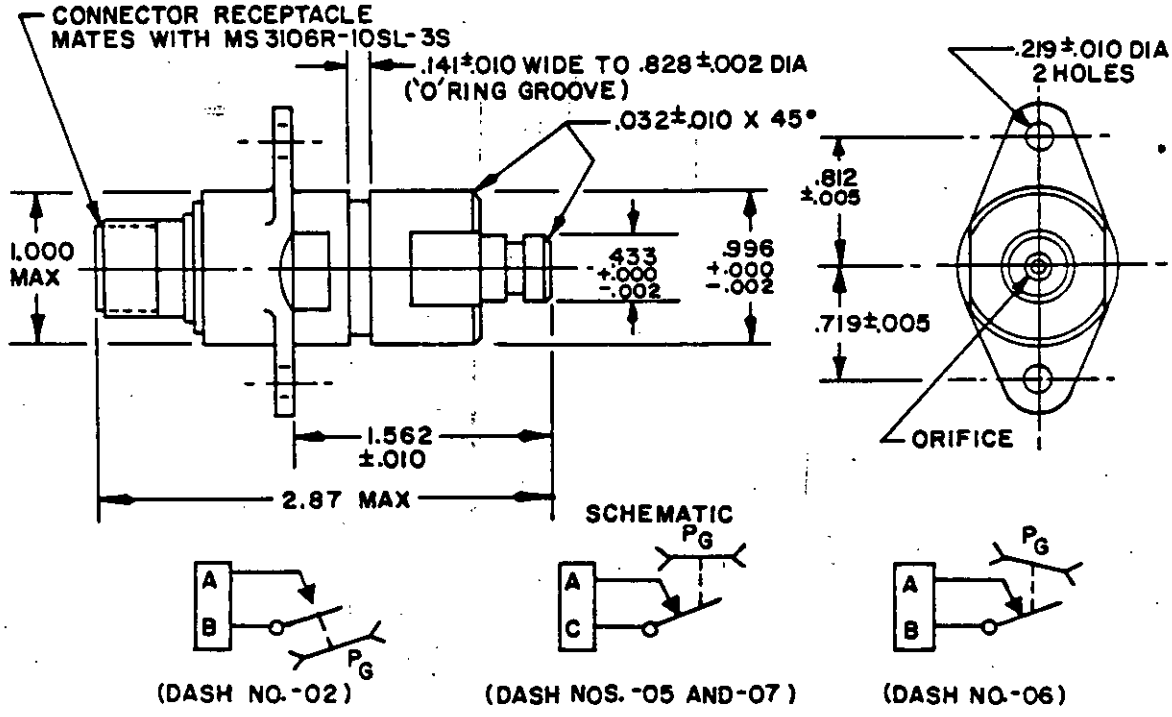


FIGURE 105B (part numbers M9395/10-02, -05, -06, and -07).

FIGURE 105-5. Gauge switches (MIL-S-9395/10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

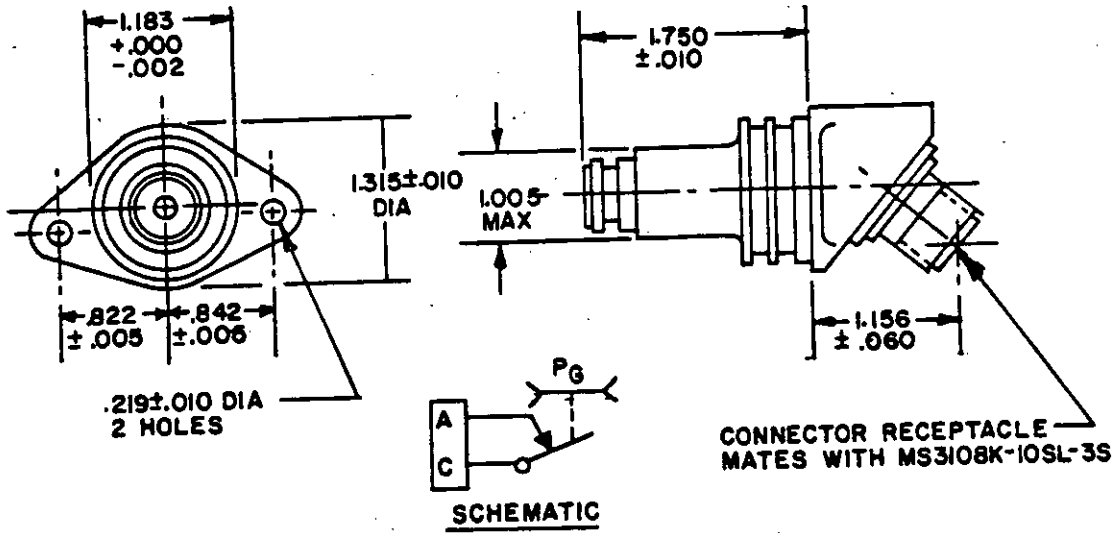



FIGURE 105C (part number M9395/10-03).

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.719	18.26	1.183	30.05
.005	.13	.812	20.62	1.315	33.40
.010	.25	.822	20.88	1.562	39.67
.020	.51	.828	21.03	1.750	44.45
.032	.81	.842	21.39	1.850	46.99
.060	1.52	.996	25.30	1.933	49.10
.141	3.58	1.000	25.40	2.87	72.90
.219	5.56	1.005	25.53	4.40	111.76
.433	11.00	1.156	29.36		

Part number	Switch setting on increasing pressure (psig)	Switch setting on decreasing pressure (psig)	Burst pressure (psig)
M9395/10-01	85 ±20	60 ±10	1200
-02	150 max	50 min	1200
-03	150 max	50 min	1200
-05	150 max	50 min	1200
-06	150 max	50 min	1200
-07	150 max	50 min	1200


FIGURE 105-5. Gauge switches (MIL-S-9395/10) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

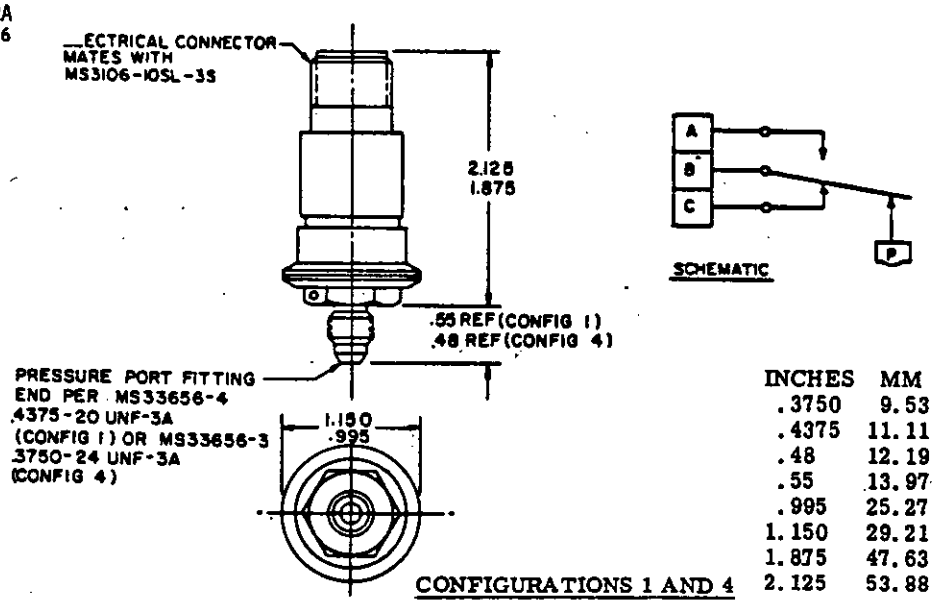


INCHES	MM
.3750	9.53
.4375	11.11
.48	12.19
.55	13.97
.995	25.27
1.150	29.21
1.875	47.63
2.125	53.88

CONFIGURATIONS 1 AND 4

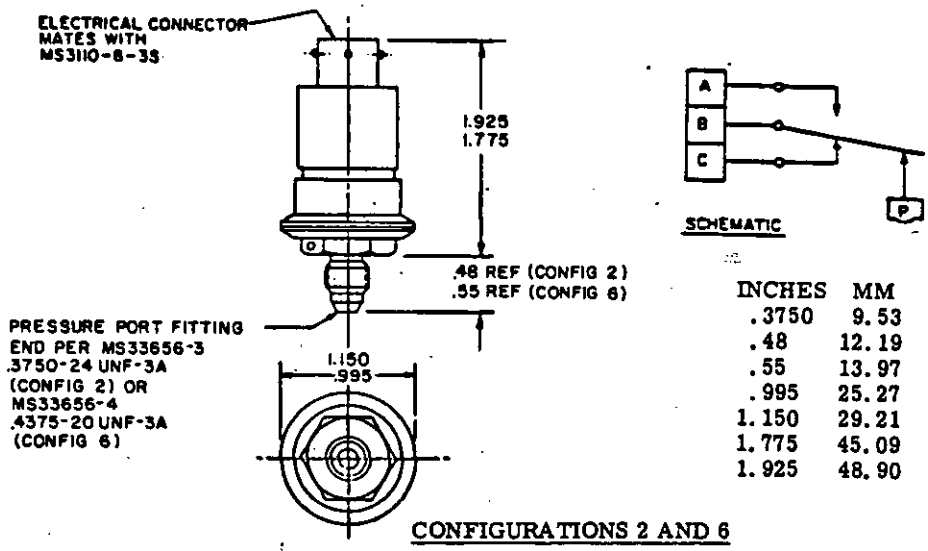

INCHES	MM
.3750	9.53
.48	12.19
.55	13.97
.995	25.27
1.150	29.21
1.775	45.09
1.925	48.90

CONFIGURATIONS 2 AND 6

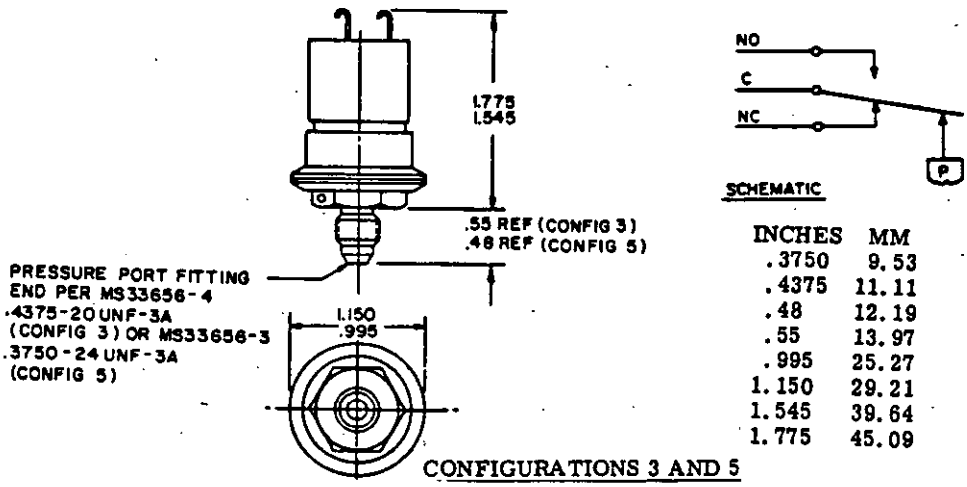

INCHES	MM
.3750	9.53
.4375	11.11
.48	12.19
.55	13.97
.995	25.27
1.150	29.21
1.545	39.64
1.775	45.09

CONFIGURATIONS 3 AND 5

NOTE: Schematics shown are for switches with pressure ports exposed to room ambient.

FIGURE 105-6. Absolute switches (MIL-S-9395/26).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PRESSURE SETTING (WITH TOLERANCE) AND MAXIMUM DIFFERENTIAL VALUES FOR EACH SETTING:

Pressure setting (psia)		Max differential (psia)	Pressure setting (psia)		Max differential (psia)
Value	Tolerance (±)		Value	Tolerance (±)	
1.0 - 10.5	.75	2.5	44.5	1.5	4.6
11.0 - 20.0	.75	2.5	45.0 - 45.5	2.0	4.7
20.5 - 29.5	1.0	3.0	46.0 - 46.5		4.8
30.0 - 30.5	1.0	3.1	47.0 - 47.5		4.9
31.0	1.5	3.2	48.0 - 48.5		5.0
31.5 - 32.0		3.3	49.0 - 49.5		5.1
32.5 - 33.0		3.4	50.0 - 50.5		5.2
33.5 - 34.0		3.5	51.0 - 51.5		5.3
34.5 - 35.0		3.6	52.0 - 52.5		5.4
35.5 - 36.0		3.7	53.0 - 53.5		5.5
36.5 - 37.0		3.8	54.0 - 54.5		5.6
37.5 - 38.0		3.9	55.0 - 55.5		5.7
38.5 - 39.0		4.0	56.0 - 56.5		5.8
39.5 - 40.0		4.1	57.0 - 57.5		5.9
40.5 - 41.0		4.2	58.0 - 58.5		6.0
41.5 - 42.0		4.3	59.0 - 59.5		6.1
42.5 - 43.0		4.4	60.0	2.0	6.2
43.5 - 44.0	1.5	4.5			

PART NUMBER: Consists of "M9395/26" followed by a dash and a three-letter code. The three-letter code in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 18.0 ±.75 psia with a maximum differential of 2.5 psia.

EXAMPLE:

M9395/26- A G E


CONFIGURATION AND CONTACT ACTION						
	Configuration					
	1	2	3	4	5	6
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M


PRESSURE SETTING TO WITHIN 1 PSIA					
Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

PRESSURE SETTING TO WITHIN .5 PSIA			
Unit	Code	Unit	Code
-1.0	A	0.5	D
-0.5	B	1.0	E
0	C		

FIGURE 105-6. Absolute switches (MIL-S-9395/26) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

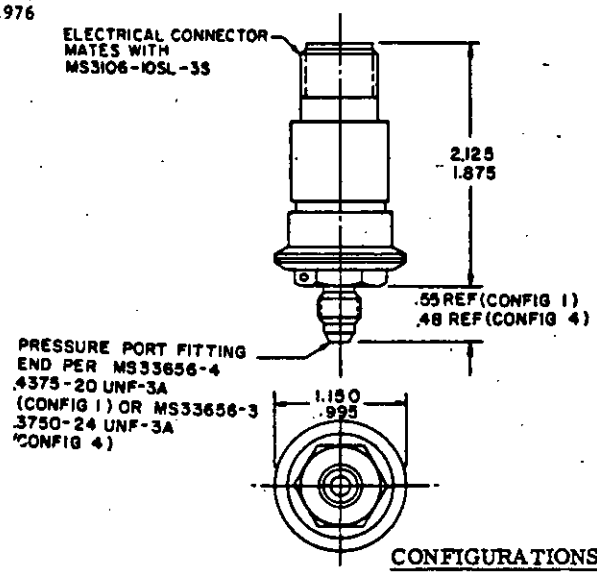





SCHEMATIC

INCHES	MM
.080	2.03
.4375	11.11
.48	12.19
.55	13.97
.995	25.27
1.150	29.21
1.875	47.63
2.125	53.88

CONFIGURATIONS 1 AND 4

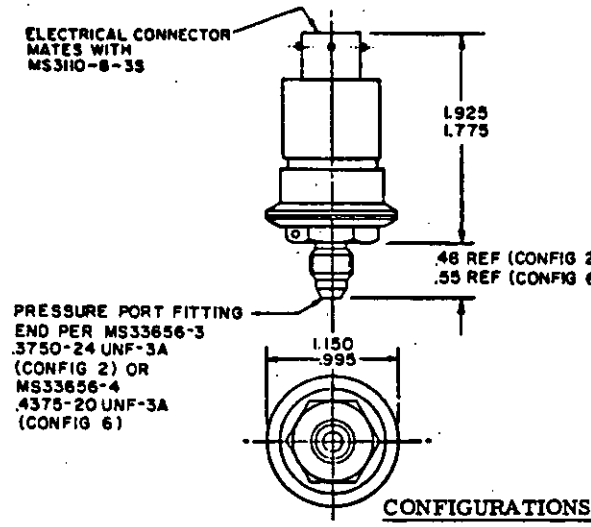





SCHEMATIC

INCHES	MM
.080	2.03
.3750	9.53
.48	12.19
.55	13.97
.688	17.48
.995	25.27
1.00	25.40
1.150	29.21
1.775	45.09
1.925	48.90

CONFIGURATIONS 2 AND 6

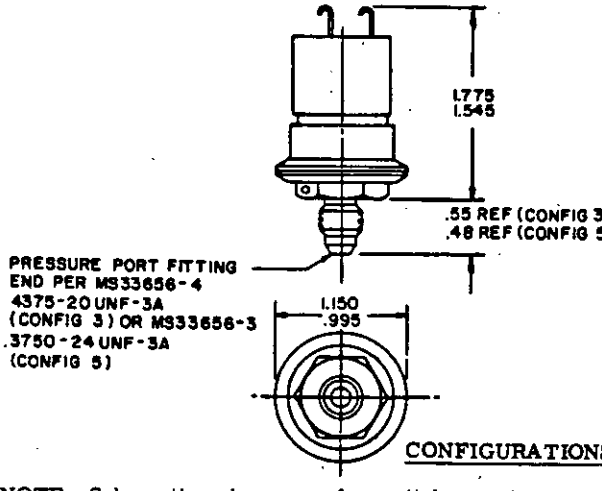



SCHEMATIC

INCHES	MM
.080	2.03
.4375	11.11
.48	12.19
.55	13.97
.688	17.48
.995	25.27
1.00	25.40
1.150	29.21
1.545	39.64
1.775	45.09

CONFIGURATIONS 3 AND 5

NOTE: Schematics shown are for switches with pressure ports exposed to room ambient.

FIGURE 105-7. Gauge switches (MIL-S-9395/27).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PRESSURE SETTING (WITH TOLERANCE) AND MAXIMUM DIFFERENTIAL VALUES FOR EACH SETTING:

Pressure setting (psig)		Max differential (psig)	Pressure setting (psig)		Max differential (psig)
Value	Tolerance (±)		Value	Tolerance (±)	
1.0 - 10.5	.50	2.0	44.5	1.5	4.6
11.0 - 20.0	.75	2.5	45.0 - 45.5	2.0	4.7
20.5 - 29.5	1.0	3.0	46.0 - 46.5	↓	4.8
30.0 - 30.5	1.0	3.1	47.0 - 47.5	↓	4.9
31.0	1.5	3.2	48.0 - 48.5	↓	5.0
31.5 - 32.0	↓	3.3	49.0 - 49.5	↓	5.1
32.5 - 33.0	↓	3.4	50.0 - 50.5	↓	5.2
33.5 - 34.0	↓	3.5	51.0 - 51.5	↓	5.3
34.5 - 35.0	↓	3.6	52.0 - 52.5	↓	5.4
35.5 - 36.0	↓	3.7	53.0 - 53.5	↓	5.5
36.5 - 37.0	↓	3.8	54.0 - 54.5	↓	5.6
37.5 - 38.0	↓	3.9	55.0 - 55.5	↓	5.7
38.5 - 39.0	↓	4.0	56.0 - 56.5	↓	5.8
39.5 - 40.0	↓	4.1	57.0 - 57.5	↓	5.9
40.5 - 41.0	↓	4.2	58.0 - 58.5	↓	6.0
41.5 - 42.0	↓	4.3	59.0 - 59.5	↓	6.1
42.5 - 43.0	↓	4.4	60.0	2.0	6.2
43.5 - 44.0	1.5	4.5			

PART NUMBER: Consists of "M9395/27" followed by a dash and a three-letter code. The three-letter code in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 18.0 ±.75 psig with a maximum differential of 2.5 psig.

EXAMPLE:

M9395/27- A G E


CONFIGURATION AND CONTACT ACTION						
	Configuration					
	1	2	3	4	5	6
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M

PRESSURE SETTING TO WITHIN 1 PSIG					
Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

PRESSURE SETTING TO WITHIN .5 PSIG			
Unit	Code	Unit	Code
-1.0	A	0.5	D
-0.5	B	1.0	E
0	C		

FIGURE 105-7. Gauge switches (MIL-S-9395/27) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the currenversion before use.

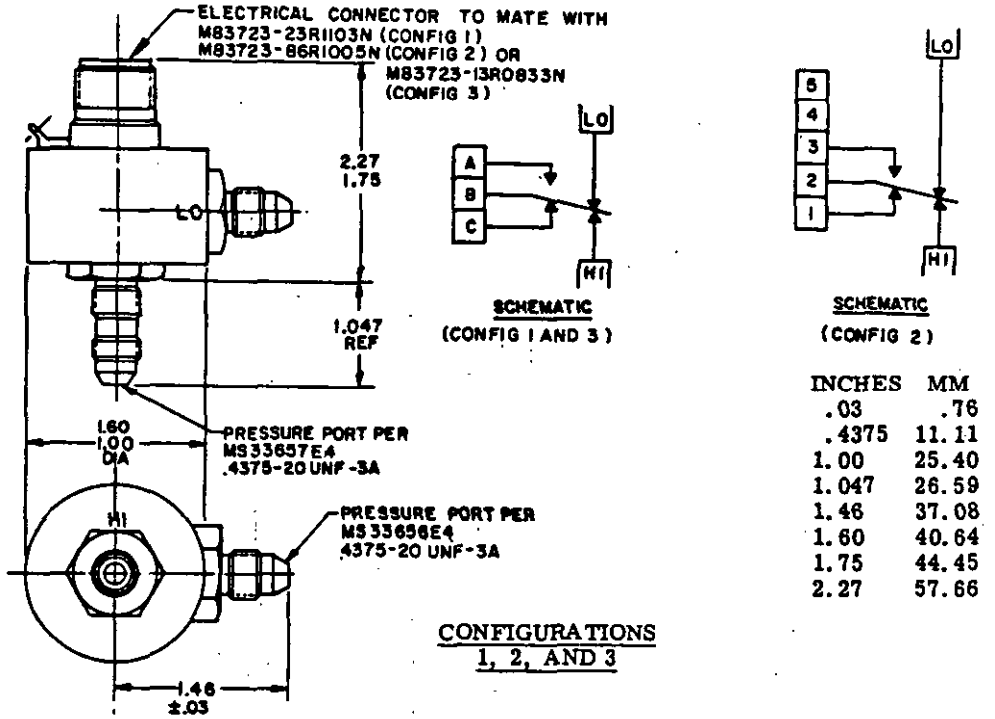

INCHES	MM
.03	.76
.4375	11.11
1.00	25.40
1.047	26.59
1.46	37.08
1.60	40.64
1.75	44.45
2.27	57.66

CONFIGURATIONS
1, 2, AND 3

PART NUMBER: Consists of "M9395/29" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 1-1/2 ±1/2 psid, and deactuates on decreasing pressure at 1/2 ±1/2 psid.

EXAMPLE:

M9395/29- A A D A B

CONFIGURATION AND PRESSURE SETTING MODE = Code "A" of table I.

HIGH-PRESSURE SETTING = Code "A" of table II (coarse value of 0 psid) and Code "D" of table III (fine value of 1-1/2 ±1/2 psid).

LOW-PRESSURE SETTING = Code "A" of table II (coarse value of 0 psid) and Code "B" of table III (fine value of 1/2 ±1/2 psid).

TABLE I. Codes for combinations of configurations and pressure setting modes.

	Configuration 1		Configuration 2		Configuration 3		Pressure setting mode	
	Electrical chamber		Electrical chamber		Electrical chamber		High setting	Low setting
	Hermetic	Unsealed	Hermetic	Unsealed	Hermetic	Unsealed		
Code - - -	A	D	G	K	N	R	At (or max) 1/	At (or min) 1/
Code - - -	B	E	H	L	P	S	At (or max) 1/	Differential 2/
Code - - -	C	F	J	M	Q	T	Differential 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.
2/ Setting values are designated by codes from table IV.

FIGURE 105-8. Differential switches (MIL-S-9395/29).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE II. Codes for coarse settings.

Code	Coarse value (in psid)	Code	Coarse value (in psid)	Code	Coarse value (in psid)
A - - -	0	L - - -	30	W - - -	80
B - - -	2-1/2	M - - -	35	X - - -	85
C - - -	5	N - - -	40	Y - - -	90
D - - -	7-1/2	P - - -	45	Z - - -	95
E - - -	10	Q - - -	50	1 - - -	100
F - - -	12-1/2	R - - -	55	2 - - -	105
G - - -	15	S - - -	60	3 - - -	110
H - - -	17-1/2	T - - -	65	4 - - -	115
J - - -	20	U - - -	70	5 - - -	120
K - - -	25	V - - -	75	6 - - -	125

TABLE III. Codes for combinations of fine settings and tolerance values.

For settings below 20 psid							For settings of 20 psid and above						
	Fine value (in psid)					Tolerance		Fine value (in psid)					Tolerance
	0	1/2	1	1-1/2	2			0	1	2	3	4	
Code - - -	A	B	C	D	E	±1/2 psid	Code - - -	A	B	C	D	E	±1 psid 1/
Code - - -	F	G	H	J	K	±1 psid	Code - - -	F	G	H	J	K	±2 psid 2/
Code - - -	L	M	N	P	Q	±2 psid	Code - - -	L	M	N	P	Q	±3 psid 3/
Code - - -	R	S	T	U	V	±3 psid	Code - - -	R	S	T	U	V	±5 psid
Code - - -	W	X	Y	Z	1	±5 psid	Code - - -	W	X	Y	Z	1	±8 psid
Code - - -	2	3	4	5	6	±8 psid	Code - - -	2	3	4	5	6	±15 psid
Code - - -	7	8	9	0	+	Min or Max	Code - - -	7	8	9	0	+	Min or Max

1/ Not applicable for pressure settings above 33 psid.
2/ Not applicable for pressure settings above 66 psid.
3/ Not applicable for pressure settings above 100 psid.


TABLE IV. Codes for differential settings.

Code	Differential value (in psid)	Code	Differential value (in psid)	Code	Differential value (in psid)
A - - -	0	N - - -	6	1 - - -	20
B - - -	1/2	P - - -	7	2 - - -	22
C - - -	1	Q - - -	8	3 - - -	24
D - - -	1-1/2	R - - -	9	4 - - -	26
E - - -	2	S - - -	10	5 - - -	28
F - - -	2-1/2	T - - -	11	6 - - -	30
G - - -	3	U - - -	12	7 - - -	35
H - - -	3-1/2	V - - -	13	8 - - -	40
J - - -	4	W - - -	14	9 - - -	45
K - - -	4-1/2	X - - -	15	0 - - -	50
L - - -	5	Y - - -	16		
M - - -	5-1/2	Z - - -	18		

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number.

FIGURE 105-8. Differential switches (MIL-S-9395/29) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

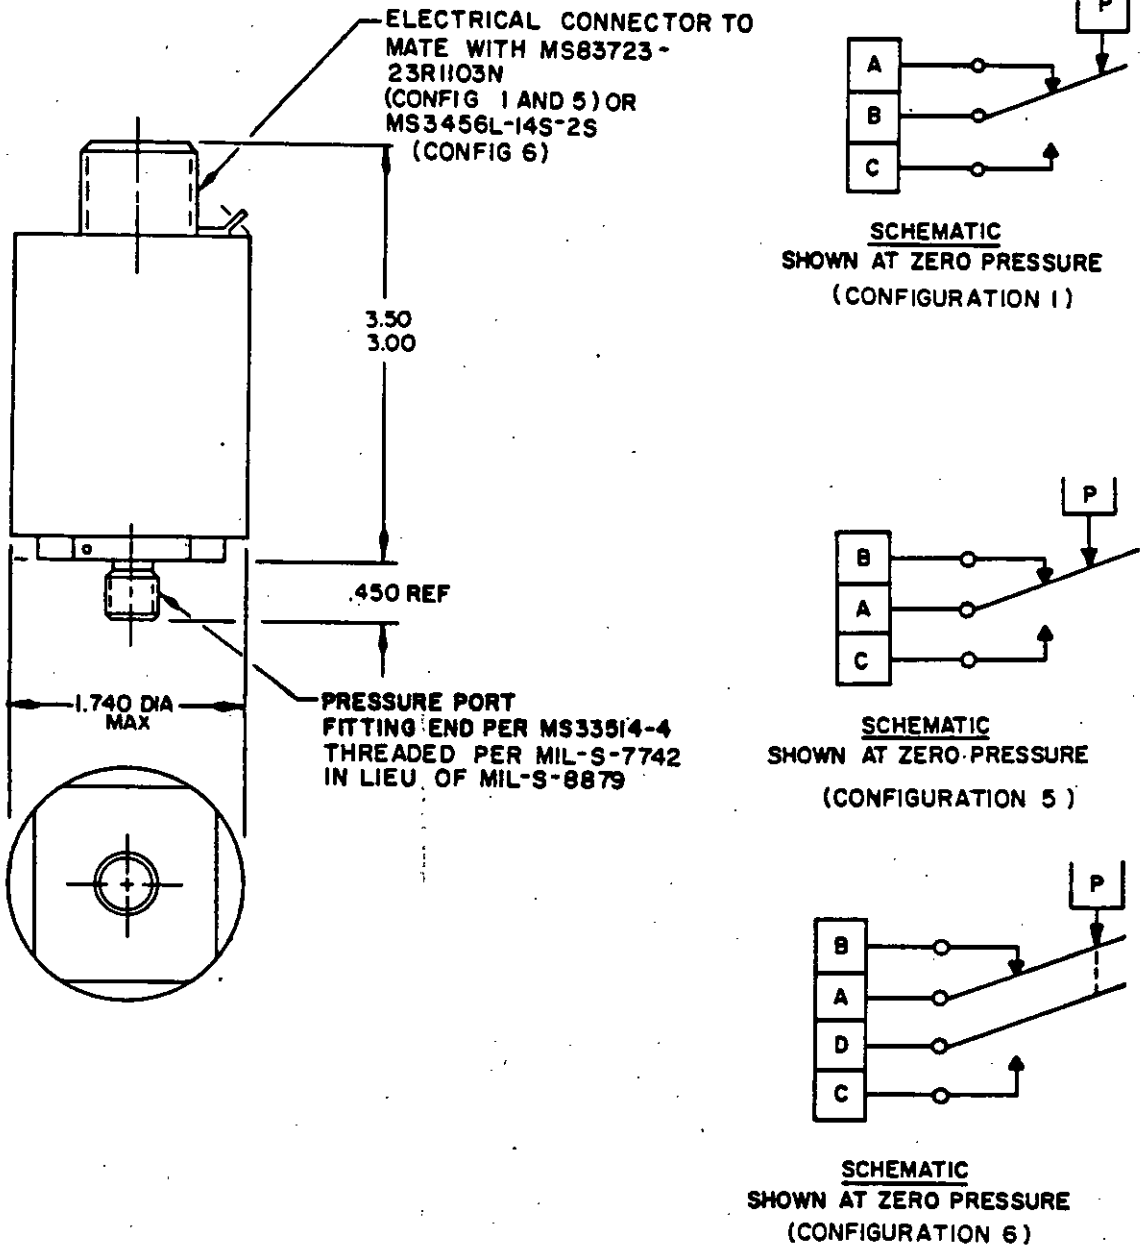

CONFIGURATIONS 1, 5, AND 6

FIGURE 105-9. Gauge switches (MIL-S-9395/30).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

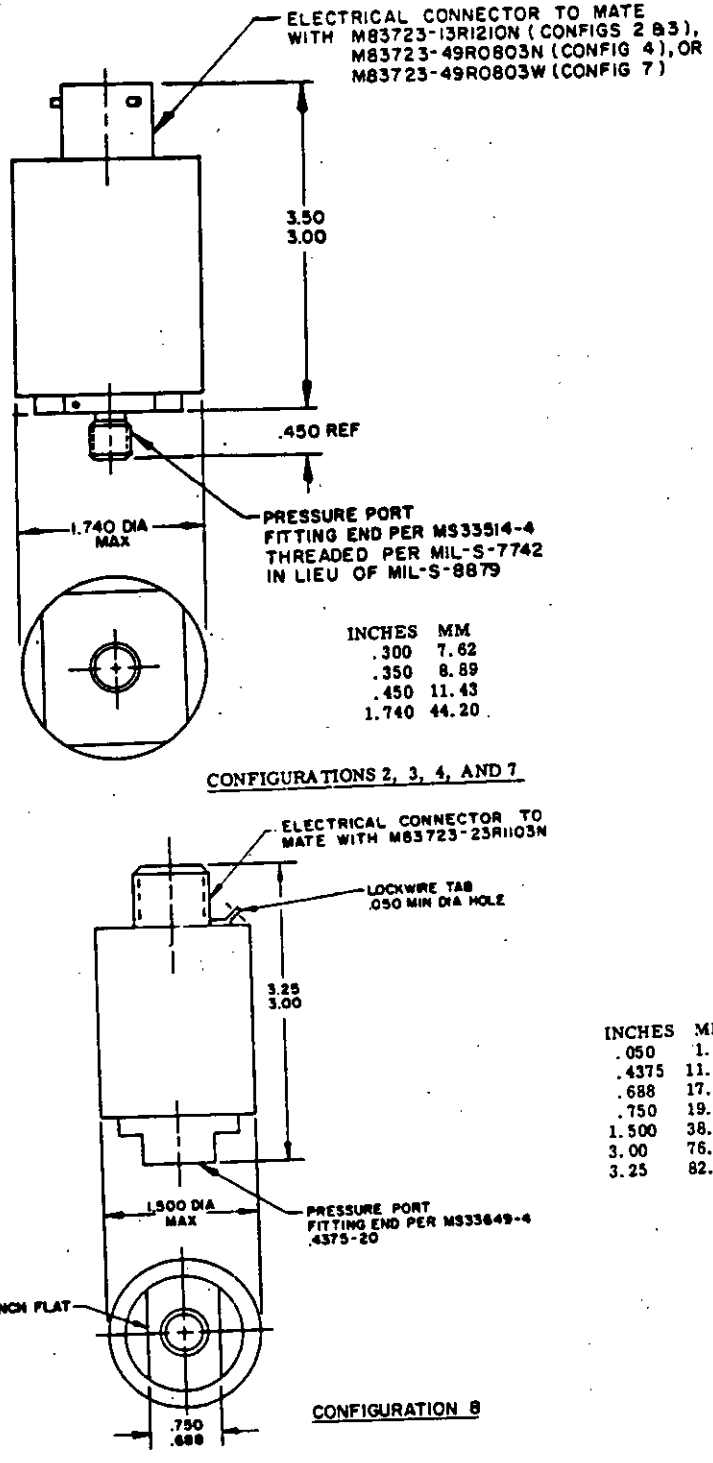


FIGURE 105-9. Gauge switches (MIL-S-9395/30) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of "M9395/30" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 300 ±25 psig, and deactuates on decreasing pressure at 150 ±25 psig.

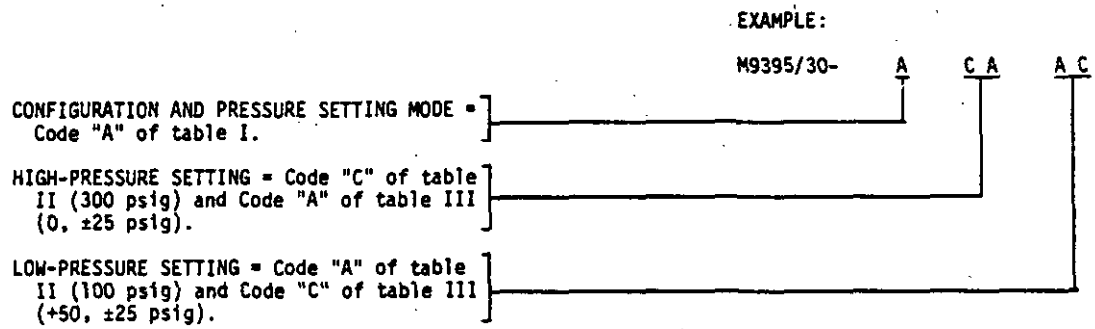


TABLE I. Codes for combinations of configurations and pressure setting modes.

	Configuration								Pressure setting mode	
	1	2	3	4	5	6	7	8	High setting	Low setting
Code - - -	A	D	G	K	N	R	U	X	At (or max) 1/	At (or min) 1/
Code - - -	B	E	H	L	P	S	V	Y	At (or max) 1/	Differential 2/
Code - - -	C	F	J	M	Q	T	W	Z	Differential 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.
2/ Setting values are designated by codes from table IV.

TABLE II. Codes for pressure settings to within 100 psig.

Code	Pressure (in psig)	Code	Pressure (in psig)	Code	Pressure (in psig)	Code	Pressure (in psig)
A - - -	100	J - - -	900	S - - -	1700	1 - - -	2500
B - - -	200	K - - -	1000	T - - -	1800	2 - - -	2600
C - - -	300	L - - -	1100	U - - -	1900	3 - - -	2700
D - - -	400	M - - -	1200	V - - -	2000	4 - - -	2800
E - - -	500	N - - -	1300	W - - -	2100	5 - - -	2900
F - - -	600	P - - -	1400	X - - -	2200	6 - - -	3000
G - - -	700	Q - - -	1500	Y - - -	2300		
H - - -	800	R - - -	1600	Z - - -	2400		

TABLE III. Codes for pressure settings to within 25 psig and tolerances.

	Unit				Tolerance
	0	+25	+50	+75	
Code - - -	A	B	C	D	±25 psig
Code - - -	E	F	G	H	±50 psig
Code - - -	J	K	L	M	±75 psig
Code - - -	N	P	Q	R	±100 psig
Code - - -	S	T	U	V	±150 psig
Code - - -	W	X	Y	Z	±200 psig
Code - - -	1	2	3	4	±300 psig
Code - - -	5	6	7	8	±400 psig
Code - - -	9	0	+	-	Min or Max

FIGURE 105-9. Gauge switches (MIL-S-9395/30) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Codes for differential pressure settings.

Code	Differential value (in psig)	Code	Differential value (in psig)
A - - -	0	M - - -	275
B - - -	25	N - - -	300
C - - -	50	P - - -	325
D - - -	75	Q - - -	350
E - - -	100	R - - -	375
F - - -	125	S - - -	400
G - - -	150	T - - -	425
H - - -	175	U - - -	450
J - - -	200	V - - -	475
K - - -	225	W - - -	500
L - - -	250		

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number.

FIGURE 105-9. Gauge switches (MIL-S-9395/30) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.



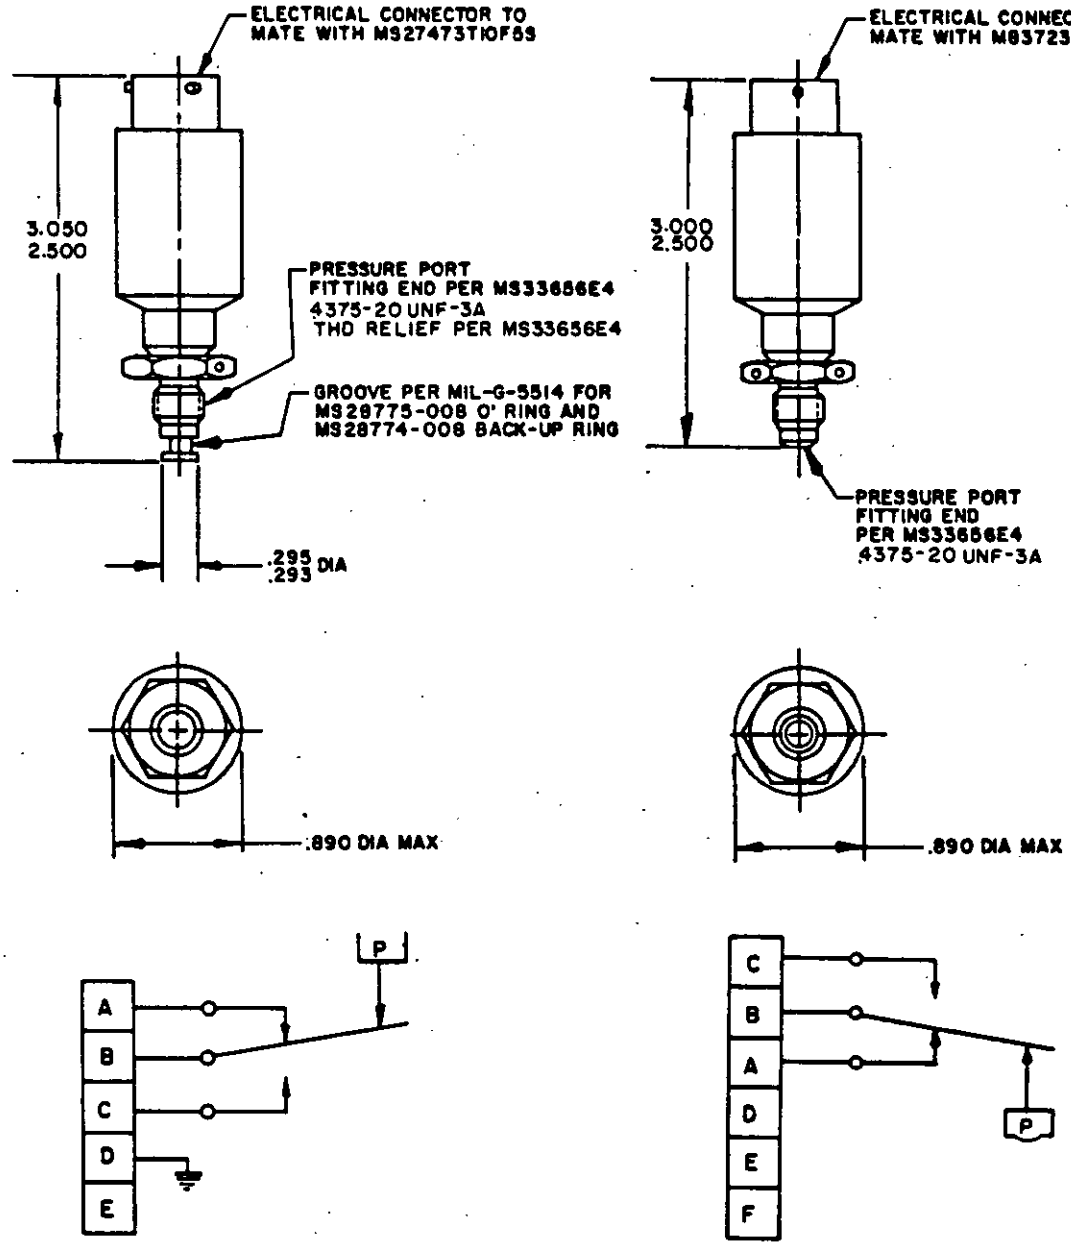


FIGURE 105-10. Gauge switches (MIL-S-9395/31).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

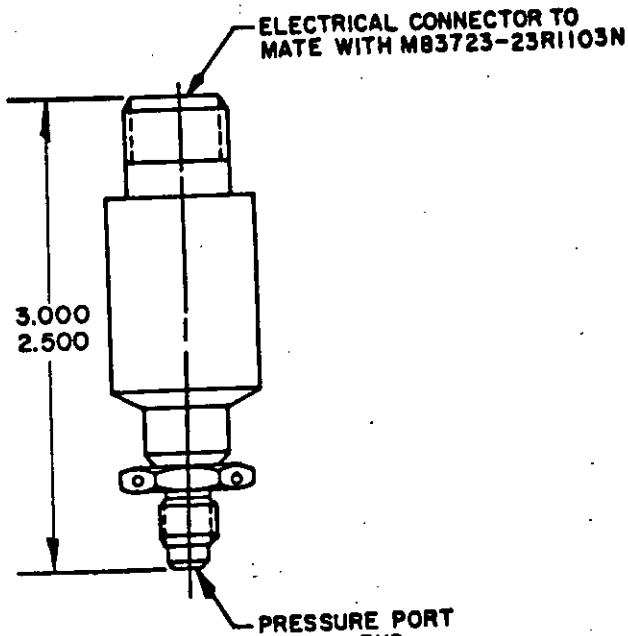



SCHEMATIC

INCHES	MM
.293	7.44
.295	7.49
.4375	11.11
.5625	14.29
.890	22.61
2.500	63.50
3.000	76.20
3.050	77.47

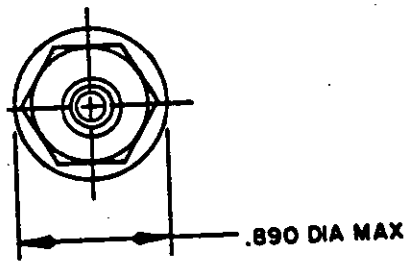

CONFIGURATIONS 3 AND 4

NOTE: Schematics shown are for switches with pressure ports exposed to room ambient.

FIGURE 105-10. Gauge switches (MIL-S-9395/31) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of "M9395/31" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 300 ±25 psig, and deactuates on decreasing pressure at 150 ±25 psig.

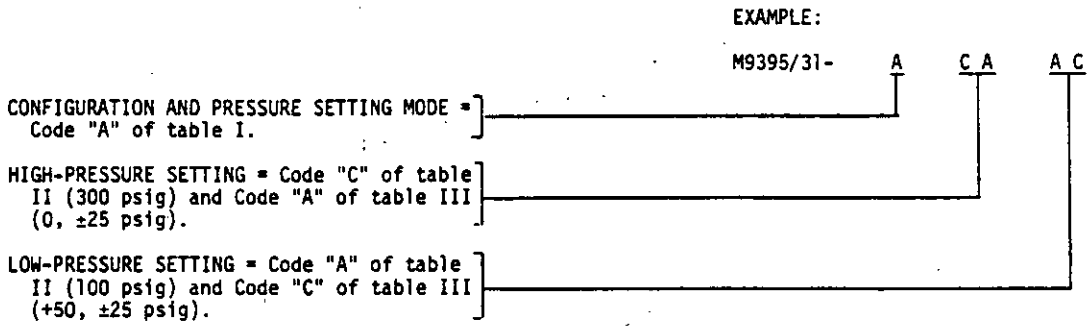


TABLE I. Codes for combinations of configurations and pressure setting modes.

	Configuration 1		Configuration 2		Pressure setting mode	
	Electrical chamber		Electrical chamber		High setting	Low setting
	Hermetic	Unsealed	Hermetic	Unsealed		
Code - - -	A	D	G	K	At (or max) 1/	At (or min) 1/
Code - - -	B	E	H	L	At (or max) 1/	Differential 2/
Code - - -	C	F	J	M	Differential 2/	At (or min) 1/

	Configuration 3		Configuration 4		Pressure setting mode	
	Electrical chamber		Electrical chamber		High setting	Low setting
	Hermetic	Unsealed	Hermetic	Unsealed		
Code - - -	N	R	U	X	At (or max) 1/	At (or min) 1/
Code - - -	P	S	V	Y	At (or max) 1/	Differential 2/
Code - - -	Q	T	W	Z	Differential 2/	At (or min) 1/

1/ Setting values are designated by characters from tables II and III.
2/ Setting values are designated by characters from table V.

TABLE II. Codes for pressure settings to within 100 psig.

Code	Pressure (in psig)	Code	Pressure (in psig)	Code	Pressure (in psig)	Code	Pressure (in psig)
A - - -	100	J - - -	900	S - - -	1700	1 - - -	2500
B - - -	200	K - - -	1000	T - - -	1800	2 - - -	2600
C - - -	300	L - - -	1100	U - - -	1900	3 - - -	2700
D - - -	400	M - - -	1200	V - - -	2000	4 - - -	2800
E - - -	500	N - - -	1300	W - - -	2100	5 - - -	2900
F - - -	600	P - - -	1400	X - - -	2200	6 - - -	3000
G - - -	700	Q - - -	1500	Y - - -	2300		
H - - -	800	R - - -	1600	Z - - -	2400		

FIGURE 105-10. Gauge switches (MIL-S-9395/31) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE III. Codes for pressure settings to within 25 psig and tolerances.

	Unit				Tolerance
	0	+25	+50	+75	
Code - - -	A	B	C	D	±25 psig
Code - - -	E	F	G	H	±50 psig
Code - - -	J	K	L	M	±75 psig
Code - - -	N	P	Q	R	±100 psig
Code - - -	S	T	U	V	±150 psig
Code - - -	W	X	Y	Z	±200 psig
Code - - -	1	2	3	4	±300 psig
Code - - -	5	6	7	8	±400 psig
Code - - -	9	0	+	-	Min or Max


TABLE IV. Codes for differential pressure settings.

Code	Differential value (in psig)	Code	Differential value (in psig)
A - - -	0	M - - -	275
B - - -	25	N - - -	300
C - - -	50	P - - -	325
D - - -	75	Q - - -	350
E - - -	100	R - - -	375
F - - -	125	S - - -	400
G - - -	150	T - - -	425
H - - -	175	U - - -	450
J - - -	200	V - - -	475
K - - -	225	W - - -	500
L - - -	250		

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number.

FIGURE 105-10. Gauge switches (MIL-S-9395/31) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

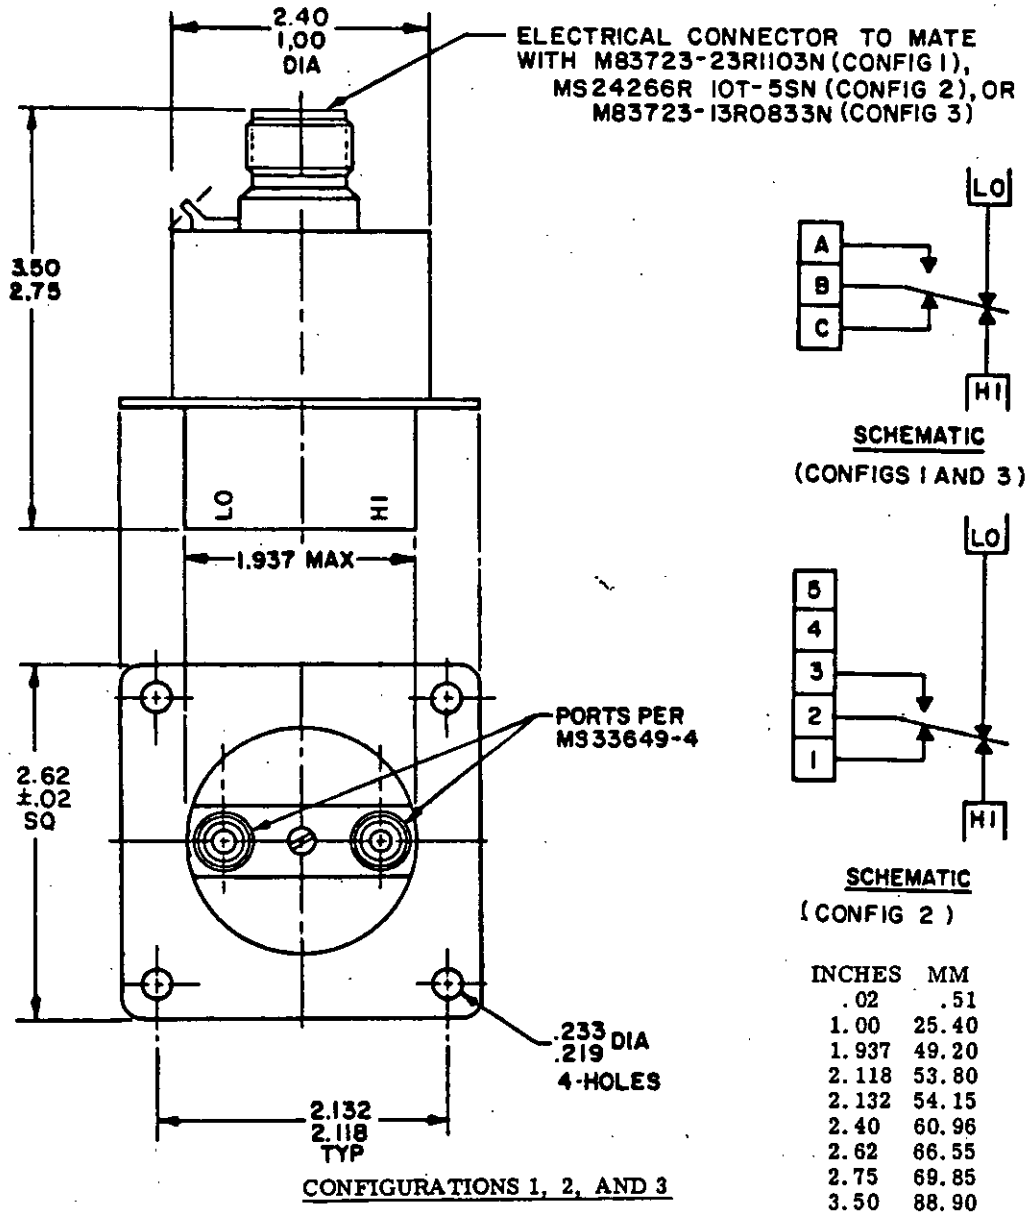

INCHES	MM
.02	.51
1.00	25.40
1.937	49.20
2.118	53.80
2.132	54.15
2.40	60.96
2.62	66.55
2.75	69.85
3.50	88.90

FIGURE 105-11. Differential switches (MIL-S-9395/32).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of "M9395/32" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 1-1/2 ±1/2 psid, and deactuates on decreasing pressure at 1/2 ±1/2 psid.

EXAMPLE:

M9395/32- A A D A B

CONFIGURATION AND PRESSURE SETTING MODE = Code "A" of table I.

HIGH-PRESSURE SETTING = Code "A" of table II (coarse value of 0 psid) and Code "D" of table III (fine value of 1-1/2 ±1/2 psid).

LOW-PRESSURE SETTING = Code "A" of table II (coarse value of 0 psid) and Code "B" of table III (fine value of 1/2 ±1/2 psid).

TABLE I. Codes for combinations of configurations and pressure setting modes.

	Configuration 1		Configuration 2		Configuration 3		Pressure setting mode	
	Electrical chamber		Electrical chamber		Electrical chamber		High setting	Low setting
	Hermetic	Unsealed	Hermetic	Unsealed	Hermetic	Unsealed		
Code - - -	A	D	G	K	N	R	At (or max) 1/	At (or min) 1/
Code - - -	B	E	H	L	P	S	At (or max) 1/	Differential 2/
Code - - -	C	F	J	M	Q	T	Differential 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.
2/ Setting values are designated by codes from table IV.

TABLE II. Codes for coarse settings.

Code	Coarse value (in psid)	Code	Coarse value (in psid)	Code	Coarse value (in psid)
A - - -	0	L - - -	30	W - - -	80
B - - -	2-1/2	M - - -	35	X - - -	85
C - - -	5	N - - -	40	Y - - -	90
D - - -	7-1/2	P - - -	45	Z - - -	95
E - - -	10	Q - - -	50	1 - - -	100
F - - -	12-1/2	R - - -	55	2 - - -	105
G - - -	15	S - - -	60	3 - - -	110
H - - -	17-1/2	T - - -	65	4 - - -	115
J - - -	20	U - - -	70	5 - - -	120
K - - -	25	V - - -	75	6 - - -	125

FIGURE 105-11. Differential switches (MIL-S-9395/32) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE III. Codes for combinations of fine settings and tolerance values.

For settings below 20 psid							For settings of 20 psid and above						
	Fine value (in psid)					Tolerance		Fine value (in psid)					Tolerance
	0	1/2	1	1-1/2	2			0	1	2	3	4	
Code - - -	A	B	C	D	E	±1/2 psid	Code - - -	A	B	C	D	E	±1 psid 1/
Code - - -	F	G	H	J	K	±1 psid	Code - - -	F	G	H	J	K	±2 psid 2/
Code - - -	L	M	N	P	Q	±2 psid	Code - - -	L	M	N	P	Q	±3 psid 3/
Code - - -	R	S	T	U	V	±3 psid	Code - - -	R	S	T	U	V	±5 psid
Code - - -	W	X	Y	Z	1	±5 psid	Code - - -	W	X	Y	Z	1	±8 psid
Code - - -	2	3	4	5	6	±8 psid	Code - - -	2	3	4	5	6	±15 psid
Code - - -	7	8	9	0	+	Min or Max	Code - - -	7	8	9	0	+	Min or Max

1/ Not applicable for pressure settings above 33 psid.
2/ Not applicable for pressure settings above 66 psid.
3/ Not applicable for pressure settings above 100 psid.

TABLE IV. Codes for differential settings.

Code	Differential value (in psid)	Code	Differential value (in psid)	Code	Differential value (in psid)
A - - -	0	N - - -	6	1 - - -	20
B - - -	1/2	P - - -	7	2 - - -	22
C - - -	1	Q - - -	8	3 - - -	24
D - - -	1-1/2	R - - -	9	4 - - -	26
E - - -	2	S - - -	10	5 - - -	28
F - - -	2-1/2	T - - -	11	6 - - -	30
G - - -	3	U - - -	12	7 - - -	35
H - - -	3-1/2	V - - -	13	8 - - -	40
J - - -	4	W - - -	14	9 - - -	45
K - - -	4-1/2	X - - -	15	0 - - -	50
L - - -	5	Y - - -	16		
M - - -	5-1/2	Z - - -	18		

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number.

FIGURE 105-11. Differential switches (MIL-S-9395/32) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


SECTION 106

SWITCHES, PUSH BUTTON
(Applicable specification: MIL-S-8805)


FIGURE NUMBER	SWITCH CHARACTERISTICS				PAGE
	Specification sheet	Operation	Circuit	Electrical ratings at 28 Vdc	
				(amperes)	
106-1	MIL-S-8805/3	Momentary and push-pull	Single circuit and 2 circuit	10 resistive	106.2
106-2	MIL-S-8805/20	Momentary	2 circuit	1 inductive at 120 Vdc, .07 Henry load	106.4
106-3	MIL-S-8805/23	Momentary	2PDT 4PDT	5 resistive	106.5
106-4	MIL-S-8805/25	Alternate	2PDT 4PDT	5 resistive	106.6
106-5	MIL-S-8805/38	Momentary	4 circuit	4 resistive	106.7
106-6	MIL-S-8805/55	Momentary-foot operated	2PST	.75 inductive	106.8
106-7	MIL-S-8805/95	Momentary	2PDT	1 resistive	106.9
106-8	MIL-S-8805/96	Momentary	SPST	5 resistive	106.10
106-9	MIL-S-8805/99	Momentary and alternate	2 circuit and DPDT	3 resistive	106.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

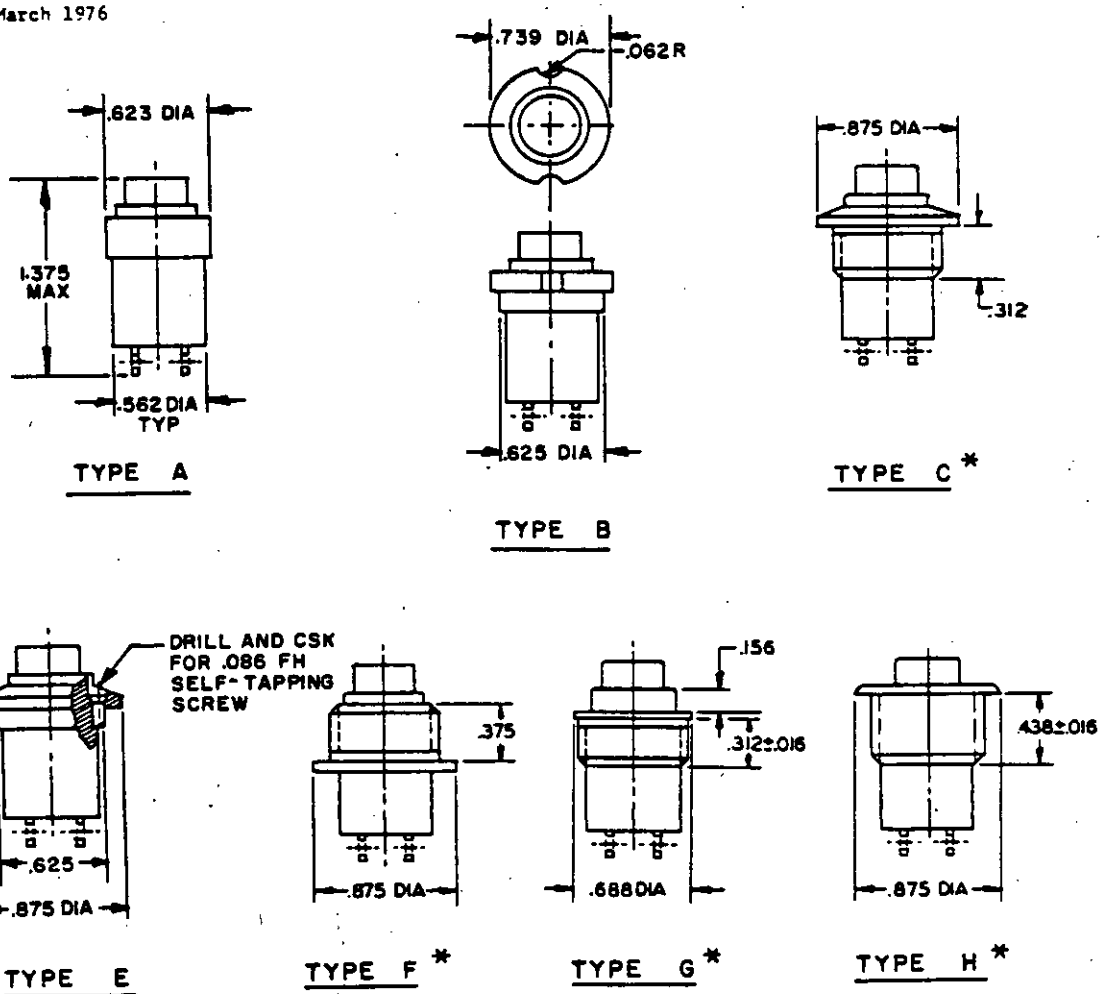



PUSH – PULL CONFIGURATION (TYPES C, F, G, AND H)

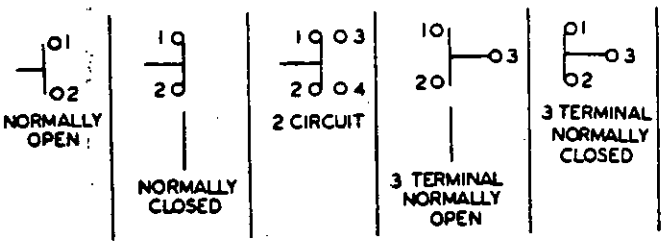

CIRCUIT SCHEMATIC

INCHES	MM
.016	.41
.062	1.57
.086	2.18
.156	3.96
.312	7.92
.375	9.53
.438	11.13
.562	14.27
.623	15.82
.625	15.88
.688	17.48
.739	18.77
.875	22.23
1.375	34.93

*Button style illustrated is for momentary action switches; push-pull configuration is shown below.

FIGURE 106-1. Switches, push button, dusttight (MIL-S-8805/3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS		
	Sea level		50,000 feet
	28 Vdc	115 Vac, 60/400 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	10	10	---
Inductive - - -	5	5	5
Lamp- - - - - -	3	3	---


MOMENTARY ACTION SWITCHES														
1/ Part No. MS25089-														Switch circuit
Type A		Type B		Type C		Type E		Type F		Type G		Type H		
Button color		Button color		Button color		Button color		Button color		Button color		Button color		
Black	Red	Black	Red	Black	Red	Black	Red	Black	Red	Black	Red	Black	Red	
1A	1AR	1B	1BR	1C	1CR	1E	1ER	1F	1FR	1G	1GR	1H	1HR	NO
2A	2AR	2B	2BR	2C	2CR	2E	2ER	2F	2FR	2G	2GR	2H	2HR	NC
3A	3AR	3B	3BR	3C	3CR	3E	3ER	3F	3FR	3G	3GR	3H	3HR	2 Circuit
4A	4AR	4B	4BR	4C	4CR	4E	4ER	4F	4FR	4G	4GR	4H	4HR	3 Term NO
5A	5AR	5B	5BR	5C	5CR	5E	5ER	5F	5FR	5G	5GR	5H	5HR	3 Term NC
PUSH-PULL SWITCHES														
None		None		1C-1 2C-1 3C-1 4C-1 5C-1	1CR-1 2CR-1 3CR-1 4CR-1 5CR-1	None		1F-1 2F-1 3F-1 4F-1 5F-1	1FR-1 2FR-1 3FR-1 4FR-1 5FR-1	1G-1 2G-1 3G-1 4G-1 5G-1	1GR-1 2GR-1 3GR-1 4GR-1 5GR-1	1H-1 2H-1 3H-1 4H-1 5H-1	1HR-1 2HR-1 3HR-1 4HR-1 5HR-1	NO NC 2 Circuit 3 Term NO 3 Term NC


1/ Examples of part numbers:
MS25089-4C = Switch, Push, Dusttight, 3 Terminal (NO), Type C, Momentary, Black Button.
MS25089-4CR-1 = Switch, Push, Dusttight, 3 Terminal (NO), Type C, Push-Pull, Red Button.

OPERATING CHARACTERISTICS:
Total plunger travel- - - - - - - - - - - - - - - - .085 ±.015 inch.
Operating force (initial only)- - - - - - - - - - 4 ±1 pounds (momentary switches).
1/2 to 2 pounds (push-pull switches).

FIGURE 106-1. Switches, push button, dusttight (MIL-S-8805/3) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

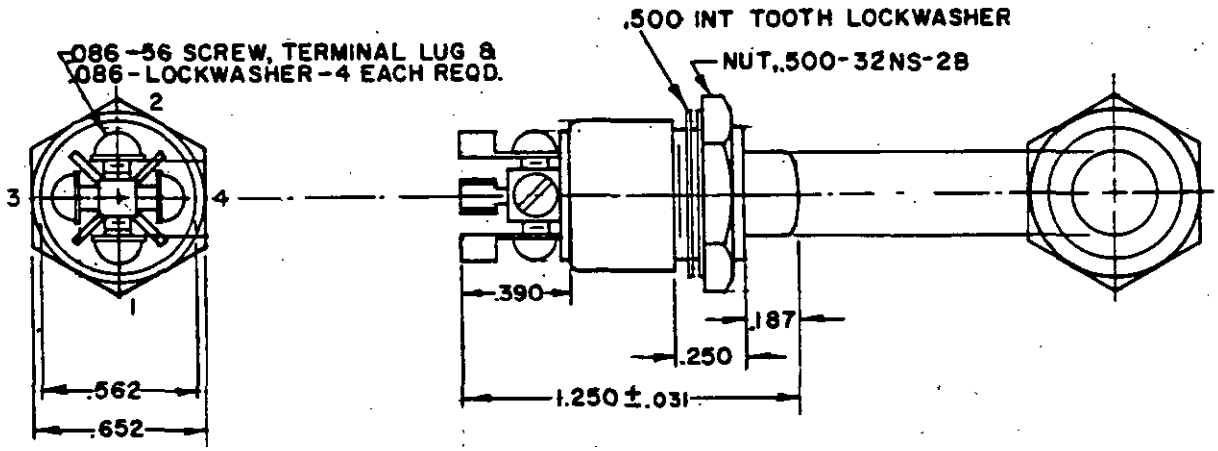



INCHES	MM
.031	.79
.187	4.75
.250	6.35
.390	9.91
.500	12.70
.562	14.27
.652	16.56
1.250	31.75


ELECTRICAL RATINGS	ENDURANCE
Inductive	
(amperes)	(cycles)
15 at 0.5 power factor (120 Vac, 60 Hz)	40,000
1 at 0.07 Henry (120 Vdc)	40,000
0.05 at 2 Henries (230 Vdc)	5,000

OPERATING CHARACTERISTICS:
Actuating force: 3-1/2 ±1 pounds.
Total travel: .085 inch approximately.

PART NUMBER: MS16712-1.

FIGURE 106-2. Switch, push, momentary, 2 circuit, unsealed (MIL-S-8805/20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

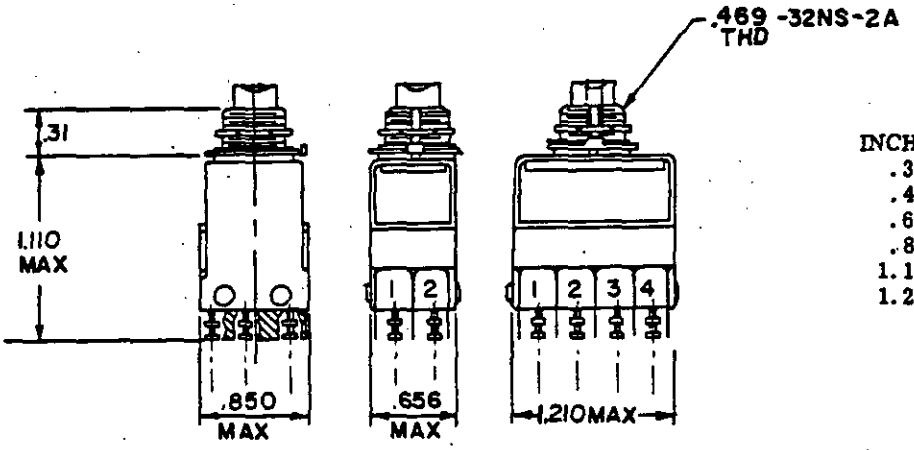

INCHES	MM
.31	7.87
.469	11.91
.656	16.66
.850	21.59
1.110	28.19
1.210	30.73

LOAD	ELECTRICAL RATINGS		
	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp- - - - - -	2.4	1.5	2.4


OPERATING CHARACTERISTICS:
Coincidence of operating and releasing points: All poles shall have transferred within .010 inch of plunger travel.
Total plunger travel: .075 inch approximately (information only).
Operating force: See following tabulation.

PART NUMBER: See following tabulation.

Part number	Circuit characteristic	Operating force	Weight	Button color
		lb max	lb max	
M8805/23-001	2PDT	4.5	.055	Black
M8805/23-002	2PDT	4.5	.055	Red
M8805/23-003	4PDT	5.5	.075	Black
M8805/23-004	4PDT	5.5	.075	Red

FIGURE 106-3. Switch assemblies, sensitive, push, momentary, 5 amperes, unsealed (MIL-S-8805/23).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

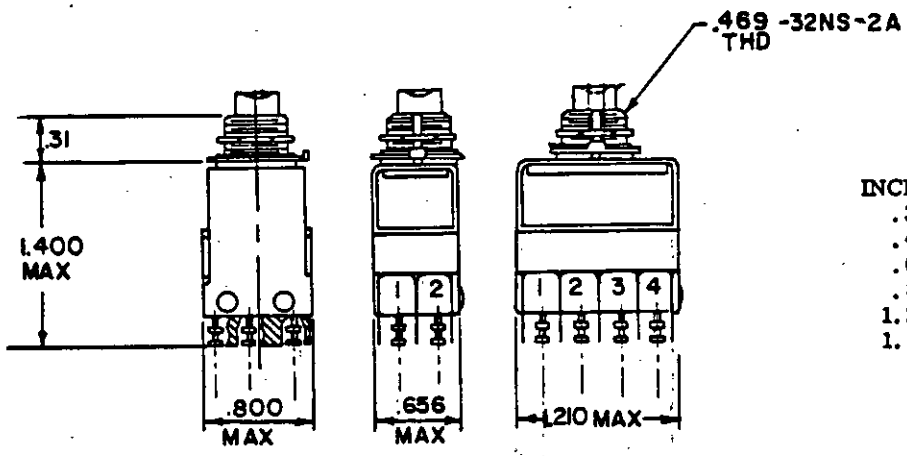

INCHES	MM
.31	7.87
.469	11.91
.656	16.66
.800	20.32
1.210	30.73
1.400	35.56

LOAD	ELECTRICAL RATINGS		
	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp- - - - - -	2.4	1.5	2.4


OPERATING CHARACTERISTICS:
Operation: Alternate action.
Coincidence of operation or releasing points: All poles shall have transferred within .010 inch of plunger travel.
Total plunger travel: .085 inch approximately (information only).
Operating force: See following tabulation.

PART NUMBER: See following tabulation.

Part number	Circuit characteristic	Operating force	Weight	Button color
		lb max	lb max	
M8805/25-001	2PDT	6	.060	Black
M8805/25-002	2PDT	6	.060	Red
M8805/25-003	4PDT	7	.100	Black
M8805/25-004	4PDT	7	.100	Red


FIGURE 106-4. Switch assemblies, sensitive, push, alternate, unsealed (MIL-S-8805/25).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

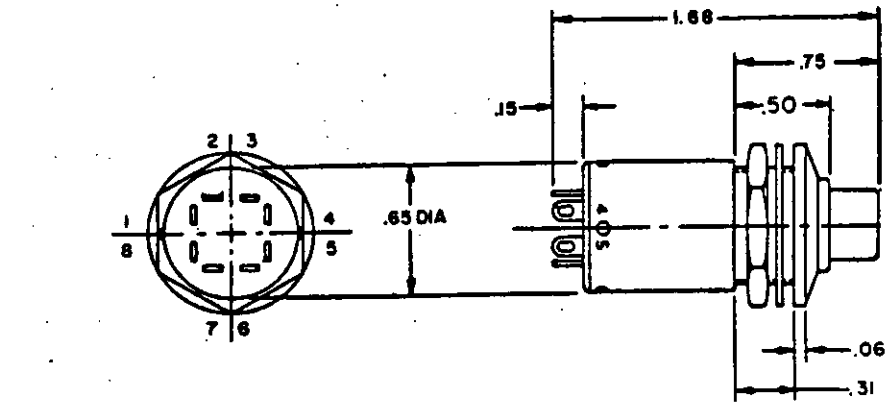


INCHES	MM
.06	1.52
.15	3.81
.25	6.35
.31	7.78
.37	9.40
.50	12.70
.65	16.51
.68	17.21
.87	22.10
1.68	42.67


TYPE C MOUNTING

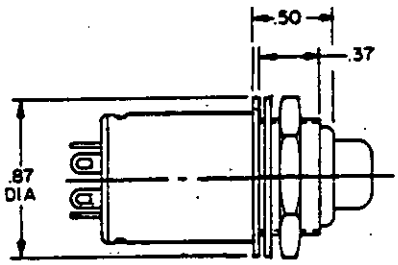

TYPE F MOUNTING

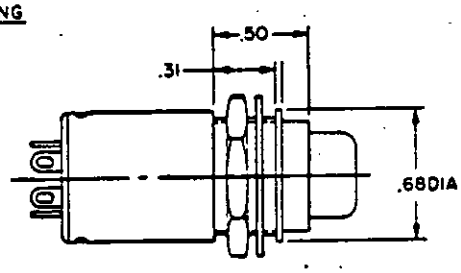

TYPE G MOUNTING



CIRCUIT


LOAD	ELECTRICAL RATINGS Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - -	4	4
Inductive - - -	2	2
Motor - - - - -	2	2

OPERATING CHARACTERISTICS:
Total plunger travel: .085 ±.015 inch.
Operating force: 4 ±1 pounds.


Part number	Mounting type	Button
MS27903-1	C	Black
MS27903-2	C	Red
MS27903-3	G	Black
MS27903-4	G	Red
MS27903-5	F	Black
MS27903-6	F	Red

FIGURE 106-5. Switches, push, 4 circuit, 4 amperes, dusttight (MIL-S-8805/38).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

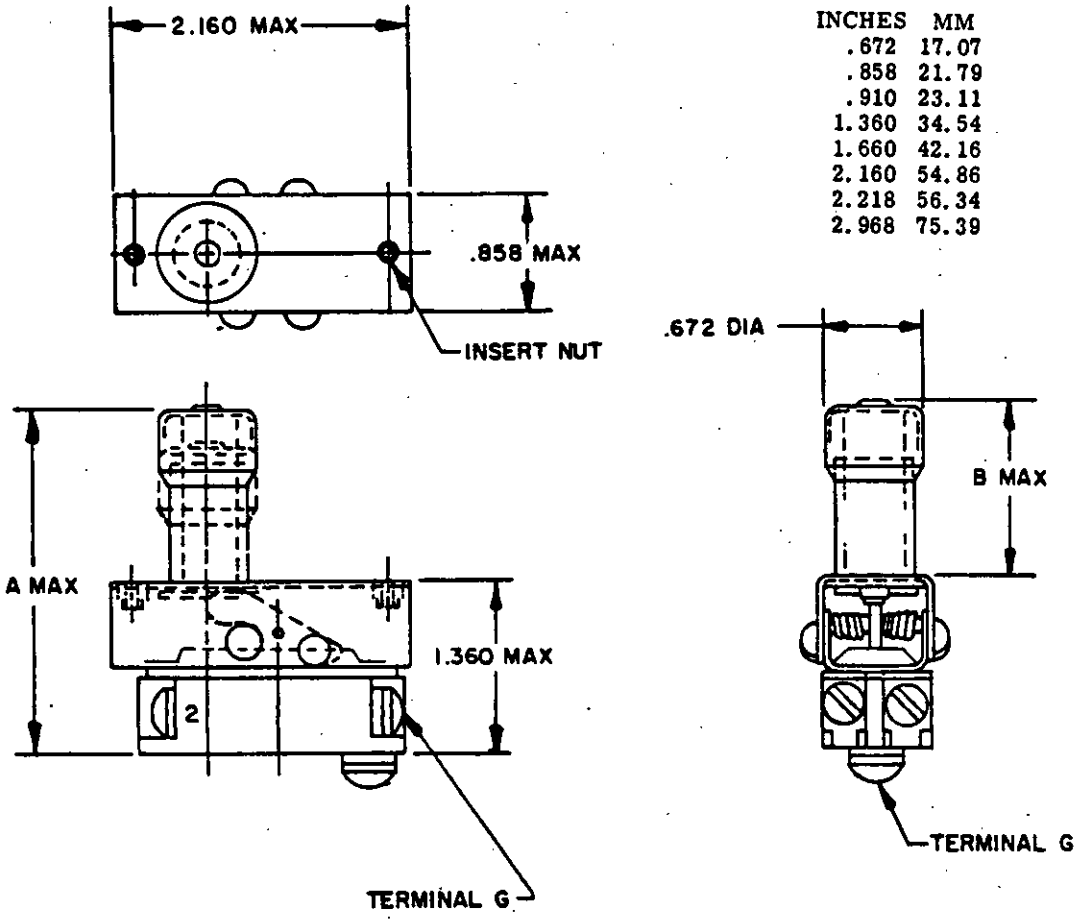

INCHES	MM
.672	17.07
.858	21.79
.910	23.11
1.360	34.54
1.660	42.16
2.160	54.86
2.218	56.34
2.968	75.39



TERMINAL MARKINGS

Part no.	A	B
M8805/55-001	2.218	.910
M8805/55-002	2.968	1.660



SCHEMATIC DIAGRAM


ELECTRICAL RATINGS:
Rated load at 28 Vdc (inductive): 0.75 ampere.
Overload at 28 Vdc (inductive): 1.75 amperes.

OPERATING CHARACTERISTICS:
Actuating force: 7.0 $^{+4}_{-0}$ pounds.
Pretravel: 1/16 inch minimum.
Total travel: 23/64 inch maximum.

PART NUMBER: See above tabulation.

FIGURE 106-6. Switches, microphone, DPST, normally open (MIL-S-8805/55).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

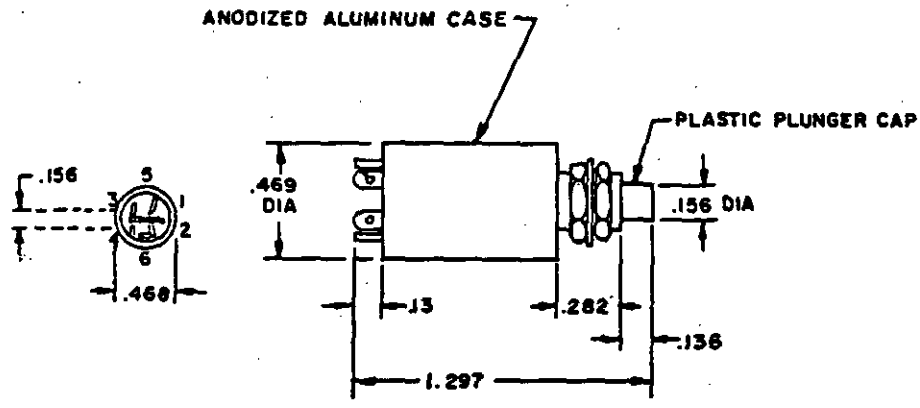

SCHEMATIC DIAGRAM

INCHES	MM
.13	3.30
.136	3.45
.156	3.96
.282	7.16
.469	11.91
1.297	32.91

LOAD	ELECTRICAL RATINGS	
	28 Vdc	115 Vac, 60 Hz
	ampere	ampere
Resistive - - -	1	1
Inductive - - -	1	1


OPERATING CHARACTERISTICS:
Total plunger travel: .093 inch maximum.
Operating force: 1.50 ±.75 pounds.

PART NUMBER: See following tabulation.

Part number M8805/95-	Button color	Case color	Hex nut
001	Black	Clear	MS25082-14
002	Red	Clear	MS25082-14
003	Black	Black	MS25082-B14
004	Red	Black	MS25082-B14

FIGURE 106-7. Switches, push, 2PDT, momentary, 1 ampere, unsealed (MIL-S-8805/95).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

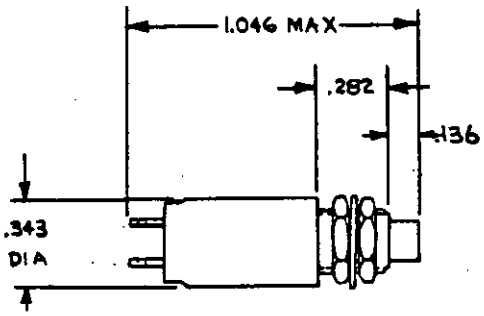

INCHES	MM
.136	3.45
.282	7.16
.343	8.71
1.046	26.50

CIRCUIT DIAGRAM



LOAD	ELECTRICAL RATINGS	
	28 Vdc	115 Vac, 60 Hz
	amperes	amperes
Resistive - - -	5.0	5.0
Inductive - - -	2.0	2.0


OPERATING CHARACTERISTICS:
Total plunger travel: .095 ±.015 inch.
Operating force:
Unsealed: 1.50 ±.5 pounds.
Dusttight: 1.75 ±.5 pounds.

PART NUMBER: See following tabulation.

Part number M8805/96-	Plunger cap color	Circuit characteristics	Case color	Hex nut	Enclosure design
001	Red	SPST-NO	Clear	MS25082-14	1 (unsealed)
002	Black	SPST-NO	Clear	MS25082-14	1 (unsealed)
003	Red	SPST-NC	Clear	MS25082-14	1 (unsealed)
004	Black	SPST-NC	Clear	MS25082-14	1 (unsealed)
005	Red	SPST-NO	Black	MS25082-B14	1 (unsealed)
006	Black	SPST-NO	Black	MS25082-B14	1 (unsealed)
007	Red	SPST-NC	Black	MS25082-B14	1 (unsealed)
008	Black	SPST-NC	Black	MS25082-B14	1 (unsealed)
009	Red	SPST-NO	Clear	MS25082-14	2 (dusttight)
010	Black	SPST-NO	Clear	MS25082-14	2 (dusttight)
011	Red	SPST-NC	Clear	MS25082-14	2 (dusttight)
012	Black	SPST-NC	Clear	MS25082-14	2 (dusttight)
013	Red	SPST-NO	Black	MS25082-B14	2 (dusttight)
014	Black	SPST-NO	Black	MS25082-B14	2 (dusttight)
015	Red	SPST-NC	Black	MS25082-B14	2 (dusttight)
016	Black	SPST-NC	Black	MS25082-B14	2 (dusttight)

FIGURE 106-8. Switches, push, momentary, SPST, 5 amperes (MIL-S-8805/96).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

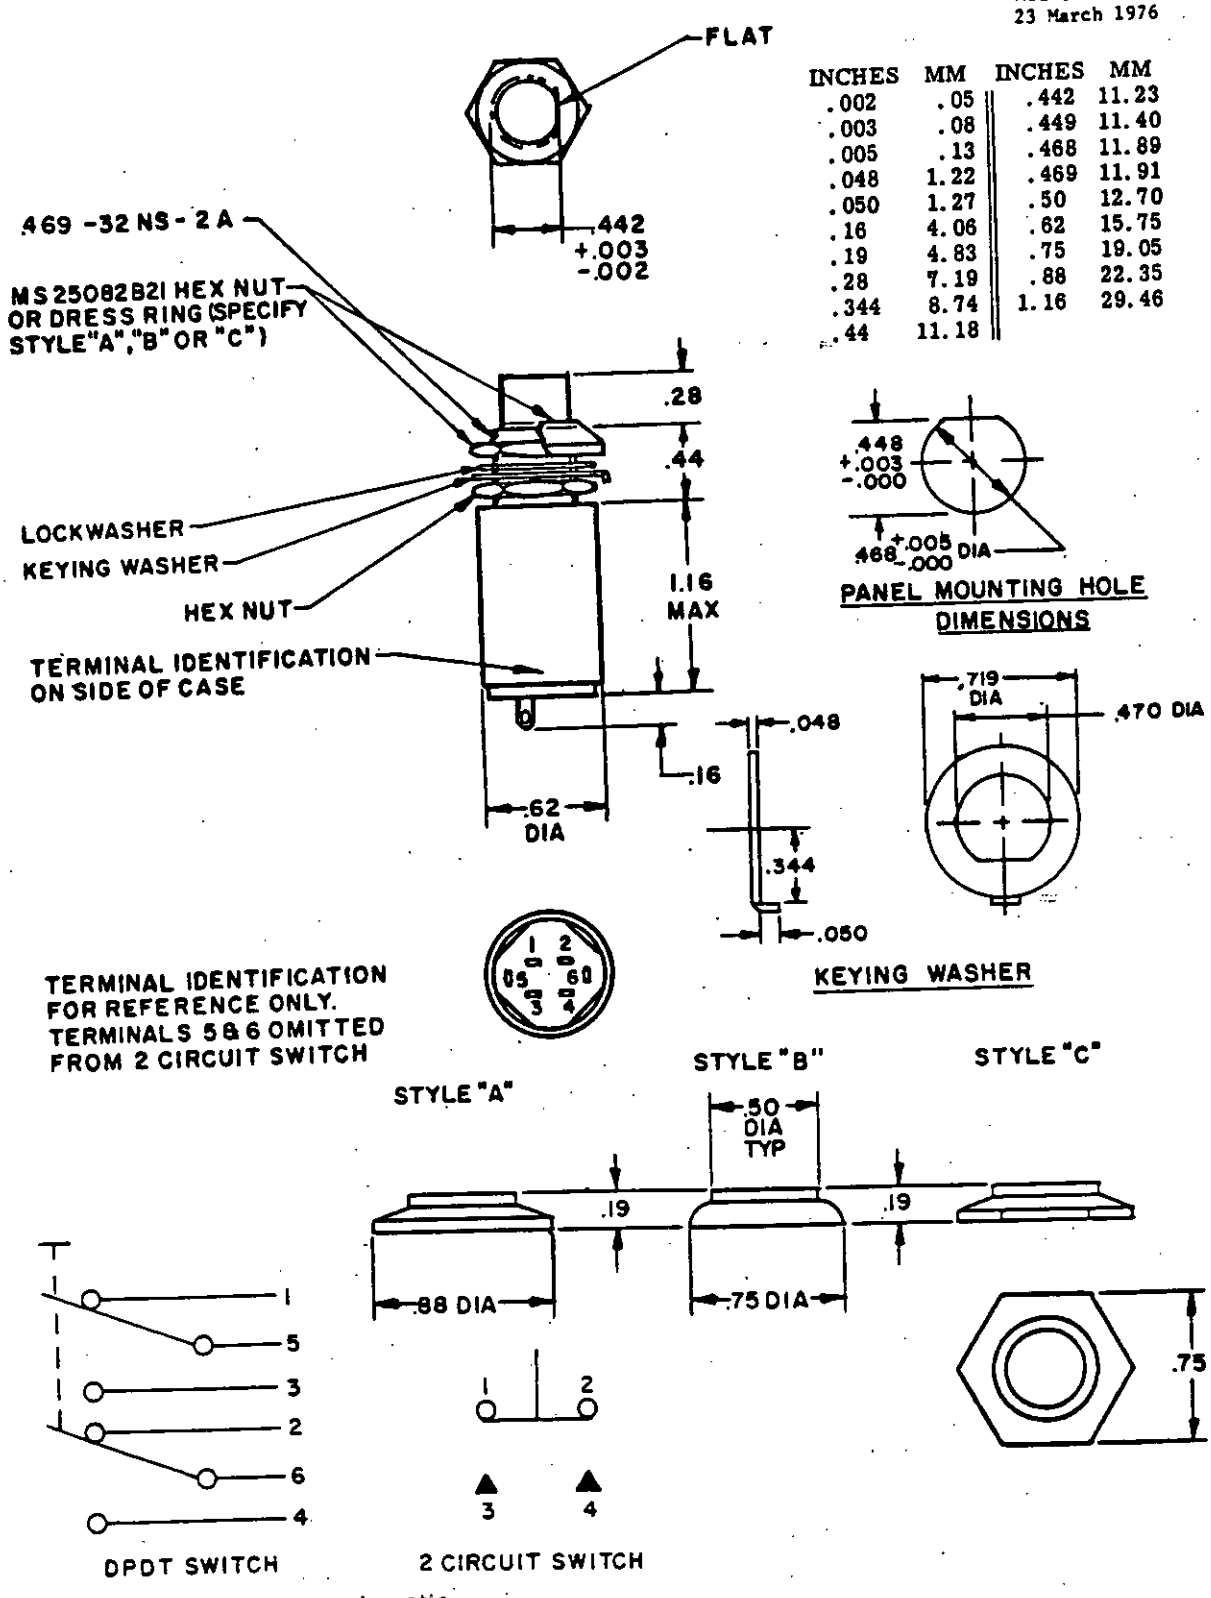

Circuit schematic.

FIGURE 106-9. Switches, push, 2 circuit and DPDT, alternate and momentary action, 3 amperes, watertight (MIL-S-8805/99).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS	
	Sea level	70,000 feet
	28 Vdc 115 Vac, 400 Hz	28 Vdc
	(amperes)	(amperes)
Resistive - - -	3	3
Inductive - - -	1.5	1.5
Lamp- - - - - -	1	1

OPERATING CHARACTERISTICS:
Actuating force: 4 ±1 pounds.
Plunger travel: .160 inch maximum.

PART NUMBER: See following tabulation.

Part number	Dress ring	Switch action	Switch circuit	Button color
M8805/99-001	A	Alternate action	2 circuit	Black
-002	B	Alternate action	2 circuit	Black
-003	C	Alternate action	2 circuit	Black
-004	None	Alternate action	2 circuit	Black
-005	A	Alternate action	2 circuit	Red
-006	B	Alternate action	2 circuit	Red
-007	C	Alternate action	2 circuit	Red
-008	None	Alternate action	2 circuit	Red
-009	A	Momentary	2 circuit	Black
-010	B	Momentary	2 circuit	Black
-011	C	Momentary	2 circuit	Black
-012	None	Momentary	2 circuit	Black
-013	A	Momentary	2 circuit	Red
-014	B	Momentary	2 circuit	Red
-015	C	Momentary	2 circuit	Red
-016	None	Momentary	2 circuit	Red
-017	A	Alternate action	DPDT	Black
-018	B	Alternate action	DPDT	Black
-019	C	Alternate action	DPDT	Black
-020	None	Alternate action	DPDT	Black
-021	A	Alternate action	DPDT	Red
-022	B	Alternate action	DPDT	Red
-023	C	Alternate action	DPDT	Red
-024	None	Alternate action	DPDT	Red
-025	A	Momentary	DPDT	Black
-026	B	Momentary	DPDT	Black
-027	C	Momentary	DPDT	Black
-028	None	Momentary	DPDT	Black
-029	A	Momentary	DPDT	Red
-030	B	Momentary	DPDT	Red
-031	C	Momentary	DPDT	Red
-032	None	Momentary	DPDT	Red

FIGURE 106-9. Switches, push, 2 circuit and DPDT, alternate and momentary action, 3 amperes, watertight (MIL-S-8805/99) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 107

SWITCHES, ROTARY
(Applicable specifications: MIL-S-3786, MIL-S-6807, and MIL-S-15291)

FIGURE NO.	SWITCH CHARACTERISTICS						PAGE
	Style	Specification sheet No. or specification No.	Section size, excluding terminals (inches)	Type of construction	Current rating (amperes)	Shaft	
107-1	SR01 SR02 SR03 SR09 SR10	MIL-S-3786/1 MIL-S-3786/2 MIL-S-3786/3 MIL-S-3786/9 MIL-S-3786/10	2.094 max dia 1.594 max dia 1.375 max dia 2.344 max dia 2.328 max dia	Open	1/2	Single	107.2
107-2	SR14 SR15	MIL-S-3786/14 MIL-S-3786/15	1.750 square 2.531 square max	Open	1/2	Single	107.3
107-3	SR05	MIL-S-3786/5	1.047 max dia	Open	1/5	Single	107.4
107-4	SR31	MIL-S-3786/31	1.05 max dia	Open	1/4	Single (lever actuated)	107.6
107-5	SR28	MIL-S-3786/28	1.328 max dia	Open	1	Single	107.8
107-6	SR19	MIL-S-3786/19	.500 dia	Closed	1/10	Single	107.9
107-7	SR20	MIL-S-3786/20	.500 dia	Closed	1/5	Single	107.10
107-8	SR25	MIL-S-3786/25	1.50 dia	Closed	1/5	Single (key operated)	107.11
107-9	SR35	MIL-S-3786/35	.562 dia	Closed	1/5	Single	107.12
107-10	SR37	MIL-S-3786/37	.500 dia	Closed	1/5	Single	107.14
107-11	SR36	MIL-S-3786/36	1.350 dia (15°) 1.190 dia (18° & 22-1/2°)	Closed	1/4	Single	107.16
107-12	SR13	MIL-S-3786/13	.800 max dia (including terminals)	Closed	1/2	Single	107.20
107-13	SR04-1 SR04-2 SR04-3	MIL-S-3786/4	1.306 max dia (including terminals)	Closed	2	Single. Concentric ADD-A-POT	107.23
107-14	---	MIL-S-6807	1.950 max dia (including terminals)	Closed	5	Single	107.29

NOTES:


1. For the styles listed under MIL-S-3786, the following variations are considered standard:

   (a) Operating-shaft length, diameter, shape, and special construction.
   (b) Deck-to-deck spacing dimensions.
   (c) Optional assemblies, such as spring return and push-to-turn actions.
   (d) Terminal angles.
   (e) Bushing thread size and diameter, and thread length.
   (f) Addition of a shield.

2. Standard switches are to be established for MIL-S-15291.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)			
	28 Vdc	115 Vrms		300 Vrms
		SR01 & 03	SR02, 09, & 10	
Resistive:				
At atmospheric pressure - - - - - -	500	225	250	50
At reduced barometric pressure- - -	350	100	100	---
Inductive (2.8 Henries):				
At atmospheric pressure - - - - - -	50	---	---	---

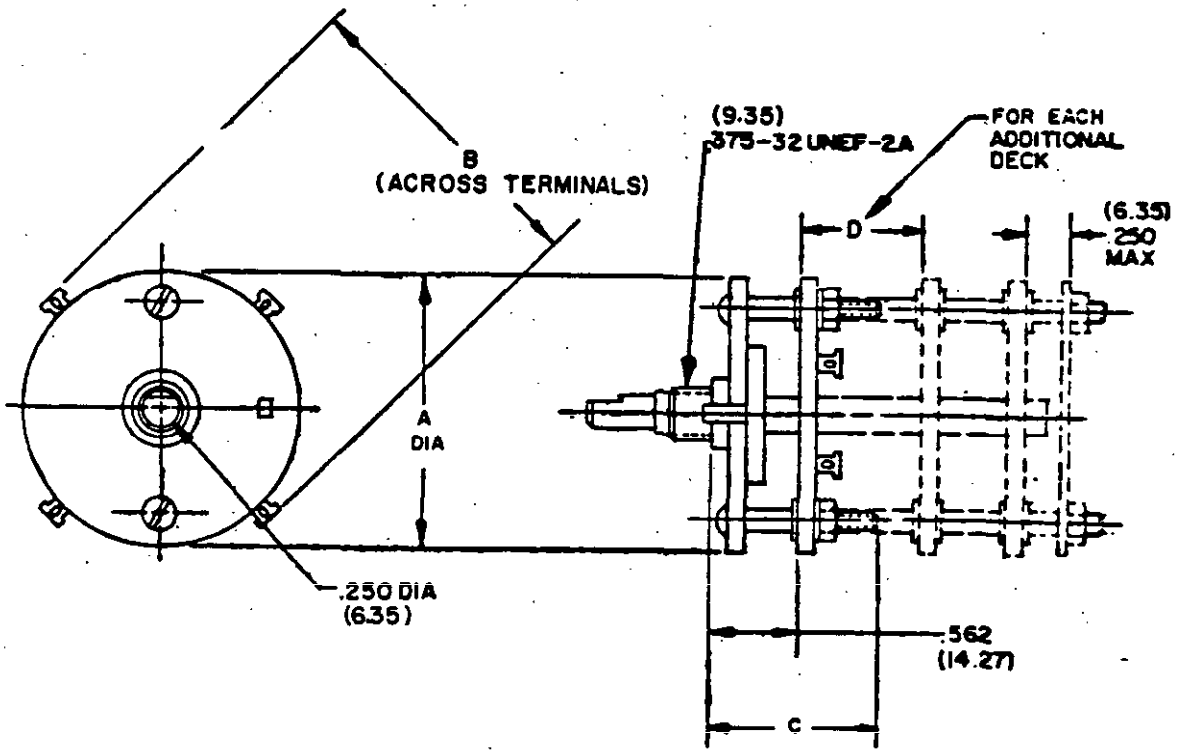


STYLE	PROCUREMENT DOCUMENT	DIMENSIONS			
		A max	B max	C max	D nom
SR01	MIL-S-3786/1	2.094 (53.19)	2.328 (59.13)	1.188 (30.20)	.750 (19.05)
SR02	MIL-S-3786/2	1.594 (40.49)	1.750 (44.45)	1.188 (30.20)	.500 (12.70)
SR03	MIL-S-3786/3	1.375 (34.93)	1.625 (41.28)	1.062 (26.97)	.500 (12.70)
SR09	MIL-S-3786/9	2.344 (59.54)	2.062 (52.37)	1.312 (33.32)	.500 (12.70)
SR10	MIL-S-3786/10	2.328 (59.13)	2.625 (66.68)	1.312 (33.32)	.500 (12.70)

NOTES:
1. For shipboard applications, switches must withstand the high impact shock test of MIL-S-3786.
2. Mounting brackets are recommended for switches that protrude over 3.50 inches (88.90 mm) behind panel or have more than five sections.
3. These switches are identified by a type designation (see MIL-S-3786).

FIGURE 107-1. SR01, SR02, SR03, SR09, and SR10 switches, rotary, open construction, 1/2 ampere, single shaft (MIL-S-3786/1, /2, /3, /9, and /10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD (At atmospheric pressure)	ELECTRICAL RATINGS (milliamperes)		
	28 Vdc	115 Vrms	300 Vrms
Resistive - - - - - - - - - - -	500	125	50
Inductive (2.8 Henries) - - -	50	---	---

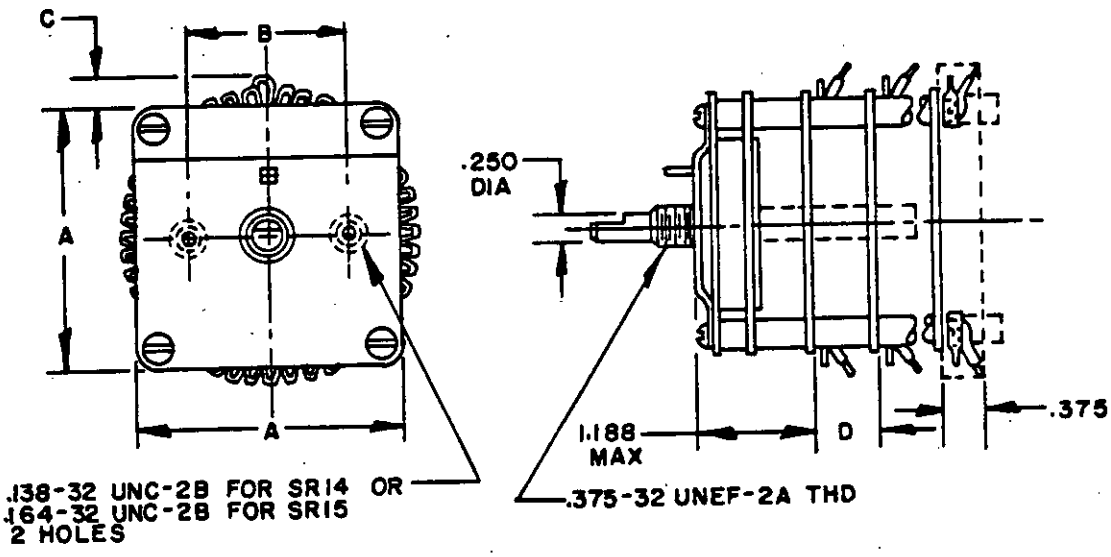

FRONT PLATE

INCHES	MM
.138	3.51
.164	4.17
.250	6.35
.375	9.53
1.188	30.23

STYLE	PROCUREMENT DOCUMENT	DIMENSIONS			
		A max	B	C max	D max
SR14	MIL-S-3786/14	1.750 (44.45)	1.375 (34.93)	.375 (9.53)	.938 (23.83)
SR15	MIL-S-3786/15	2.531 (64.29)	1.500 (38.10)	.312 (7.92)	1.062 (26.97)


NOTES:

1. For shipboard applications, switches must withstand the high impact shock test of MIL-S-3786.
2. Mounting brackets are recommended for switches that protrude over 3.50 inches (88.90 mm) behind panel or have more than five sections.
3. These switches are identified by a type designation (see MIL-S-3786).

FIGURE 107-2. SR14 and SR15 switches, rotary, open construction, 1/2 ampere, single shaft (MIL-S-3786/14 and /15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms
Resistive:		
At atmospheric pressure	200	100
At reduced barometric pressure	100	50
Inductive:		
At atmospheric pressure	20	---

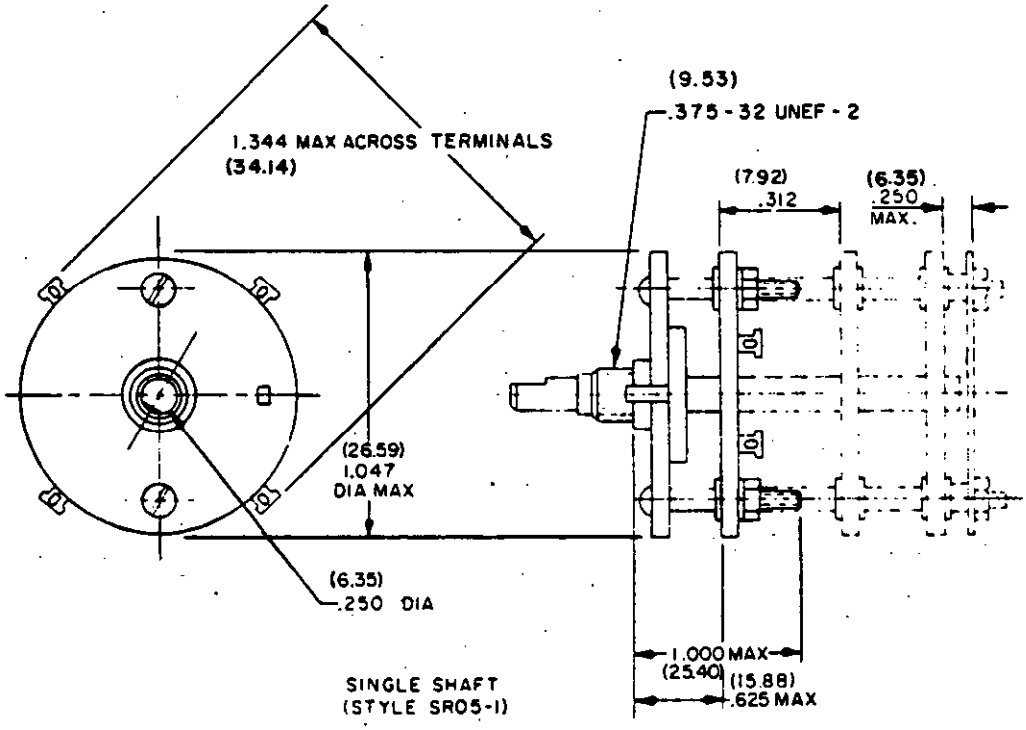

NOTES:
1. For shipboard applications, switches must withstand the high impact shock test of MIL-S-3786.
2. Mounting brackets are recommended for switches that protrude over 3.50 inches (88.90 mm) behind panel or have more than five sections.

PART NUMBER: Consists of "M3786/5" followed by a dash and a four-letter code. The four-letter code used in the following example identifies a switch of construction type N, temperature-life characteristic B, shock type H and M, ceramic or glass bonded mica insulation material, 36 degree angle of throw, 1 pole per deck, 5 positions, 2 decks, and nonshorting switching characteristic.

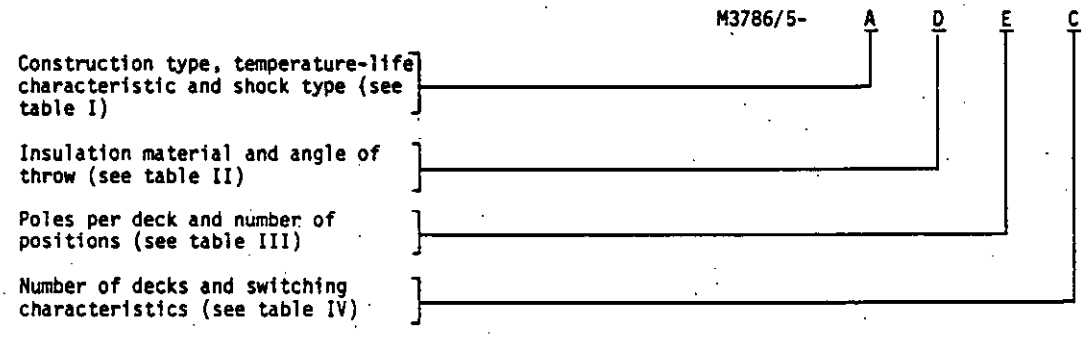


FIGURE 107-3. SR05 switches, rotary, open construction, 1/5 ampere, single shaft (MIL-S-3786/5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Code letters for combinations of construction type, temperature-life characteristic, and shock type.

Code letter	Construction type	Temperature-life characteristic	Shock type	Code letter	Construction type	Temperature-life characteristic	Shock type
A - - -	N	B	H and M	G - - -	N	B	M
B - - -	S	B	↓	H - - -	S	B	↓
C - - -	N	C		J - - -	N	C	
D - - -	S	C		K - - -	S	C	
E - - -	N	D		L - - -	N	D	
F - - -	S	D	H and M	M - - -	S	D	M

TABLE II. Code letters for combinations of insulation material and angle of throw.

Code letter	Insulation material	Angle of throw	Code letter	Insulation material	Angle of throw	Code letter	Insulation material	Angle of throw
A - - -	C	30	F - - -	P	36	L - - -	G	60
B - - -	G	30	G - - -	C	45	M - - -	P	60
C - - -	P	30	H - - -	G	45	N - - -	C	90
D - - -	C	36	J - - -	P	45	P - - -	G	90
E - - -	G	36	K - - -	C	60	Q - - -	P	90

TABLE III. Code letters for combinations of poles per deck and number of positions.

Code letter	Poles per deck	Number of positions	Code letter	Poles per deck	Number of positions	Code letter	Poles per deck	Number of positions
A - - -	1	C 1/	J - - -	1	9	S - - -	2	6
B - - -	1	2	K - - -	1	10	T - - -	3	2
C - - -	1	3	L - - -	1	11	U - - -	3	3
D - - -	1	4	M - - -	1	12	V - - -	3	4
E - - -	1	5	N - - -	2	2	W - - -	4	2
F - - -	1	6	P - - -	2	3	X - - -	4	3
G - - -	1	7	Q - - -	2	4			
H - - -	1	8	R - - -	2	5			

1/ Switch is continuous rotation type (no stops), and number of positions is dependent on angle of throw as follows:

Angle of throw	Positions
30°	12
36°	10
45°	8
60°	6
90°	4

TABLE IV. Code letters for combinations of number of decks and switching characteristics.


Code letter	Number of decks	Switching characteristics					Code letter	Number of decks	Switching characteristics				
		First deck	Second deck	Third deck	Fourth deck	Fifth deck			First deck	Second deck	Third deck	Fourth deck	Fifth deck
A - - -	1	NS	---	---	---	---	K - - -	4	NS	NS	NS	NS	---
B - - -	1	S	---	---	---	---	L - - -	4	S	S	S	S	---
C - - -	2	NS	NS	---	---	---	M - - -	4	NS	NS	NS	S	---
D - - -	2	S	S	---	---	---	N - - -	4	NS	S	S	S	---
E - - -	2	NS	S	---	---	---	P - - -	5	NS	NS	NS	NS	NS
F - - -	3	NS	NS	NS	---	---	Q - - -	5	S	S	S	S	S
G - - -	3	S	S	S	---	---	R - - -	5	NS	NS	NS	NS	S
H - - -	3	NS	NS	S	---	---	S - - -	5	NS	S	S	S	S
J - - -	3	NS	S	S	---	---							

FIGURE 107-3. SR05 switches, rotary, open construction, 1/5 ampere, single shaft (MIL-S-3786/5) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms
Resistive:		
At atmospheric pressure- - - - - - -	250	100
At reduced barometric pressure - - -	120	50
At room ambient 1/ - - - - - - - - -	300	200
Inductive (2.8 Henries):		
At atmospheric pressure- - - - - - -	25	---
At room ambient 1/ - - - - - - - - -	100	---

1/ For information only.

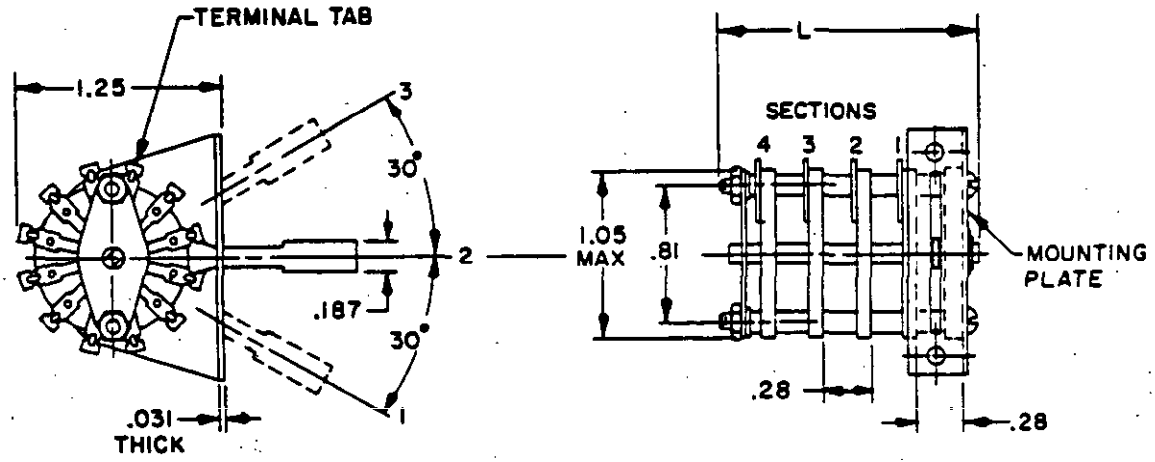

Maximum depth (L), inches	
Decks	L dimension
1	.75 (19.05)
2	1.00 (25.40)
3	1.31 (33.27)
4	1.69 (42.93)

INCHES	MM
.031	.79
.125	3.18
.187	4.75
.28	7.11
.360	9.14
.81	20.57
1.05	26.67
1.25	31.75
1.460	37.26

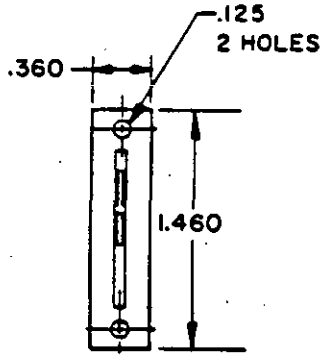

MOUNTING PLATE

FIGURE 107-4. SR31 switches, rotary, open construction, 1/4 ampere, single shaft (lever actuated) (MIL-S-3786/31).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per section	Total sections	Part number M3786/31-							
		2 Position				3 Position			
		Shorting		Nonshorting		Shorting		Nonshorting	
			See 1/		See 1/		See 1/		See 1/
1	1	001	---	002	---	033	---	034	---
2	1	003	065	004	066	035	097	036	098
3	1	005	---	006	---	037	---	038	---
4	1	007	067	008	068	039	099	040	100
1	2	009	---	010	---	041	---	042	---
2	2	011	073	012	074	043	105	044	106
3	2	013	---	014	---	045	---	046	---
4	2	015	075	016	076	047	107	048	108
1	3	017	---	018	---	049	---	050	---
2	3	019	081	020	082	051	113	052	114
3	3	021	---	022	---	053	---	054	---
4	3	023	083	024	084	055	115	056	116
1	4	025	---	026	---	057	---	058	---
2	4	027	089	028	090	059	121	060	122
3	4	029	---	030	---	061	---	062	---
4	4	031	091	032	092	063	123	064	124
6	1	---	069	---	070	---	101	---	102
8	1	---	071	---	072	---	103	---	104
6	2	---	077	---	078	---	109	---	110
8	2	---	079	---	080	---	111	---	112
6	3	---	085	---	086	---	117	---	118
8	3	---	087	---	088	---	119	---	120
6	4	---	093	---	094	---	125	---	126
8	4	---	095	---	096	---	127	---	128


1/ Dash numbers 065 through 128 have circuitry both sides of switch sections.

FIGURE 107-4. SR31 switches, rotary, open construction, 1/4 ampere, single shaft (lever actuated) (MIL-S-3786/31) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)		
	28 Vdc	115 Vac	115 Vac, 60 Hz
Resistive:			
At atmospheric pressure (125°C)- - - - - -	750	250	---
At atmospheric pressure (25°C) - - - - - -	1000	---	350
At reduced barometric pressure (25°C)- - -	250	40	---
Inductive (2.8 Henries):			
At atmospheric pressure (125°C)- - - - - -	100	---	---
At atmospheric pressure (25°C) - - - - - -	100 1/	---	---
At reduced barometric pressure (25°C)- - -	40	---	---

1/ Reference only.

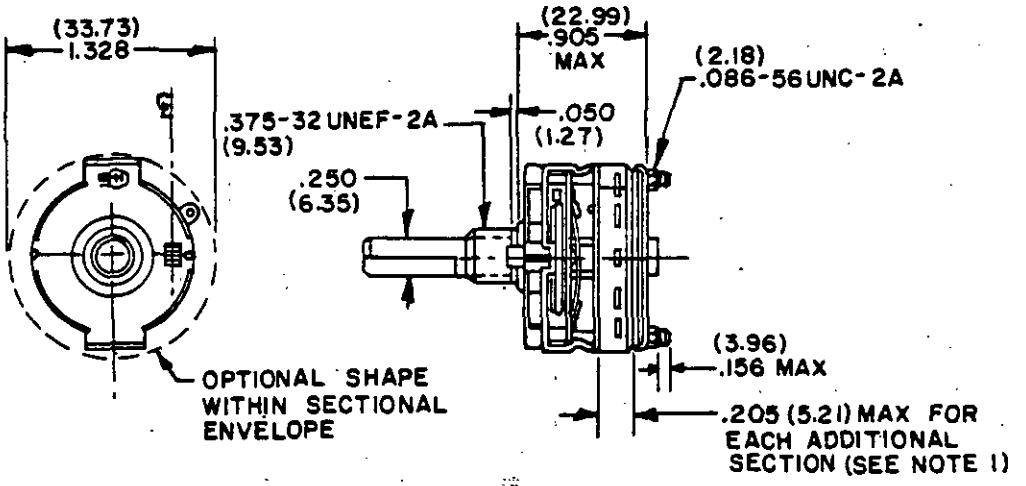


NOTES:
1. For 7 through 12 positions, two sections may be joined together for each pole. An external pole strap (not shown) is used for wiring together commons of both sections of each related pole.
2. Switches having more than 2.750 inch length from the mounting surface are provided with through-bolts extended .250 inch minimum beyond the nuts securing the last switch section at the rear of the switch to provide means to support the rear of the switch.

No. of poles	Switching characteristic	Part number M3786/28-										
		Position					Position					
		2	3	4	5	6	7	8	9	10	11	12
1	Shorting	021	022	023	024	025	101	102	103	104	105	106
1	Nonshorting	026	027	028	029	030	107	108	109	110	111	112
2	Shorting	031	032	033	034	035	113	114	115	116	117	118
2	Nonshorting	036	037	038	039	040	119	120	121	122	123	124
3	Shorting	041	042	043	044	045	125	126	127	128	129	130
3	Nonshorting	046	047	048	049	050	131	132	133	134	135	136
4	Shorting	051	052	053	054	055	137	138	139	140	141	142
4	Nonshorting	056	057	058	059	060	143	144	145	146	147	148
5	Shorting	061	062	063	064	065	149	150	151	152	153	154
5	Nonshorting	066	067	068	069	070	155	156	157	158	159	160
6	Shorting	071	072	073	074	075	161	162	163	164	165	166
6	Nonshorting	076	077	078	079	080	167	168	169	170	171	172
7	Shorting	081	082	083	084	085	173	174	175	176	177	178
7	Nonshorting	086	087	088	089	090	179	180	181	182	183	184
8	Shorting	091	092	093	094	095	185	186	187	188	189	190
8	Nonshorting	096	097	098	099	100	191	192	193	194	195	196

FIGURE 107-5. SR28 switches, rotary, open construction, 1 ampere, single shaft (MIL-S-3786/28).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms
Resistive:		
At atmospheric pressure- - - - - - -	100	25
At reduced barometric pressure - - -	50	---
Inductive (2.8 Henries):		
At atmospheric pressure- - - - - - -	10	---

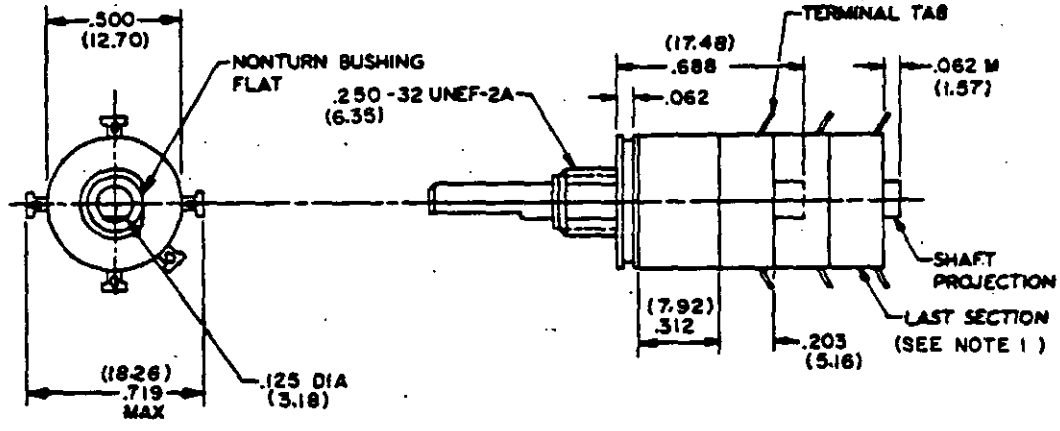


NOTES:
1. The number of sections is optional. Maximum 5 sections.
2. These switches are identified by a type designation (see MIL-S-3786).

FIGURE 107-6. SR19 switches, rotary, closed construction, 1/10 ampere, single shaft (MIL-S-3786/19).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms, 60 Hz
Lamp (tungsten)- - - - - - - - - - -	100	---
Resistive:		
At atmospheric pressure- - - - - -	200	150
At reduced barometric pressure - -	200	150
Inductive (2.8 Henries):		
At atmospheric pressure- - - - - -	30	---

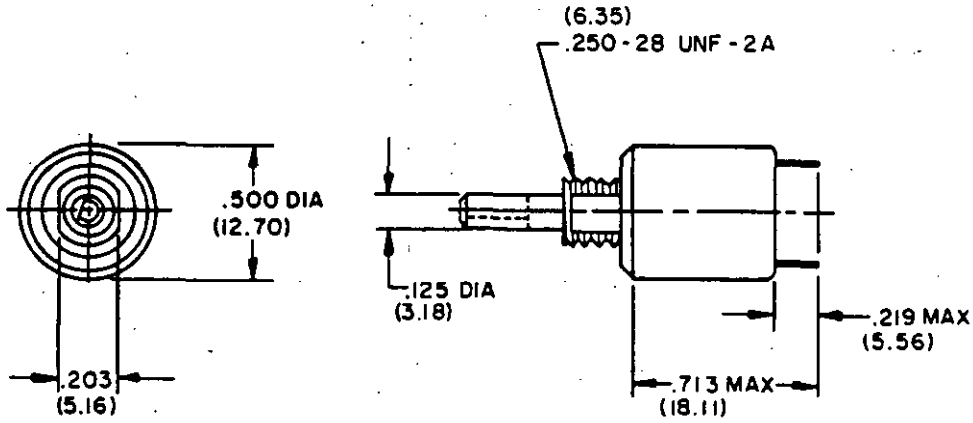


Angle of throw	No. of poles	Pos. per pole	Part No. M3786/20- Construction F	E	F	E	Angle of throw	No. of poles	Pos. per pole	Part No. M3787/20- Construction F	E	F	E
			Shorting		Nonshorting					Shorting		Nonshorting	
36	1	2	001	301	014	314	45	2	3	---	---	051	351
	1	3	002	302	015	315	45	2	4	---	---	052	352
	1	4	003	303	016	316	36	1	10	053	353	054	354
	1	5	004	304	017	317	60	1	6	055	355	056	356
	1	6	005	305	018	318	45	1	8	---	---	057	357
	1	7	006	306	019	319	36	3	2	058	358	061	361
	1	8	007	307	020	320	36	3	3	059	359	062	362
	1	9	008	308	021	321	36	4	2	060	360	063	363
	1	10 1/	009	309	022	322	30	1	2	064	364	085	385
	2	2	010	310	023	323		1	3	065	365	086	386
	2	3	011	311	024	324		1	4	066	366	087	387
	2	4	012	312	025	325		1	5	067	367	088	388
36	2	5	013	313	026	326		1	6	068	368	089	389
60	1	2	027	327	035	335		1	7	069	369	090	390
	1	3	028	328	036	336		1	8	070	370	091	391
	1	4	029	329	037	337		1	9	071	371	092	392
	1	5	030	330	038	338		1	10	072	372	093	393
	1	6 1/	031	331	039	339		1	11	073	373	094	394
	2	2	032	332	040	340		1	12 1/	074	374	095	395
	2	3	033	333	041	341		1	12	075	375	096	396
60	3	2	034	334	042	342		2	2	076	376	097	397
45	1	2	---	---	043	343		2	3	077	377	098	398
	1	3	---	---	044	344		2	4	078	378	099	399
	1	4	---	---	045	345		2	5	079	379	100	400
	1	5	---	---	046	346		2	6	080	380	101	401
	1	6	---	---	047	347		3	2	081	381	102	402
	1	7	---	---	048	348		3	3	082	382	103	403
	1	8 1/	---	---	049	349		4	2	083	383	104	404
45	2	2	---	---	050	350	30	4	3	084	384	105	405

1/ Continuous rotation.

FIGURE 107-7. SR20 switches, rotary, closed construction, explosion proof, 1/5 ampere, single shaft (MIL-S-3786/20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	30 Vdc	115 Vac
Resistive:		
At atmospheric pressure- - - - - - -	200	100
At reduced barometric pressure - - -	200	50
Inductive (2.8 Henries):		
At atmospheric pressure- - - - - - -	100	---
At reduced barometric pressure - - -	25	---

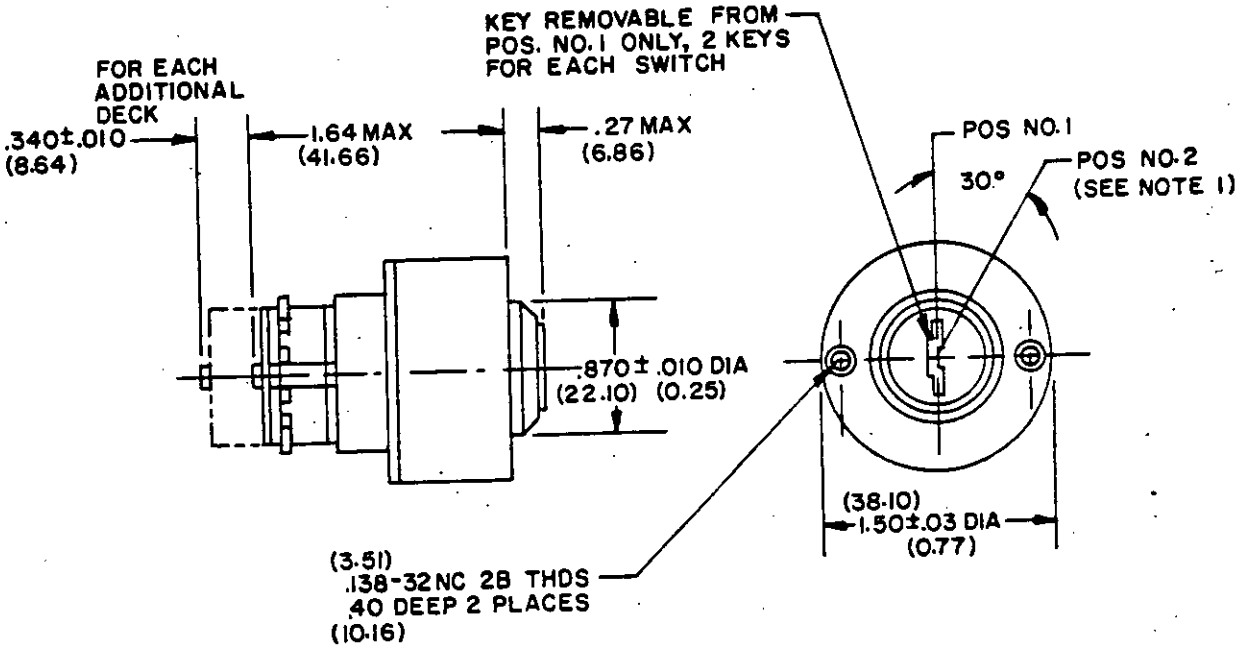


NOTES:
1. Available with multipole construction in 30°, 36°, 45°, or 90° indexing.
2. These switches are identified by a type designation (see MIL-S-3786).

FIGURE 107-8. SR25 switches, rotary, closed construction, 1/5 ampere, single shaft (key operated) (MIL-S-3786/25).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms, 60 Hz
Lamp (tungsten):		
At atmospheric pressure- - - - - -	100	---
Resistive:		
At atmospheric pressure- - - - - -	200	150
At reduced barometric pressure - -	200	150
Inductive (2.8 Henries):		
At atmospheric pressure- - - - - -	30	---

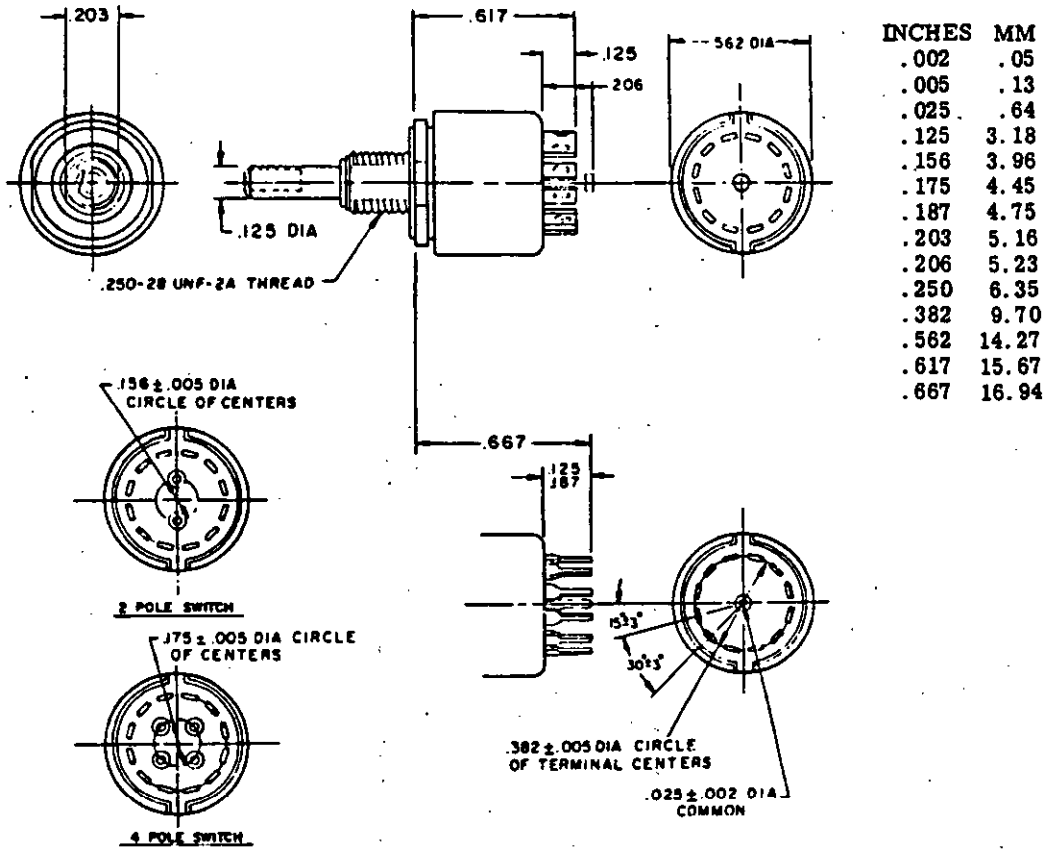

INCHES	MM
.002	.05
.005	.13
.025	.64
.125	3.18
.156	3.96
.175	4.45
.187	4.75
.203	5.16
.206	5.23
.250	6.35
.382	9.70
.562	14.27
.617	15.67
.667	16.94

FIGURE 107-9. SR35 switches, rotary, closed construction, explosion proof, 1/5 ampere, single shaft (MIL-S-3786/35).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

No. of poles	No. of positions per pole	Type of stops	Part No. M3786/35-			
			Terminations			
			Solder lug		Printed circuit	
			Nonshorting	Shorting	Nonshorting	Shorting
1	2 thru 12	Adjustment	001	---	004	---
2	2 thru 6	Adjustment	002	---	005	---
4	2 thru 3	Adjustment	003	---	006	---
1	2	Fixed	007	043	025	061
1	3	Fixed	008	044	026	062
1	4	Fixed	009	045	027	063
1	5	Fixed	010	046	028	064
1	6	Fixed	011	047	029	065
1	7	Fixed	012	048	030	066
1	8	Fixed	013	049	031	067
1	9	Fixed	014	050	032	068
1	10	Fixed	015	051	033	069
1	11	Fixed	016	052	034	070
1	12	Fixed	017	053	035	071
2	2	Fixed	018	054	036	072
2	3	Fixed	019	055	037	073
2	4	Fixed	020	056	038	074
2	5	Fixed	021	057	039	075
2	6	Fixed	022	058	040	076
4	2	Fixed	023	059	041	077
4	3	Fixed	024	060	042	078
1	12	None	079 1/	081 1/	080 1/	082 1/

1/ Continuous rotation.

FIGURE 107-9. SR35 switches, rotary, closed construction, explosion proof, 1/5 ampere, single shaft (MIL-S-3786/35) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

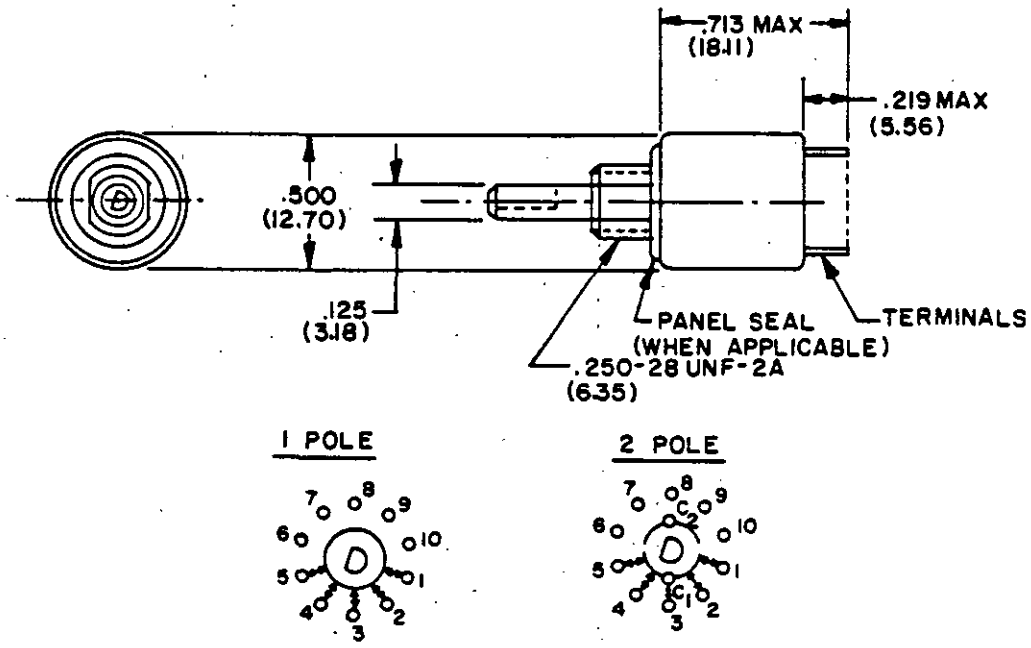

Number of poles	Pos. per pole	Part No. M3786/37-	
		Construction F	Construction E
1	10 1/	001	301
2	5 1/	002	302
1	10	003	303
2	5	004	304

1/ Continuous rotation.

FIGURE 107-10. SR37 switches, rotary, closed construction, explosion proof, coded output circuitry, 1/5 ampere, single shaft (MIL-S-3786/37).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

ELECTRICAL LOADS. 20 milliamperes maximum resistive at 28 Vdc maximum at both atmospheric and reduced barometric pressure

TRUTH TABLE INDICATING CIRCUITRY. As shown in the following:

Switch position	Count	X denotes circuit is made				
		Switch terminal				
		1	2	3	4	5
1	0	X	X	X	X	X
2	1		X	X	X	X
3	2			X	X	X
4	3				X	X
5	4					X
6	5					
7	6	X				
8	7	X	X			
9	8	X	X	X		
10	9	X	X	X	X	

APPLICATION NOTE. Switches covered by MIL-S-3786/37 are intended only for special low-current, low-voltage applications requiring coded circuitry. For general service requirements of similar switches with conventional circuitry, refer to figure 107-7 (MIL-S-3786/20).

FIGURE 107-10. SR37 switches, rotary, closed construction, explosion proof, coded output circuitry, 1/5 ampere, single shaft (MIL-S-3786/37) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)	
	28 Vdc	115 Vrms, 60 Hz
Resistive:		
At 70,000 ft. altitude - - - - - - -	50	20
At atmospheric pressure and 125°C -	75	25
At atmospheric pressure and room temperature (approx 25°C)- - - - -	250	150
Inductive (250 millihenries):		
At 70,000 ft. altitude - - - - - - -	10	----
At atmospheric pressure and 125°C -	25	---
At atmospheric pressure and room temperature (approx 25°C) - -	75	---

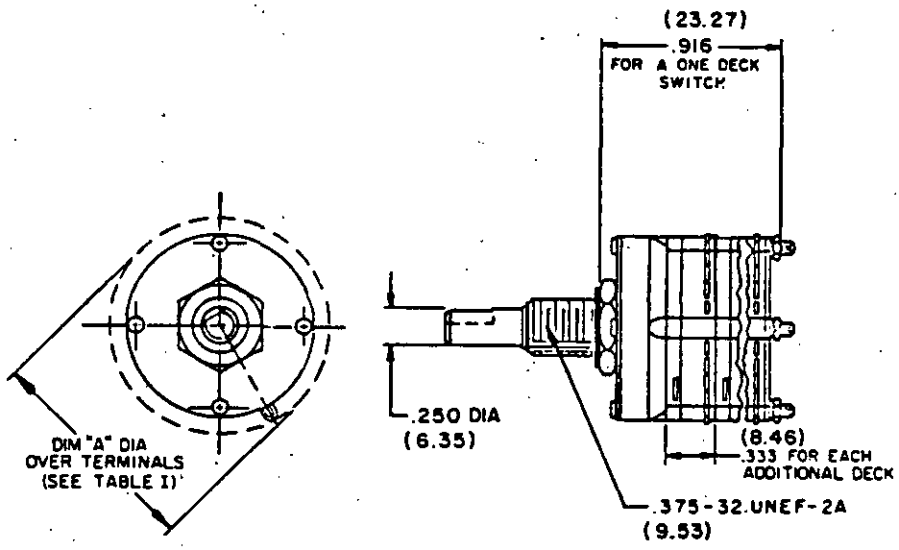


TABLE I

ANGLE OF THROW	DIM. "A"	
15°	1.350	(34.29)
18°, 22 1/2°	1.190	(30.23)

FIGURE 107-11. SR36 switches, rotary, closed construction, 1/4 ampere, single shaft (MIL-S-3786/36).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	15° ANGLE OF THROW									
		Part No. M3786/36-									
		1 Deck		2 Decks		3 Decks		4 Decks		5 Decks	
		NS	S	NS	S	NS	S	NS	S	NS	S
1	2	0001	0254	0053	0306	0105	0358	0157	0410	0207	0460
	3	0002	0255	0054	0307	0106	0359	0158	0411	0208	0461
	4	0003	0256	0055	0308	0107	0360	0159	0412	0209	0462
	5	0004	0257	0056	0309	0108	0361	0160	0413	0210	0463
	6	0005	0258	0057	0310	0109	0362	0161	0414	0211	0464
	7	0006	0259	0058	0311	0110	0363	0162	0415	0212	0465
	8	0007	0260	0059	0312	0111	0364	0163	0416	0213	0466
	9	0008	0261	0060	0313	0112	0365	0164	0417	0214	0467
	10	0009	0262	0061	0314	0113	0366	0165	0418	0215	0468
	11	0010	0263	0062	0315	0114	0367	0166	0419	0216	0469
	12	0011	0264	0063	0316	0115	0368	0167	0420	0217	0470
	13	0012	0265	0064	0317	0116	0369	0168	0421	0218	0471
	14	0013	0266	0065	0318	0117	0370	0169	0422	0219	0472
	15	0014	0267	0066	0319	0118	0371	0170	0423	0220	0473
	16	0015	0268	0067	0320	0119	0372	0171	0424	0221	0474
	17	0016	0269	0068	0321	0120	0373	0172	0425	0222	0475
	18	0017	0270	0069	0322	0121	0374	0173	0426	0223	0476
	19	0018	0271	0070	0323	0122	0375	0174	0427	0224	0477
	20	0019	0272	0071	0324	0123	0376	0175	0428	0225	0478
	21	0020	0273	0072	0325	0124	0377	0176	0429	0226	0479
	22	0021	0274	0073	0326	0125	0378	0177	0430	0227	0480
	23	0022	0275	0074	0327	0126	0379	0178	0431	0228	0481
	24 1/	0023	0276	0075	0328	0127	0380	0179	0432	0229	0482
	24	0024	0277	0076	0329	0128	0381	0180	0433	0230	0483
2	2	0025	0278	0077	0330	0129	0382	0181	0434	0231	0484
	3	0026	0279	0078	0331	0130	0383	0182	0435	0232	0485
	4	0027	0280	0079	0332	0131	0384	0183	0436	0233	0486
	5	0028	0281	0080	0333	0132	0385	0184	0437	0234	0487
	6	0029	0282	0081	0334	0133	0386	0185	0438	0235	0488
	7	0030	0283	0082	0335	0134	0387	0186	0439	0236	0489
	8	0031	0284	0083	0336	0135	0388	0187	0440	0237	0490
	9	0032	0285	0084	0337	0136	0389	0188	0441	0238	0491
	10	0033	0286	0085	0338	0137	0390	0189	0442	0239	0492
	11	0034	0287	0086	0339	0138	0391	0190	0443	0240	0493
	12	0035	0288	0087	0340	0139	0392	0191	0444	0241	0494
3	2	0036	0289	0088	0341	0140	0393	0192	0445	0242	0495
	3	0037	0290	0089	0342	0141	0394	0193	0446	0243	0496
	4	0038	0291	0090	0343	0142	0395	0194	0447	0244	0497
	5	0039	0292	0091	0344	0143	0396	0195	0448	0245	0498
	6	0040	0293	0092	0345	0144	0397	0196	0449	0246	0499

1/ See footnote at end of figure.

FIGURE 107-11. SR36 switches, rotary, closed construction, 1/4 ampere, single shaft (MIL-S-3786/36) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	15° ANGLE OF THROW									
		Part No. M3786/36-									
		1 Deck		2 Decks		3 Decks		4 Decks		5 Decks	
		NS	S	NS	S	NS	S	NS	S	NS	S
3	7	0041	0294	0093	0346	0145	0398	0197	0450	0247	0500
3	8	0042	0295	0094	0347	0146	0399	0198	0451	0248	0501
4	2	0043	0296	0095	0348	0147	0400	0199	0452	0249	0502
↓	3	0044	0297	0096	0349	0148	0401	0200	0453	0250	0503
↓	4	0045	0298	0097	0350	0149	0402	0201	0454	0251	0504
↓	5	0046	0299	0098	0351	0150	0403	0202	0455	0252	0505
↓	6	0047	0300	0099	0352	0151	0404	0203	0456	0253	0506
6	2	0048	0301	0100	0353	0152	0405	0204	0457	---	---
↓	3	0049	0302	0101	0354	0153	0406	0205	0458	---	---
↓	4	0050	0303	0102	0355	0154	0407	0206	0459	---	---
8	2	0051	0304	0103	0356	0155	0408	---	---	---	---
8	3	0052	0305	0104	0357	0156	0409	---	---	---	---
18° ANGLE OF THROW											
1	2	0507	0684	0543	0720	0579	0756	0615	0792	0651	0828
↓	3	0508	0685	0544	0721	0580	0757	0616	0793	0652	0829
↓	4	0509	0686	0545	0722	0581	0758	0617	0794	0653	0830
↓	5	0510	0687	0546	0723	0582	0759	0618	0795	0654	0831
↓	6	0511	0688	0547	0724	0583	0760	0619	0796	0655	0832
↓	7	0512	0689	0548	0725	0584	0761	0620	0797	0656	0833
↓	8	0513	0690	0549	0726	0585	0762	0621	0798	0657	0834
↓	9	0514	0691	0550	0727	0586	0763	0622	0799	0658	0835
↓	10	0515	0692	0551	0728	0587	0764	0623	0800	0659	0836
↓	11	0516	0693	0552	0729	0588	0765	0624	0801	0660	0837
↓	12	0517	0694	0553	0730	0589	0766	0625	0802	0661	0838
↓	13	0518	0695	0554	0731	0590	0767	0626	0803	0662	0839
↓	14	0519	0696	0555	0732	0591	0768	0627	0804	0663	0840
↓	15	0520	0697	0556	0733	0592	0769	0628	0805	0664	0841
↓	16	0521	0698	0557	0734	0593	0770	0629	0806	0665	0842
↓	17	0522	0699	0558	0735	0594	0771	0630	0807	0666	0843
↓	18	0523	0700	0559	0736	0595	0772	0631	0808	0667	0844
↓	19	0524	0701	0560	0737	0596	0773	0632	0809	0668	0845
↓	20 1/	0525	0702	0561	0738	0597	0774	0633	0810	0669	0846
↓	20	0526	0703	0562	0739	0598	0775	0634	0811	0670	0847
2	2	0527	0704	0563	0740	0599	0776	0635	0812	0671	0848
↓	3	0528	0705	0564	0741	0600	0777	0636	0813	0672	0849
↓	4	0529	0706	0565	0742	0601	0778	0637	0814	0673	0850
↓	5	0530	0707	0566	0743	0602	0779	0638	0815	0674	0851
↓	6	0531	0708	0567	0744	0603	0780	0639	0816	0675	0852

1/ See footnote at end of figure.

FIGURE 107-11. SR36 switches, rotary, closed construction, 1/4 ampere, single shaft (MIL-S-3786/36) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Poles per deck	Pos. per pole	18° ANGLE OF THROW									
		Part No. M3786/36-									
		1 Deck		2 Decks		3 Decks		4 Decks		5 Decks	
		NS	S	NS	S	NS	S	NS	S	NS	S
2	7	0532	0709	0568	0745	0604	0781	0640	0817	0676	0853
	8	0533	0710	0569	0746	0605	0782	0641	0818	0677	0854
	9	0534	0711	0570	0747	0606	0783	0642	0819	0678	0855
▼	10	0535	0712	0571	0748	0607	0784	0643	0820	0679	0856
4	2	0536	0713	0572	0749	0608	0785	0644	0821	0680	0857
	3	0537	0714	0573	0750	0609	0786	0645	0822	0681	0858
	4	0538	0715	0574	0751	0610	0787	0646	0823	0682	0859
▼	5	0539	0716	0575	0752	0611	0788	0647	0824	0683	0860
5	2	0540	0717	0576	0753	0612	0789	0648	0825	---	---
	3	0541	0718	0577	0754	0613	0790	0649	0826	---	---
▼	4	0542	0719	0578	0755	0614	0791	0650	0827	---	---
22° 30' ANGLE OF THROW											
1	2	0861	0991	0887	1017	0913	1043	0939	1069	0965	1095
	3	0862	0992	0888	1018	0914	1044	0940	1070	0966	1096
	4	0863	0993	0889	1019	0915	1045	0941	1071	0967	1097
	5	0864	0994	0890	1020	0916	1046	0942	1072	0968	1098
	6	0865	0995	0891	1021	0917	1047	0943	1073	0969	1099
	7	0866	0996	0892	1022	0918	1048	0944	1074	0970	1100
	8	0867	0997	0893	1023	0919	1049	0945	1075	0971	1101
	9	0868	0998	0894	1024	0920	1050	0946	1076	0972	1102
	10	0869	0999	0895	1025	0921	1051	0947	1077	0973	1103
	11	0870	1000	0896	1026	0922	1052	0948	1078	0974	1104
	12	0871	1001	0897	1027	0923	1053	0949	1079	0975	1105
	13	0872	1002	0898	1028	0924	1054	0950	1080	0976	1106
	14	0873	1003	0899	1029	0925	1055	0951	1081	0977	1107
	15	0874	1004	0900	1030	0926	1056	0952	1082	0978	1108
	16 1/	0875	1005	0901	1031	0927	1057	0953	1083	0979	1109
▼	16	0876	1006	0902	1032	0928	1058	0954	1084	0980	1110
2	2	0877	1007	0903	1033	0929	1059	0955	1085	0981	1111
	3	0878	1008	0904	1034	0930	1060	0956	1086	0982	1112
	4	0879	1009	0905	1035	0931	1061	0957	1087	0983	1113
	5	0880	1010	0906	1036	0932	1062	0958	1088	0984	1114
	6	0881	1011	0907	1037	0933	1063	0959	1089	0985	1115
	7	0882	1012	0908	1038	0934	1064	0960	1090	0986	1116
▼	8	0883	1013	0909	1039	0935	1065	0961	1091	0987	1117
4	2	0884	1014	0910	1040	0936	1066	0962	1092	0988	1118
4	3	0885	1015	0911	1041	0937	1067	0963	1093	0989	1119
4	4	0886	1016	0912	1042	0938	1068	0964	1094	0990	1120

1/ Continuous rotation, all other switches have stops provided at the beginning and end of the range of control positions.

FIGURE 107-11. SR36 switches, rotary, closed construction, 1/4 ampere, single shaft (MIL-S-3786/36) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-04-20 07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (milliamperes)			
	28 Vdc		115 Vrms, 60 Hz	
	85°C or 125°C	Approx 25°C	85°C or 125°C	Approx 25°C
Resistive:				
At atmospheric pressure- - - - - -	125	500	75	500
At reduced barometric pressure - -	---	50	---	20
Inductive (250 millihenries):				
At atmospheric pressure- - - - - -	50	250	---	---
At reduced barometric pressure - -	---	10	---	---

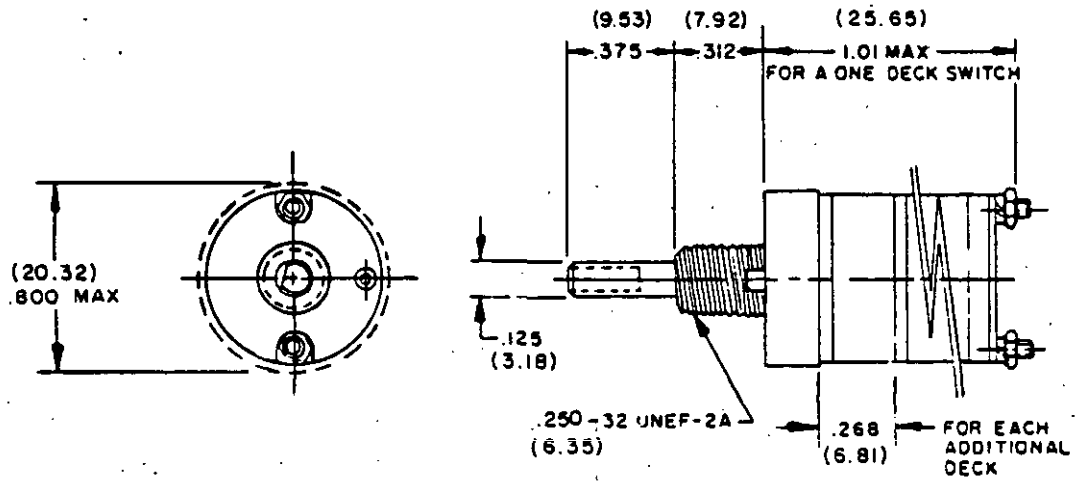

"E" CONSTRUCTION STYLE
(EXPLOSION-PROOF, CLOSED CONSTRUCTION
WITHOUT SEALED SHAFT AND BUSHING)

FIGURE 107-12. SR13 switches, rotary, closed construction, 1/2 ampere, single shaft (MIL-S-3786/13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	30° ANGLE OF THROW Part No. M3786/13-									
		1 Deck		2 Decks		3 Decks		4 Decks		5 Decks	
		NS	S	NS	S	NS	S	NS	S	NS	S
1	2	0001	0219	0024	0242	0047	0265	0070	0288	0092	0310
	3	0002	0220	0025	0243	0048	0266	0071	0289	0093	0311
	4	0003	0221	0026	0244	0049	0267	0072	0290	0094	0312
	5	0004	0222	0027	0245	0050	0268	0073	0291	0095	0313
	6	0005	0223	0028	0246	0051	0269	0074	0292	0096	0314
	7	0006	0224	0029	0247	0052	0270	0075	0293	0097	0315
	8	0007	0225	0030	0248	0053	0271	0076	0294	0098	0316
	9	0008	0226	0031	0249	0054	0272	0077	0295	0099	0317
	10	0009	0227	0032	0250	0055	0273	0078	0296	0100	0318
	11	0010	0228	0033	0251	0056	0274	0079	0297	0101	0319
	12 1/	0011	0229	0034	0252	0057	0275	0080	0298	0102	0320
▼	12	0012	0230	0035	0253	0058	0276	0081	0299	0103	0321
2	2	0013	0231	0036	0254	0059	0277	0082	0300	0104	0322
	3	0014	0232	0037	0255	0060	0278	0083	0301	0105	0323
	4	0015	0233	0038	0256	0061	0279	0084	0302	0106	0324
	5	0016	0234	0039	0257	0062	0280	0085	0303	0107	0325
▼	6	0017	0235	0040	0258	0063	0281	0086	0304	0108	0326
3	2	0018	0236	0041	0259	0064	0282	0087	0305	0109	0327
3	3	0019	0237	0042	0260	0065	0283	0088	0306	0110	0328
3	4	0020	0238	0043	0261	0066	0284	0089	0307	0111	0329
4	2	0021	0239	0044	0262	0067	0285	0090	0308	---	---
4	3	0022	0240	0045	0263	0068	0286	0091	0309	---	---
6	2	0023	0241	0046	0264	0069	0287	---	---	---	---
		6 Decks		7 Decks		8 Decks		9 Decks		10 Decks	
1	2	0112	0330	0132	0350	0149	0367	0166	0384	0183	0401
	3	0113	0331	0133	0351	0150	0368	0167	0385	0184	0402
	4	0114	0332	0134	0352	0151	0369	0168	0386	0185	0403
	5	0115	0333	0135	0353	0152	0370	0169	0387	0186	0404
	6	0116	0334	0136	0354	0153	0371	0170	0388	0187	0405
	7	0117	0335	0137	0355	0154	0372	0171	0389	0188	0406
	8	0118	0336	0138	0356	0155	0373	0172	0390	0189	0407
	9	0119	0337	0139	0357	0156	0374	0173	0391	0190	0408
	10	0120	0338	0140	0358	0157	0375	0174	0392	0191	0409
	11	0121	0339	0141	0359	0158	0376	0175	0393	0192	0410
	12 1/	0122	0340	0142	0360	0159	0377	0176	0394	0193	0411
▼	12	0123	0341	0143	0361	0160	0378	0177	0395	0194	0412
2	2	0124	0342	0144	0362	0161	0379	0178	0396	---	---
	3	0125	0343	0145	0363	0162	0380	0179	0397	---	---
	4	0126	0344	0146	0364	0163	0381	0180	0398	---	---
	5	0127	0345	0147	0365	0164	0382	0181	0399	---	---
▼	6	0128	0346	0148	0366	0165	0383	0182	0400	---	---
3	2	0129	0347	---	---	---	---	---	---	---	---
3	3	0130	0348	---	---	---	---	---	---	---	---
3	4	0131	0349	---	---	---	---	---	---	---	---
		11 Decks		12 Decks							
1	2	0195	0413	0207	0425						
	3	0196	0414	0208	0426						
	4	0197	0415	0209	0427						
	5	0198	0416	0210	0428						
	6	0199	0417	0211	0429						
	7	0200	0418	0212	0430						
	8	0201	0419	0213	0431						
	9	0202	0420	0214	0432						
	10	0203	0421	0215	0433						
	11	0204	0422	0216	0434						
	12 1/	0205	0423	0217	0435						
▼	12	.0206	0424	0218	0436						

1/ See footnote at end of tabulation.

FIGURE 107-12. SR13 switches, rotary, closed construction, 1/2 ampere, single shaft (MIL-S-3786/13) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Poles per deck	Pos. per pole	36° ANGLE OF THROW Part No. M3786/13-											
		1 Deck		2 Decks		3 Decks		4 Decks		5 Decks		6 Decks	
		NS	S	NS	S	NS	S	NS	S	NS	S	NS	S
1	2	0437	0593	0451	0607	0465	0621	0479	0635	0493	0649	0507	0663
	3	0438	0594	0452	0608	0466	0622	0480	0636	0494	0650	0508	0664
	4	0439	0595	0453	0609	0467	0623	0481	0637	0495	0651	0509	0665
	5	0440	0596	0454	0610	0468	0624	0482	0638	0496	0652	0510	0666
	6	0441	0597	0455	0611	0469	0625	0483	0639	0497	0653	0511	0667
	7	0442	0598	0456	0612	0470	0626	0484	0640	0498	0654	0512	0668
	8	0443	0599	0457	0613	0471	0627	0485	0641	0499	0655	0513	0669
	9	0444	0600	0458	0614	0472	0628	0486	0642	0500	0656	0514	0670
	10 1/	0445	0601	0459	0615	0473	0629	0487	0643	0501	0657	0515	0671
▼	10	0446	0602	0460	0616	0474	0630	0488	0644	0502	0658	0516	0672
2	2	0447	0603	0461	0617	0475	0631	0489	0645	0503	0659	0517	0673
	3	0448	0604	0462	0618	0476	0632	0490	0646	0504	0660	0518	0674
	4	0449	0605	0463	0619	0477	0633	0491	0647	0505	0661	0519	0675
▼	5	0450	0606	0464	0620	0478	0634	0492	0648	0506	0662	0520	0676
		7 Decks		8 Decks		9 Decks		10 Decks		11 Decks		12 Decks	
1	2	0521	0677	0535	0691	0549	0705	0563	0715	0573	0725	0583	0735
	3	0522	0678	0536	0692	0550	0706	0564	0716	0574	0726	0584	0736
	4	0523	0679	0537	0693	0551	0707	0565	0717	0575	0727	0585	0737
	5	0524	0680	0538	0694	0552	0708	0566	0718	0576	0728	0586	0738
	6	0525	0681	0539	0695	0553	0709	0567	0719	0577	0729	0587	0739
	7	0526	0682	0540	0696	0554	0710	0568	0720	0578	0730	0588	0740
	8	0527	0683	0541	0697	0555	0711	0569	0721	0579	0731	0589	0741
	9	0528	0684	0542	0698	0556	0712	0570	0722	0580	0732	0590	0742
	10 1/	0529	0685	0543	0699	0557	0713	0571	0723	0581	0733	0591	0743
▼	10	0530	0686	0544	0700	0558	0714	0572	0724	0582	0734	0592	0744
2	2	0531	0687	0545	0701	0559	---	---	---	---	---	---	---
	3	0532	0688	0546	0702	0560	---	---	---	---	---	---	---
	4	0533	0689	0547	0703	0561	---	---	---	---	---	---	---
▼	5	0534	0690	0548	0704	0562	---	---	---	---	---	---	---

1/ Continuous rotation.

FIGURE 107-12. SR13 switches, rotary, closed construction, 1/2 ampere, single shaft (MIL-S-3786/13) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS	
	28 Vdc	115 Vrms, 60 Hz
Resistive:		
At atmospheric pressure (approx 85°C or 125°C) - -	.250 A	.075 A
At atmospheric pressure (approx 25°C)- - - - - - -	1.25 A	2.0 A
At reduced barometric pressure (approx 25°C) - - -	.200 A	.020 A
Inductive (2.8 Henries):		
At atmospheric pressure (approx 85°C or 125°C) - -	100 mA	---
At atmospheric pressure (approx 25°C)- - - - - - -	250 mA	---
At reduced barometric pressure (approx 25°C) - - -	25 mA	---

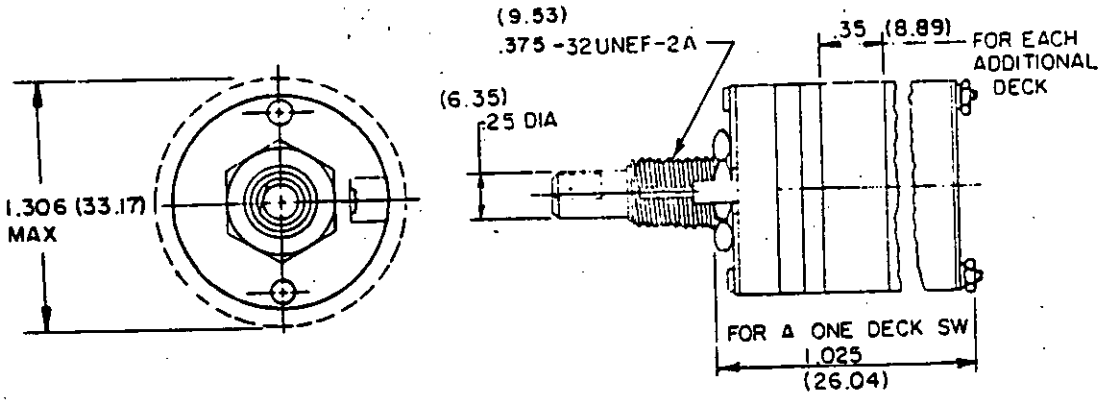

SINGLE SHAFT (SR04-1)
TEMPERATURE-LIFE CHARACTERISTIC C

Poles per deck	Pos. per pole	30° ANGLE OF THROW - STYLE SR04-1 Part No. M3786/4- 1 Deck Construction E NS	1 Deck Construction E S	1 Deck Construction F NS	1 Deck Construction F S	2 Decks Construction E NS	2 Decks Construction E S	2 Decks Construction F NS	2 Decks Construction F S	3 Decks Construction E NS	3 Decks Construction E S	3 Decks Construction F NS	3 Decks Construction F S	4 Decks Construction E NS	4 Decks Construction E S	4 Decks Construction F NS	4 Decks Construction F S
1	2	3001	3169	5001	5169	3023	3191	5023	5191	3045	3213	5045	5213	3067	3235	5067	5235
	3	3002	3170	5002	5170	3024	3192	5024	5192	3046	3214	5046	5214	3068	3236	5068	5236
	4	3003	3171	5003	5171	3025	3193	5025	5193	3047	3215	5047	5215	3069	3237	5069	5237
	5	3004	3172	5004	5172	3026	3194	5026	5194	3048	3216	5048	5216	3070	3238	5070	5238
	6	3005	3173	5005	5173	3027	3195	5027	5195	3049	3217	5049	5217	3071	3239	5071	5239
	7	3006	3174	5006	5174	3028	3196	5028	5196	3050	3218	5050	5218	3072	3240	5072	5240
	8	3007	3175	5007	5175	3029	3197	5029	5197	3051	3219	5051	5219	3073	3241	5073	5241
	9	3008	3176	5008	5176	3030	3198	5030	5198	3052	3220	5052	5220	3074	3242	5074	5242
	10	3009	3177	5009	5177	3031	3199	5031	5199	3053	3221	5053	5221	3075	3243	5075	5243
	11	3010	3178	5010	5178	3032	3200	5032	5200	3054	3222	5054	5222	3076	3244	5076	5244
	12 1/	3011	3179	5011	5179	3033	3201	5033	5201	3055	3223	5055	5223	3077	3245	5077	5245
	12	3545	3557	5545	5557	3546	3558	5546	5558	3547	3559	5547	5559	3548	3560	5548	5560
2	2	3012	3180	5012	5180	3034	3202	5034	5202	3056	3224	5056	5224	3078	3246	5078	5246
	3	3013	3181	5013	5181	3035	3203	5035	5203	3057	3225	5057	5225	3079	3247	5079	5247
	4	3014	3182	5014	5182	3036	3204	5036	5204	3058	3226	5058	5226	3080	3248	5080	5248
	5	3015	3183	5015	5183	3037	3205	5037	5205	3059	3227	5059	5227	3081	3249	5081	5249
	6	3016	3184	5016	5184	3038	3206	5038	5206	3060	3228	5060	5228	3082	3250	5082	5250
3	2	3017	3185	5017	5185	3039	3207	5039	5207	3061	3229	5061	5229	3083	3251	5083	5251
3	3	3018	3186	5018	5186	3040	3208	5040	5208	3062	3230	5062	5230	3084	3252	5084	5252
3	4	3019	3187	5019	5187	3041	3209	5041	5209	3063	3231	5063	5231	3085	3253	5085	5253
4	2	3020	3188	5020	5188	3042	3210	5042	5210	3064	3232	5064	5232	3086	3254	5086	5254
4	3	3021	3189	5021	5189	3043	3211	5043	5211	3065	3233	5065	5233	3087	3255	5087	5255
6	2	3022	3190	5022	5190	3044	3212	5044	5212	3066	3234	5066	5234	3088	3256	5088	5256

1/ See footnote at end of SR04-1 tabulation.

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	30° ANGLE OF THROW - STYLE SR04-1 Part No. M3786/4-															
		5 Decks Construction				6 Decks Construction				7 Decks Construction				8 Decks Construction			
		E		F		E		F		E		F		E		F	
		NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S
1	2	3089	3257	5089	5257	3110	3278	5110	5278	3131	3299	5131	5299	3150	3318	5150	5318
	3	3090	3258	5090	5258	3111	3279	5111	5279	3132	3300	5132	5300	3151	3319	5151	5319
	4	3091	3259	5091	5259	3112	3280	5112	5280	3133	3301	5133	5301	3152	3320	5152	5320
	5	3092	3260	5092	5260	3113	3281	5113	5281	3134	3302	5134	5302	3153	3321	5153	5321
	6	3093	3261	5093	5261	3114	3282	5114	5282	3135	3303	5135	5303	3154	3322	5154	5322
	7	3094	3262	5094	5262	3115	3283	5115	5283	3136	3304	5136	5304	3155	3323	5155	5323
	8	3095	3263	5095	5263	3116	3284	5116	5284	3137	3305	5137	5305	3156	3324	5156	5324
	9	3096	3264	5096	5264	3117	3285	5117	5285	3138	3306	5138	5306	3157	3325	5157	5325
	10	3097	3265	5097	5265	3118	3286	5118	5286	3139	3307	5139	5307	3158	3326	5158	5326
	11	3098	3266	5098	5266	3119	3287	5119	5287	3140	3308	5140	5308	3159	3327	5159	5327
	12[1/]	3099	3267	5099	5267	3120	3288	5120	5288	3141	3309	5141	5309	3160	3328	5160	5328
▼	12	3549	3561	5549	5561	3550	3562	5550	5562	3551	3563	5551	5563	3552	3564	5552	5564
2	2	3100	3268	5100	5268	3121	3289	5121	5289	3142	3310	5142	5310	3161	3329	5161	5329
	3	3101	3269	5101	5269	3122	3290	5122	5290	3143	3311	5143	5311	3162	3330	5162	5330
	4	3102	3270	5102	5270	3123	3291	5123	5291	3144	3312	5144	5312	3163	3331	5163	5331
	5	3103	3271	5103	5271	3124	3292	5124	5292	3145	3313	5145	5313	3164	3332	5164	5332
▼	6	3104	3272	5104	5272	3125	3293	5125	5293	3146	3314	5146	5314	3165	3333	5165	5333
3	2	3105	3273	5105	5273	3126	3294	5126	5294	3147	3315	5147	5315	3166	3334	5166	5334
3	3	3106	3274	5106	5274	3127	3295	5127	5295	3148	3316	5148	5316	3167	3335	5167	5335
3	4	3107	3275	5107	5275	3128	3296	5128	5296	3149	3317	5149	5317	3168	3336	5168	5336
4	2	3108	3276	5108	5276	3129	3297	5129	5297	---	---	---	---	---	---	---	---
4	3	3109	3277	5109	5277	3130	3298	5130	5298	---	---	---	---	---	---	---	---
		9 Decks				10 Decks				11 Decks				12 Decks			
1	2	3553	3711	5553	5711	3723	3733	5723	5733	3745	3757	5745	5757	3769	3781	5769	5781
	3	3701	3712	5701	5712	3555	3734	5555	5734	3746	3758	5746	5758	3770	3782	5770	5782
	4	3702	3713	5702	5713	3724	3735	5724	5735	3747	3759	5747	5759	3771	3783	5771	5783
	5	3703	3714	5703	5714	3725	3736	5725	5736	3748	3760	5748	5760	3772	3784	5772	5784
	6	3704	3715	5704	5715	3556	3737	5556	5737	3749	3761	5749	5761	3773	3785	5773	5785
	7	3705	3716	5705	5716	3726	3738	5726	5738	3750	3762	5750	5762	3774	3786	5774	5786
	8	3706	3717	5706	5717	3727	3739	5727	5739	3751	3763	5751	5763	3775	3787	5775	5787
	9	3707	3718	5707	5718	3728	3740	5728	5740	3752	3764	5752	5764	3776	3788	5776	5788
	10	3708	3719	5708	5719	3729	3741	5729	5741	3753	3765	5753	5765	3777	3789	5777	5789
	11	3709	3720	5709	5720	3730	3742	5730	5742	3754	3766	5754	5766	3778	3790	5778	5790
	12[1/]	3554	3721	5554	5721	3731	3743	5731	5743	3755	3767	5755	5767	3779	3791	5779	5791
▼	12	3710	3722	5710	5722	3732	3744	5732	5744	3756	3768	5756	5768	3780	3792	5780	5792
		36° ANGLE OF THROW															
		1 Deck				2 Decks				3 Decks				4 Decks			
1	2	3337	3441	5337	5441	3350	3454	5350	5454	3363	3467	5363	5467	3376	3480	5376	5480
	3	3338	3442	5338	5442	3351	3455	5351	5455	3364	3468	5364	5468	3377	3481	5377	5481
	4	3339	3443	5339	5443	3352	3456	5352	5456	3365	3469	5365	5469	3378	3482	5378	5482
	5	3340	3444	5340	5444	3353	3457	5353	5457	3366	3470	5366	5470	3379	3483	5379	5483
	6	3341	3445	5341	5445	3354	3458	5354	5458	3367	3471	5367	5471	3380	3484	5380	5484
	7	3342	3446	5342	5446	3355	3459	5355	5459	3368	3472	5368	5472	3381	3485	5381	5485
	8	3343	3447	5343	5447	3356	3460	5356	5460	3369	3473	5369	5473	3382	3486	5382	5486
	9	3344	3448	5344	5448	3357	3461	5357	5461	3370	3474	5370	5474	3383	3487	5383	5487
	10[1/]	3345	3449	5345	5449	3358	3462	5358	5462	3371	3475	5371	5475	3384	3488	5384	5488
▼	10	3565	3581	5565	5581	3566	3582	5566	5582	3567	3583	5567	5583	3568	3584	5568	5584
2	2	3346	3450	5346	5450	3359	3463	5359	5463	3372	3476	5372	5476	3385	3489	5385	5489
	3	3347	3451	5347	5451	3360	3464	5360	5464	3373	3477	5373	5477	3386	3490	5386	5490
	4	3348	3452	5348	5452	3361	3465	5361	5465	3374	3478	5374	5478	3387	3491	5387	5491
▼	5	3349	3453	5349	5453	3362	3466	5362	5466	3375	3479	5375	5479	3388	3492	5388	5492

1/ See footnote at end of SR04-1 tabulation.

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	36° ANGLE OF THROW - STYLE SR04-1 Part No. M3786/4-															
		5 Decks Construction				6 Decks Construction				7 Decks Construction				8 Decks Construction			
		E		F		E		F		E		F		E		F	
		NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S
1	2	3389	3493	5389	5493	3402	3506	5402	5506	3415	3519	5415	5519	3428	3532	5428	5532
	3	3390	3494	5390	5494	3403	3507	5403	5507	3416	3520	5416	5520	3429	3533	5429	5533
	4	3391	3495	5391	5495	3404	3508	5404	5508	3417	3521	5417	5521	3430	3534	5430	5534
	5	3392	3496	5392	5496	3405	3509	5405	5509	3418	3522	5418	5522	3431	3535	5431	5535
	6	3393	3497	5393	5497	3406	3510	5406	5510	3419	3523	5419	5523	3432	3536	5432	5536
	7	3394	3498	5394	5498	3407	3511	5407	5511	3420	3524	5420	5524	3433	3537	5433	5537
	8	3395	3499	5395	5499	3408	3512	5408	5512	3421	3525	5421	5525	3434	3538	5434	5538
	9	3396	3500	5396	5500	3409	3513	5409	5513	3422	3526	5422	5526	3435	3539	5435	5539
	10 1/	3397	3501	5397	5501	3410	3514	5410	5514	3423	3527	5423	5527	3436	3540	5436	5540
	10	3569	3585	5569	5585	3570	3586	5570	5586	3571	3587	5571	5587	3572	3588	5572	5588
2	2	3398	3502	5398	5502	3411	3515	5411	5515	3424	3528	5424	5528	3437	3541	5437	5541
2	3	3399	3503	5399	5503	3412	3516	5412	5516	3425	3529	5425	5529	3438	3542	5438	5542
2	4	3400	3504	5400	5504	3413	3517	5413	5517	3426	3530	5426	5530	3439	3543	5439	5543
2	5	3401	3505	5401	5505	3414	3518	5414	5518	3427	3531	5427	5531	3440	3544	5440	5544
		9 Decks				10 Decks				11 Decks				12 Decks			
1	2	3793	3800	5793	5800	3810	3815	5810	5815	3825	3835	5825	5835	3845	3855	5845	5855
	3	3794	3801	5794	5801	3576	3816	5576	5816	3826	3836	5826	5836	3846	3856	5846	5856
	4	3795	3802	5795	5802	3811	3817	5811	5817	3827	3837	5827	5837	3847	3857	5847	5857
	5	3796	3803	5796	5803	3812	3818	5812	5818	3828	3838	5828	5838	3848	3858	5848	5858
	6	3574	3804	5574	5804	3577	3819	5577	5819	3829	3839	5829	5839	3849	3859	5849	5859
	7	3797	3805	5797	5805	3578	3820	5578	5820	3830	3840	5830	5840	3850	3860	5850	5860
	8	3575	3806	5575	5806	3813	3821	5813	5821	3831	3841	5831	5841	3851	3861	5851	5861
	9	3798	3807	5798	5807	3814	3822	5814	5822	3832	3842	5832	5842	3852	3862	5852	5862
	10 1/	3573	3808	5573	5808	3580	3823	5580	5823	3833	3843	5833	5843	3853	3863	5853	5863
	10	3799	3809	5799	5809	3579	3824	5579	5824	3834	3844	5834	5844	3854	3864	5854	5864
		45° ANGLE OF THROW - STYLE SR04-1															
		1 Deck				2 Decks				3 Decks				4 Decks			
1	2	3865	3945	5865	5945	3873	3953	5873	5953	3881	3961	5881	5961	3889	3969	5889	5969
	3	3866	3946	5866	5946	3874	3954	5874	5954	3882	3962	5882	5962	3890	3970	5890	5970
	4	3867	3947	5867	5947	3875	3955	5875	5955	3883	3963	5883	5963	3891	3971	5891	5971
	5	3868	3948	5868	5948	3876	3956	5876	5956	3884	3964	5884	5964	3892	3972	5892	5972
	6	3869	3949	5869	5949	3877	3957	5877	5957	3885	3965	5885	5965	3893	3973	5893	5973
	7	3870	3950	5870	5950	3878	3958	5878	5958	3886	3966	5886	5966	3894	3974	5894	5974
	8 1/	3871	3951	5871	5951	3879	3959	5879	5959	3887	3967	5887	5967	3895	3975	5895	5975
	8	3872	3952	5872	5952	3880	3960	5880	5960	3888	3968	5888	5968	3896	3976	5896	5976
		5 Decks				6 Decks				7 Decks				8 Decks			
1	2	3897	3977	5897	5977	3905	3985	5905	5985	3913	3993	5913	5993	3921	4001	5921	6001
	3	3898	3978	5898	5978	3906	3986	5906	5986	3914	3994	5914	5994	3922	4002	5922	6002
	4	3899	3979	5899	5979	3907	3987	5907	5987	3915	3995	5915	5995	3923	4003	5923	6003
	5	3900	3980	5900	5980	3908	3988	5908	5988	3916	3996	5916	5996	3924	4004	5924	6004
	6	3901	3981	5901	5981	3909	3989	5909	5989	3917	3997	5917	5997	3925	4005	5925	6005
	7	3902	3982	5902	5982	3910	3990	5910	5990	3918	3998	5918	5998	3926	4006	5926	6006
	8 1/	3903	3983	5903	5983	3911	3991	5911	5991	3919	3999	5919	5999	3927	4007	5927	6007
	8	3904	3984	5904	5984	3912	3992	5912	5992	3920	4000	5920	6000	3928	4008	5928	6008

1/ See footnote at end of SR04-1 tabulation.

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	45° ANGLE OF THROW - STYLE SR04-1 Part No. M3786/4-								
		9 Decks Construction E		9 Decks Construction F		10 Decks Construction E		10 Decks Construction F		
		NS	S	NS	S	NS	S	NS	S	
1	2	3929	4009	5929	6009	3937	4017	5937	6017	
	3	3930	4010	5930	6010	3938	4018	5938	6018	
	4	3931	4011	5931	6011	3939	4019	5939	6019	
	5	3932	4012	5932	6012	3940	4020	5940	6020	
	6	3933	4013	5933	6013	3941	4021	5941	6021	
	7	3934	4014	5934	6014	3942	4022	5942	6022	
	8 1/	3935	4015	5935	6015	3943	4023	5943	6023	
	8	3936	4016	5936	6016	3944	4024	5944	6024	

60° ANGLE OF THROW

		1 Deck				2 Decks				3 Decks				4 Decks			
		NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S	NS	S
1	2	4025	4085	6025	6085	4031	4091	6031	6091	4037	4097	6037	6097	4043	4103	6043	6103
	3	4026	4086	6026	6086	4032	4092	6032	6092	4038	4098	6038	6098	4044	4104	6044	6104
	4	4027	4087	6027	6087	4033	4093	6033	6093	4039	4099	6039	6099	4045	4105	6045	6105
	5	4028	4088	6028	6088	4034	4094	6034	6094	4040	4100	6040	6100	4046	4106	6046	6106
	6 1/	4029	4089	6029	6089	4035	4095	6035	6095	4041	4101	6041	6101	4047	4107	6047	6107
	6	4030	4090	6030	6090	4036	4096	6036	6096	4042	4102	6042	6102	4048	4108	6048	6108

		5 Decks				6 Decks				7 Decks				8 Decks			
1	2	4049	4109	6049	6109	4055	4115	6055	6115	4061	4121	6061	6121	4067	4127	6067	6127
	3	4050	4110	6050	6110	4056	4116	6056	6116	4062	4122	6062	6122	4068	4128	6068	6128
	4	4051	4111	6051	6111	4057	4117	6057	6117	4063	4123	6063	6123	4069	4129	6069	6129
	5	4052	4112	6052	6112	4058	4118	6058	6118	4064	4124	6064	6124	4070	4130	6070	6130
	6 1/	4053	4113	6053	6113	4059	4119	6059	6119	4065	4125	6065	6125	4071	4131	6071	6131
	6	4054	4114	6054	6114	4060	4120	6060	6120	4066	4126	6066	6126	4072	4132	6072	6132

						9 Decks				10 Decks							
1	2					4073	4133	6073	6133	4079	4139	6079	6139				
	3					4074	4134	6074	6134	4080	4140	6080	6140				
	4					4075	4135	6075	6135	4081	4141	6081	6141				
	5					4076	4136	6076	6136	4082	4142	6082	6142				
	6 1/					4077	4137	6077	6137	4083	4143	6083	6143				
	6					4078	4138	6078	6138	4084	4144	6084	6144				

90° ANGLE OF THROW

		1 Deck				2 Decks				3 Decks				4 Decks			
1	2	4145	4185	6145	6185	4149	4189	6149	6189	4153	4193	6153	6193	4157	4197	6157	6197
	3	4146	4186	6146	6186	4150	4190	6150	6190	4154	4194	6154	6194	4158	4198	6158	6198
	4 1/	4147	4187	6147	6187	4151	4191	6151	6191	4155	4195	6155	6195	4159	4199	6159	6199
	4	4148	4188	6148	6188	4152	4192	6152	6192	4156	4196	6156	6196	4160	4200	6160	6200

		5 Decks				6 Decks				7 Decks				8 Decks			
1	2	4161	4201	6161	6201	4165	4205	6165	6205	4169	4209	6169	6209	4173	4213	6173	6213
	3	4162	4202	6162	6202	4166	4206	6166	6206	4170	4210	6170	6210	4174	4214	6174	6214
	4 1/	4163	4203	6163	6203	4167	4207	6167	6207	4171	4211	6171	6211	4175	4215	6175	6215
	4	4164	4204	6164	6204	4168	4208	6168	6208	4172	4212	6172	6212	4176	4216	6176	6216


1/ See footnote at end of SR04-1 tabulation.

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Poles per deck	Pos. per pole	90° ANGLE OF THROW - STYLE SR04-1 Part No. M3786/4-							
		9 Decks Construction				10 Decks Construction			
		E		F		E		F	
		NS	S	NS	S	NS	S	NS	S
1	2	4177	4217	6177	6217	4181	4221	6181	6221
	3	4178	4218	6178	6218	4182	4222	6182	6222
	4 1/	4179	4219	6179	6219	4183	4223	6183	6223
	4	4180	4220	6180	6220	4184	4224	6184	6224

1/ Continuous rotation.

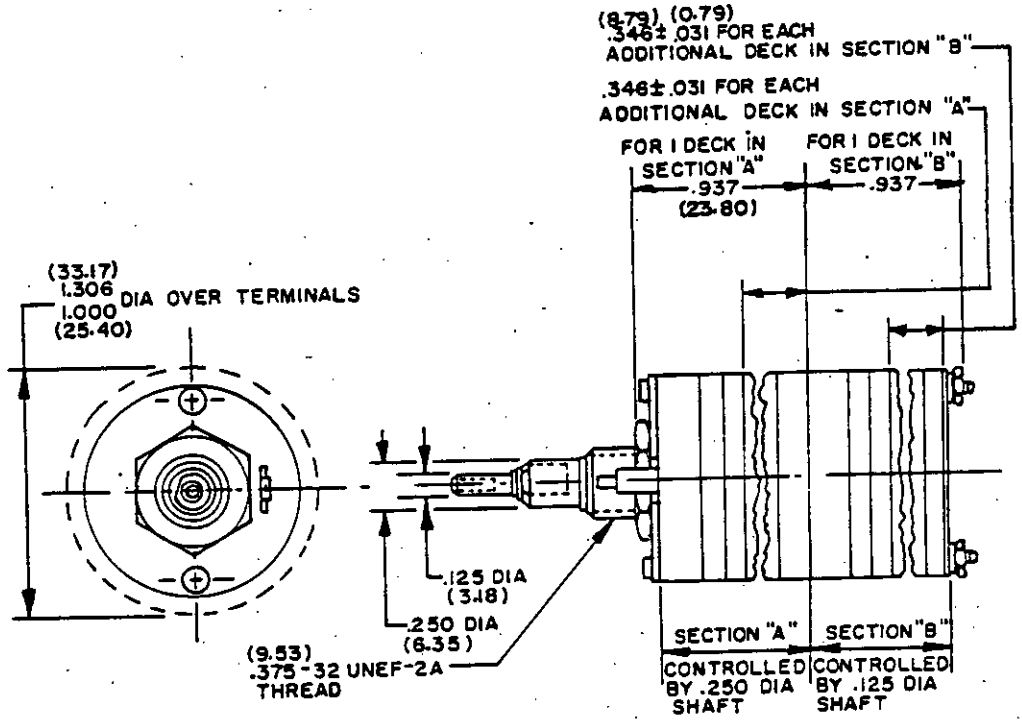


CONCENTRIC SHAFT (SR04-2)

NOTE: SR04-2 switches are identified by a type designation (see MIL-S-3786).

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

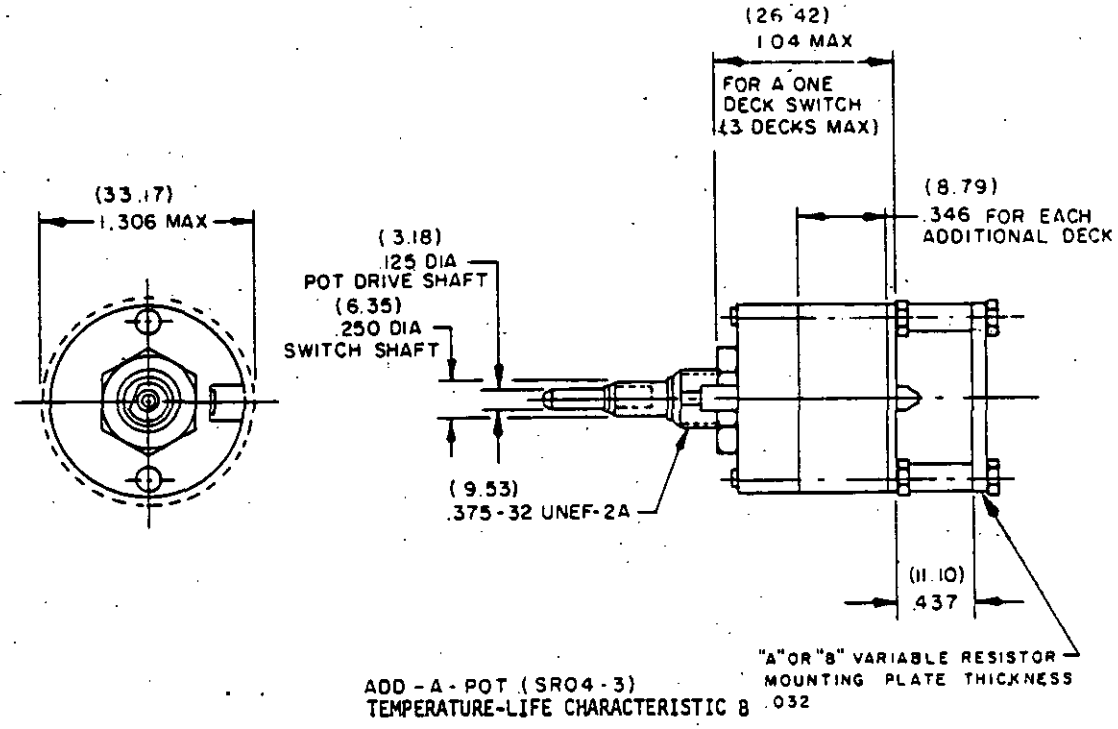


Poles per deck	Pos. per pole	30° ANGLE OF THROW - CONSTRUCTION E - STYLE SR04-3					
		Style SR04-3 - Part No. M3786/4-					
		1 Deck		2 Decks		3 Decks	
		NS	S	NS	S	NS	S
1	2	7001	7017	7033	7049	7065	7081
	3	7002	7018	7034	7050	7066	7082
	4	7003	7019	7035	7051	7067	7083
	5	7004	7020	7036	7052	7068	7084
	6	7005	7021	7037	7053	7069	7085
	7	7006	7022	7038	7054	7070	7086
	8	7007	7023	7039	7055	7071	7087
	9	7008	7024	7040	7056	7072	7088
	10	7009	7025	7041	7057	7073	7089
	11	7010	7026	7042	7058	7074	7090
	12 1/	7011	7027	7043	7059	7075	7091
▼	12	7097	7100	7098	7101	7099	7102
2	2	7012	7028	7044	7060	7076	7092
	3	7013	7029	7045	7061	7077	7093
	4	7014	7030	7046	7062	7078	7094
	5	7015	7031	7047	7063	7079	7095
▼	6	7016	7032	7048	7064	7080	7096

1/ Continuous rotation.

FIGURE 107-13. SR04 switches, rotary, closed construction, 2 amperes (MIL-S-3786/4) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS (amperes)	
	28 Vdc	115 Vac, 400 Hz
Resistive - - - - - - - -	5	5
Inductive - - - - - - - -	5	---
Lamp- - - - - - - - - -	2	---
Power factor, 50% - - -	---	3

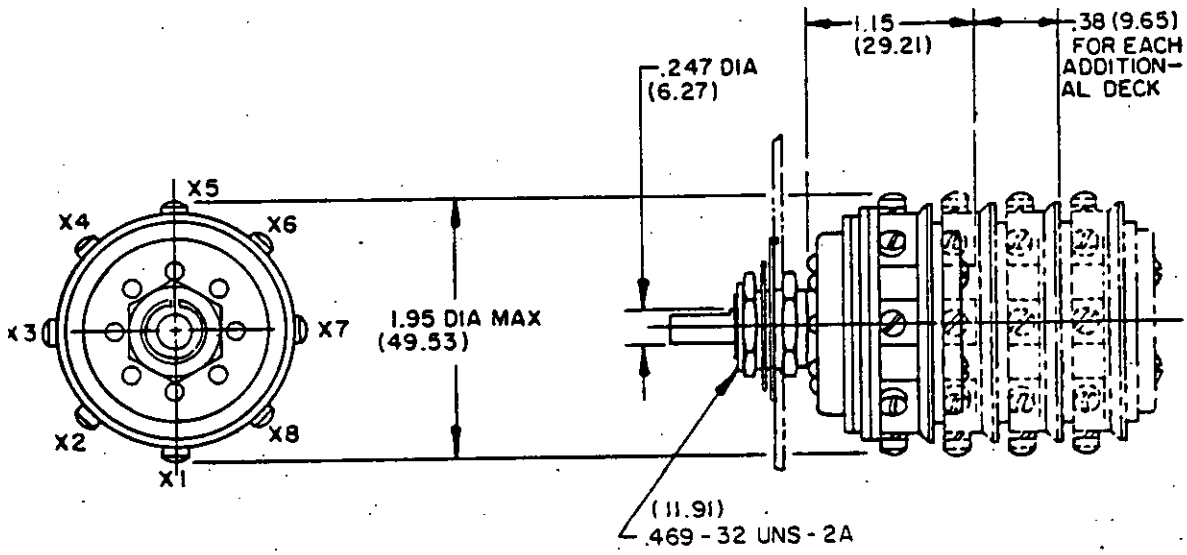

Number of wafers	Part number	
	Shock method I	Shock methods I and II
1	MS25002-1	MS25002-12
2	MS25002-2	MS25002-22
3	MS25002-3	MS25002-32
4	MS25002-4	MS25002-42
5	MS25002-5	MS25002-52
6	MS25002-6	MS25002-62

FIGURE 107-14. Switches, rotary, closed construction, 5 amperes, single shaft (MIL-S-6807).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 108

SWITCHES, ROTARY, ELECTRO-MECHANICAL ACTUATED (SOLENOID TYPE)
(Applicable specification: MIL-S-3786)

FIGURE NUMBER	SWITCH CHARACTERISTICS					PAGE
	Applicable specification sheet	Style number	Solenoid-input voltage, dc		Stepping speed	
			(min)	(max)	(steps per second, min)	
108-1	MIL-S-3786/18	SR18-1 SR18-2	24	30	20	108.2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the currentversion before use.

LOAD	ELECTRICAL RATINGS (milliamperes)		
	28 Vdc	300 Vrms	115 Vrms
Resistive:			
At atmospheric pressure- - - - - - -	500	50	225
At reduced barometric pressure - - -	350	---	100
Inductive (2.8 Henries):.			
At atmospheric pressure- - - - - - -	50	---	---

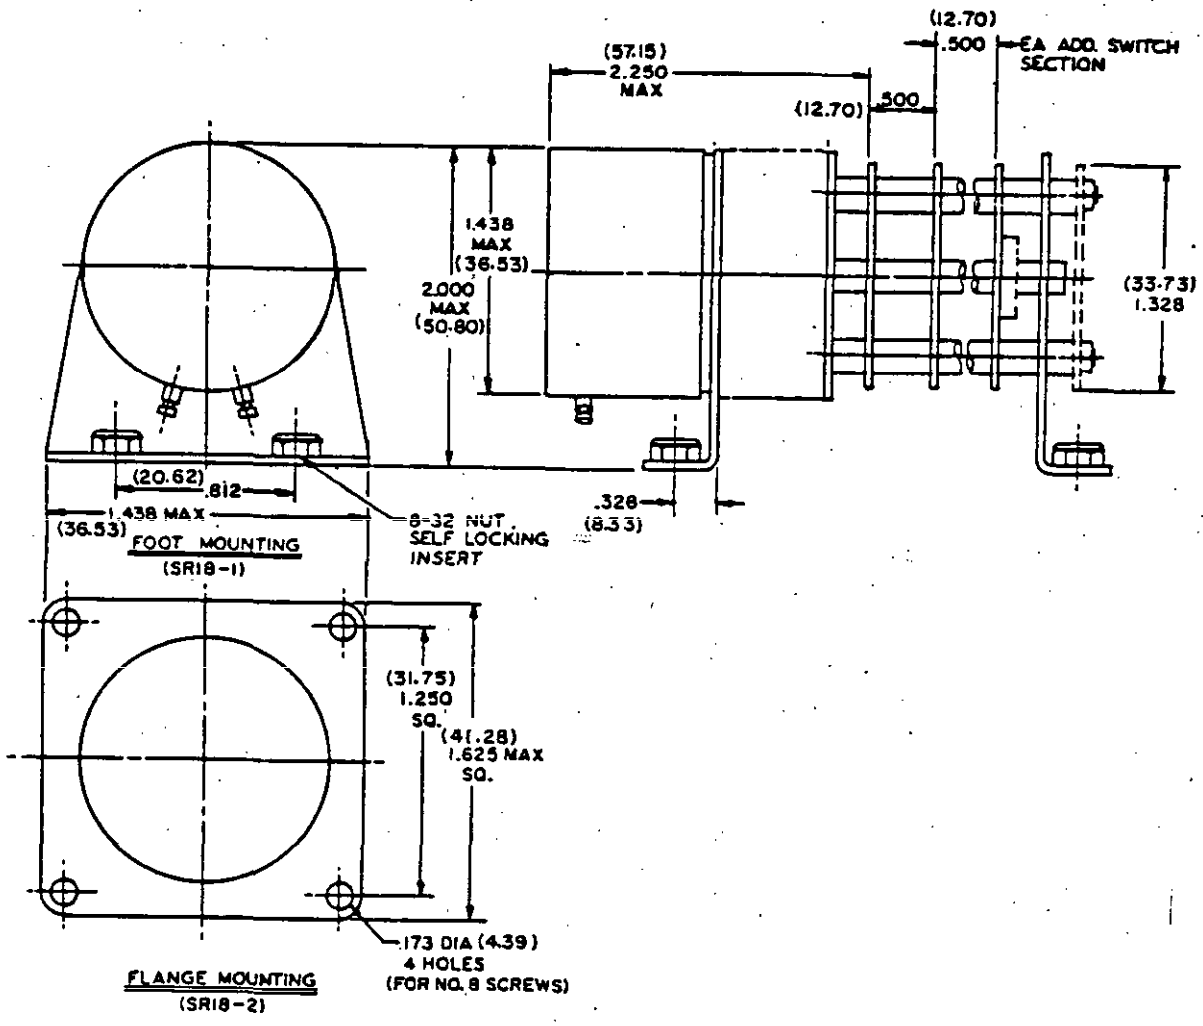


FIGURE 108-1. Switches, rotary, electro-mechanical actuated (solenoid type), styles SR18-1 and SR18-2 (MIL-S-3786/18).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 109

SWITCHES, ROTARY, PRINTED CIRCUIT (THUMBWHEEL AND PUSHBUTTON)
(Applicable specification: MIL-S-22710)

FIGURE NUMBER	SWITCH CHARACTERISTICS					PAGE
	Applicable specification sheet	Operating force		Shock	Vibration	
		Min	Max			
		(oz)	(oz)			
109-1	MIL-S-22710/11	4	22	Medium and high	15G 10 to 2,000 Hz	109.2
109-2	MIL-S-22710/12	4	22	Medium and high	15G 10 to 2,000 Hz	109.6
109-3	MIL-S-22710/14	4	22	Medium	15G 10 to 2,000 Hz	109.10
109-4	MIL-S-22710/15	6	20	Medium and high	15G 10 to 2,000 Hz	109.14
109-5	MIL-S-22710/18	20	40	Medium	15G 10 to 2,000 Hz	109.20
109-6	MIL-S-22710/20	6	22	Medium and high	15G 10 to 2,000 Hz	109.26
109-7	MIL-S-22710/23	20	40	Medium	15G 10 to 2,000 Hz	109.32
109-8	MIL-S-22710/24	15	30	Mec and high	15G 10 to 2,000 Hz	109.37

Source: https://assist.dla.mil -- Downloaded: 2026-0-26T07:41Z
Check the source to verify that this is the current version before use.

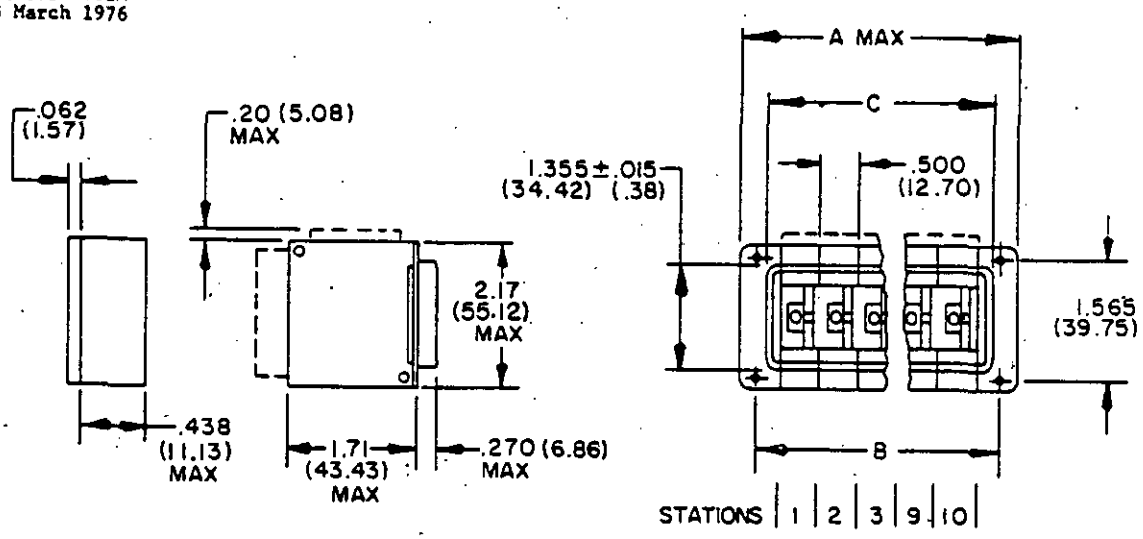

Number of stations	Dimensions			Number of stations	Dimensions		
	A (max)	B	C		A (max)	B	C
1	1.50 (38.10)	1.075 (27.31)	0.870 (22.10)	6	4.00 (101.60)	3.575 (90.81)	3.370 (85.60)
2	2.00 (50.80)	1.575 (40.01)	1.370 (34.80)	7	4.50 (114.30)	4.075 (103.51)	3.870 (98.30)
3	2.50 (63.50)	2.075 (52.71)	1.870 (47.50)	8	5.00 (127.00)	4.575 (116.21)	4.370 (111.00)
4	3.00 (76.20)	2.575 (65.41)	2.370 (60.20)	9	5.50 (139.70)	5.075 (128.91)	4.870 (123.70)
5	3.50 (88.90)	3.075 (78.11)	2.870 (72.90)	10	6.00 (152.40)	5.575 (141.61)	5.370 (136.40)

Number of stations										Part No. M22710/11- Module designation													
1	2	3	4	5	6	7	8	9	10	A	A1	A2	B	B1	B2	C	C1	C2	D	D1	D2	E	E1
x										001	011	021	031	041	051	061	071	081	091	101	111	121	131
x	x									002	012	022	032	042	052	062	072	082	092	102	112	122	132
x	x	x								003	013	023	033	043	053	063	073	083	093	103	113	123	133
x	x	x	x							004	014	024	034	044	054	064	074	084	094	104	114	124	134
x	x	x	x	x						005	015	025	035	045	055	065	075	085	095	105	115	125	135
x	x	x	x	x	x					006	016	026	036	046	056	066	076	086	096	106	116	126	136
x	x	x	x	x	x	x				007	017	027	037	047	057	067	077	087	097	107	117	127	137
x	x	x	x	x	x	x	x			008	018	028	038	048	058	068	078	088	098	108	118	128	138
x	x	x	x	x	x	x	x	x		009	019	029	039	049	059	069	079	089	099	109	119	129	139
x	x	x	x	x	x	x	x	x	x	010	020	030	040	050	060	070	080	090	100	110	120	130	140


Number of stations										Module designation													
1	2	3	4	5	6	7	8	9	10	E2	F	F1	F2	G	G1	G2	H	H1	H2	J	J1	J2	
x										141	151	161	171	181	191	201	211	221	231	241	251	261	
x	x									142	152	162	172	182	192	202	212	222	232	242	252	262	
x	x	x								143	153	163	173	183	193	203	213	223	233	243	253	263	
x	x	x	x							144	154	164	174	184	194	204	214	224	234	244	254	264	
x	x	x	x	x						145	155	165	175	185	195	205	215	225	235	245	255	265	
x	x	x	x	x	x					146	156	166	176	186	196	206	216	226	236	246	256	266	
x	x	x	x	x	x	x				147	157	167	177	187	197	207	217	227	237	247	257	267	
x	x	x	x	x	x	x	x			148	158	168	178	188	198	208	218	228	238	248	258	268	
x	x	x	x	x	x	x	x	x		149	159	169	179	189	199	209	219	229	239	249	259	269	
x	x	x	x	x	x	x	x	x	x	150	160	170	180	190	200	210	220	230	240	250	260	270	

FIGURE 109-1. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, illuminated or nonilluminated), style SRPC11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Module designation 1/	Dial		Illumination	
	Background	Marking	Color	Location
A thru J	Black opaque	White opaque	N/A	N/A
A1 thru J1	Black opaque	White translucent	Red	Top
A2 thru J2	Black opaque	White translucent	Clear	Top


1/ The module is part of the switch assembly and cannot be procured by itself.

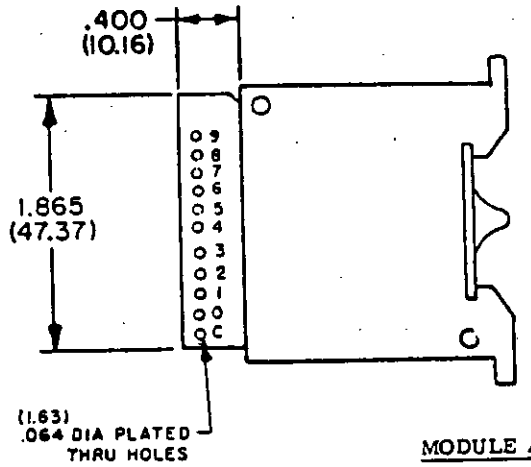

MODULE A, A1, OR A2

TRUTH TABLE
(Circuit configuration 1)
36° INDEXING


DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

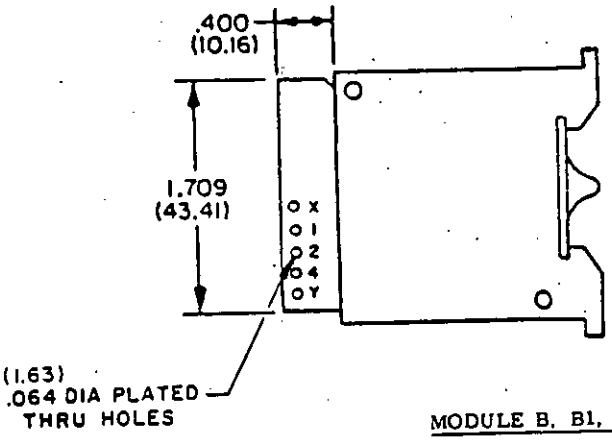

MODULE B, B1, OR B2

TRUTH TABLE
(Circuit configuration 2)
45° INDEXING

DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

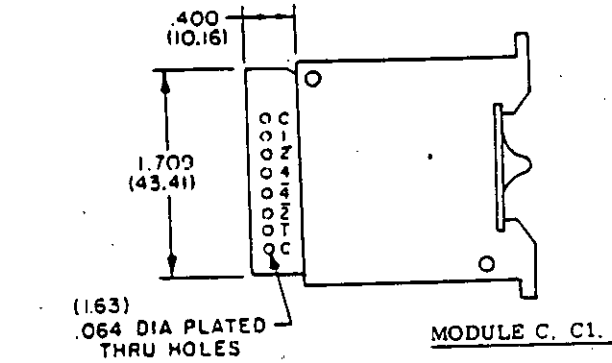


MODULE C, C1, OR C2

TRUTH TABLE
(Circuit configuration 3)
45° INDEXING

DIAL MARKING	COMMON C CONN. TO:			COMMON $\bar{C}$ CONN. TO:		
	1	2	4	$\bar{1}$	$\bar{2}$	$\bar{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			


FIGURE 109-1. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, illuminated or nonilluminated), style SRPC11 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

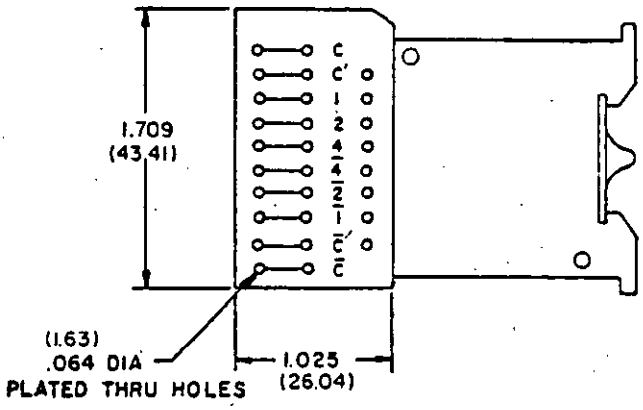


TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

MODULE D, D1 OR D2

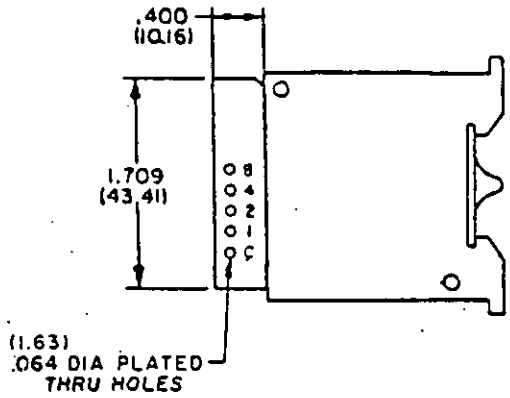

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

MODULE E, E1, OR E2

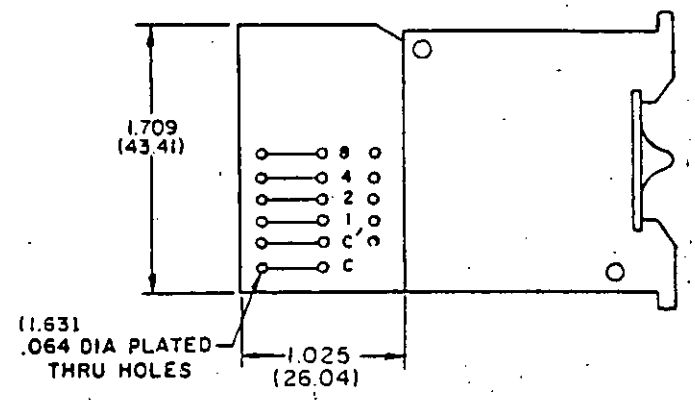


TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

MODULE F, F1, OR F2

FIGURE 109-1. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, illuminated or nonilluminated), style SRPC11 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

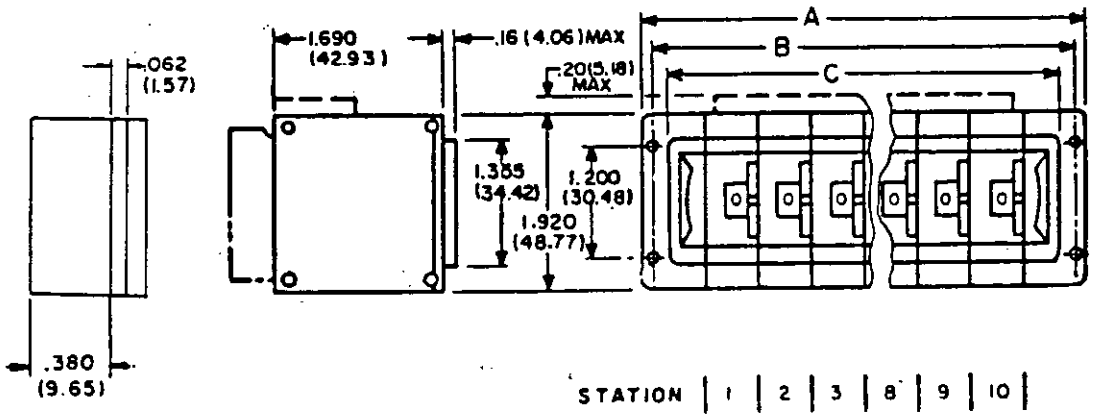


Number of stations	Dimensions			Number of stations	Dimensions		
	A ±.03 (.76)	B	C		A ±.03 (.76)	B	C
1	1.80 (45.72)	1.535 (38.99)	1.185 (30.10)	6	4.80 (121.92)	4.535 (115.19)	4.185 (106.30)
2	2.40 (60.96)	2.135 (54.23)	1.785 (45.34)	7	5.40 (137.16)	5.135 (130.43)	4.785 (121.54)
3	3.00 (76.20)	2.735 (69.47)	2.385 (60.58)	8	6.00 (152.40)	5.735 (145.67)	5.385 (136.78)
4	3.60 (91.44)	3.335 (84.71)	2.985 (75.82)	9	6.60 (167.64)	6.335 (160.91)	5.985 (152.02)
5	4.20 (106.68)	3.935 (99.95)	3.585 (91.06)	10	7.20 (182.88)	6.935 (176.15)	6.585 (167.26)

Number of stations										Part No. M22710/12- Module designation														
1	2	3	4	5	6	7	8	9	10	A	A1	A2	B	B1	B2	C	C1	C2	D	D1	D2	E	E1
x										001	011	021	031	041	051	061	071	081	091	101	111	121	131
x	x									002	012	022	032	042	052	062	072	082	092	102	112	122	132
x	x	x								003	013	023	033	043	053	063	073	083	093	103	113	123	133
x	x	x	x							004	014	024	034	044	054	064	074	084	094	104	114	124	134
x	x	x	x	x						005	015	025	035	045	055	065	075	085	095	105	115	125	135
x	x	x	x	x	x					006	016	026	036	046	056	066	076	086	096	106	116	126	136
x	x	x	x	x	x	x				007	017	027	037	047	057	067	077	087	097	107	117	127	137
x	x	x	x	x	x	x	x			008	018	028	038	048	058	068	078	088	098	108	118	128	138
x	x	x	x	x	x	x	x	x		009	019	029	039	049	059	069	079	089	099	109	119	129	139
x	x	x	x	x	x	x	x	x	x	010	020	030	040	050	060	070	080	090	100	110	120	130	140

Number of stations										Module designation													
1	2	3	4	5	6	7	8	9	10	E2	F	F1	F2	G	G1	G2	H	H1	H2	J	J1	J2	
x										141	151	161	171	181	191	201	211	221	231	241	251	261	
x	x									142	152	162	172	182	192	202	212	222	232	242	252	262	
x	x	x								143	153	163	173	183	193	203	213	223	233	243	253	263	
x	x	x	x							144	154	164	174	184	194	204	214	224	234	244	254	264	
x	x	x	x	x						145	155	165	175	185	195	205	215	225	235	245	255	265	
x	x	x	x	x	x					146	156	166	176	186	196	206	216	226	236	246	256	266	
x	x	x	x	x	x	x				147	157	167	177	187	197	207	217	227	237	247	257	267	
x	x	x	x	x	x	x	x			148	158	168	178	188	198	208	218	228	238	248	258	268	
x	x	x	x	x	x	x	x	x		149	159	169	179	189	199	209	219	229	239	249	259	269	
x	x	x	x	x	x	x	x	x	x	150	160	170	180	190	200	210	220	230	240	250	260	270	


FIGURE 109-2. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated and nonilluminated), style SRPC12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

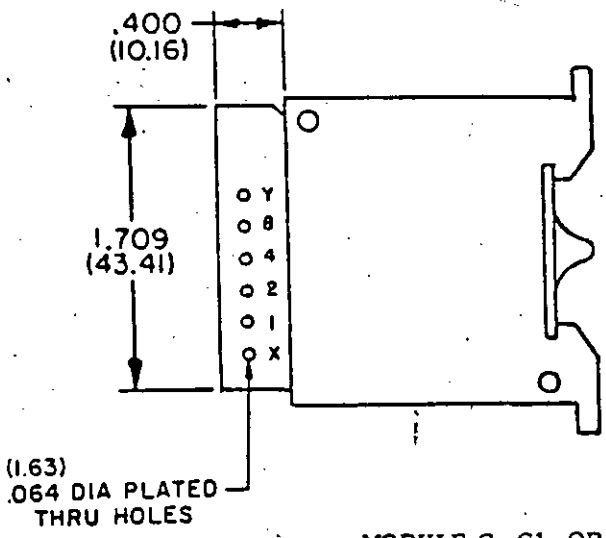


MODULE G, G1, OR G2

TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(O) CONN TO:			
	1	2	4	8
0	O	O	O	O
1	●	O	O	O
2	O	●	O	O
3	●	●	O	O
4	O	O	●	O
5	●	O	●	O
6	O	●	●	O
7	●	●	●	O
8	O	O	O	●
9	●	O	O	●

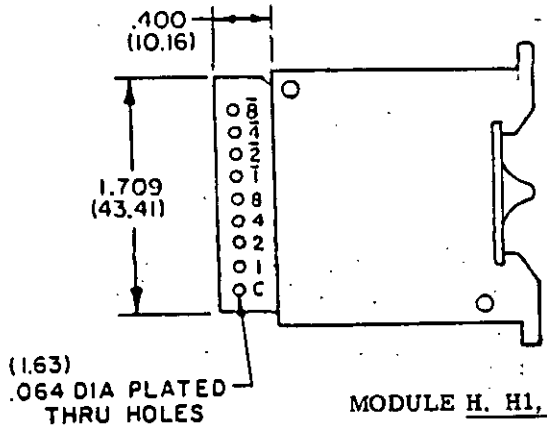

MODULE H, H1, OR H2

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

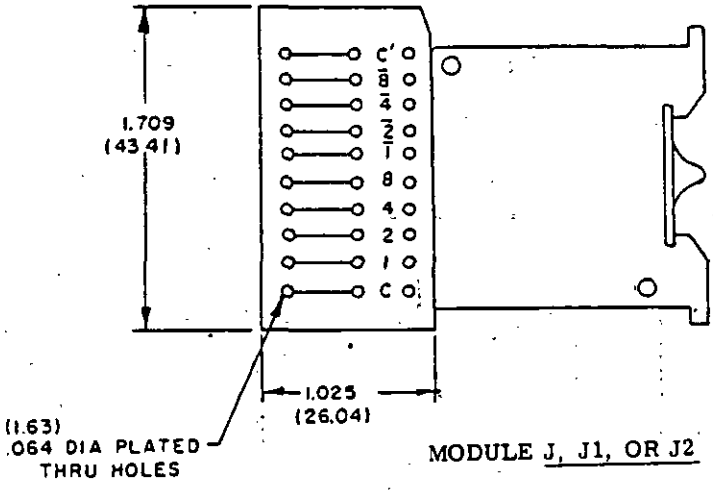

MODULE J, J1, OR J2


TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

FIGURE 109-1. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, illuminated or nonilluminated), style SRPC11 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Module designation 1/	Dial		Illumination	
	Background	Marking	Color	Location
A thru J	Black opaque	White opaque	N/A	N/A
A1 thru J1	Black opaque	White translucent	Red	Top
A2 thru J2	Black opaque	White translucent	Clear	Top

1/ The module is part of the switch assembly and cannot be procured by itself.

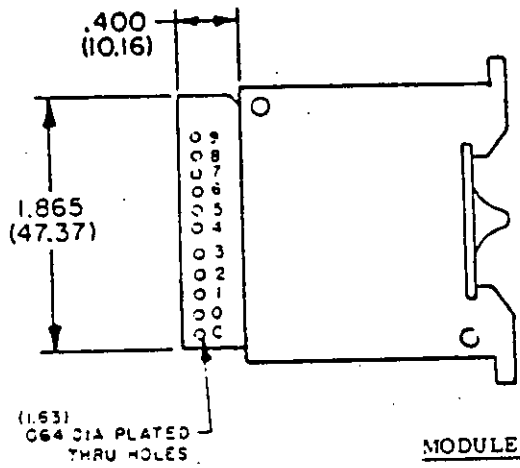


MODULE A, A1, OR A2

TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

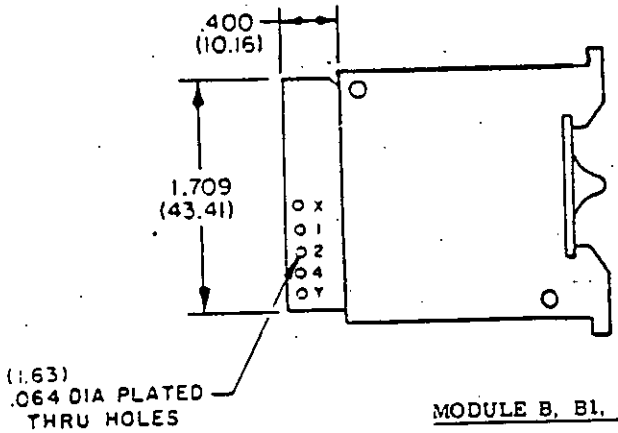

MODULE B, B1, OR B2

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(○) CONN. TO:		
	1	2	4
0	○	○	○
1	●	○	○
2	○	●	○
3	●	●	○
4	○	○	●
5	●	○	●
6	○	●	●
7	●	●	●

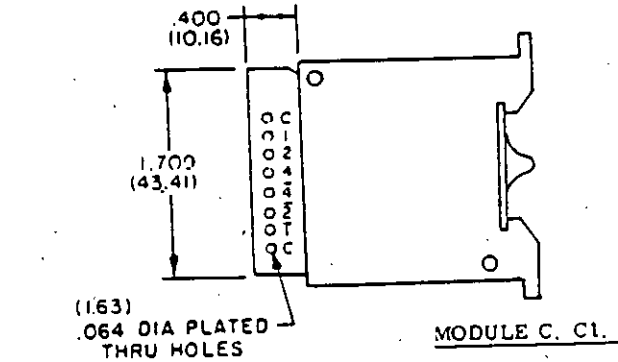


MODULE C, C1, OR C2

TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

FIGURE 109-2. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated and nonilluminated), style SRPC12 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

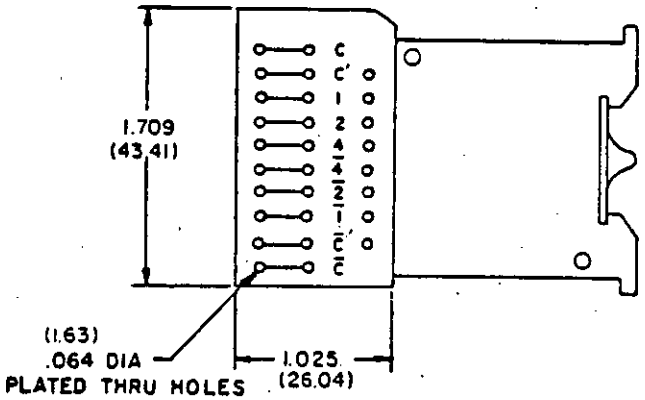

TRUTH TABLE
(Circuit configuration 3)
45° INDEXING

DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			


MODULE D, D1 OR D2

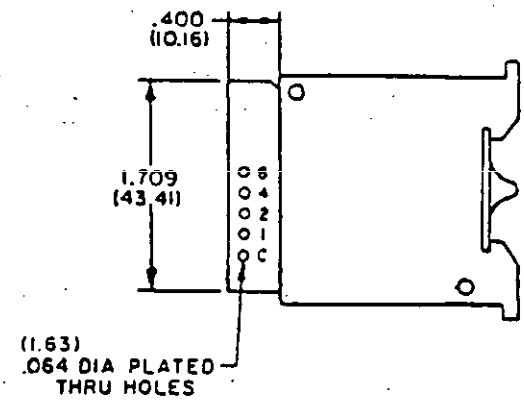

TRUTH TABLE
(Circuit configuration 4)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

MODULE E, E1, OR E2

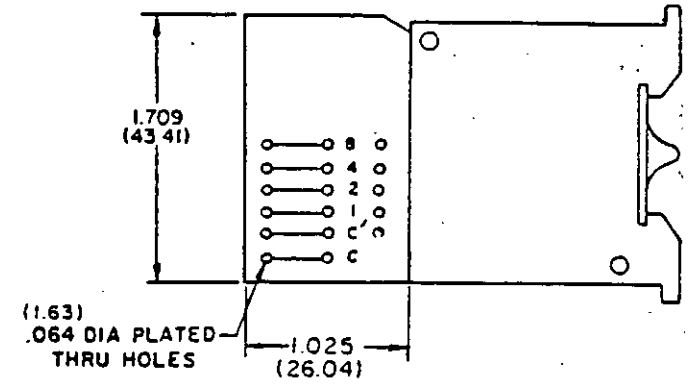


TRUTH TABLE
(Circuit configuration 4)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

MODULE F, F1, OR F2


FIGURE 109-2. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated and nonilluminated), style SRPC12 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

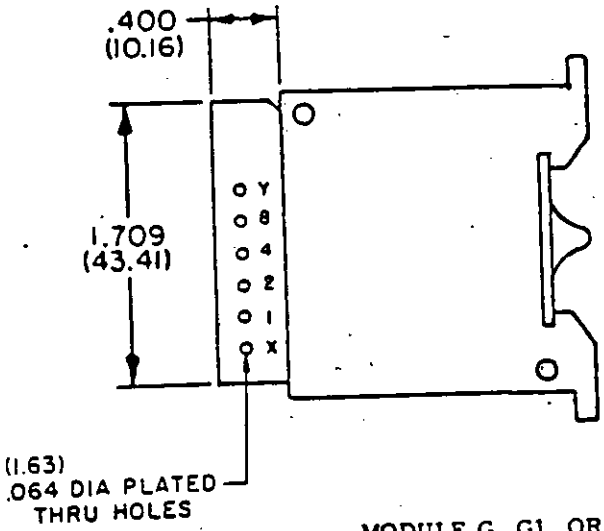


MODULE G, G1, OR G2

TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(O) CONN TO:			
	1	2	4	8
0	O	O	O	O
1	●	O	O	O
2	O	●	O	O
3	●	●	O	O
4	O	O	●	O
5	●	O	●	O
6	O	●	●	O
7	●	●	●	O
8	O	O	O	●
9	●	O	O	●

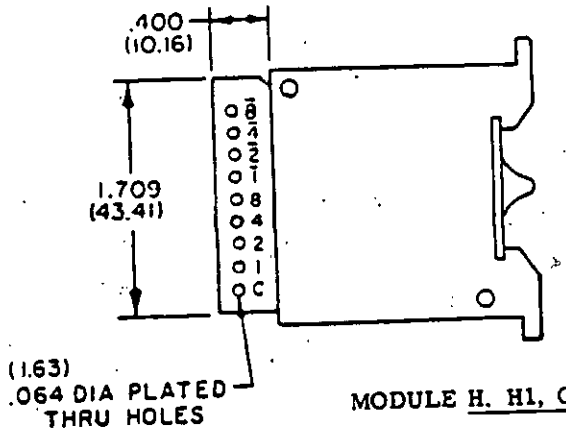

MODULE H, H1, OR H2

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					
8				●	●	●	●	
9	●			●		●	●	

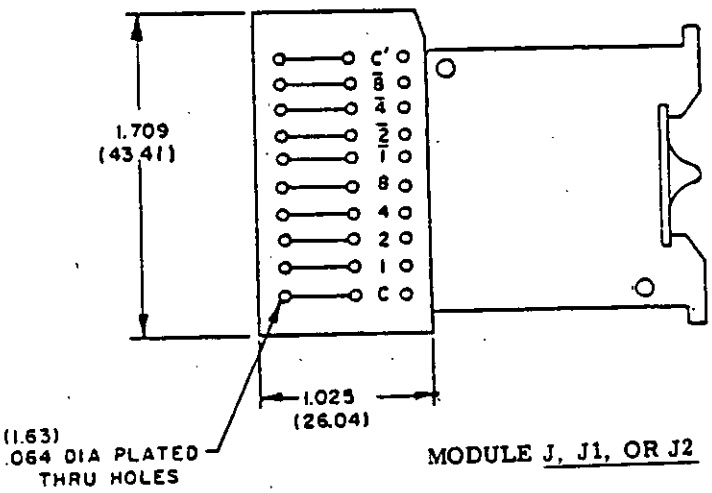


MODULE J, J1, OR J2

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					
8				●	●	●	●	
9	●			●		●	●	

FIGURE 109-2. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated and nonilluminated), style SRPC12 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

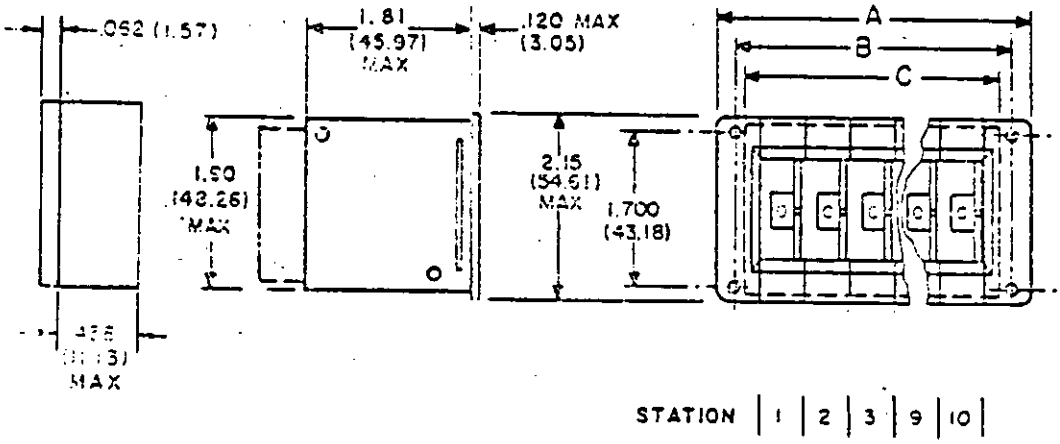

Number of stations	Dimensions		
	A (max)	B	C ±.03 (.76)
1	1.40 (35.56)	.980 (24.89)	.70 (17.78)
2	1.90 (48.26)	1.480 (37.59)	1.20 (30.48)
3	2.40 (60.96)	1.980 (50.29)	1.70 (43.18)
4	2.90 (73.66)	2.480 (62.99)	2.20 (55.88)
5	3.40 (86.36)	2.980 (75.69)	2.70 (68.58)
6	3.90 (99.06)	3.480 (88.39)	3.20 (81.28)
7	4.40 (111.76)	3.980 (101.09)	3.70 (93.98)
8	4.90 (124.46)	4.480 (113.79)	4.20 (106.68)
9	5.40 (137.16)	4.980 (126.49)	4.70 (119.38)
10	5.90 (149.86)	5.480 (139.19)	5.20 (132.08)


Number of stations										Part No. M22710/14- Module designation								
1	2	3	4	5	6	7	8	9	10	A	B	C	D	E	F	G	H	J
x										001	011	021	031	041	051	061	071	081
x	x									002	012	022	032	042	052	062	072	082
x	x	x								003	013	023	033	043	053	063	073	083
x	x	x	x							004	014	024	034	044	054	064	074	084
x	x	x	x	x						005	015	025	035	045	055	065	075	085
x	x	x	x	x	x					006	016	026	036	046	056	066	076	086
x	x	x	x	x	x	x				007	017	027	037	047	057	067	077	087
x	x	x	x	x	x	x	x			008	018	028	038	048	058	068	078	088
x	x	x	x	x	x	x	x	x		009	019	029	039	049	059	069	079	089
x	x	x	x	x	x	x	x	x	x	010	020	030	040	050	060	070	080	090

FIGURE 109-3. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, nonilluminated), style SRPC14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Module designation 1/	Dial	
	Background	Marking
All	Black opaque	White opaque

1/ The module is part of the switch assembly and cannot be procured by itself.

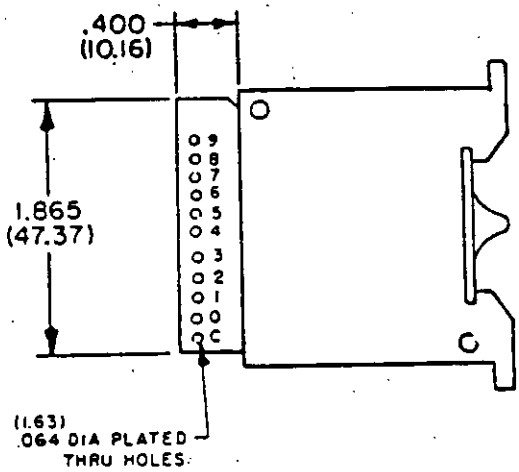


MODULE A

TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

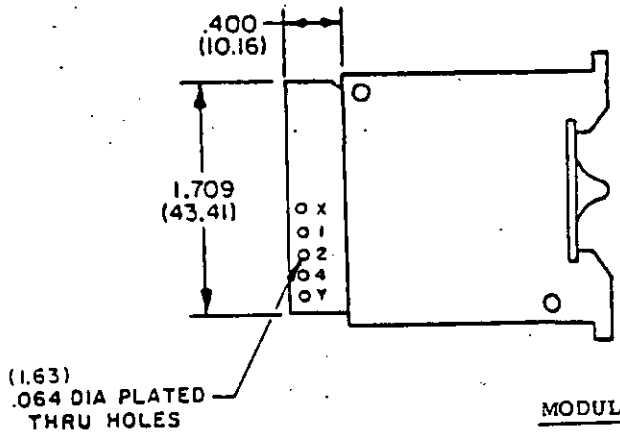

MODULE B

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

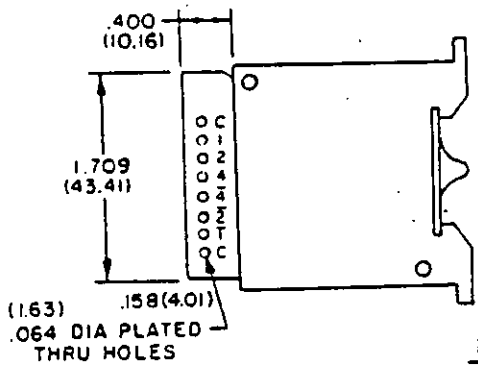


MODULE C

TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			


FIGURE 109-3. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, nonilluminated), style SRPC14 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

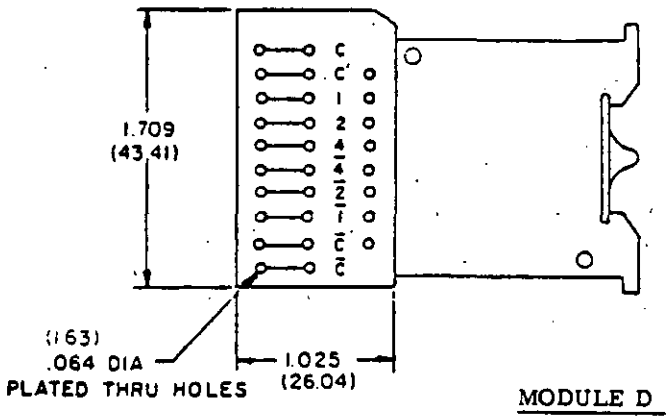


MODULE D

TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

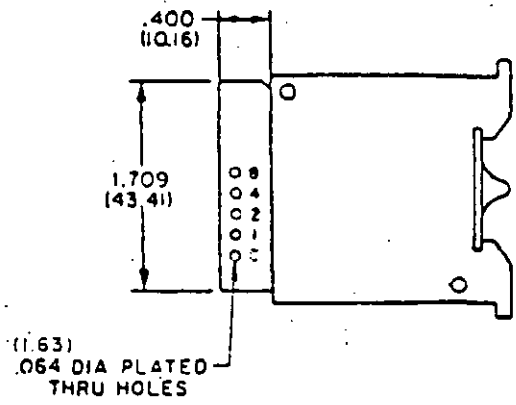

MODULE E

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

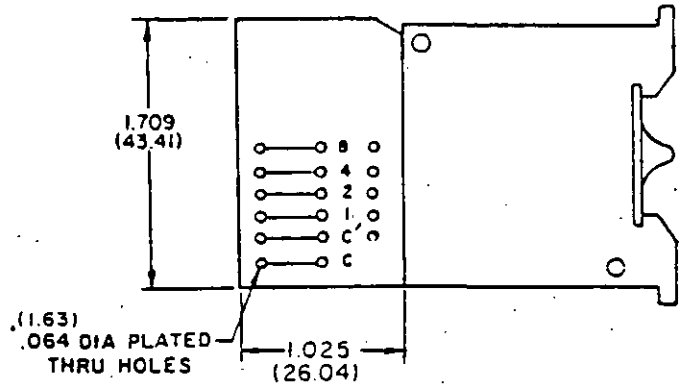


MODULE F

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●


FIGURE 109-3. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, nonilluminated), style SRPC14 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

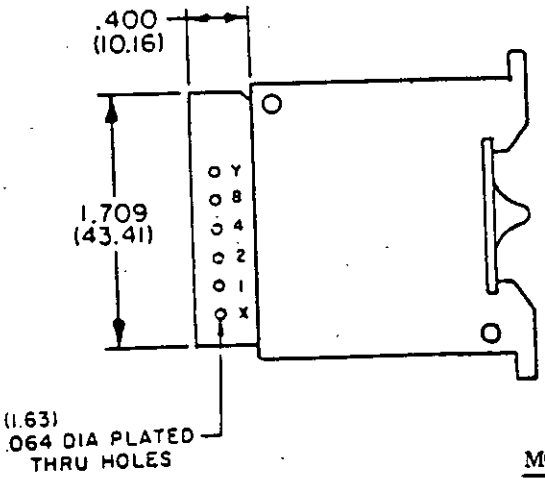


MODULE G

TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(○) CONN TO:			
	1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

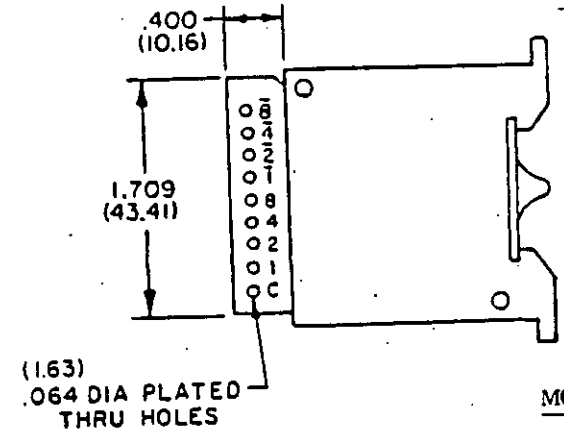

MODULE H

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●						●
4			●		●	●		
5	●		●			●		●
6		●	●		●			●
7	●	●	●					
8				●	●	●	●	
9	●			●		●	●	

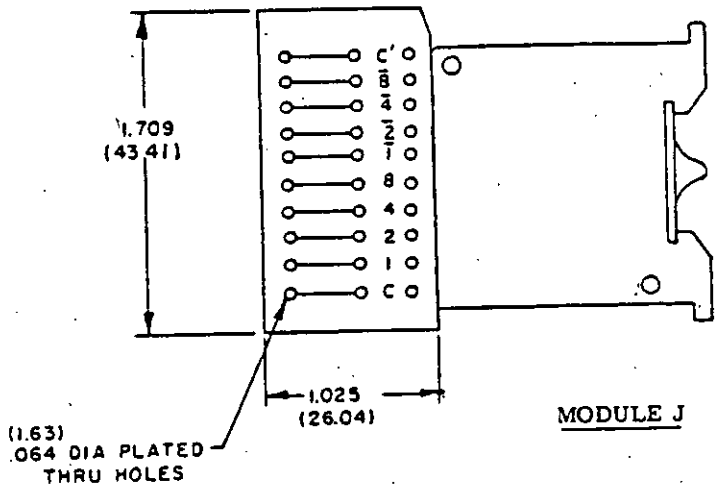


MODULE J

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	1̄	2̄	4̄	8̄
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●						●
4			●		●	●		
5	●		●			●		●
6		●	●		●			●
7	●	●	●					
8				●	●	●	●	
9	●			●		●	●	

FIGURE 109-3. Switches, rotary (printed circuit) (thumbwheel switch assembly, integral bezel, nonsealed, nonilluminated), style SRPC14 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

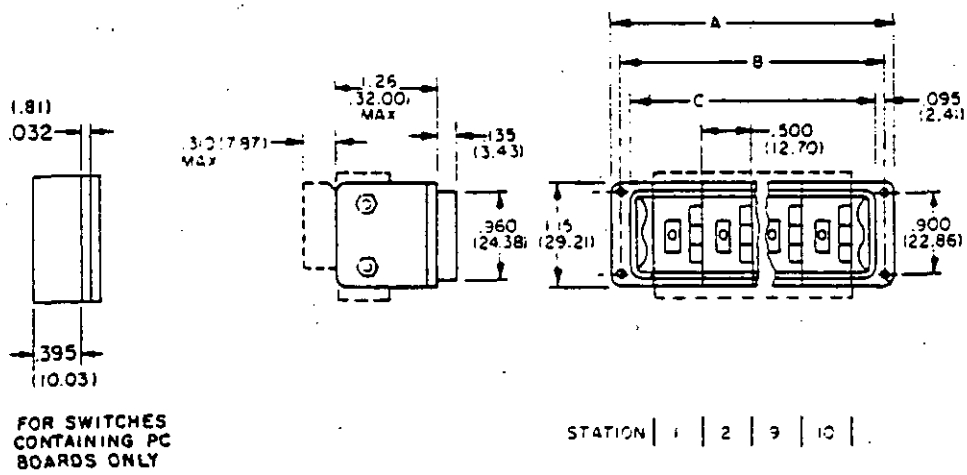

No. of stations	Dimensions		
	A ±0.03(0.76)	B	C
1	1.26 (32.00)	1.090 (27.69)	0.900 (22.86)
2	1.76 (44.70)	1.590 (40.39)	1.400 (35.56)
3	2.26 (57.40)	2.090 (53.09)	1.900 (48.26)
4	2.76 (70.10)	2.590 (65.79)	2.400 (60.96)
5	3.26 (82.80)	3.090 (78.49)	2.900 (73.66)
6	3.76 (95.50)	3.590 (91.19)	3.400 (86.36)
7	4.26(108.20)	4.090(103.89)	3.900 (99.06)
8	4.76(120.90)	4.590(116.59)	4.400(111.76)
9	5.26(133.60)	5.090(129.29)	4.900(124.46)
10	5.76(146.30)	5.590(141.99)	5.400(137.16)

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Number of stations										Part No. M22710/15- Module designation														
1	2	3	4	5	6	7	8	9	10	A	A1	A2	B	B1	B2	C	C1	C2	D	D1	D2	E	E1
x										001	011	021	031	041	051	061	071	081	091	101	111	121	131
x	x									002	012	022	032	042	052	062	072	082	092	102	112	122	132
x	x	x								003	013	023	033	043	053	063	073	083	093	103	113	123	133
x	x	x	x							004	014	024	034	044	054	064	074	084	094	104	114	124	134
x	x	x	x	x						005	015	025	035	045	055	065	075	085	095	105	115	125	135
x	x	x	x	x	x					006	016	026	036	046	056	066	076	086	096	106	116	126	136
x	x	x	x	x	x	x				007	017	027	037	047	057	067	077	087	097	107	117	127	137
x	x	x	x	x	x	x	x			008	018	028	038	048	058	068	078	088	098	108	118	128	138
x	x	x	x	x	x	x	x	x		009	019	029	039	049	059	069	079	089	099	109	119	129	139
x	x	x	x	x	x	x	x	x	x	010	020	030	040	050	060	070	080	090	100	110	120	130	140

Number of stations										Module designation													
1	2	3	4	5	6	7	8	9	10	E2	F	F1	F2	G	G1	G2	H	H1	H2	J	J1	J2	K
x										141	151	161	171	181	191	201	211	221	231	241	251	261	271
x	x									142	152	162	172	182	192	202	212	222	232	242	252	262	272
x	x	x								143	153	163	173	183	193	203	213	223	233	243	253	263	273
x	x	x	x							144	154	164	174	184	194	204	214	224	234	244	254	264	274
x	x	x	x	x						145	155	165	175	185	195	205	215	225	235	245	255	265	275
x	x	x	x	x	x					146	156	166	176	186	196	206	216	226	236	246	256	266	276
x	x	x	x	x	x	x				147	157	167	177	187	197	207	217	227	237	247	257	267	277
x	x	x	x	x	x	x	x			148	158	168	178	188	198	208	218	228	238	248	258	268	278
x	x	x	x	x	x	x	x	x		149	159	169	179	189	199	209	219	229	239	249	259	269	279
x	x	x	x	x	x	x	x	x	x	150	160	170	180	190	200	210	220	230	240	250	260	270	280

Number of stations										Module designation													
1	2	3	4	5	6	7	8	9	10	K1	K2	L	L1	L2	M	M1	M2	N	N1	N2	P	P1	P2
x										281	291	301	311	321	331	341	351	361	371	381	391	401	411
x	x									282	292	302	312	322	332	342	352	362	372	382	392	402	412
x	x	x								283	293	303	313	323	333	343	353	363	373	383	393	403	413
x	x	x	x							284	294	304	314	324	334	344	354	364	374	384	394	404	414
x	x	x	x	x						285	295	305	315	325	335	345	355	365	375	385	395	405	415
x	x	x	x	x	x					286	296	306	316	326	336	346	356	366	376	386	396	406	416
x	x	x	x	x	x	x				287	297	307	317	327	337	347	357	367	377	387	397	407	417
x	x	x	x	x	x	x	x			288	298	308	318	328	338	348	358	368	378	388	398	408	418
x	x	x	x	x	x	x	x	x		289	299	309	319	329	339	349	359	369	379	389	399	409	419
x	x	x	x	x	x	x	x	x	x	290	300	310	320	330	340	350	360	370	380	390	400	410	420


Number of stations										Module designation		
1	2	3	4	5	6	7	8	9	10	R	R1	R2
x										421	431	441
x	x									422	432	442
x	x	x								423	433	443
x	x	x	x							424	434	444
x	x	x	x	x						425	435	445
x	x	x	x	x	x					426	436	446
x	x	x	x	x	x	x				427	437	447
x	x	x	x	x	x	x	x			428	438	448
x	x	x	x	x	x	x	x	x		429	439	449
x	x	x	x	x	x	x	x	x	x	430	440	450

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Module designation 1/	Dial		Illumination	
	Background	Marking	Color	Location
A thru R	Black opaque	White opaque	N/A	N/A
A1 thru R1	Black opaque	White translucent	Red	Top
A2 thru R2	Black opaque	White translucent	Clear	Top


1/ The module is part of the switch assembly and cannot be procured by itself.

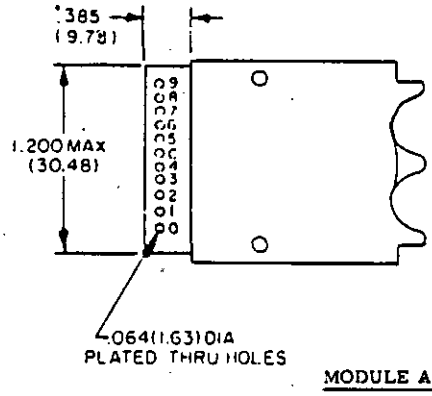


MODULE A, A1, OR A2

TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

LEAD	COLOR
C	WHT/BRN
0	BLACK
1	BROWN
2	RED
3	ORANGE
4	YELLOW
5	GREEN
6	BLUE
7	VIOLET
8	GREY
9	WHITE

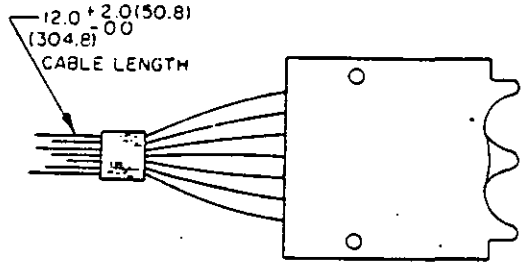


TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

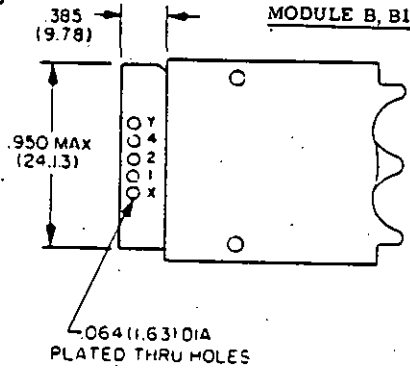

MODULE B, B1, OR B2

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

LEAD	COLOR
X	WHITE
Y	BLACK
1	BROWN
2	RED
4	YELLOW

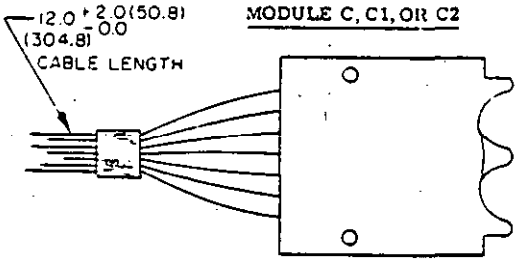


MODULE C, C1, OR C2

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

MODULE D, D1, OR D2

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

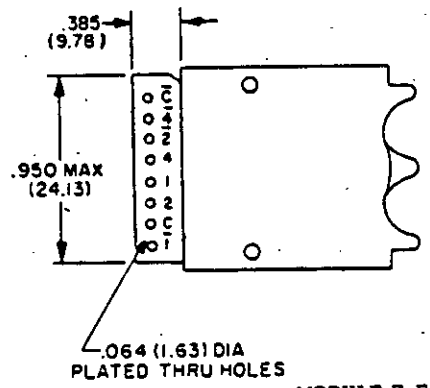

MODULE E, E1, OR E2


TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

LEAD	COLOR
$\overline{C}$	WHT/BRN
C	WHT/ORN
$\overline{1}$	BROWN
2	RED
$\overline{4}$	YELLOW
$\overline{1}$	BLUE
$\overline{2}$	VIOLET
$\overline{4}$	ORANGE

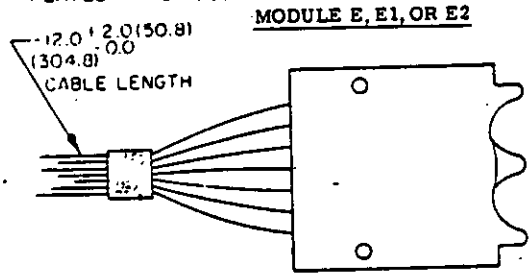


MODULE F, F1, OR F2

TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

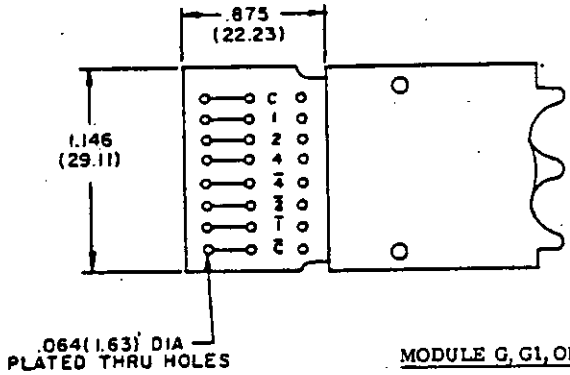

MODULE G, G1, OR G2

TRUTH TABLE (Circuit configuration 3) 45° INDEXING						
DIAL MARKING	COMMON C CONN. TO:			COMMON $\overline{C}$ CONN. TO:		
	1	2	4	$\overline{1}$	$\overline{2}$	$\overline{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

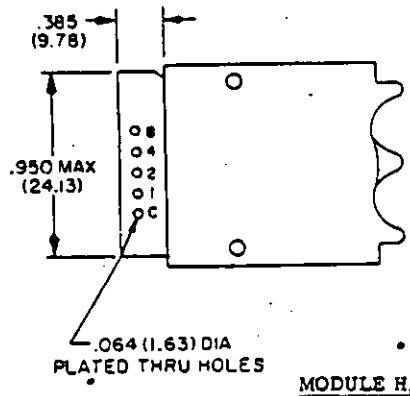


MODULE H, H1, OR H2

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LEAD	COLOR
C	WHT/BRN
1	BROWN
2	RED
4	YELLOW
8	GREY

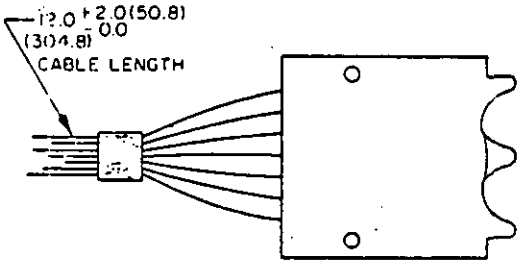


MODULE J, J1, OR J2

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

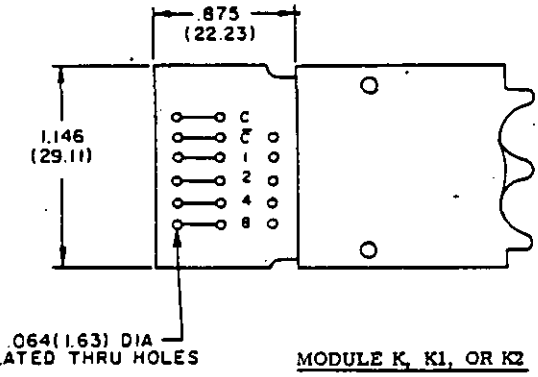

MODULE K, K1, OR K2


TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

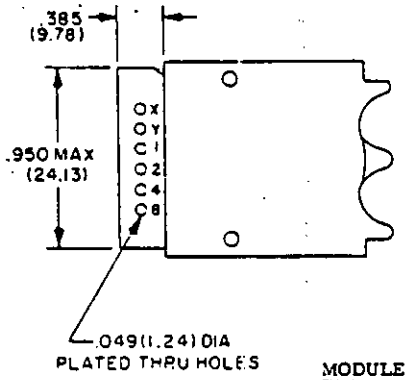

MODULE L, L1, OR L2

TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(○) CONN. TO:			
	1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

LEAD	COLOR
X	WHT/BRN
Y	WHT/BLK
1	BROWN
2	RED
4	YELLOW
8	GREY

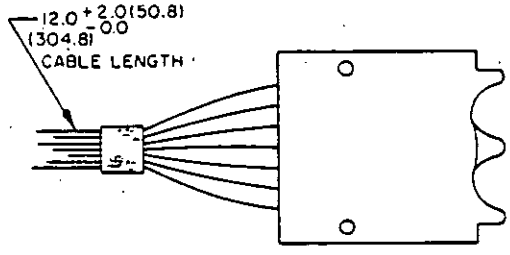


MODULE M, M1, OR M2

TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(○) CONN. TO:			
	1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

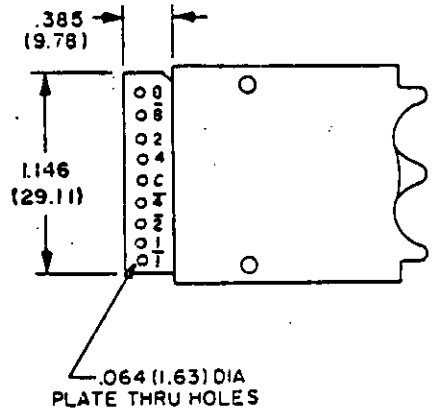

TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

MODULE N, N1, OR N2

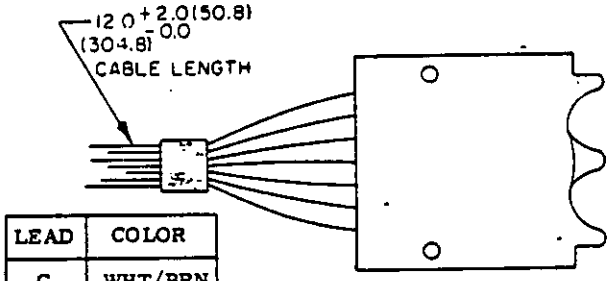


LEAD	COLOR
C	WHT/BRN
1	BROWN
2	RED
4	YELLOW
8	GREY
$\bar{1}$	BLUE
$\bar{2}$	VIOLET
$\bar{4}$	ORANGE
$\bar{8}$	BLACK

TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

MODULE P, P1, OR P2

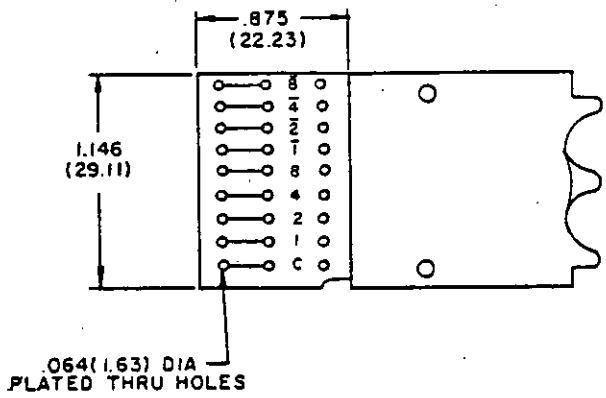


TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

MODULE R, R1, OR R2

FIGURE 109-4. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, illuminated or nonilluminated), (top, bottom, or rear relampable), style SRPC15 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

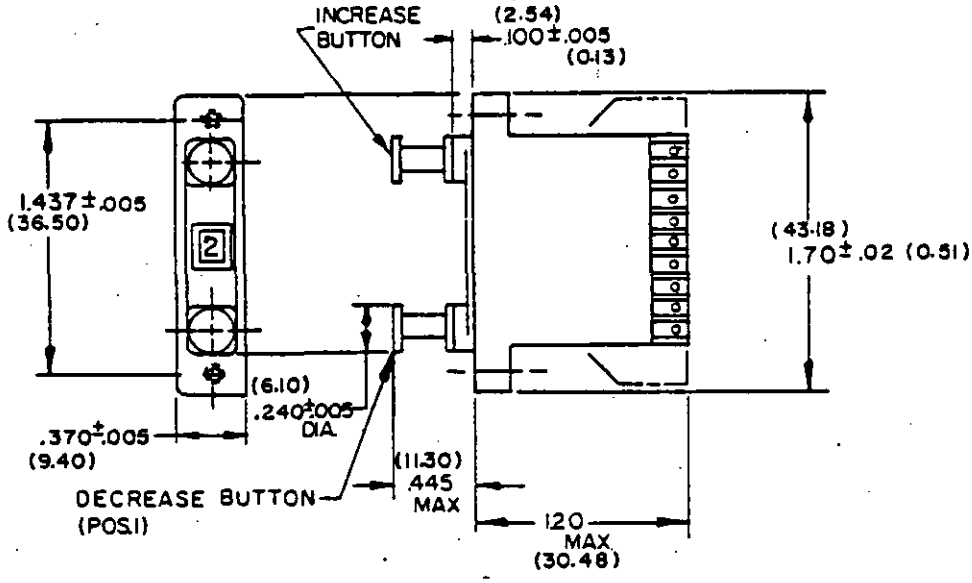

Terminal design and circuit configuration number	Readout characters	Part No. M22710/18-	
		Sealed switch (method I seal test)	Sealed switch with panel seal gasket (methods I and II seal test)
1	1/ B/W 2/	001	031
1	W/B	002	032
2	B/W	003	033
2	W/B	004	034
3	B/W	005	035
3	W/B	006	036
4	B/W	007	037
4	W/B	008	038
5	B/W	009	039
5	W/B	010	040
6	B/W	011	041
6	W/B	012	042
7	B/W	013	043
7	W/B	014	044
8	B/W	015	045
8	W/B	016	046
9	B/W	017	047
9	W/B	018	048
10	B/W	019	049
10	W/B	020	050
11	B/W	021	051
11	W/B	022	052
12	B/W	023	053
12	W/B	024	054
13	B/W	025	055
13	W/B	026	056
14	B/W	027	057
14	W/B	028	058
15	B/W	029	059
15	W/B	030	060


1/ Color of stamping on wheel: B (black) or W (white).
2/ Color of background: B (black) or W (white).

FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.1

DIAL READS	COMMON C CONNECTED TO TERMINALS							
	0	1	2	3	4	5	6	7
0	●							
1		●						
2			●					
3				●				
4					●			
5						●		
6							●	
7								●

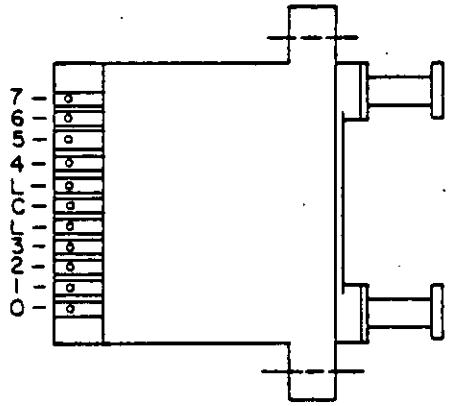

NO.2

DIAL READS	COMMON C CONNECTED TO TERMINALS							
	0	1	2	3	4	5	6	7
0	●							
1		●						
2			●					
3				●				
4					●			
5						●		
6							●	
7								●

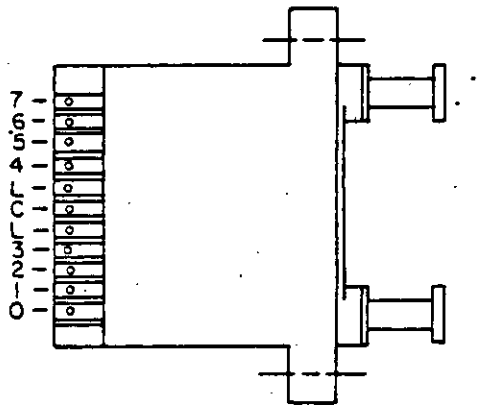

NO.3

DIAL READS	COMMON C CONNECTED TO TERMINALS		
	1	2	4
0			
1	●		
2		●	
3	●	●	
4			●
5	●		●
6		●	●
7	●	●	●


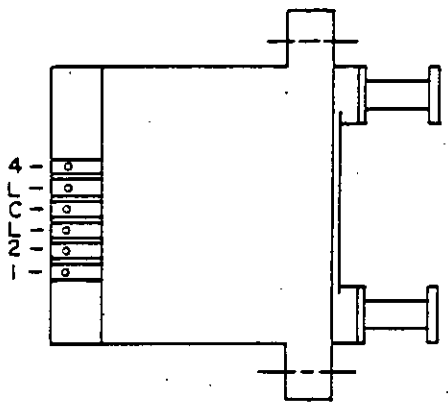


FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.4

DIAL READS	COMMON C CONNECTED TO TERMINALS			
	0	1	2	4
0	●			
1		●		
2			●	
3		●	●	
4				●
5		●		●
6			●	●
7		●	●	●

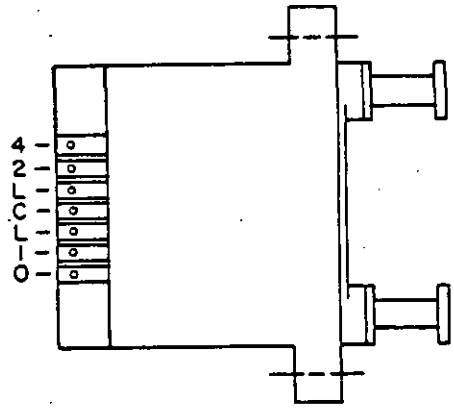

NO.5

DIAL READS	COMMON C CONNECTED TO TERMINALS					
	1	2	4	$\bar{1}$	$\bar{2}$	$\bar{4}$
0				●	●	●
1	●				●	●
2		●		●		●
3	●	●				●
4			●	●	●	
5	●		●		●	
6		●	●	●		
7	●	●	●			

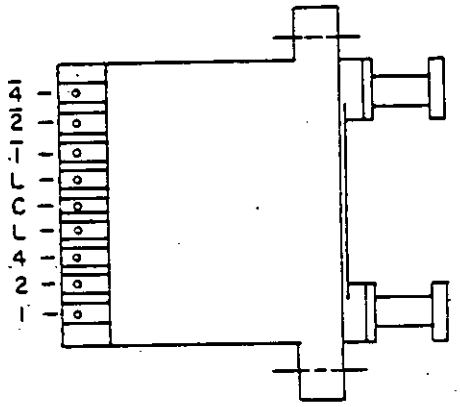

NO.6

DIAL READS	COMMON C CONNECTION TO TERMINAL									
	0	1	2	3	4	5	6	7	8	9
0	●									
1		●								
2			●							
3				●						
4					●					
5						●				
6							●			
7								●		
8									●	
9										●


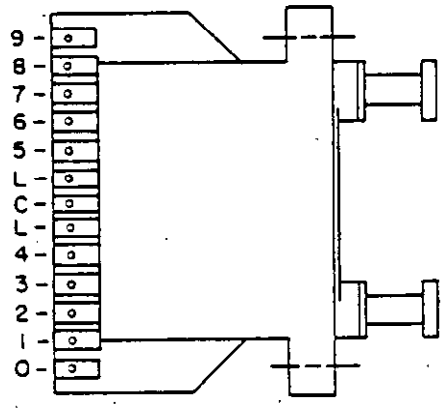


FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.7

DIAL READS	COMMON C CONNECTION TO TERMINAL									
	0	1	2	3	4	5	6	7	8	9
0	●									
1		●								
2			●							
3				●						
4					●					
5						●				
6							●			
7								●		
8									●	
9										●

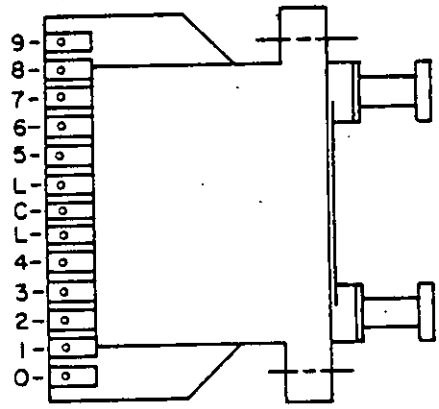

NO.8

DIAL READS	COMMON C CONNECTED TO TERMINALS			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

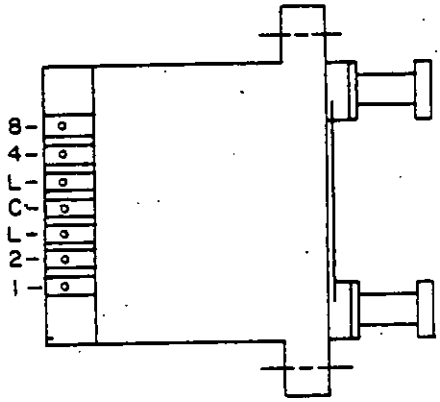

NO.9

DIAL READS	COMMON C CONNECTED TO TERMINALS				
	1	2	4	8	P
0					●
1	●				
2		●			
3	●	●			●
4			●		
5	●		●		●
6		●	●		●
7	●	●	●		
8				●	
9	●			●	●


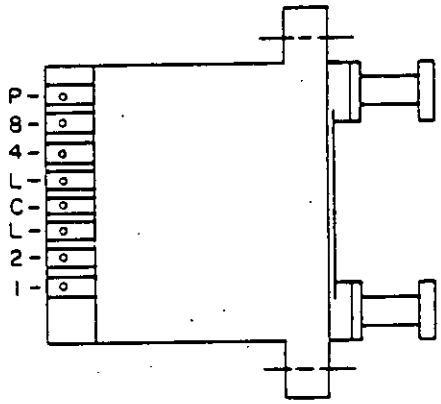


FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.10

DIAL READS	COMMON C CONNECTED TO TERMINALS			
	1	2	4	8
0	●	●		
1			●	
2	●		●	
3		●	●	
4	●	●	●	
5				●
6	●			●
7		●		●
8	●	●		●
9			●	●

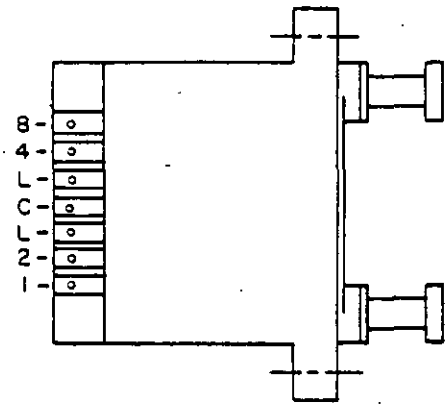

NO.11

DIAL READS	COMMON C CONNECTED TO TERMINALS							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

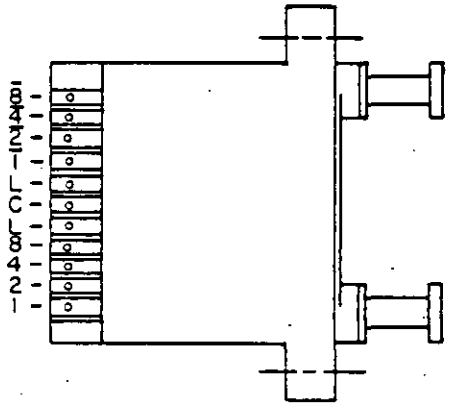

NO.12

DIAL READS	COMMON C CONNECTOR TO TERMINAL											
	0	1	2	3	4	5	6	7	8	9	10	11
0	●											
1		●										
2			●									
3				●								
4					●							
5						●						
6							●					
7								●				
8									●			
9										●		
10											●	
11												●


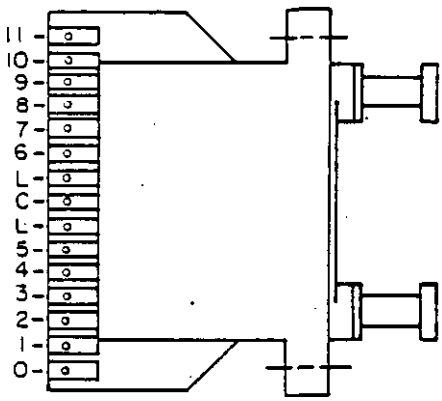


FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.13

DIAL READS	COMMON C CONNECTOR TO TERMINAL											
	0	1	2	3	4	5	6	7	8	9	10	11
0	●											
1		●										
2			●									
3				●								
4					●							
5						●						
6							●					
7								●				
8									●			
9										●		
10											●	
11												●

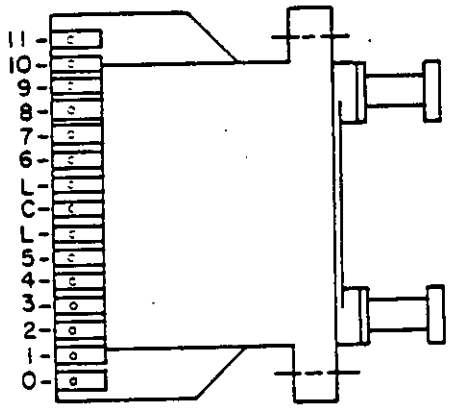

NO.14

DIAL READS	COMMON C CONNECTED TO TERMINALS			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
10		●		●
11	●	●		●

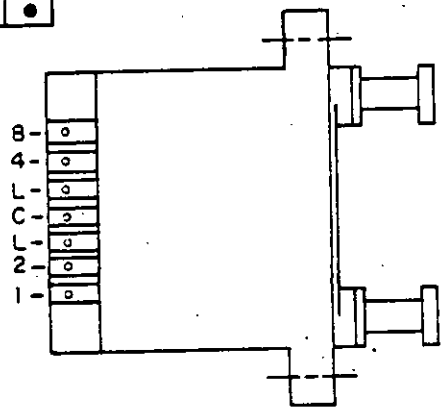

NO.15

DIAL READS	COMMON C CONNECTED TO TERMINALS							
	1	2	4	8	$\overline{1}$	$\overline{2}$	$\overline{4}$	$\overline{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	
10		●		●	●		●	
11	●	●		●			●	


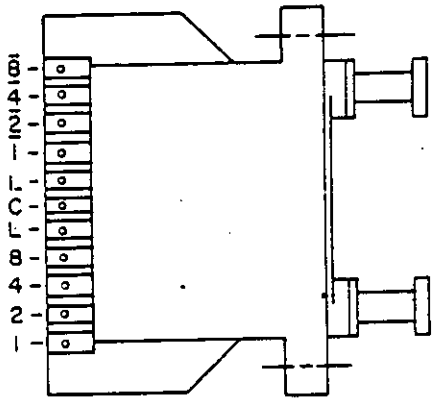


FIGURE 109-5. Switches, rotary (printed circuit) (pushbutton, bidirectional, sealed or unsealed, nonilluminated) style SRPC18 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

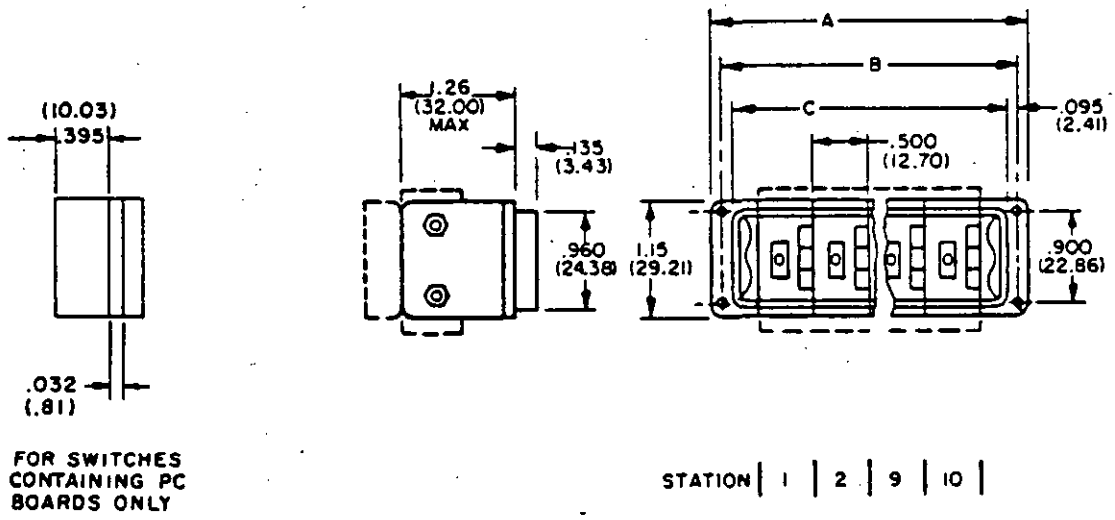

No. of stations	Dimensions		
	A ±0.03 (0.76)	B	C
1	1.26 (32.00)	1.090 (27.69)	0.900 (22.86)
2	1.76 (44.70)	1.590 (40.39)	1.400 (35.56)
3	2.26 (57.40)	2.090 (53.09)	1.900 (48.26)
4	2.76 (70.10)	2.590 (65.79)	2.400 (60.96)
5	3.26 (82.80)	3.090 (78.49)	2.900 (73.66)
6	3.76 (95.50)	3.590 (91.19)	3.400 (86.36)
7	4.26 (108.20)	4.090 (103.89)	3.900 (99.06)
8	4.76 (120.90)	4.590 (116.59)	4.400 (111.76)
9	5.26 (133.60)	5.090 (129.29)	4.900 (124.46)
10	5.76 (146.30)	5.590 (141.99)	5.400 (137.16)

FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Number of stations										Part No. M22710/20- Module designation															
1	2	3	4	5	6	7	8	9	10	A	A1	B	B1	C	C1	D	D1	E	E1	F	F1	G	G1
X										001	011	021	031	041	051	061	071	081	091	101	111	121	131
X	X									002	012	022	032	042	052	062	072	082	092	102	112	122	132
X	X	X								003	013	023	033	043	053	063	073	083	093	103	113	123	133
X	X	X	X							004	014	024	034	044	054	064	074	084	094	104	114	124	134
X	X	X	X	X						005	015	025	035	045	055	065	075	085	095	105	115	125	135
X	X	X	X	X	X					006	016	026	036	046	056	066	076	086	096	106	116	126	136
X	X	X	X	X	X	X				007	017	027	037	047	057	067	077	087	097	107	117	127	137
X	X	X	X	X	X	X	X			008	018	028	038	048	058	068	078	088	098	108	118	128	138
X	X	X	X	X	X	X	X	X		009	019	029	039	049	059	069	079	089	099	109	119	129	139
X	X	X	X	X	X	X	X	X	X	010	020	030	040	050	060	070	080	090	100	110	120	130	140

Number of stations										Module designation															
1	2	3	4	5	6	7	8	9	10	H	H1	J	J1	K	K1	L	L1	M	M1	N	N1	P	P1
X										141	151	161	171	181	191	201	211	221	231	241	251	261	271
X	X									142	152	162	172	182	192	202	212	222	232	242	252	262	272
X	X	X								143	153	163	173	183	193	203	213	223	233	243	253	263	273
X	X	X	X							144	154	164	174	184	194	204	214	224	234	244	254	264	274
X	X	X	X	X						145	155	165	175	185	195	205	215	225	235	245	255	265	275
X	X	X	X	X	X					146	156	166	176	186	196	206	216	226	236	246	256	266	276
X	X	X	X	X	X	X				147	157	167	177	187	197	207	217	227	237	247	257	267	277
X	X	X	X	X	X	X	X			148	158	168	178	188	198	208	218	228	238	248	258	268	278
X	X	X	X	X	X	X	X	X		149	159	169	179	189	199	209	219	229	239	249	259	269	279
X	X	X	X	X	X	X	X	X	X	150	160	170	180	190	200	210	220	230	240	250	260	270	280


Number of stations										Module designation	
1	2	3	4	5	6	7	8	9	10	R	R1
X										281	291
X	X									282	292
X	X	X								283	293
X	X	X	X							284	294
X	X	X	X	X						285	295
X	X	X	X	X	X					286	296
X	X	X	X	X	X	X				287	297
X	X	X	X	X	X	X	X			288	298
X	X	X	X	X	X	X	X	X		289	299
X	X	X	X	X	X	X	X	X	X	290	300

FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Module designation 1/	Dial		Illumination	
	Background	Marking	Color	Location
A thru R A1 thru R1	Black opaque Black opaque	White translucent White translucent	Red Clear	Top and bottom Top and bottom


1/ The module is part of the switch assembly and cannot be procured by itself.

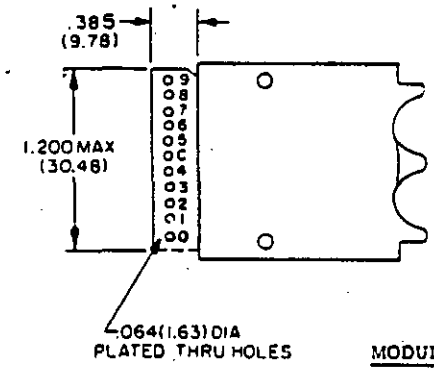

MODULE A OR A1


TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

LEAD	COLOR
C	WHT/BRN
0	BLACK
1	BROWN
2	RED
3	ORANGE
4	YELLOW
5	GREEN
6	BLUE
7	VIOLET
8	GREY
9	WHITE

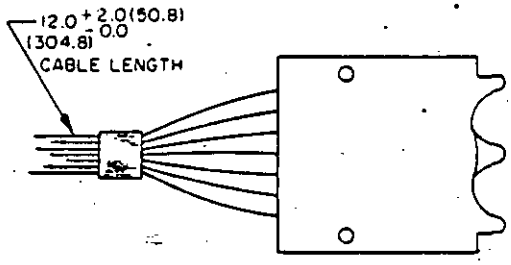

MODULE B OR B1


TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

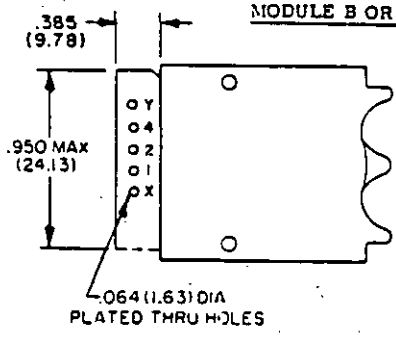

MODULE C OR C1

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

LEAD	COLOR
X	WHITE
Y	BLACK
1	BROWN
2	RED
4	YELLOW

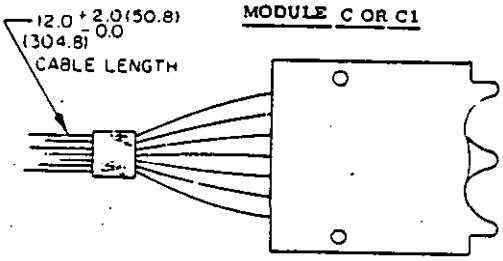

MODULE D OR D1

TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)&Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


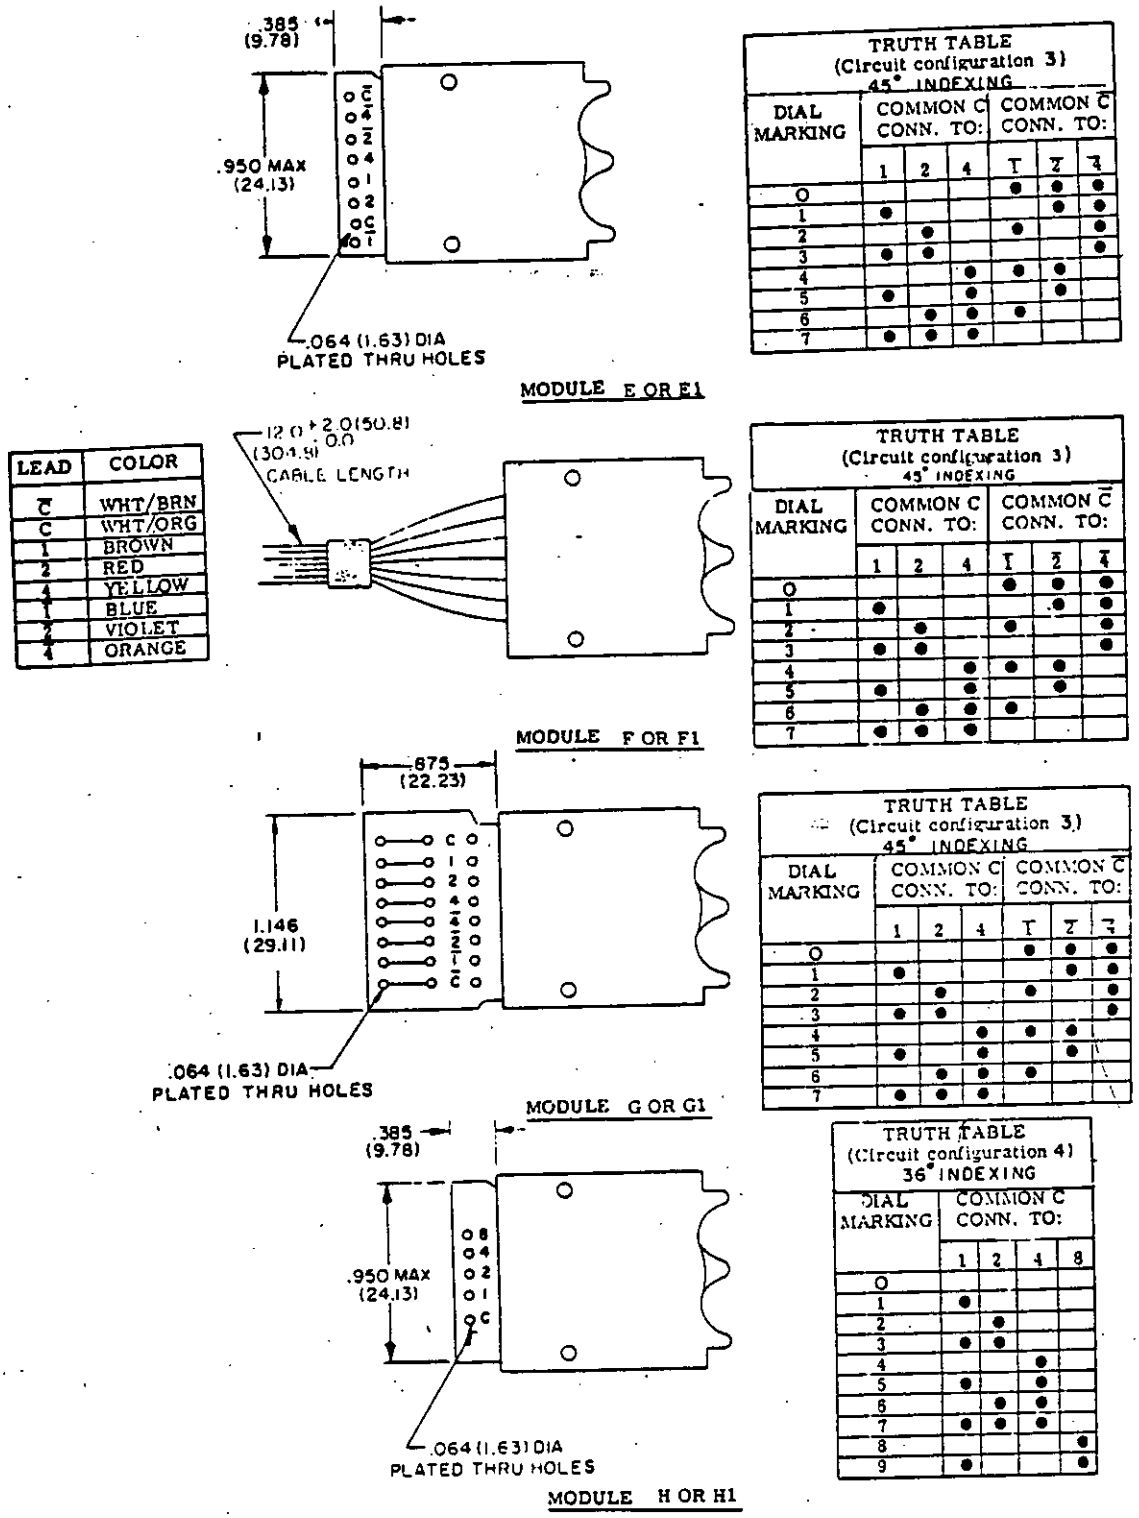



FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


LEAD	COLOR
C	WHT/BRN
1	BROWN
2	RED
4	YELLOW
8	GREY

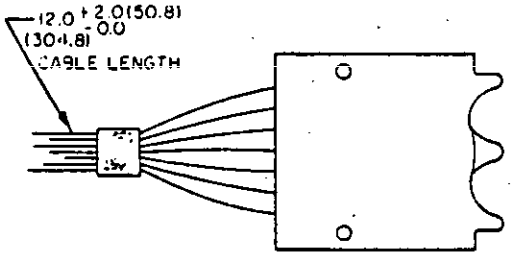

MODULE J OR J1

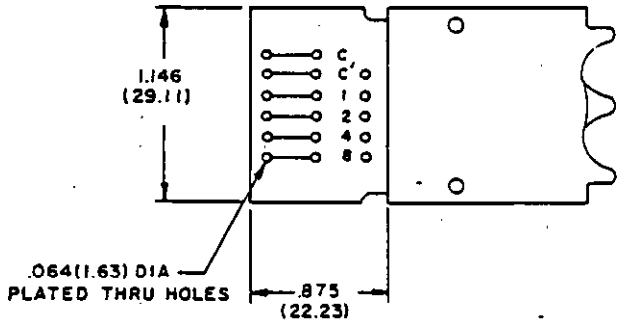


MODULE K OR K1

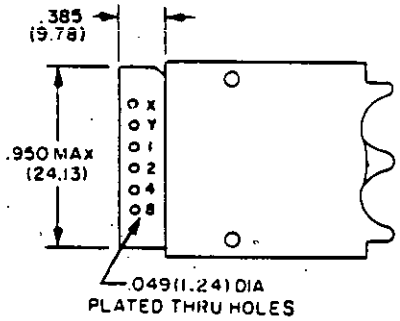

MODULE L OR L1

LEAD	COLOR
X	WHT/BRN
Y	WHT/BLK
1	BROWN
2	RED
4	YELLOW
8	GREY

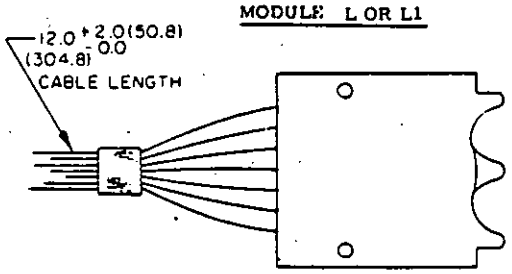

MODULE M OR M1

TRUTH TABLE
(Circuit configuration 4)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

TRUTH TABLE
(Circuit configuration 4)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

TRUTH TABLE
(Circuit configuration 5)
36° INDEXING


DIAL MARKING	COMMON X(●)&Y(○) CONN. TO:			
	1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

TRUTH TABLE
(Circuit configuration 5)
36° INDEXING

DIAL MARKING	COMMON X(●)&Y(○) CONN. TO:			
	1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

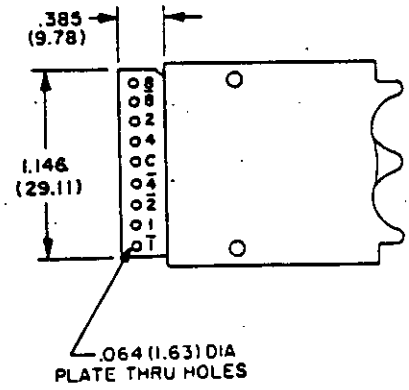

MODULE N or N1

TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	T	2	4	8
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

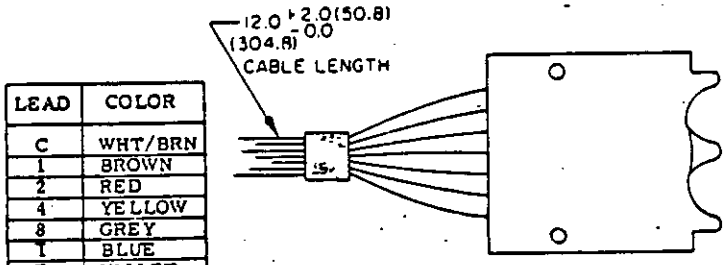


LEAD	COLOR
C	WHT/BRN
1	BROWN
2	RED
4	YELLOW
8	GREY
T	BLUE
2	VIOLET
4	ORANGE
8	BLACK

MODULE P or P1

TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	T	2	4	8
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

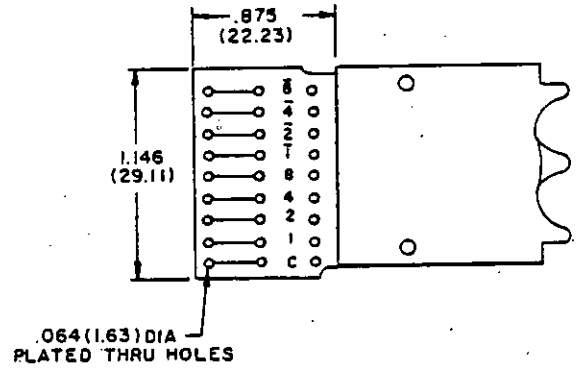


MODULE R or R1

TRUTH TABLE
(Circuit configuration 6)
36° INDEXING

DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	T	2	4	8
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

FIGURE 109-6. Switches, rotary (printed circuit) (thumbwheel switch assembly, sealed, dual-illuminated), (top and bottom relampable), style SRPC20 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

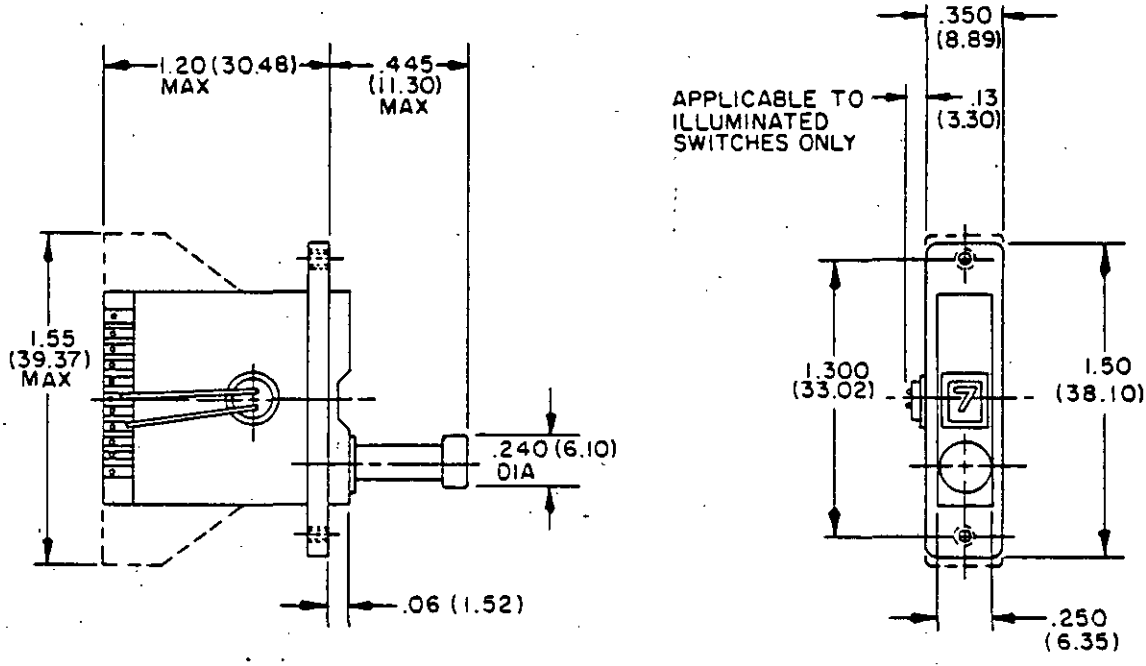


Seal test	Illumination	Panel seal	Readout characters	Part No. M22710/23- Terminal design and circuit configuration									
				No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10
No	None	No	B/W	001	013	025	037	049	061	073	085	097	109
No	None	No	W/B	002	014	026	038	050	062	074	086	098	110
Yes	None	No	B/W	003	015	027	039	051	063	075	087	099	111
Yes	None	No	W/B	004	016	028	040	052	064	076	088	100	112
Yes	None	Yes	B/W	005	017	029	041	053	065	077	089	101	113
Yes	None	Yes	W/B	006	018	030	042	054	066	078	090	102	114
No	White	No	B/W	007	019	031	043	055	067	079	091	103	115
Yes	White	No	B/W	008	020	032	044	056	068	080	092	104	116
Yes	White	Yes	B/W	009	021	033	045	057	069	081	093	105	117
No	Red	No	B/W	010	022	034	046	058	070	082	094	106	118
Yes	Red	No	B/W	011	023	035	047	059	071	083	095	107	119
Yes	Red	Yes	B/W	012	024	036	048	060	072	084	096	108	120

FIGURE 109-7. Switches, rotary (printed circuit) (pushbutton, unidirectional, sealed or unsealed illuminated (side relampable) or nonilluminated), style SPRC23.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.1

DIAL READS	COMMON C CONNECTED TO TERMINALS							
	0	1	2	3	4	5	6	7
0	●							
1		●						
2			●					
3				●				
4					●			
5						●		
6							●	
7								●

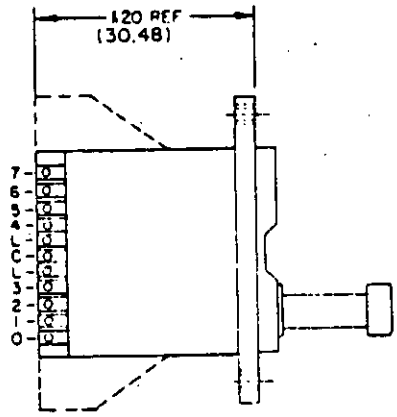

NO.2

DIAL READS	COMMON C CONNECTED TO TERMINALS		
	1	2	4
0			
1	●		
2		●	
3	●	●	
4			●
5	●		●
6		●	●
7	●	●	●

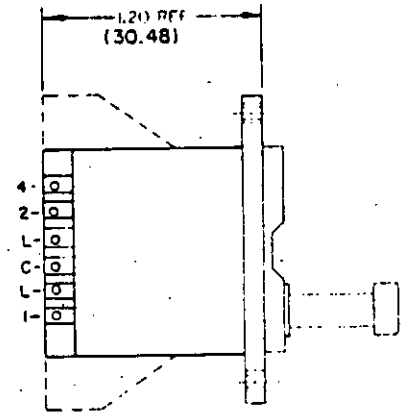

NO. 3

DIAL READS	COMMON C CONNECTED TO TERMINAL			
	0	1	2	4
0	●			
1		●		
2			●	
3		●	●	
4				●
5		●		●
6			●	●
7		●	●	●


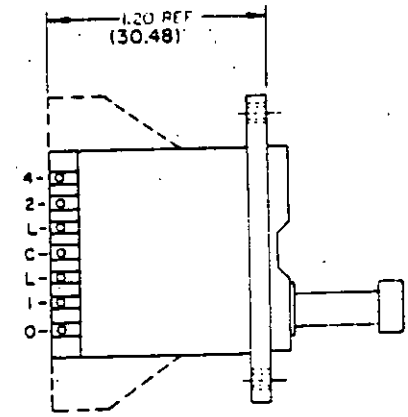


FIGURE 109-7. Switches, rotary (printed circuit) (pushbutton, unidirectional, sealed or unsealed illuminated (side relampable) or nonilluminated), style SRPC23 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO. 4

DIAL READS	COMMON C CONNECTED TO TERMINAL									
	0	1	2	3	4	5	6	7	8	9
0	●									
1		●								
2			●							
3				●						
4					●					
5						●				
6							●			
7								●		
8									●	
9										●

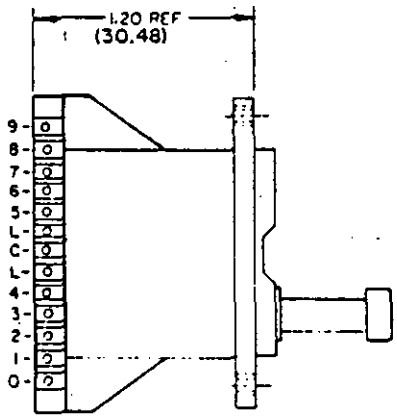

NO. 5

DIAL READS	COMMON C CONNECTED TO TERMINAL			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

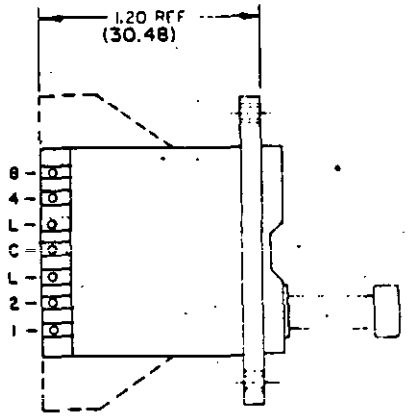

NO. 6

DIAL READS	COMMON C CONNECTED TO TERMINAL				
	1	2	4	8	P
0					●
1	●				
2		●			
3	●	●			●
4			●		
5	●		●		●
6		●	●		●
7	●	●	●		
8				●	
9	●			●	●


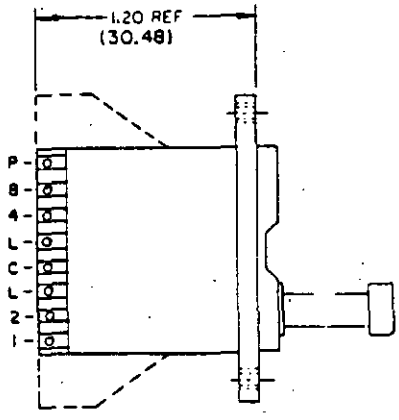


FIGURE 109-7. Switches, rotary (printed circuit) (pushbutton, unidirectional, sealed or unsealed illuminated (side relampable) or nonilluminated), style SRPC23 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


NO.7

DIAL READS	COMMON C CONNECTED TO TERMINAL			
	1	2	4	8
0	●	●		
1			●	
2	●		●	
3		●	●	
4	●	●	●	
5				●
6	●			●
7		●		●
8	●	●		●
9			●	●

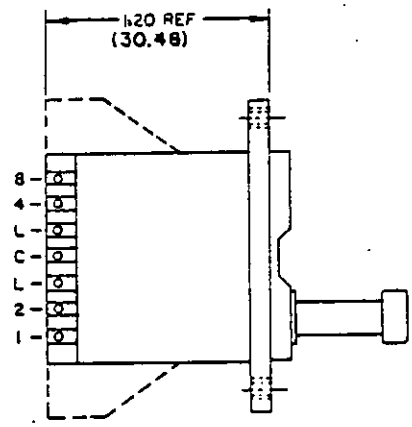

NO.8

DIAL READS	COMMON C CONNECTED TO TERMINAL							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

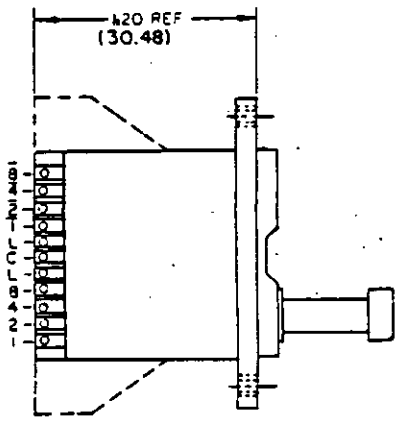

NO.9

DIAL READS	COMMON C CONNECTED TO TERMINAL											
	0	1	2	3	4	5	6	7	8	9	10	11
0	●											
1		●										
2			●									
3				●								
4					●							
5						●						
6							●					
7								●				
8									●			
9										●		
10											●	
11												●


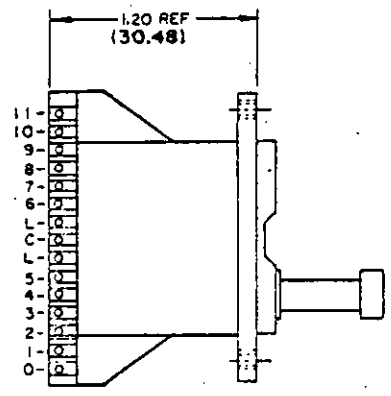


FIGURE 109-7. Switches, rotary (printed circuit) (pushbutton, unidirectional, sealed or unsealed illuminated (side relampable) or nonilluminated), style SRPC23 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

NO.10


DIAL READS	COMMON C CONNECTED TO TERMINAL			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
10		●		●
11	●	●		●

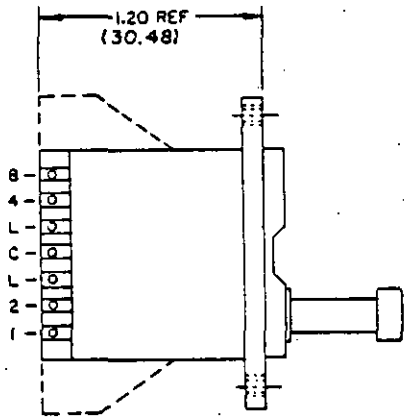

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.

FIGURE 109-7. Switches, rotary (printed circuit) (pushbutton, unidirectional, sealed or unsealed illuminated (side relampable) or nonilluminated), style SRPC23 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

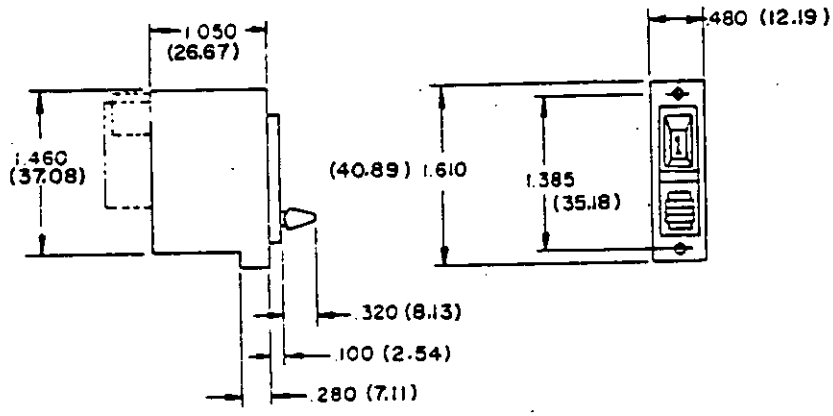

Dial		Illumination		Special features	Part No. M22710/24-			
					Circuit configuration			
Background	Marking	Color	Location		No. 1	No. 2	No. 3	No. 4
Black opaque	White opaque	---	---	---	001	007	013	021
Black opaque	White opaque	---	---	RFI shielded	002	008	014	022
Black opaque	White translucent	Red	Back	---	003	009	015	023
Black opaque	White translucent	Red	Back	RFI shielded	004	010	016	024
Black opaque	White translucent	Clear	Back	---	005	011	017	025
Black opaque	White translucent	Clear	Back	RFI shielded	006	012	018	026
Black opaque	White translucent	Amber	Back	---	---	---	019	---
Black opaque	White translucent	Amber	Back	RFI shielded	---	---	020	---

FIGURE 109-8. Switches, rotary (printed circuit) (toggle, bidirectional, sealed, illuminated or nonilluminated) style SRPC24.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

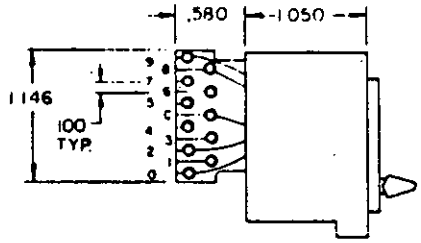

Circuit configuration 1


Truth table Straight decimal	
Dial marking	Common C Conn to:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

INCHES	MM
.028	.71
.100	2.54
.125	3.18
.250	6.35
.360	9.14
.580	14.73
.923	23.44
.980	24.89
1.050	26.67
1.146	29.11

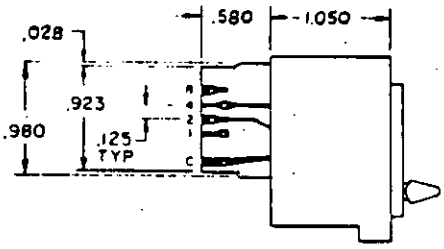


Circuit configuration 2

Truth table Binary coded decimal				
Dial marking	Common C Conn to: 1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

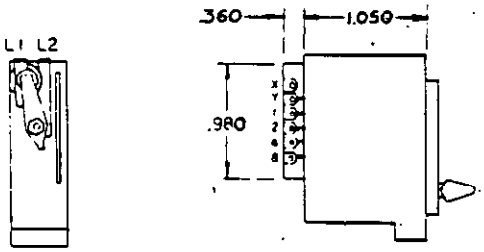

Circuit configuration 3

Truth table Binary coded octal with two commons				
Dial marking	Common X(●) Y(○) Conn to: 1	2	4	8
0	○	○	○	○
1	●	○	○	○
2	○	●	○	○
3	●	●	○	○
4	○	○	●	○
5	●	○	●	○
6	○	●	●	○
7	●	●	●	○
8	○	○	○	●
9	●	○	○	●

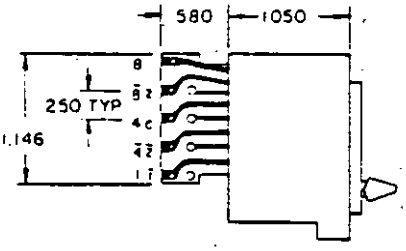

Circuit configuration 4

Truth table Binary coded decimal plus compliment								
Dial marking	Common C Conn to: 1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

FIGURE 109-8. Switches, rotary (printed circuit) (toggle, bidirectional, sealed, illuminated or nonilluminated), style SRPC24 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 110

SWITCHES, SENSITIVE

(Applicable specification: MIL-S-8805)

TABLE 110.I. Switches, sensitive, characteristics.


Figure number	Applicable specification sheet MIL-S-8805	Operation	Circuit	Electrical ratings (28 Vdc resistive) (amperes)	General remarks
110-1	/1	Momentary	SPDT	2	
110-2	/2	Momentary	SPDT	5	
110-3	/4	Momentary	SPDT	7	
110-4	/5	Latching - reset button	4 circuit	15	
110-5	/7	Momentary	2 circuit	10	
110-6	/8	Momentary	SPDT	4	Hermetic seal
110-7	/11	Momentary	2 circuit	10	
110-8	/14	Latching - reset button	2 circuit	10	
110-9	/15	Momentary	4 circuit	15	
110-10	/16	Latching - reset button	4 circuit	15	
110-11	/17	Latching - reset button	6 circuit	15	
110-12	/18	Momentary	6 circuit	15	
110-13	/19	Momentary	2 circuit	40	
110-14	/27	Momentary	SPST, SPDT	10	
110-15	/28	Momentary	SPDT	7.5	
110-16	/29	Momentary	SPDT double break	10	
110-17	/31	Momentary	DPDT	10	
110-18	/32	Momentary	SPDT	7	Watertight seal
110-19	/34	Latching - reset button	2 circuit	40	
110-20	/39	Momentary	2PDT 4PDT	7	Plunger - resilient seal
110-21	/40	Momentary	2PDT 2 circuit 4 circuit	4,10 15 15	Plunger - resilient seal
110-22	/41	Momentary	2PDT	5	Plunger - hermetic seal
110-23	/42	Momentary	SPDT	6	Plunger - watertight seal
110-24	/43	Momentary	2PDT 4PDT	7	Pin and roller plunger - resilient seal
110-25	/44	Momentary	SPDT	5	Resilient seal
110-26	/45	Momentary	SPDT	5	Resilient seal
110-27	/47	Momentary	SPDT	25	Hermetic seal
110-28	/48	Roller lever - self return	2PDT 2 circuit 4 circuit	5,10 15 15	Resilient seal
110-29	/49	Rotary linkage lever (nonself-return)	2PDT 2 circuit 4 circuit	4,10 15 10,15	Resilient seal
110-30	/65	Momentary	2PDT	5	Plunger - resilient seal
110-31	/68	Momentary	SPDT	7	Hermetic seal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 110.I. Switches, sensitive, characteristics - Continued.

Figure number	Applicable specification sheet MIL-S-8805	Operation	Circuit	Electrical ratings (28 Vdc resistive) (amperes)	General remarks
110-32	/70	Momentary	2PDT 4PDT	7	Pin and roller plunger-hermetic seal
110-33	/72	Momentary	SPDT	7	Plunger-hermetic seal
110-34	/73	Momentary	SPDT	7	Plunger-hermetic seal
110-35	/74	Momentary	SPDT	7	Plunger-hermetic seal
110-36	/76	Momentary	2 circuit	5	
110-37	/77	Momentary	4 circuit	10	
110-38	/78	Momentary	6 circuit	10	
110-39	/80	Momentary	2PDT	5	Plunger-hermetic seal
110-40	/84	Momentary	2 circuit	10	Watertight seal
110-41	/85	Rotary - nonself-return	2PDT 4PDT	4	Resilient seal
110-42	/90	Momentary	SPDT	10	
110-43	/101	Momentary	2 circuit	5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

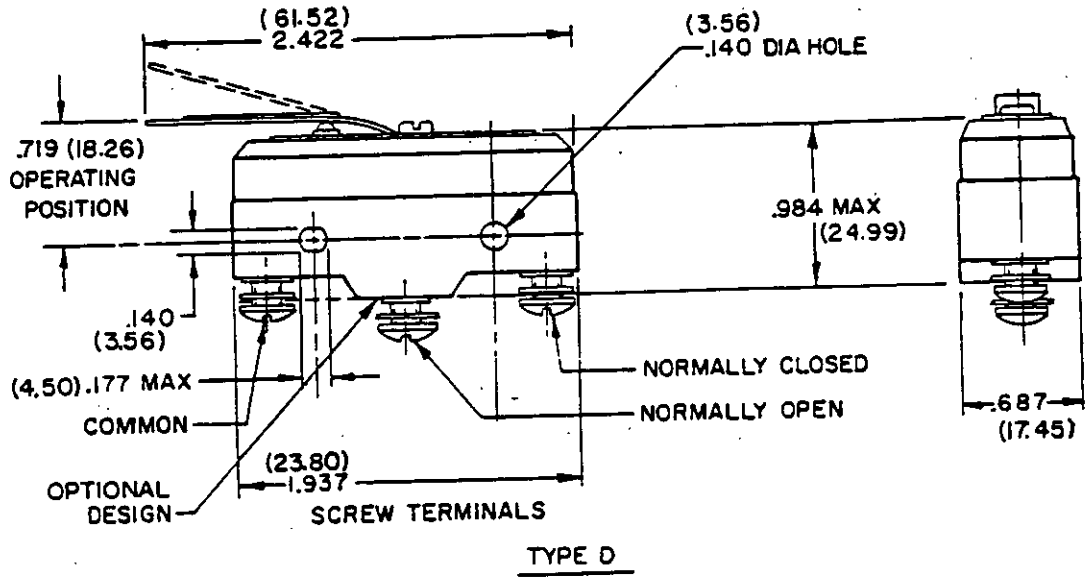

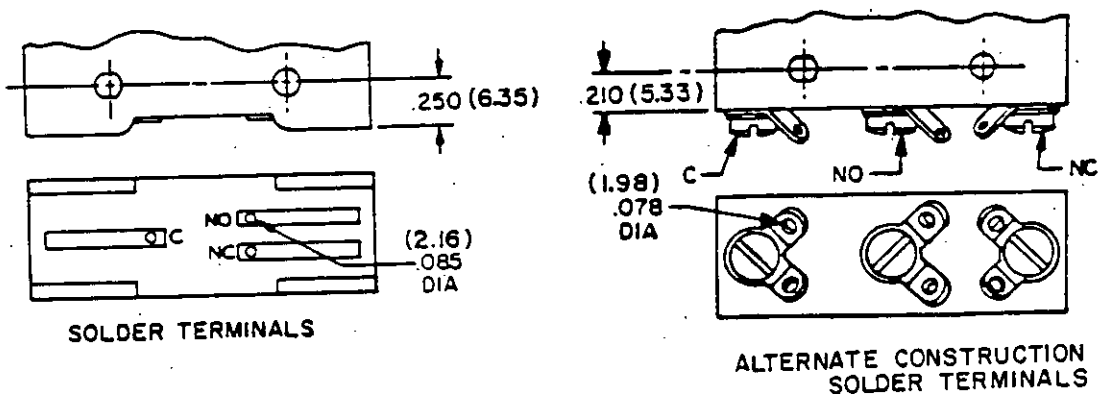


FIGURE 110-1. Switches, sensitive, SPDT, unsealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

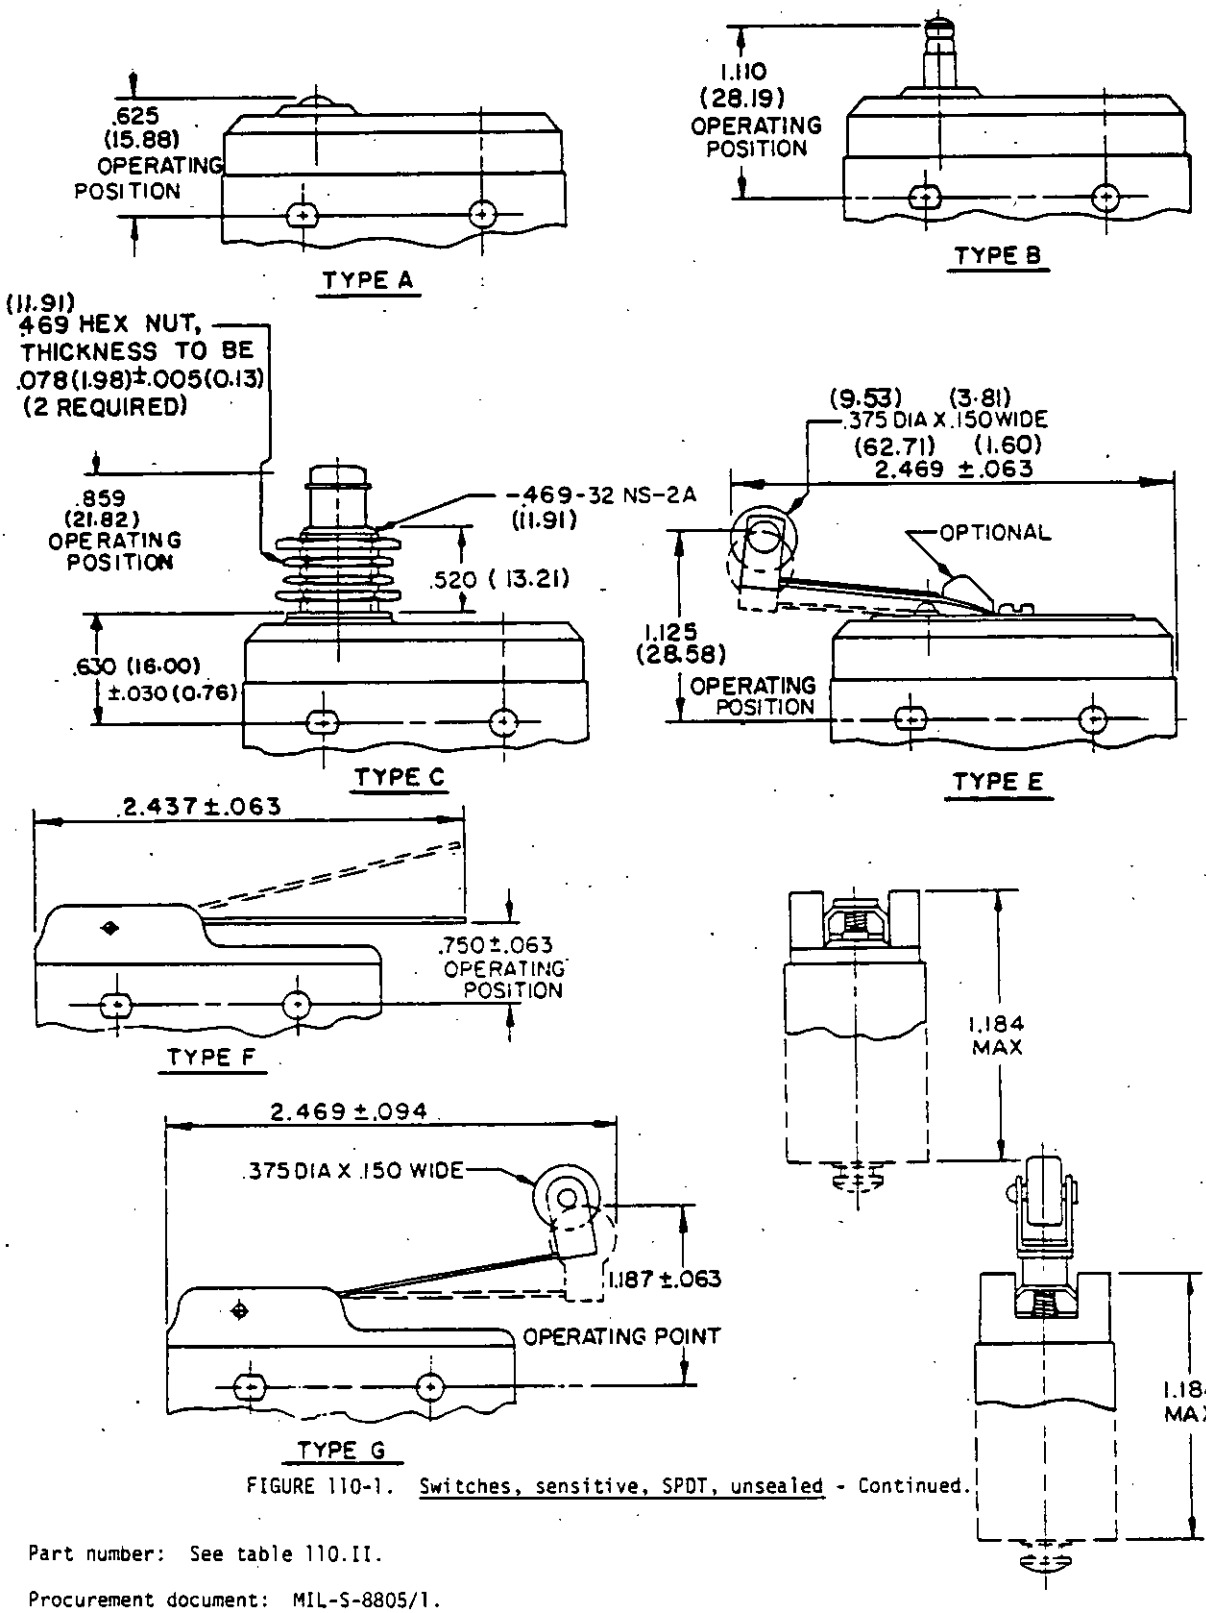


FIGURE 110-1. Switches, sensitive, SPDT, unsealed - Continued.

Part number: See table 110.II.

Procurement document: MIL-S-8805/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	28 VDC		115 VAC - 60 Hz	
	Current amperes	Number of operations	Current amperes	Number of operations
Resistive - sea level	2	100,000	15	100,000
50,000 ft	2	100,000	15	100,000
Inductive - sea level	1	100,000	15	100,000
50,000 ft	1	100,000	15	100,000
Lamp - sea level	1.5	100,000	1.5	100,000
50,000 ft	1.5	100,000	1.5	100,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 110.II. Operating characteristics[1/] and part numbers.

Type	Nominal contact separation (Inch)	Maximum operating force (Ounce)	Minimum release force (Ounces)	Maximum differential travel (Inch)	Travel		Part number[2/] M8805/1 Terminal	
					Maximum pretravel (Inch)	Minimum overtravel (Inch)	Solder	Screw
Pin plunger	.010	10	4	.003	.040	.005	-028	-027
Pin plunger	.020	13	4	.005	.040	.005	-003	-004
A Pin plunger	.040	20	4	.007	.040	.005	-005	-006
Pin plunger	.070	28	4	.010	.040	.005	-007	-008
Spring plunger	.010	10	4	.003	.040	.050	-009	-010
Spring plunger	.020	13	4	.005	.040	.050	-011	-012
B Spring plunger	.040	20	4	.007	.040	.050	-013	-014
Spring plunger	.070	28	4	.010	.040	.050	-015	-016
Panel mount 1/4-inch overtravel	.010	10	4	.003	.040	.203	-017	-018
Panel mount 1/4-inch overtravel	.020	13	4	.005	.040	.203	-019	-020
C Panel mount 1/4-inch overtravel	.040	20	4	.007	.040	.203	-021	-022
Panel mount 1/4-inch overtravel	.070	28	4	.010	.040	.203	-023	-024
Leaf spring	.010	5	.5	.030	.156	.031	-025	-026
Leaf spring	.020	6	.5	.050	.156	.031	-002	-001
D Leaf spring	.040	7	.5	.065	.156	.031	-029	-030
Leaf spring	.070	9	.5	.080	.219	.031	-031	-032
Roller leaf spring	.010	5	.5	.030	.188	.031	-033	-034
Roller leaf spring	.020	6	.5	.050	.188	.031	-035	-036
E Roller leaf spring	.040	7	.5	.070	.188	.031	-037	-038
Roller leaf spring	.070	10	.5	.080	.219	.031	-039	-040
Hinge leaf	.010	3	.5	.060	.375	.160	-041	-042
Hinge leaf	.020	3.5	.5	.093	.406	.156	-043	-044
F Hinge leaf	.040	4	.5	.140	.515	.109	-045	-046
Hinge leaf	.070	7	.75	.150	.515	.125	-047	-048
Hinge roller leaf	.010	3	.5	.080	.281	.156	-049	-050
Hinge roller leaf	.020	3.5	.5	.093	.312	.140	-051	-052
G Hinge roller leaf	.040	4	.5	.131	.469	.109	-053	-054
Hinge roller leaf	.070	7	.75	.150	.469	.125	-055	-056

1/ Characteristic may change ±25 percent after endurance test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

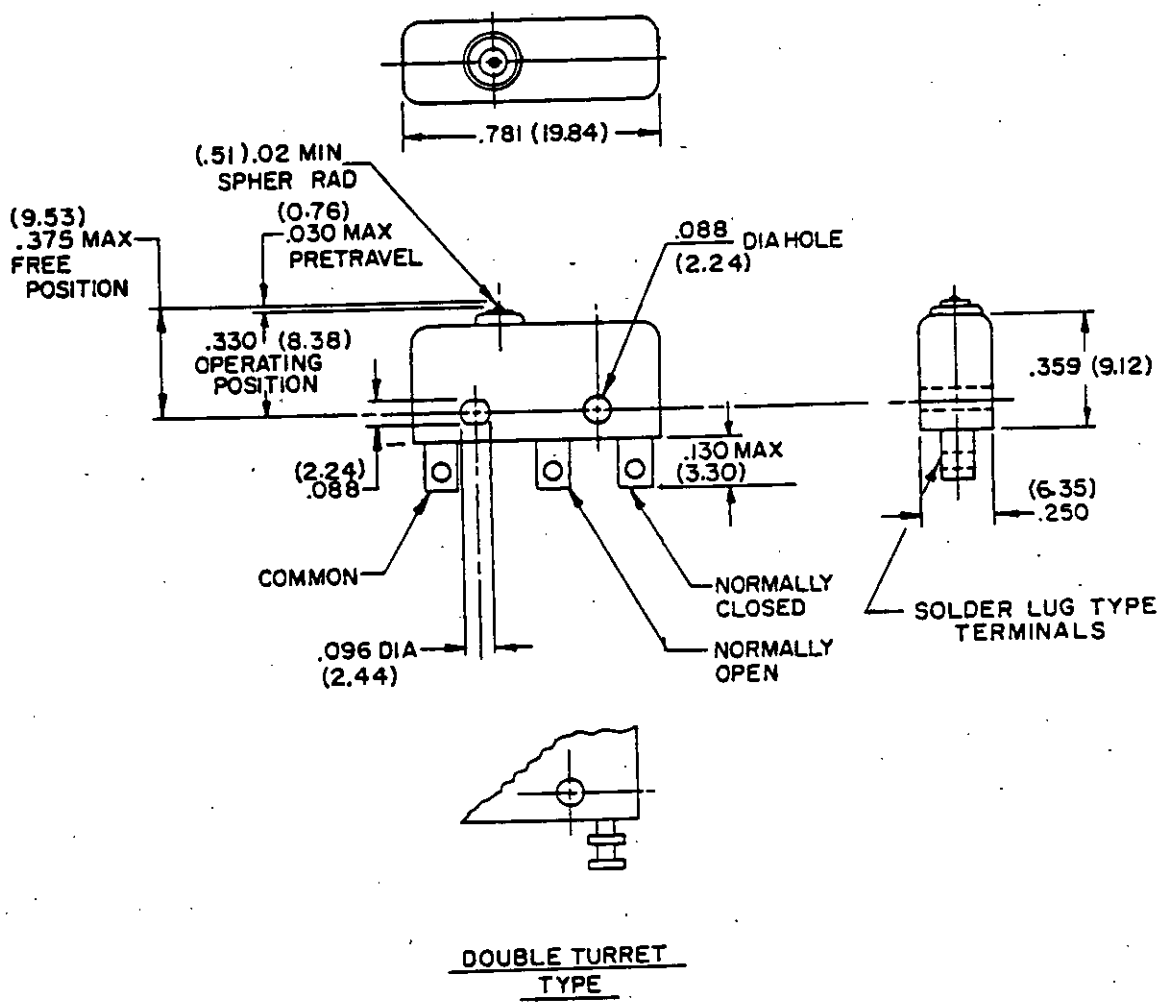


FIGURE 110-2. Switches, sensitive, SPDT.

Procurement document: MIL-S-8805/2.

Part numbers: See table 110.III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - - - - -	5	5	5
Inductive - - - - - -	3	5	2.5
Lamp- - - - - - - - -	2.4	1.5	2.4

Operating characteristics:

Actuating force:	5 ounces maximum.
Releasing force:	1 ounce minimum.
Movement differential:	
-1 and -2:	0.004 inch maximum.
Pretravel:	0.030 inch maximum.
Overtravel:	0.005 inch minimum.

TABLE 110.III. Part numbers.

Part number	Terminal style	Terminal strength (pounds)	Supersedes
MS25085-1	Solder lug	20	M8805/2-001
MS25085-2	Double turret	5	M8805/2-002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

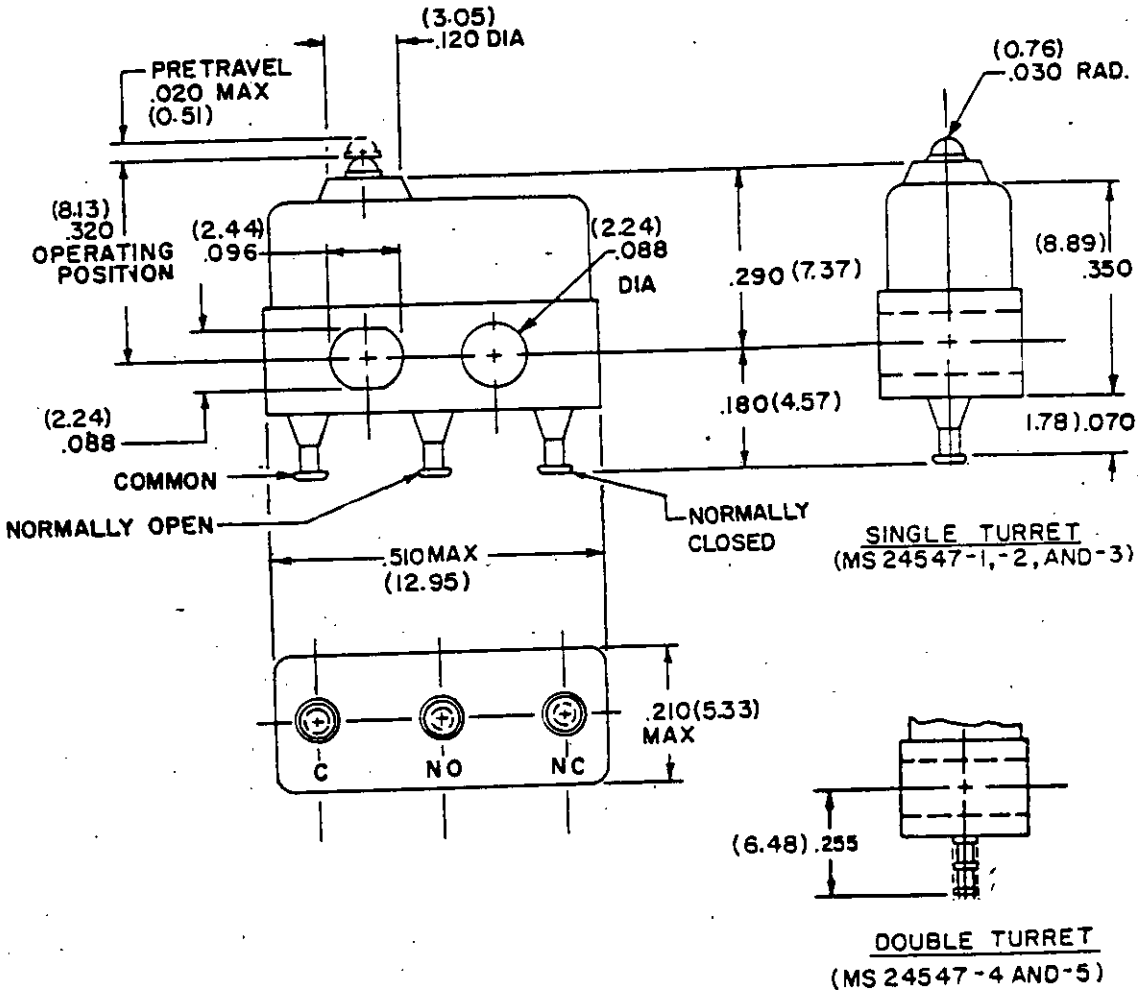


FIGURE 110-3. Switches, sensitive, SPDT, unsealed.

Procurement document: MIL-S-8805/4.

Part numbers and electrical ratings: See tables 110.IV through 110.VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Operating characteristics:

Actuating force:	
MS24547-1, -2, -4, and -5:	5 ounces maximum.
MS24547-3:	4 ounces maximum.
Releasing force:	1 ounce minimum.
Movement differential:	
MS24547-1, -2, -4, and -5:	.005 inch maximum.
MS24547-3:	.0015 inch maximum.
Pretravel:	.020 inch maximum.
Overtravel:	.004 inch minimum.
Differential force: MS24547-3:	2 ounces maximum.

TABLE 110.IV. Silver contacts (MS24547-1 and -4).

Load	Sea level		50,000 feet
	28 vdc	115 vac, 60 Hz	28 vdc
	(amperes)	(amperes)	(amperes)
Resistive	7	7	4
Inductive	4	7	2.5
Lamp	2.5	2	2.5


TABLE 110.V. Gold contacts, solid gold, gold filled, or gold diffused (MS24547-2 and -5).


Load	Sea level 28 vdc	50,000 feet 28 vdc
	(amperes)	(amperes)
Resistive	1	1
Inductive	.5	.5

TABLE 110.VI. Fine silver (gold plated) (MS24547-3).

Load	Sea level	
	28 vdc	115 vac, 60 Hz
	(amperes)	(amperes)
Resistive	5	5
Inductive	3	5
Lamp	2.5	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

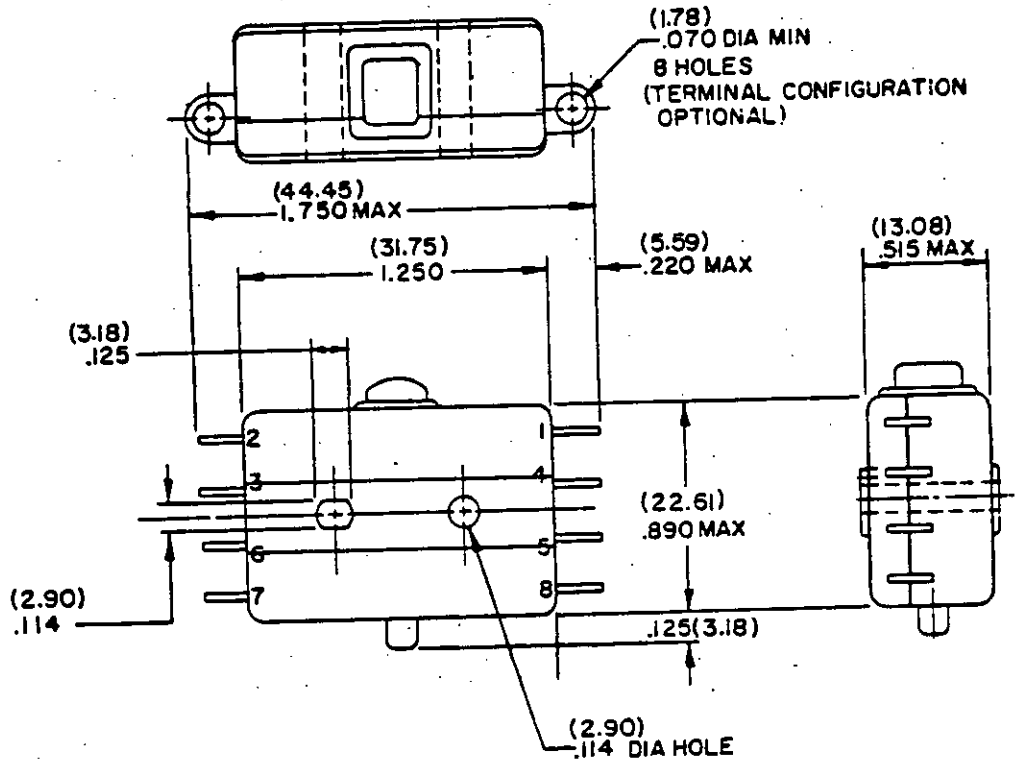



CIRCUIT SCHEMATIC

FIGURE 110-4. Switch, sensitive, 4 circuit, 15 amperes, unsealed latching unit - manual reset.

Procurement document: MIL-S-8805/5.

Part number: MS25350-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Operating characteristics:

Actuating force:	1.25 pounds maximum.	±20 percent variation from specified values acceptable after test
Movement differential:	.035 inch maximum.	
Pretravel:	.060 inch maximum.	
Overtravel:	.015 inch minimum.	
Reset button:		
Pretravel:	.060 inch maximum.	
Overtravel:	.005 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

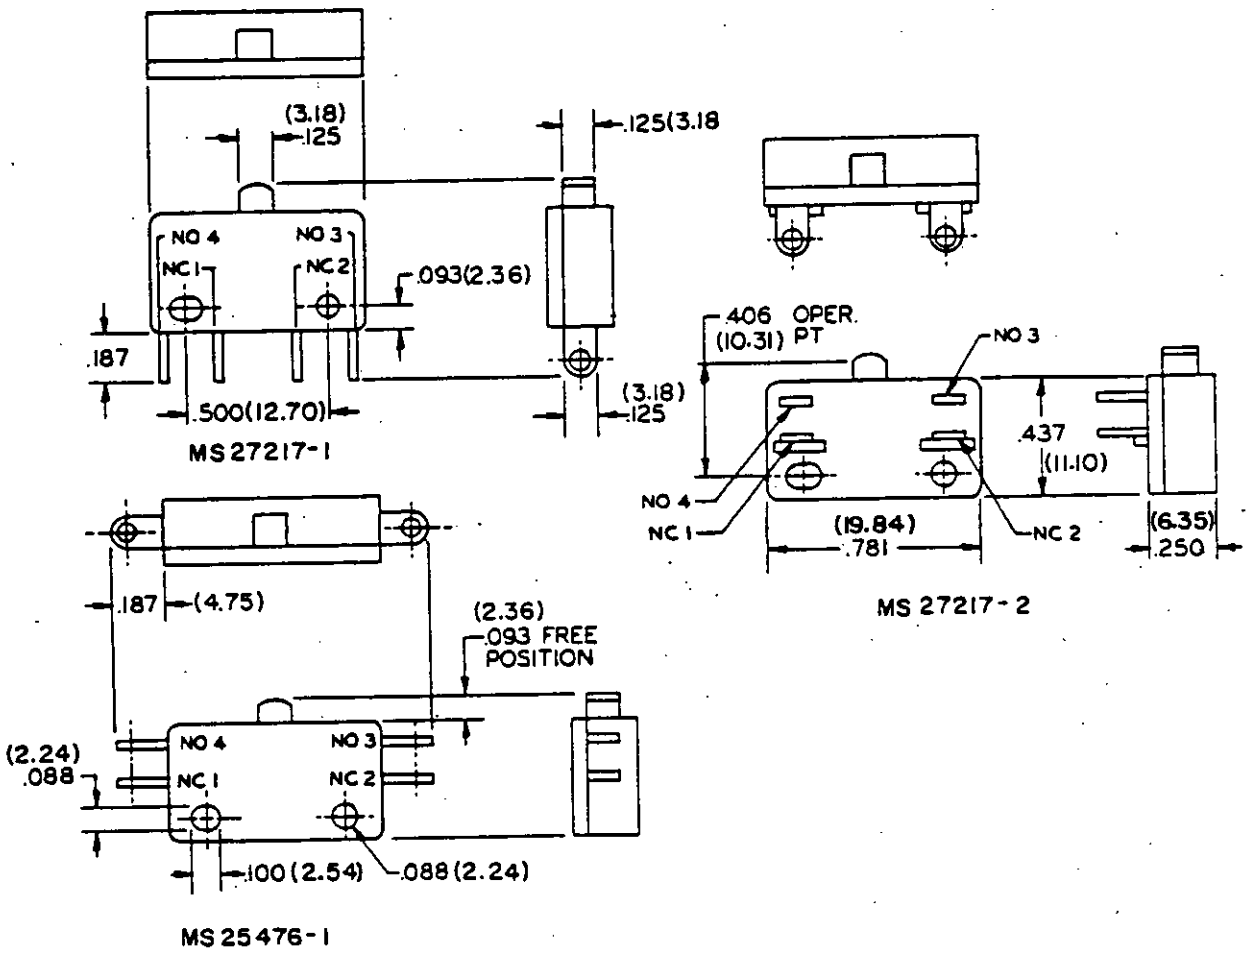


FIGURE 110-5. Switch, sensitive, momentary, unsealed.

Procurement document: MIL-S-8805/7.

Part numbers: See table 110.VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		70,000 feet
	28 VDC	115 VAC, 60 Hz	28 VDC
	amperes	amperes	amperes
NO or NC			
Resistive	10	7.5	10
Inductive	7.5	5	3.5
Lamp	4	3	---
2 CIRCUIT			
Resistive	10	5	10
Inductive	5	5	2
Lamp	3	1.5	---


Operating characteristics:

Actuating force:	8 ounces maximum.
Pretravel:	.050 inch maximum.
Overtravel:	.012 inch minimum.


TABLE 110.VII. Part numbers.

Part number	Terminal type
MS27217-1	Bottom solder
MS27217-2	Side solder
MS25476-1	End solder


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

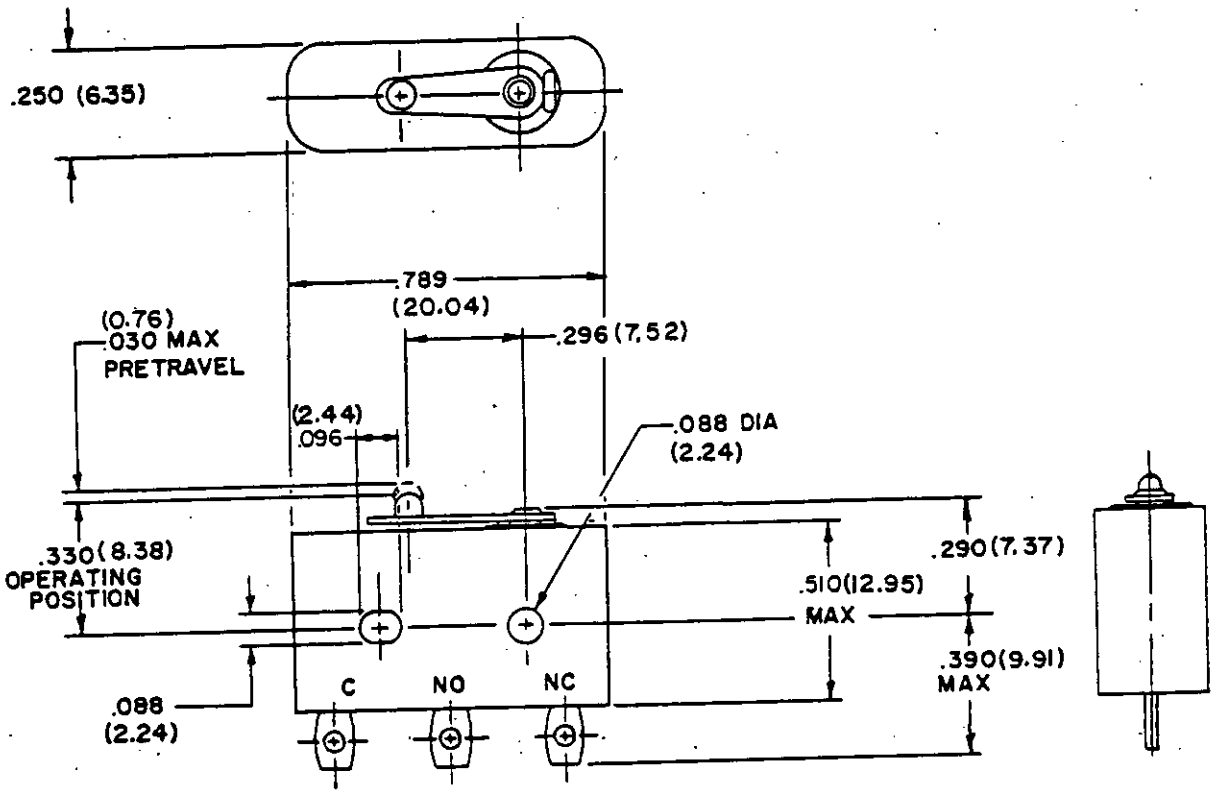

MS 27216-1

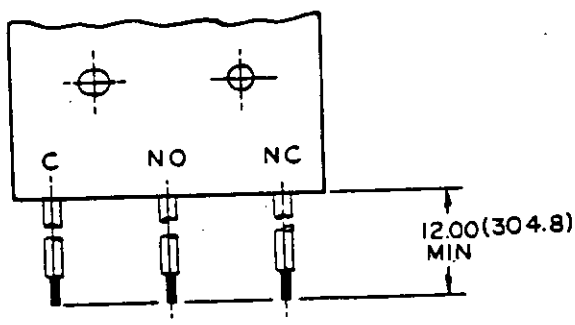

MS 27216-2

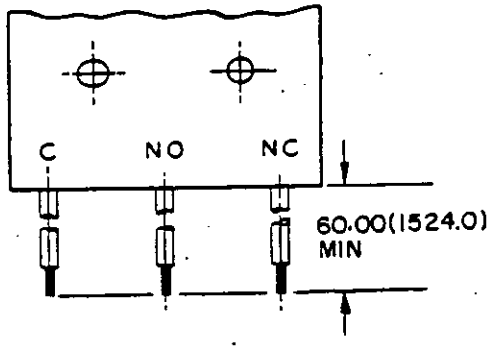

MS 27216-4

FIGURE 110-6. Switches, sensitive, SPDT, leaf, 4 amperes, hermetic.

Procurement document: MIL-S-8805/8.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level		70 000 feet
	28 vdc	115 vac, 400 Hz	28 vdc
	(amperes)	(amperes)	(amperes)
Resistive	4	4	4
Inductive	2	2	2
Lamp	1	.5	1


Operating characteristics:
Actuating force: 7 ounces maximum.
Release force: 1 ounce minimum.
Movement differential: .006 inch maximum.
Pretravel: .030 inch maximum.
Overtravel: .003 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

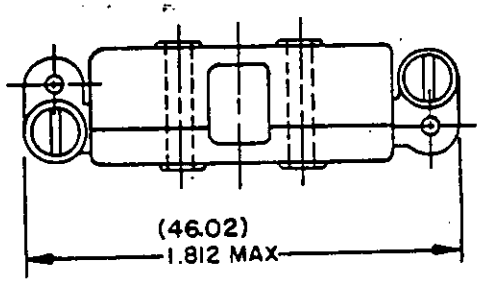




CIRCUIT SCHEMATIC

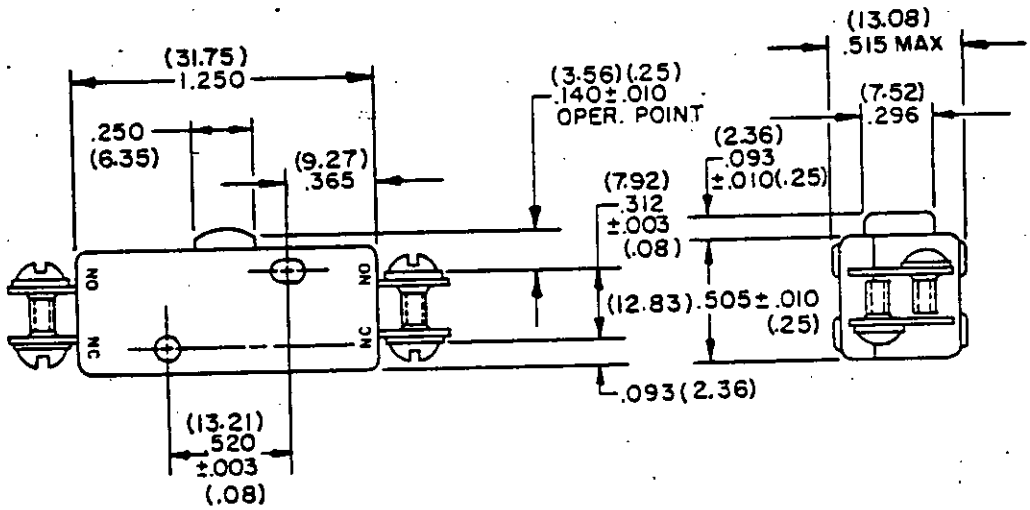


MS 25344-1

FIGURE 110-7. Switches, sensitive, 2 circuit, 10 amperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

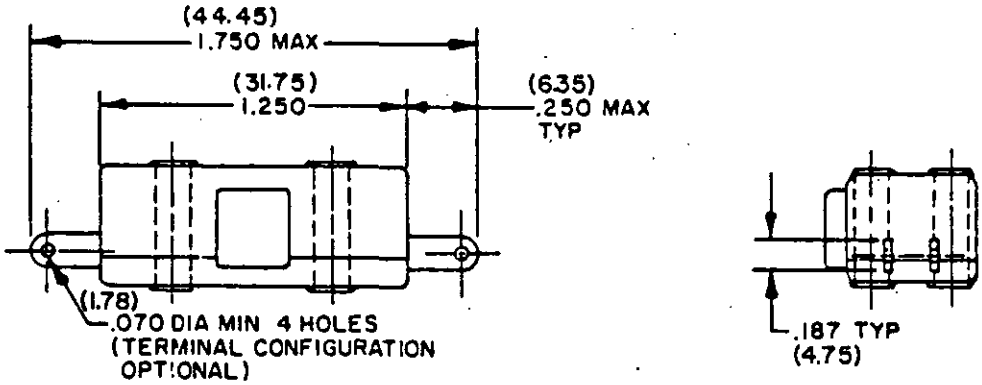

MS25342-1

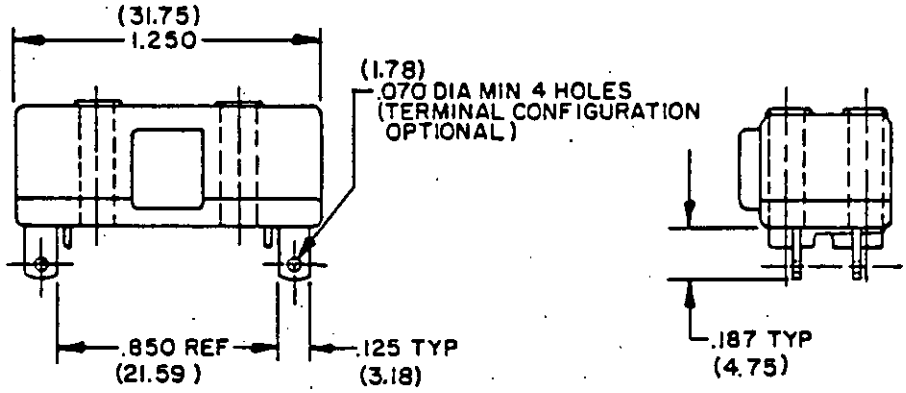

MS25343-1

FIGURE 110-7. Switches, sensitive, 2 circuit, 10 amperes - Continued.

Procurement document: MIL-S-8805/11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.


Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	(amperes)	(amperes)
Resistive	10	10
Inductive	10	10
Motor	6	6

Operating characteristics:


Actuating force:	1.25 pounds maximum.	±20 percent variation from specified values acceptable after test
Movement differential:	.027 inch maximum.	
Pretravel:	.060 inch maximum.	
Overtravel:	.015 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

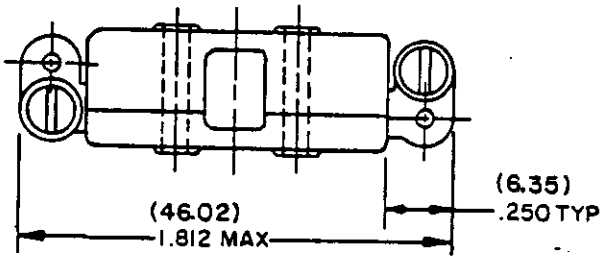




CIRCUIT SCHEMATIC

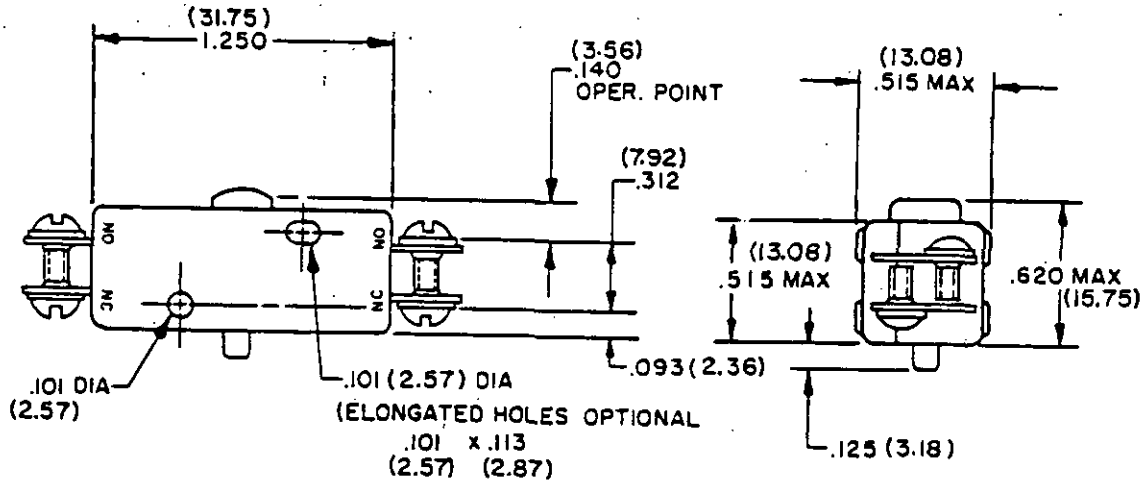


MS 25347-1

FIGURE 110-8. Switch, sensitive-maintained, 2 circuit, 10 amperes, unsealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

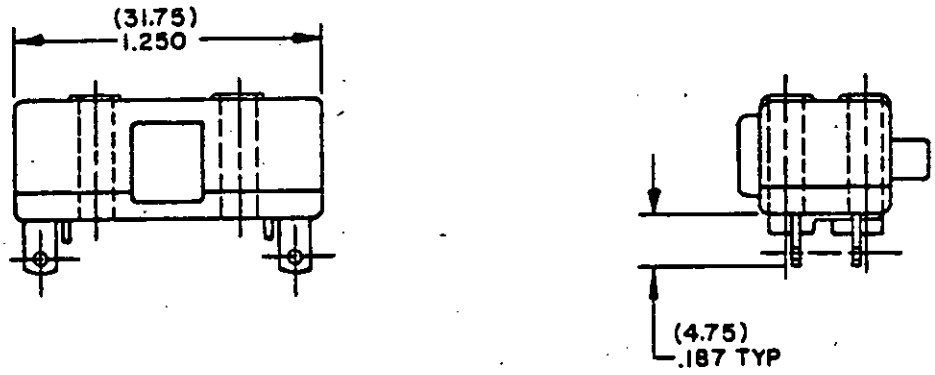

MS25346-1

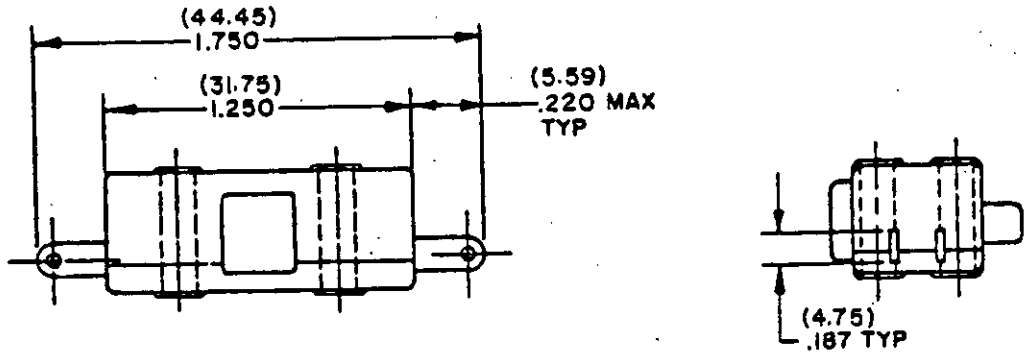

MS25345-1

FIGURE 110-8. Switch, sensitive-maintained, 2 circuit, 10 amperes, unsealed - Continued.

Procurement document: MIL-S-8805/14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	10	10
Inductive	10	10
Motor	6	6

Operating characteristics:

Actuating force:	.62 pound maximum.	±20 percent variation from specified values acceptable after test
Movement differential:	.025 inch maximum.	
Pretravel:	.060 inch maximum.	
Overtravel:	.015 inch minimum.	
Reset button:		
Pretravel:	.060 inch maximum.	
Overtravel:	.005 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

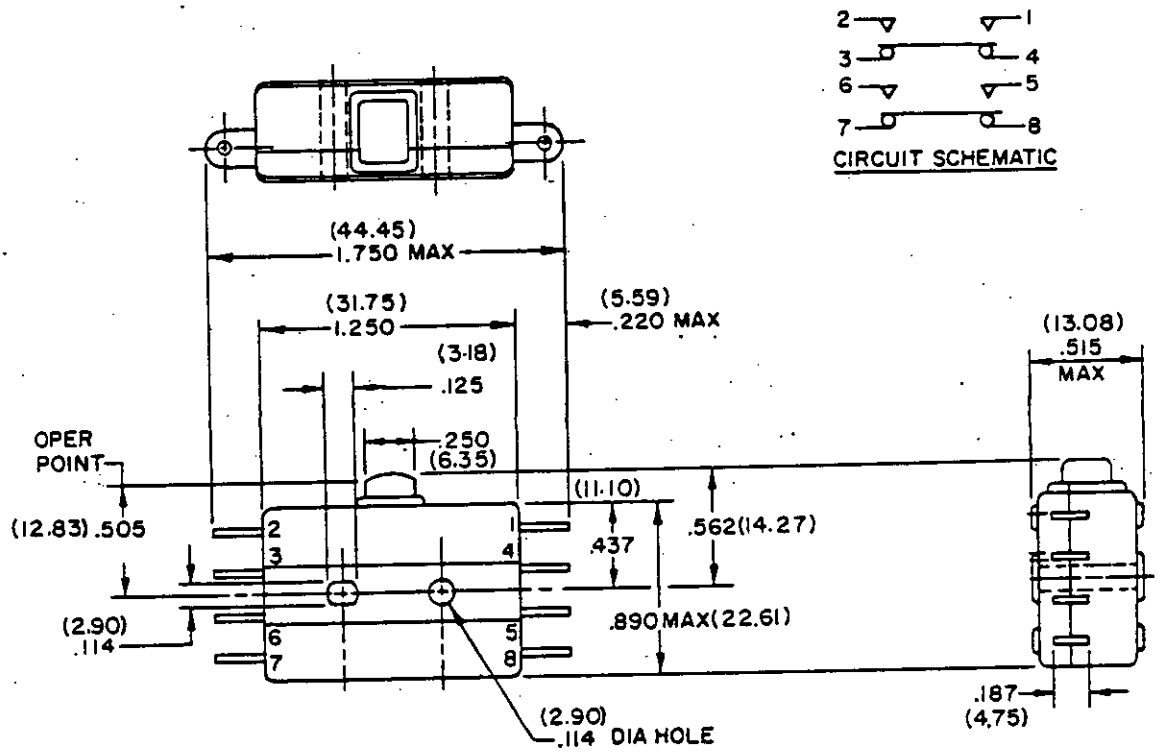

MS25348-1

FIGURE 110-9. Switches, sensitive-momentary, 4 circuit, 15 amperes, unsealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

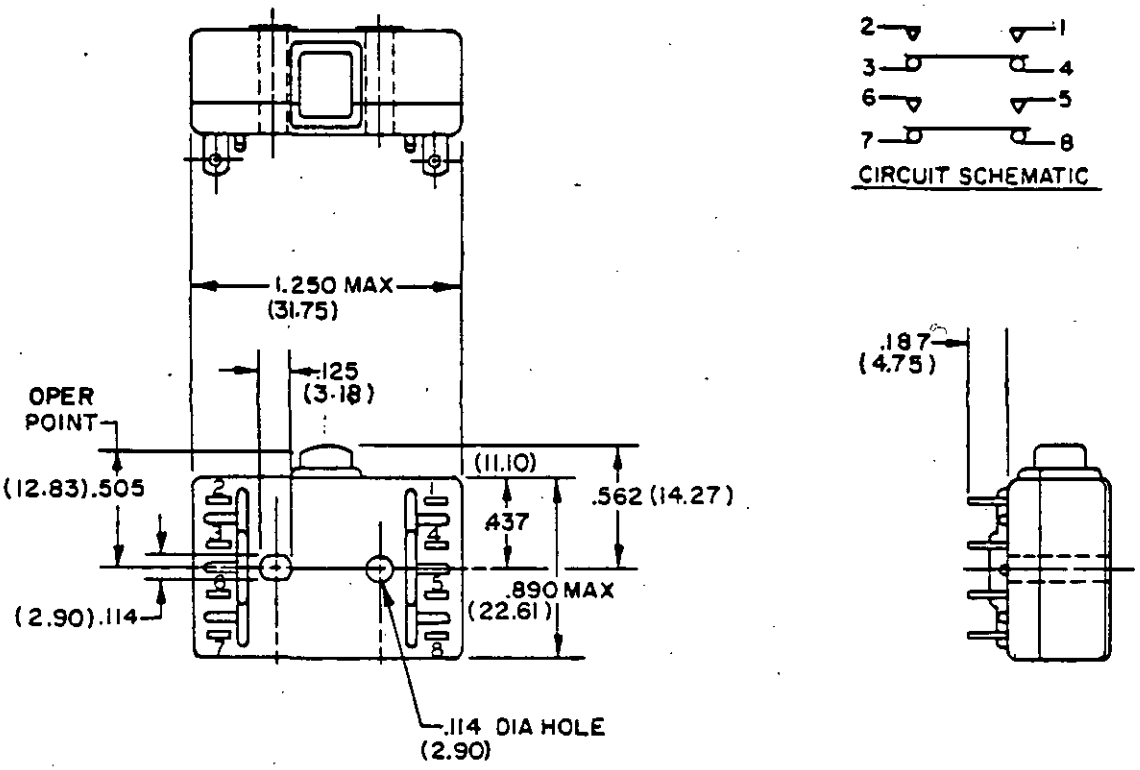


FIGURE 110-9. Switches, sensitive-momentary, 4 circuit, 15 amperes, unsealed - Continued.

Procurement document: MIL-S-8805/15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Operating characteristics:

Actuating force:	2.18 pounds maximum.	±20 percent variation from specified values acceptable after test
Movement differential:	.035 inch maximum.	
Pretravel:	.060 inch maximum.	
Overtravel:	.015 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

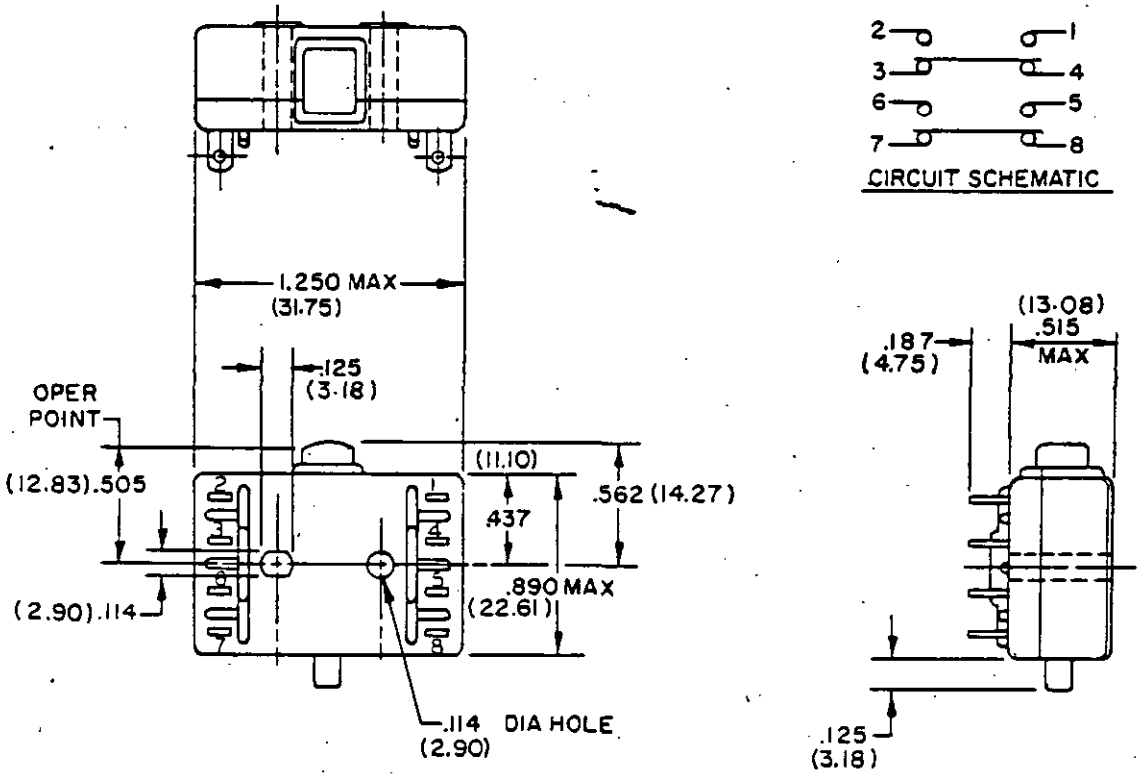


FIGURE 110-10. Switch, sensitive-maintained, 4 circuit, 15 amperes, unsealed.

Procurement document: MIL-S-8805/16.

Part number: MS25351-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Operating characteristics:

Actuating force:	1.25 pounds maximum.	±20 percent variation from specified values
Movement differential:	0.035 inch maximum.	
Pretravel:	0.060 inch maximum.	
Overtravel:	0.015 inch minimum.	
Reset button:		
Pretravel:	0.060 inch maximum.	
Overtravel:	0.005 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

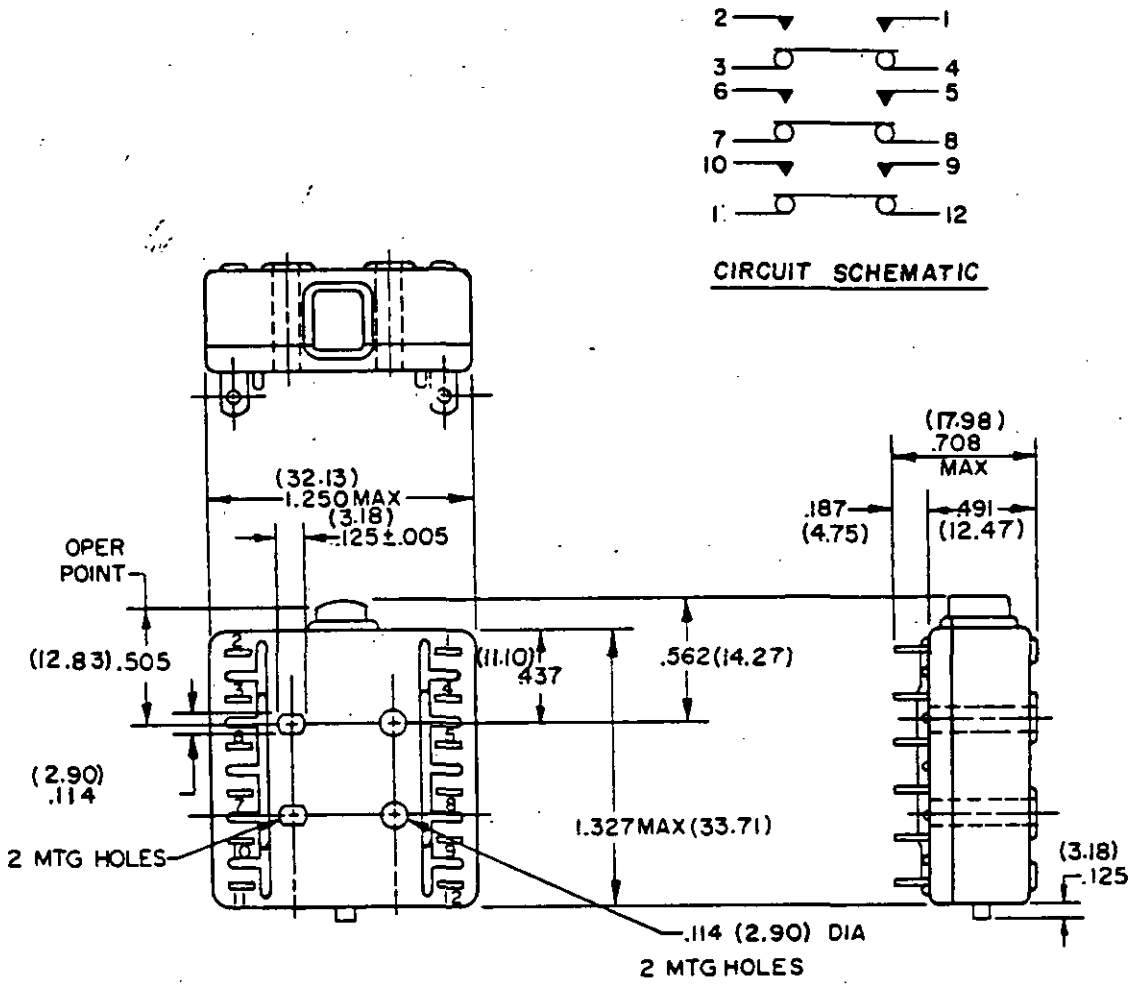


FIGURE 110-11. Switch, sensitive-maintained, 6 circuit, 15 amperes, unsealed.

Procurement document: MIL-S-8805/17.

Part number: MS25353-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	15	15
Inductive	10	15
Motor	10	6

Operating characteristics:

Actuating force:	1.75 pounds maximum.
Movement differential:	0.036 inch maximum.
Pretravel:	0.075 inch maximum.
Overtravel:	0.015 inch minimum.
Reset button:	
Pretravel:	0.075 inch maximum.
Overtravel:	0.005 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

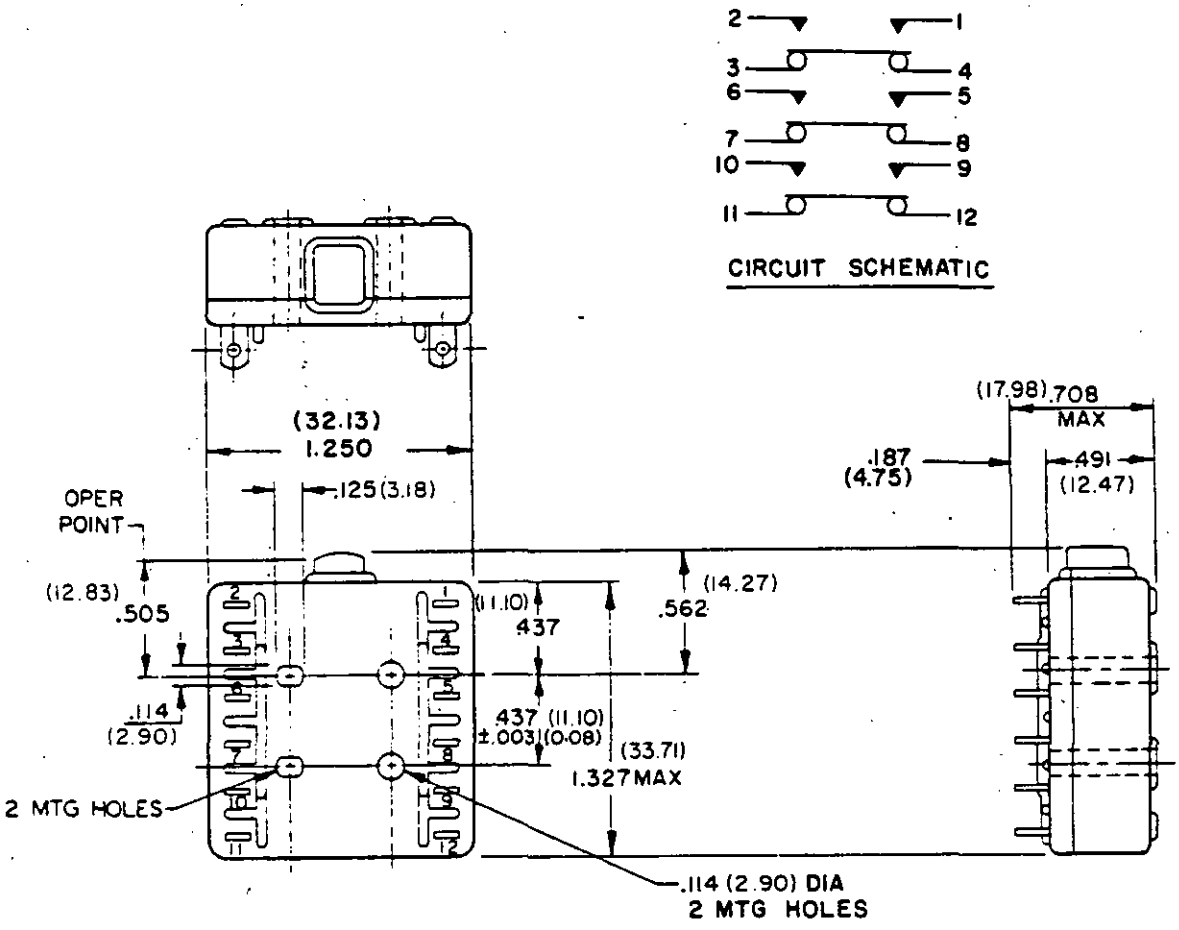


FIGURE 110-12. Switch, sensitive-momentary, 6 circuit, 15 amperes, unsealed.

Procurement document: MIL-S-8805/18.

Part number: MS25356-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - - - - -	15	15
Inductive - - - - - -	10	15
Motor - - - - - - - -	10	6

Operating characteristics:

Actuating force:	3.50 pounds maximum.
Movement differential:	0.036 inch maximum.
Pretravel:	0.075 inch maximum.
Overtravel:	0.015 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

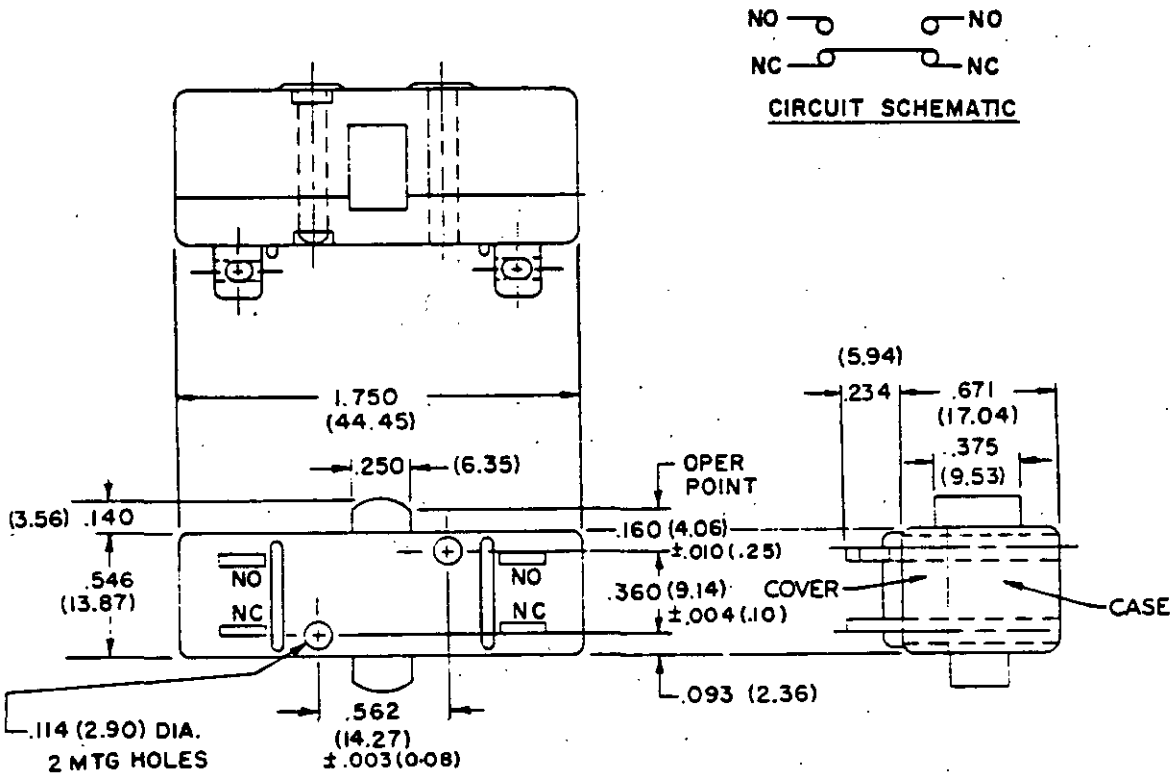

PART NO: MS 25357-1

FIGURE 110-13. Switch, sensitive-momentary, 2 circuit, 40 amperes, unsealed.

Procurement document: MIL-S-8805/19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - - - -	40	30
Inductive - - - - -	30	20
Motor - - - - - - -	15	10

Operating characteristics:

Actuating force:	3.18 pounds maximum.
Movement differential:	0.065 inch maximum.
Pretravel:	0.093 inch maximum.
Overtravel:	0.015 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

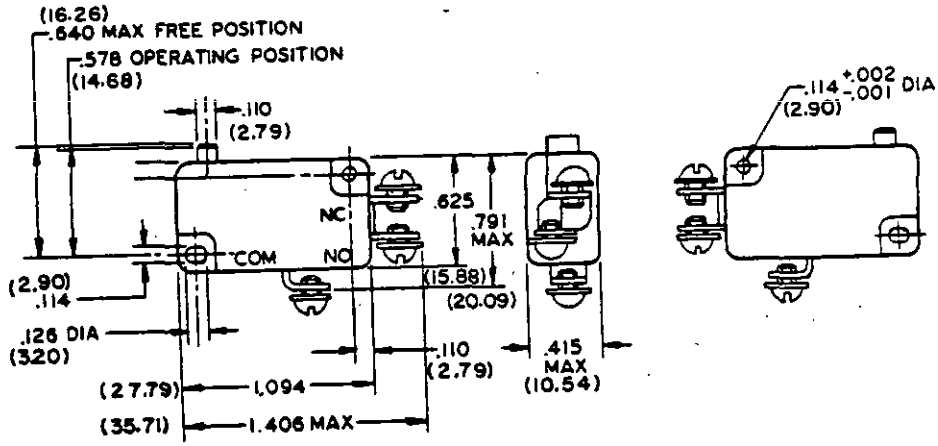


FIGURE 110-14. Switches, sensitive, 10 amperes, unsealed.

Procurement document: MIL-S-8805/27.

Part numbers: See table 110.VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet	
	28 Vdc	115 Vac, 60 Hz	28 Vdc	115 Vac, 60 Hz
	amperes	amperes	amperes	amperes
Resistive - - -	10	10	10	10
Inductive - - -	10	10	6	10
Motor - - - - -	6	3	---	---

Operating characteristics:

Actuating force:	14 ounces maximum.
Movement differential:	.020 inch maximum.
Pretravel:	.047 inch maximum.
Overtravel:	.031 inch minimum.

TABLE 110.VIII. Part numbers.

Part number	Terminal strength (pounds)	Terminals	Circuit
MS25253-1	20	NC, NO and Common	SPDT
MS25253-2	20	NO and Common	SPNO
MS25253-3	20	NC and Common	SPNC
1/ MS25253-4			

1/ MS25253-4 is cancelled, use MS25253-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

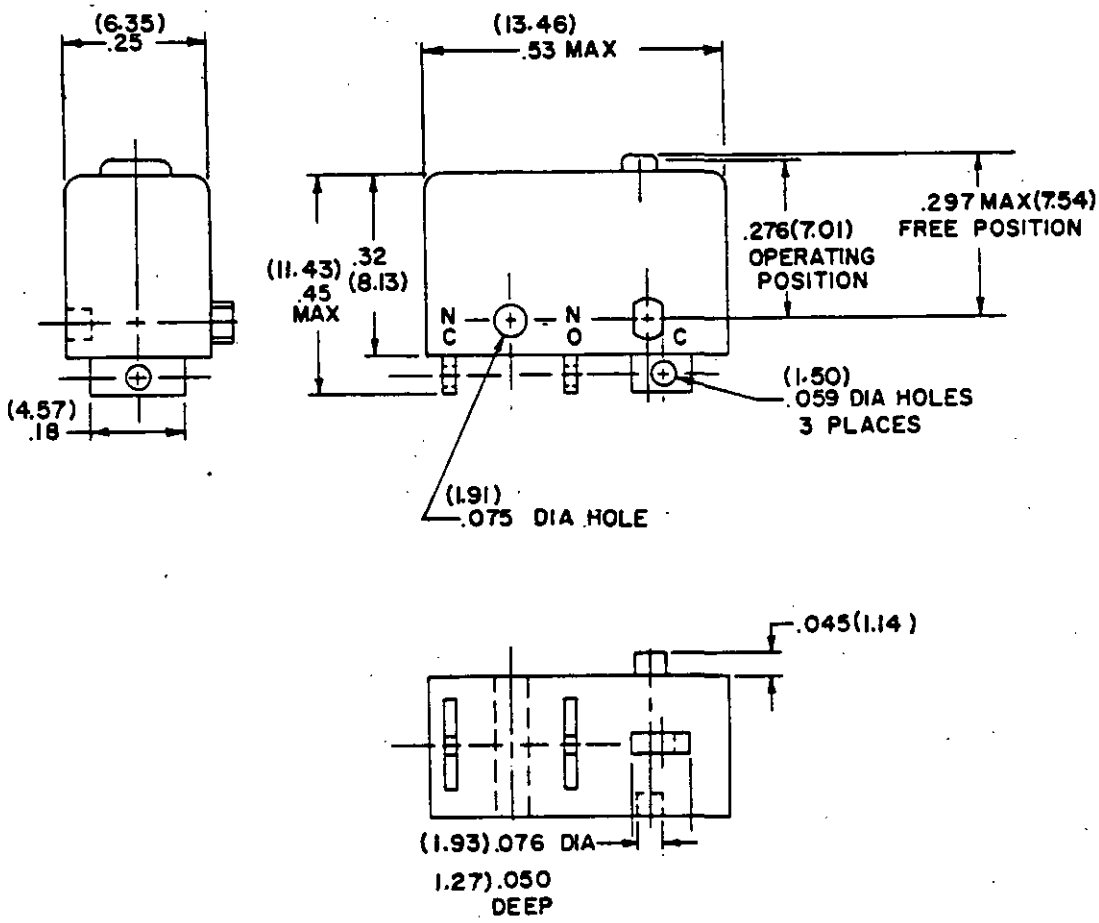


FIGURE 110-15. Switch, sensitive, momentary, SPDT, 7.5 amperes, unsealed.

Procurement document: MIL-S-8805/28.

Part number: MS28134-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	7.5	7.5
Inductive	2.5	7.5
Motor	3	3

Operating characteristics:

Actuating force:	7.05 ounces maximum.
Movement differential:	.003 inch maximum.
Pretravel:	.015 inch maximum.
Overtravel:	.005 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

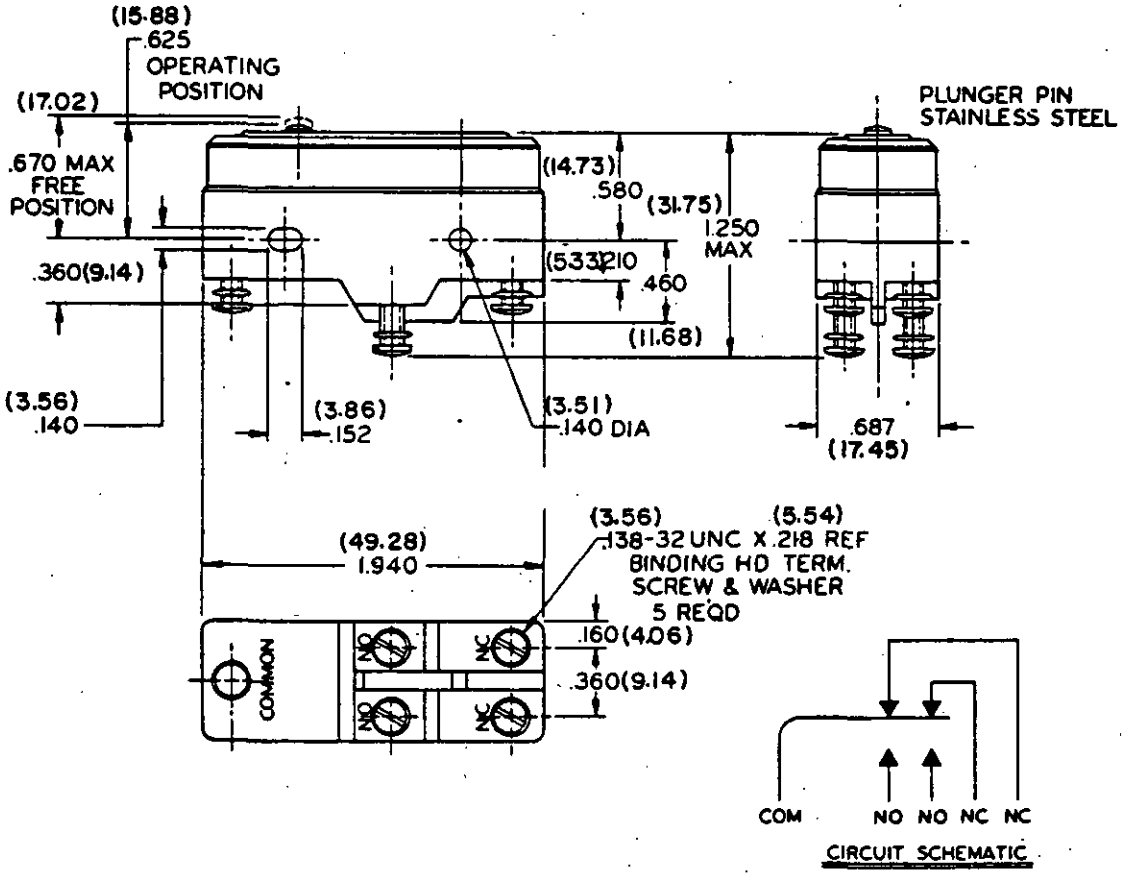


FIGURE 110-16. Switch, sensitive, SPDT, momentary, double break, 10 amperes, unsealed.

Procurement document: MIL-S-8805/29.

Part number: MS25383-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet
	28 VDC	115 VAC, 400 cps	28 VDC
	amperes	amperes	amperes
Resistive	10	10	10
Inductive	3	10	3
Motor	3	2.5	3

Operating characteristics:

Actuating force:	16 to 26 ounces.
Pretravel:	.030 inch maximum.
Movement differential:	.004 inch maximum.
Overtravel:	.005 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

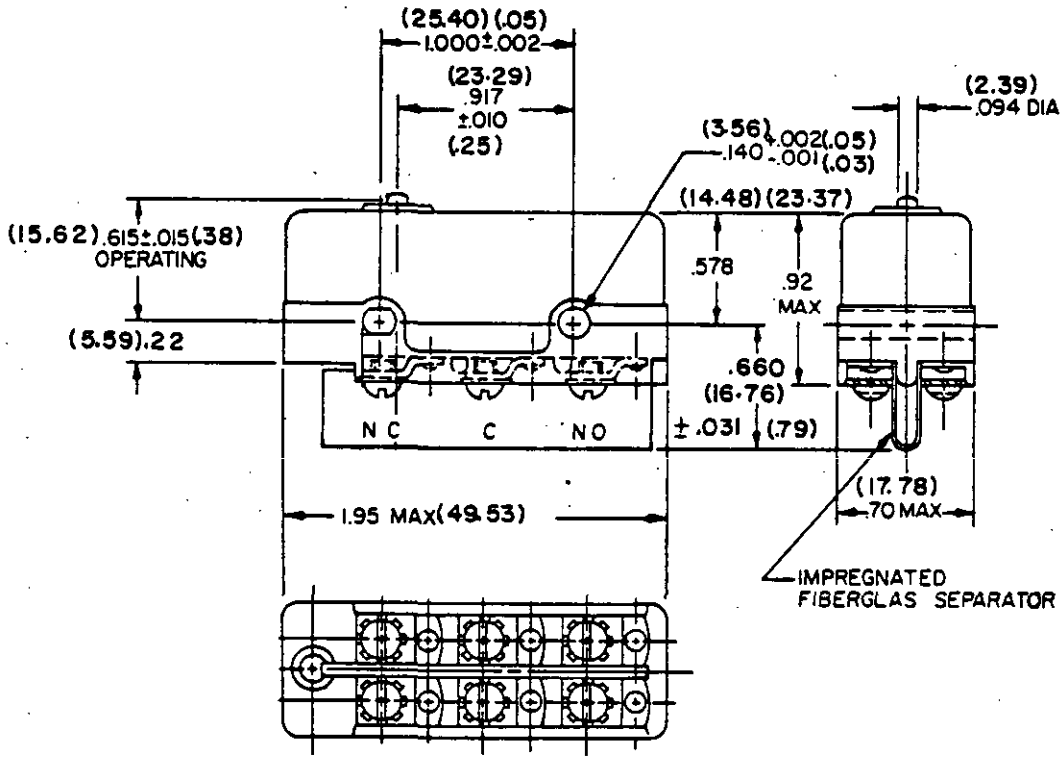


FIGURE 110-17. Switch, sensitive, DPDT, plunger, 10 amperes, unsealed.

Procurement document: MIL-S-8805/31.

Part number: MS25008-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level 28 vdc	50,000 feet 28 vdc
	(amperes)	(amperes)
Resistive - - - - -	10	10
Inductive - - - - -	5	2
Motor - - - - - - -	5	5

Operating characteristics:

Actuating force:	20 ounces maximum.
Release force:	2 ounces minimum.
Movement differential:	.040 to .060 inch.
Overtravel:	.005 inch minimum.
Pretravel:	.075 inch maximum.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

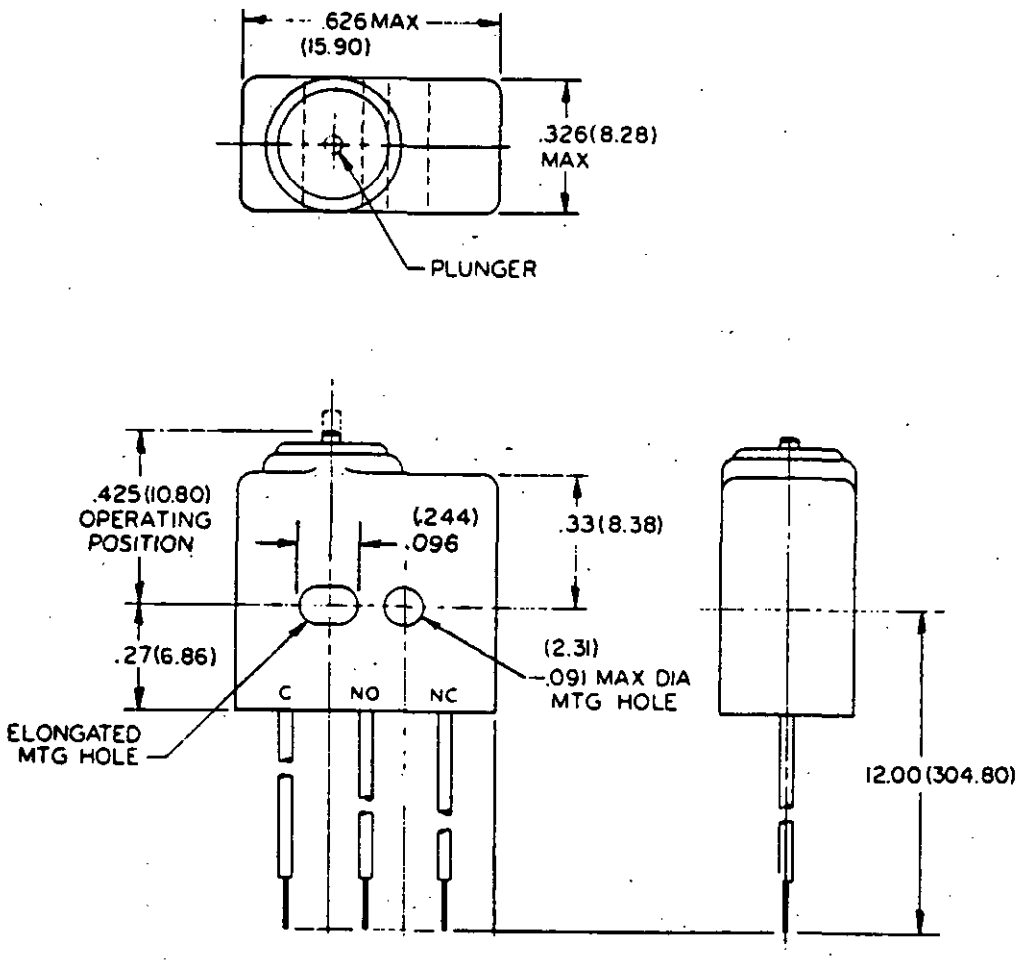

Wire lead terminals MS27994-1

FIGURE 110-18. Switches, sensitive, SPDT, 7 amperes, watertight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

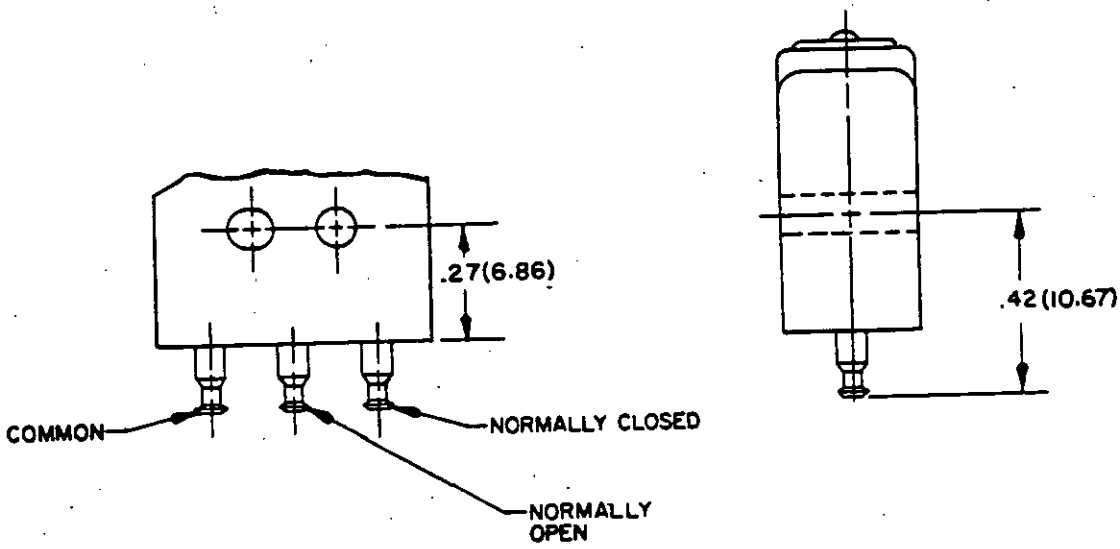

TURRET TERMINALS
MS 27994-3

FIGURE 110-18. Switches, sensitive, SPDT, 7 amperes, watertight - Continued.

Procurement document: MIL-S-8805/32.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Part number	Load	Sea level		50,000 ft
		28 Vdc	115 Vac, 400 Hz	28 Vdc
		(Amperes)	(Amperes)	(Amperes)
MS27994-1 and -3 (silver contacts)	Resistive	7	7	7
	Inductive	4	4	2.5
	Motor	4	4	
	Lamp	1	1	
MS27994-2 (Gold contacts)	Resistive	1	---	1
	Inductive	.5	---	.5

Operating characteristics:

Actuating force:	17 ounces maximum.
Release force:	4 ounces minimum.
Movement differential:	.005 inch maximum.
Pretravel:	.050 inch maximum.
Overtravel:	.004 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

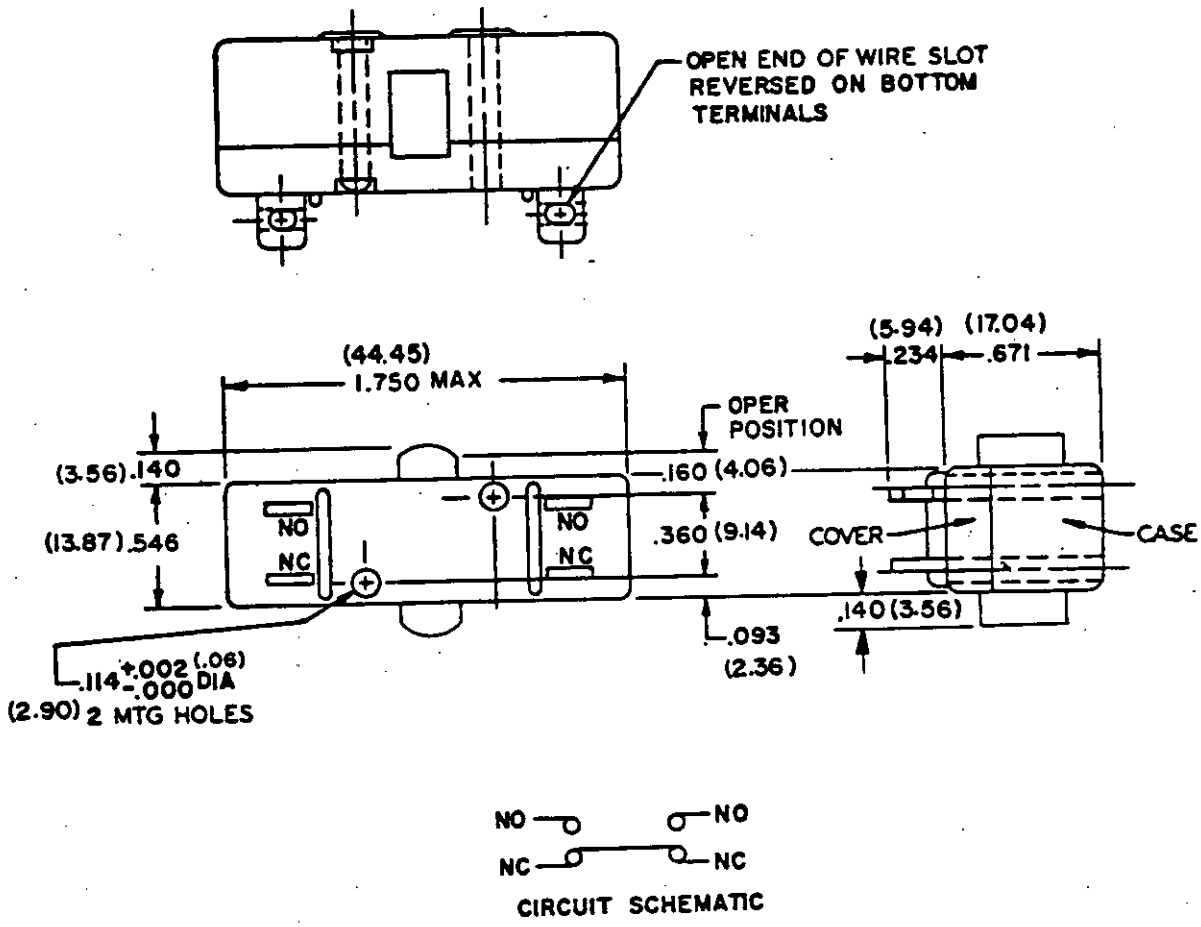


FIGURE 110-19. Switch, sensitive-maintained, 2 circuit, 40 amperes, unsealed.

Procurement document: MIL-S-8805/34.

Part number: MS25354-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive - - - - -	40	30
Inductive - - - - -	30	20
Motor - - - - - - -	15	10

Operating characteristics:

Actuating force:	2.18 pounds maximum.
Movement differential:	0.065 inch maximum.
Pretravel:	0.093 inch maximum.
Overtravel:	0.015 inch minimum.
Reset button:	
Pretravel:	0.093 inch maximum.
Overtravel:	0.005 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

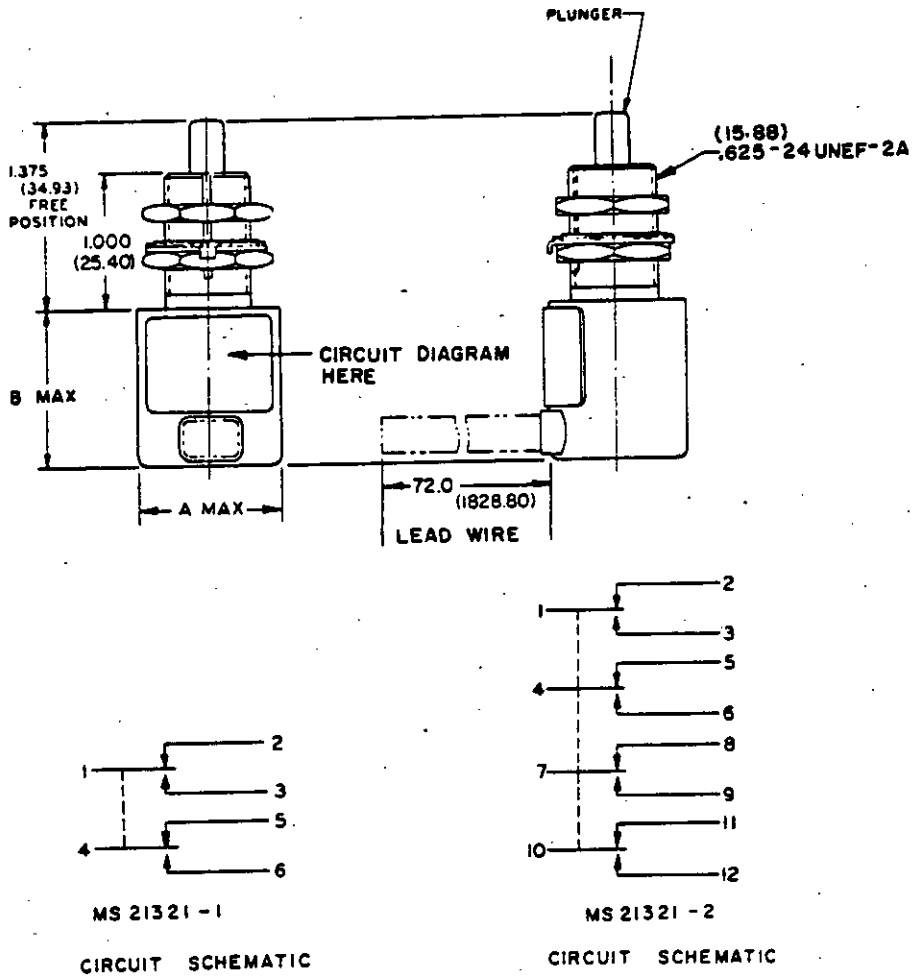


FIGURE 110-20. Switches, sensitive, plunger, 7 amperes, resilient seal.

Procurement document: MIL-S-8805/39.

Part number: See table 110.IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level 28 Vdc	50,000 feet 28 Vdc
	(amperes)	(amperes)
Resistive - - - - - -	7	7
Inductive - - - - - -	4	2.5
Motor - - - - - - - -	4	4

Operating characteristics:

Actuating force:	9 ±3 pounds.	±20 percent variation from specified values acceptable after test
Overtravel force:	30 pounds maximum.	
Release force:	4 pounds minimum.	
Pretravel:	.040 inch maximum.	
Movement differential:	.020 inch maximum.	
Coincidence of operating and releasing points:	All poles shall transfer within .010 inch of plunger travel.	

TABLE 110.IX. Part numbers and characteristics.

Part number	A dia	B	Lead wires No. req'd	Circuit characteristics
MS21321-1	.720 (18.29)	.980 (24.89)	6	2 SPDT
MS21321-2	1.031 (26.19)	1.200 (30.48)	12	4 SPDT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

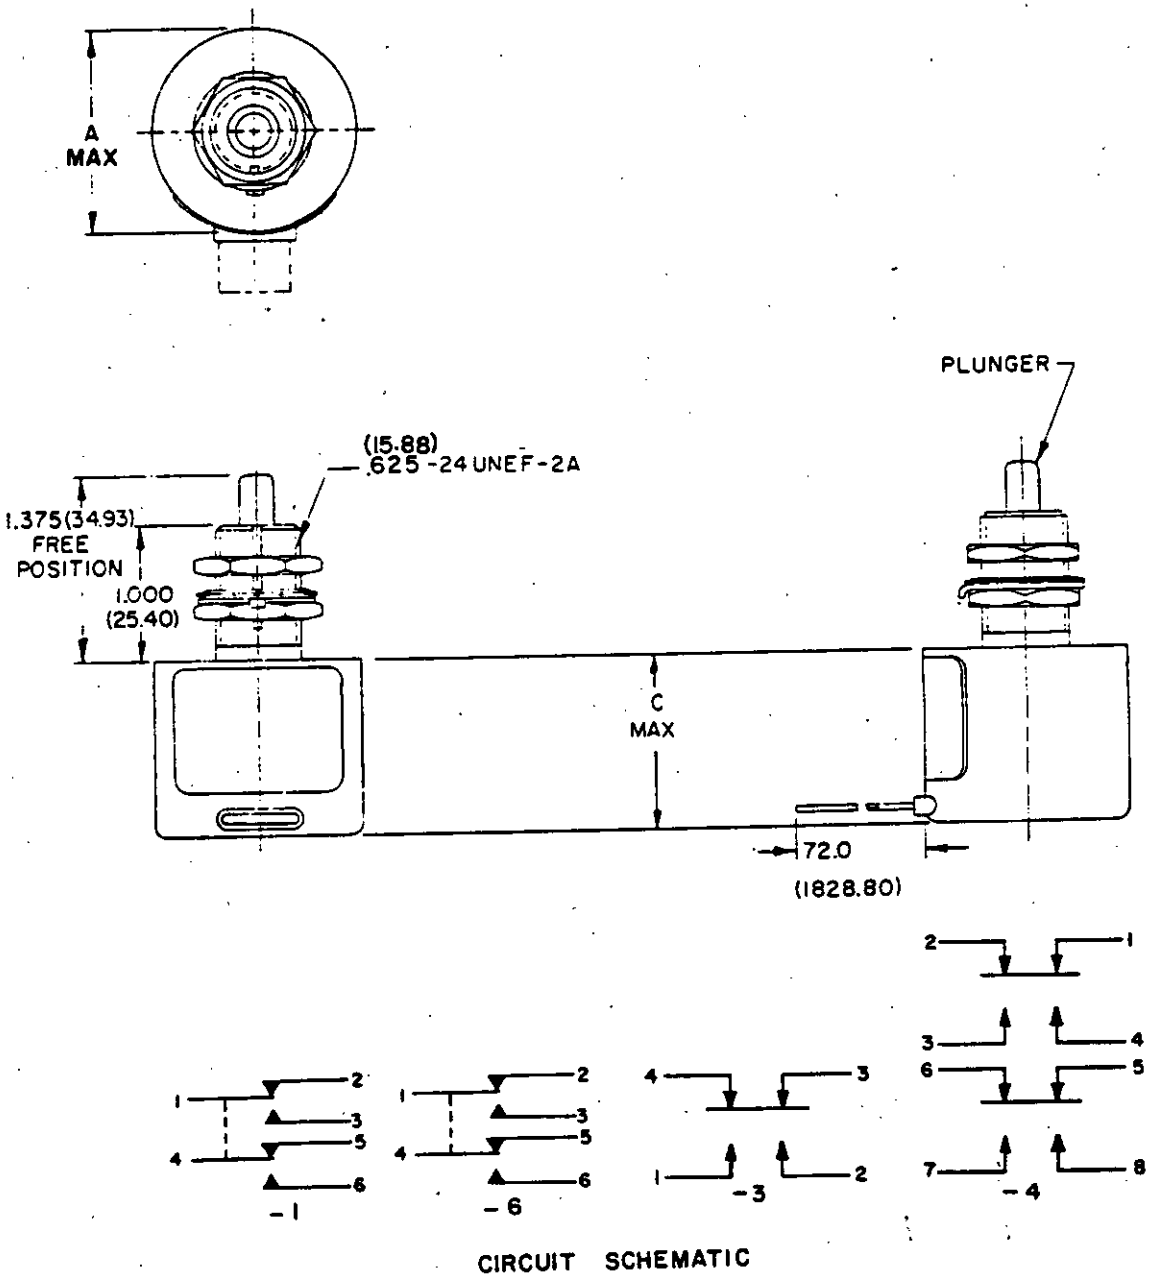


FIGURE 110-21. Switches, sensitive, plunger, resilient seal.

Procurement document: MIL-S-8805/40.

Part numbers: See table 110.X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings (amperes).

Load	Sea level 28 Vdc				50,000 feet 28 Vdc			
	-1	-6	-3	-4	-1	-6	-3	-4
Resistive - - - - -	4	10	15	15	4	10	15	15
Inductive - - - - -	2	3	10	10	2	3	10	10
Motor - - - - - - -	4	6	5	5	4	6	5	5


Operating characteristics:


Actuating force:	9 ±3 pounds.
Full overtravel force:	30 pounds maximum.
Releasing force:	
-1:	4 pounds minimum.
-3, -4, -6:	5 pounds minimum.
Pretravel:	.070 inch maximum.
Movement differential:	
-1:	.020 inch maximum.
-3, -6:	.035 inch maximum.
-4:	.045 inch maximum.
Overtravel:	.250 inch minimum.
Coincidence of operating and releasing points:	All circuits shall transfer within .010 inch of plunger travel after first circuit transfers.

TABLE 110.X. Part numbers and characteristics.

Part number	A dia max	C max	Lead wires	
			Size	No. req'd
MS24331-1	1.015 (25.78)	.980 (24.89)	No. 20	6
MS24331-3	1.515 (38.48)	1.310 (33.27)	No. 18	4
MS24331-4	1.515 (38.48)	1.700 (43.18)	No. 18	8
MS24331-6	1.015 (25.78)	1.000 (25.40)	No. 18	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

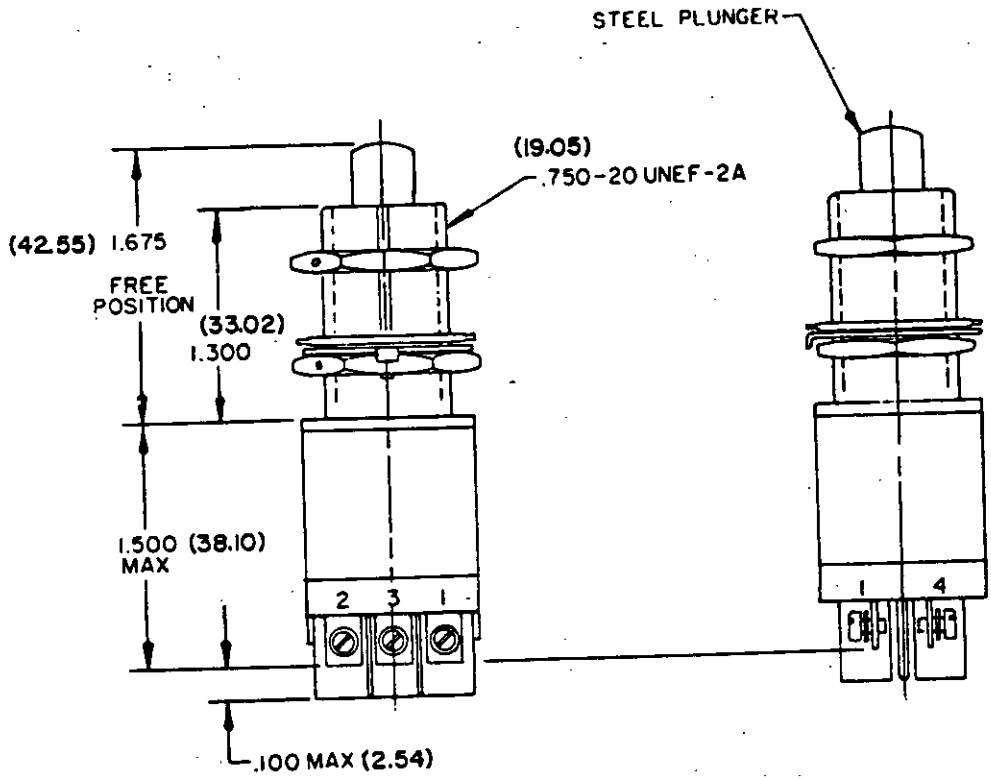



MS 24594-1

FIGURE 110-22. Switch, sensitive, DPDT, plunger, 5 amperes, hermetic.

Procurement document: MIL-S-8805/41.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level 28 Vdc (amperes)
Resistive	5
Inductive	2

Operating characteristics:

Actuating force:	9.0 ± 3.0 pounds	±20 percent variation from specified values acceptable after test.
Movement differential:	.015 inch maximum	
Pretravel:	.050 inch maximum	
Overtravel:	.250 inch minimum	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

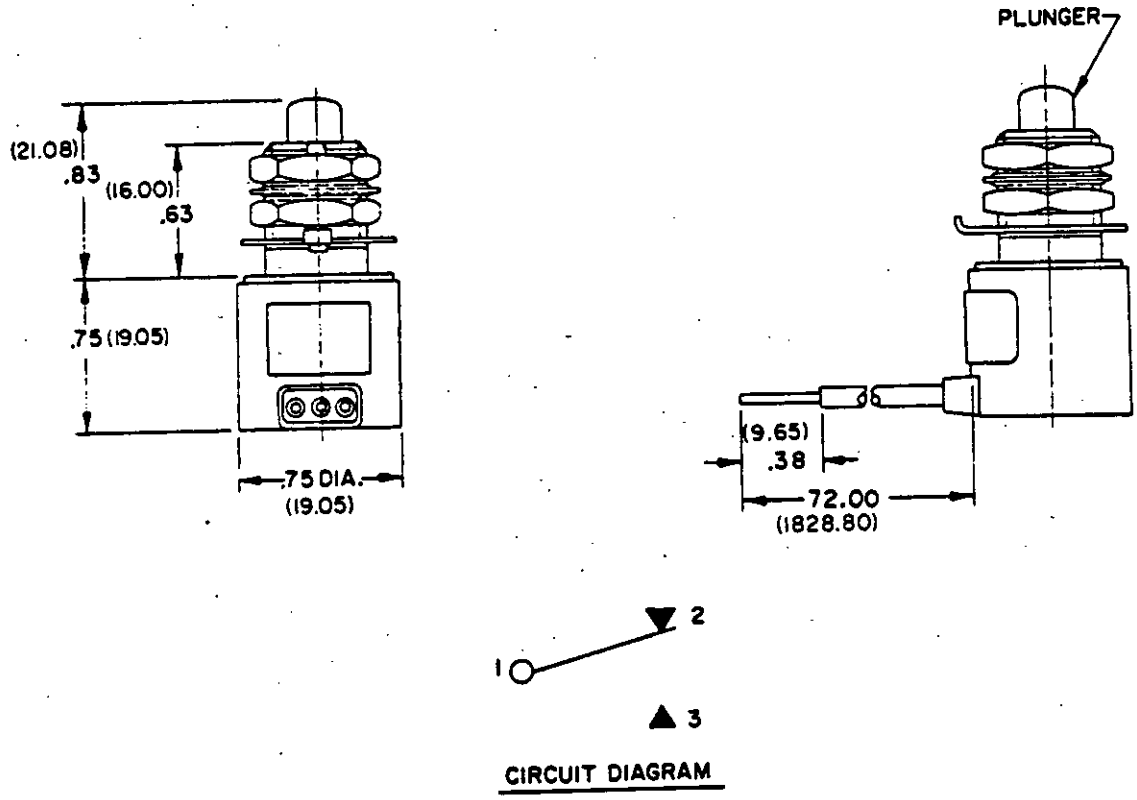

CIRCUIT DIAGRAM

FIGURE 110-23. Switch, sensitive, SPDT, 6 amperes, watertight.

Procurement document: MIL-S-8805/42.

Part number: MS27995-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level 28 Vdc
	amperes
Resistive	6
Inductive	2.5
Motor	3

Operating characteristic:

Actuating force:	8.50 ±3 pounds.
Release force:	4 pounds minimum.
Pretravel:	.040 inch maximum.
Movement differential:	.008 inch maximum.
Overtravel:	.125 inch minimum.
Overtravel force:	20 pounds maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

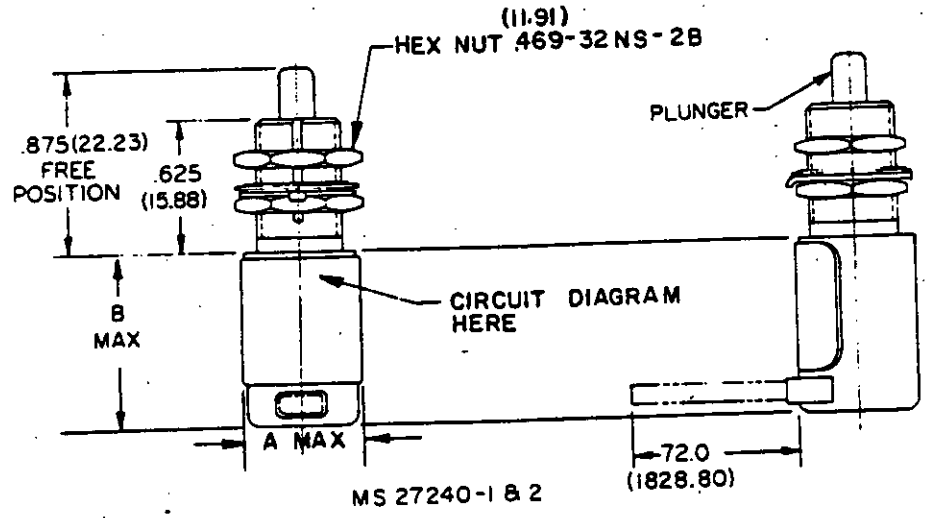

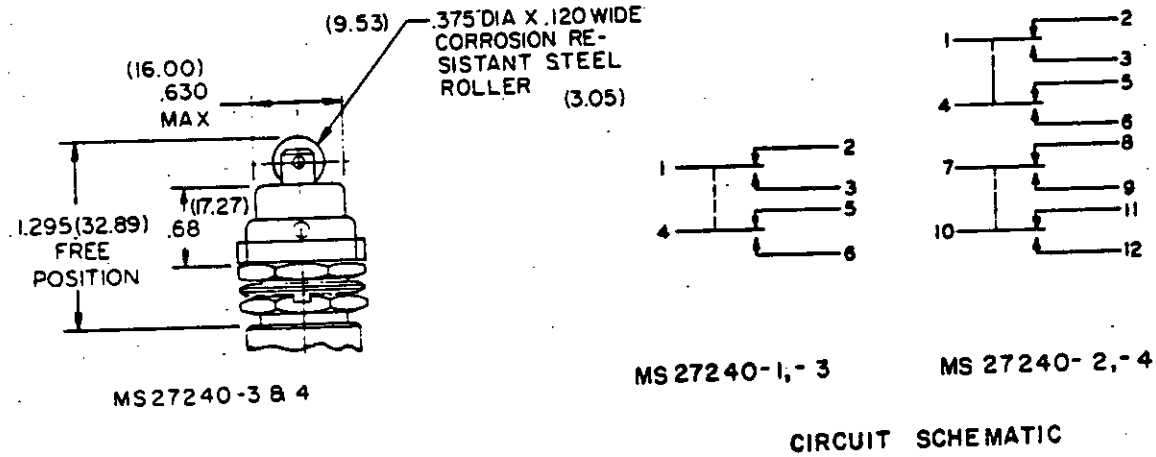


FIGURE 110-24. Switches, sensitive, plunger, 7 amperes, resilient seal.

Procurement document: MIL-S-8805/43.

Part numbers: See table 110.XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level 28 Vdc	50,000 feet 28 Vdc
	amperes	amperes
Resistive - - - - -	7	7
Inductive - - - - -	4	2.5
Motor - - - - - - -	4	4

Operating characteristics:

Actuating force:	9 ±3 pounds.
Release force:	4 pounds minimum.
Movement differential:	.020 inch maximum.
Pretravel:	.040 inch maximum.
Overtravel:	.125 inch minimum.
Full overtravel force:	30 pounds maximum.

TABLE 110.XI. Part numbers and characteristics.

Part number	Actuator	A dia	B
MS27240-1	Plunger	.720 (18.29)	1.000 (25.40)
MS27240-2	Plunger	1.031 (26.19)	1.200 (30.48)
MS27240-3	Roller	.720 (18.29)	1.000 (25.40)
MS27240-4	Roller	1.031 (26.19)	1.200 (30.48)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.

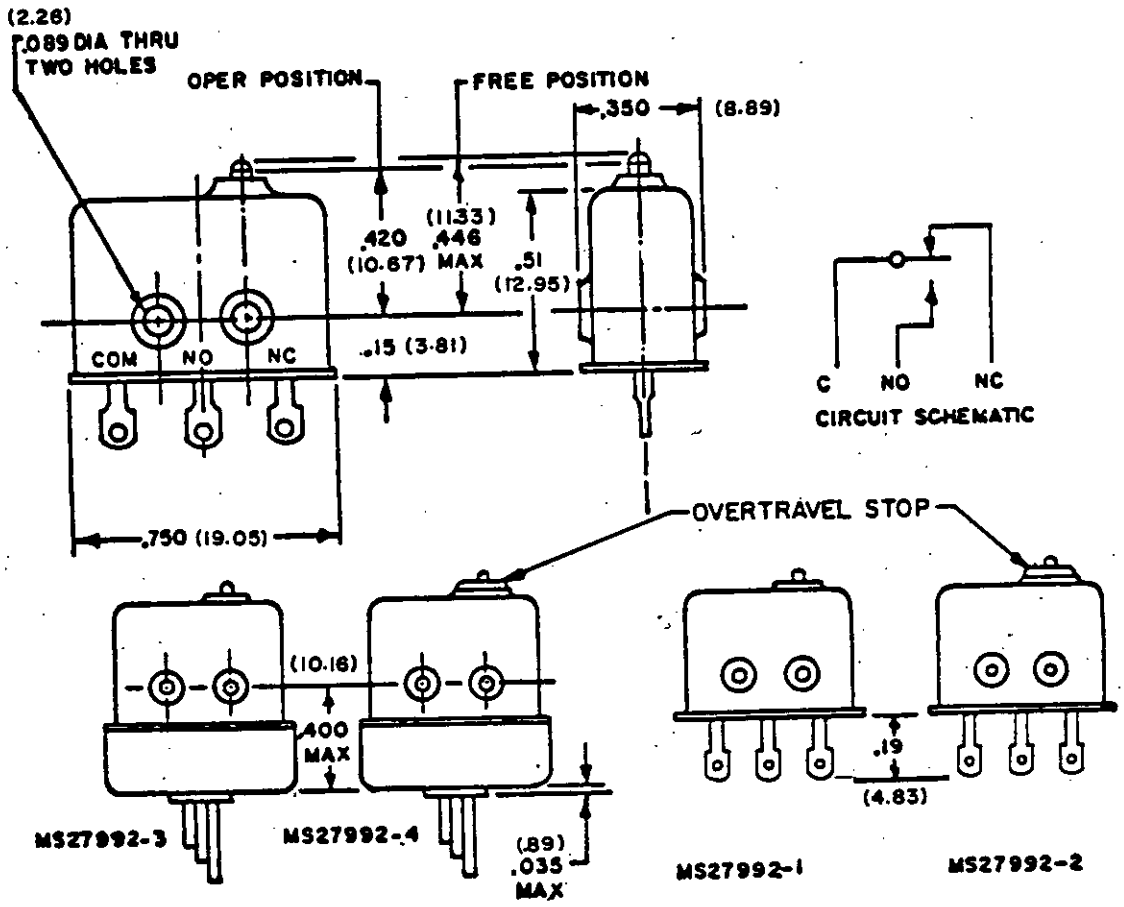


FIGURE 110-25. Switches, sensitive, SPDT, 5 amperes, resilient seal.

Procurement document: MIL-S-8805/44.

Part numbers: See table 110.XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 400 Hz	28 Vdc
	amperes	amperes	amperes
Resistive	5	5	5
Inductive	3	3	3
Lamp	1.5	1.5	1.5

TABLE 110.XII. Part numbers and operating characteristics.

Part number	Actuating force	Releasing force	Movement differential	Over - travel	Weight	Weight with wire	Termination
MS27992-1	10oz. max.	2oz. min.	.005 inch max	.007 inch max. 1/	.02 pound max.	-	Solder
MS27992-2	10oz. max.	2oz. min.	.005 inch max	.006 inch min. .010 inch max.	.02 pound	-	Solder
MS27992-3	10oz. max.	2oz. min.	.005 inch max	.007 inch max. 1/	-	.0616 pound max.	Leadwire
MS27992-4	10oz. max.	2oz. min.	.005 inch max	.006 inch min. .010 inch max.	-	.0616 pound max.	Leadwire

1/ Overtravel stop not provided. In use, do not exceed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

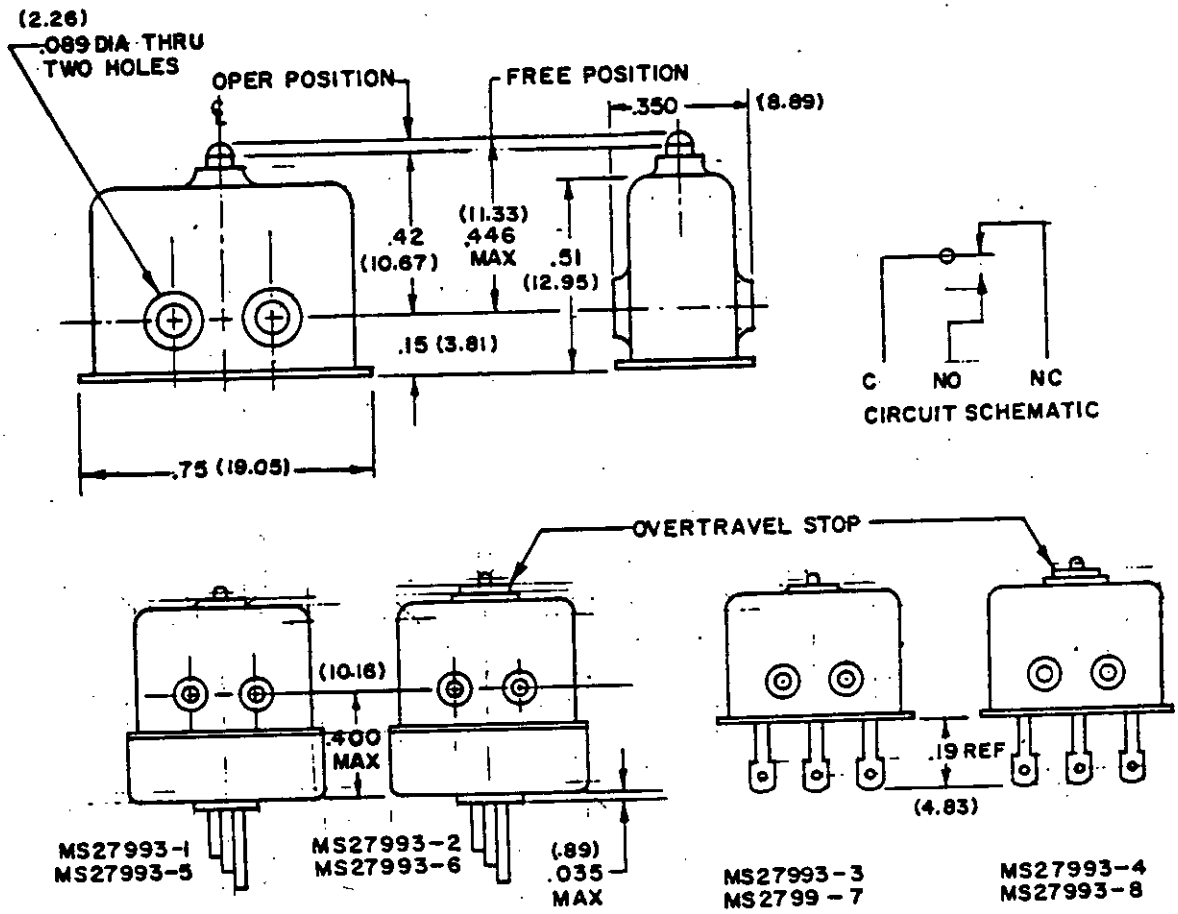


FIGURE 110-26. Switches, sensitive, SPDT, 5 amperes, resilient seal.

Procurement document: MIL-S-8805/45.

Part numbers: See table 110.XIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 400 Hz	28 Vdc
	amperes	amperes	amperes
Resistive	5	5	5
Inductive	3	3	3
Lamp	1.5	1.5	1.5

TABLE 110.XIII. Part numbers and operating characteristics.

Part number	Actuating force	Releasing force	Movement differential	Over-travel	Weight	Weight with wire	Applied actuator force	Termination
MS27993-1	22 oz max	6 oz min	.0005 to .005 inch	.007 inch max 1/	---	.0616 lbs max	Does not apply	Lead-wire
MS27993-2	22 ox max	6 oz min	.0005 to .005 inch	.007 inch max 1/	.02 lbs max	---	Does not apply	Solder
MS27993-3	22 oz max	6 oz min	.0005 to .005 inch	.006 inch min	---	.0616 lbs max	10 lbs max	Lead-wire
MS27993-4	22 oz max	6 oz min	.0005 to .005 inch	.006 inch min	.02 lbs max	---	10 lbs max	Solder
MS27993-5	10 oz max	3 oz min	.0005 to .005 inch	.007 inch max 1/	---	.0616 lbs max	Does not apply	Lead-wire
MS27993-6	10 oz max	3 oz min	.0005 to .005 inch	.006 inch min	---	.0616 lbs max	10 lbs max	Lead-wire
MS27993-7	10 oz max	3 oz min	.0005 to .005 inch	.007 inch max 1/	.02 lbs max	---	Does not apply	Solder
MS27993-8	10 oz max	3 oz min	.0005 to .005 inch	.006 inch min	.02 lbs max	---	10 lbs max	Solder

1/ Overtravel stop not provided. In use, do not exceed.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

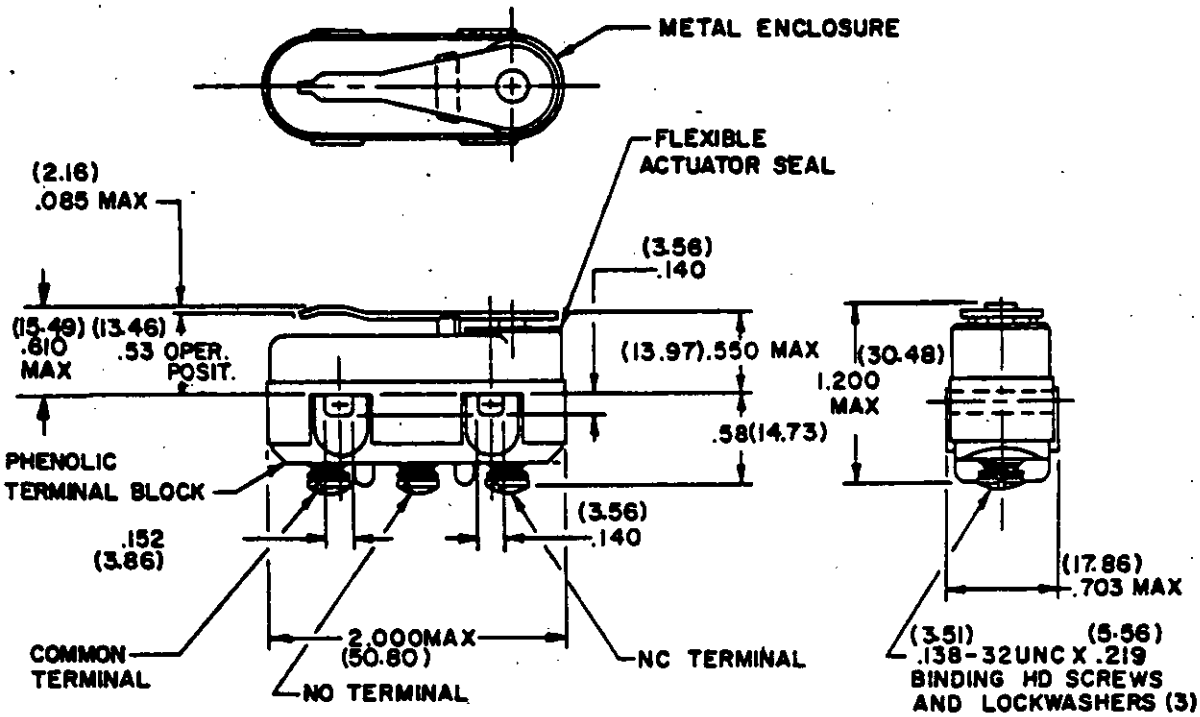


FIGURE 110-27. Switches, sensitive, SPDT, lever, 25 amperes, hermetic.

Procurement document: MIL-S-8805/47.

Part number: MS25011-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Current capacity (amperes)		
	28 Vdc	115 Vac, 60 Hz	120 Vdc
Resistive	25	1	1
Inductive	10	1	.5

Operating characteristics.

A Maximum free position	B Maximum pretravel	Operating position	Maximum differential travel	Minimum overtravel	Actuating force	Minimum release force
inch	inch	inch	inch	inch	oz	oz
.610	.085	.53	.020	.010	25 ±3	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.



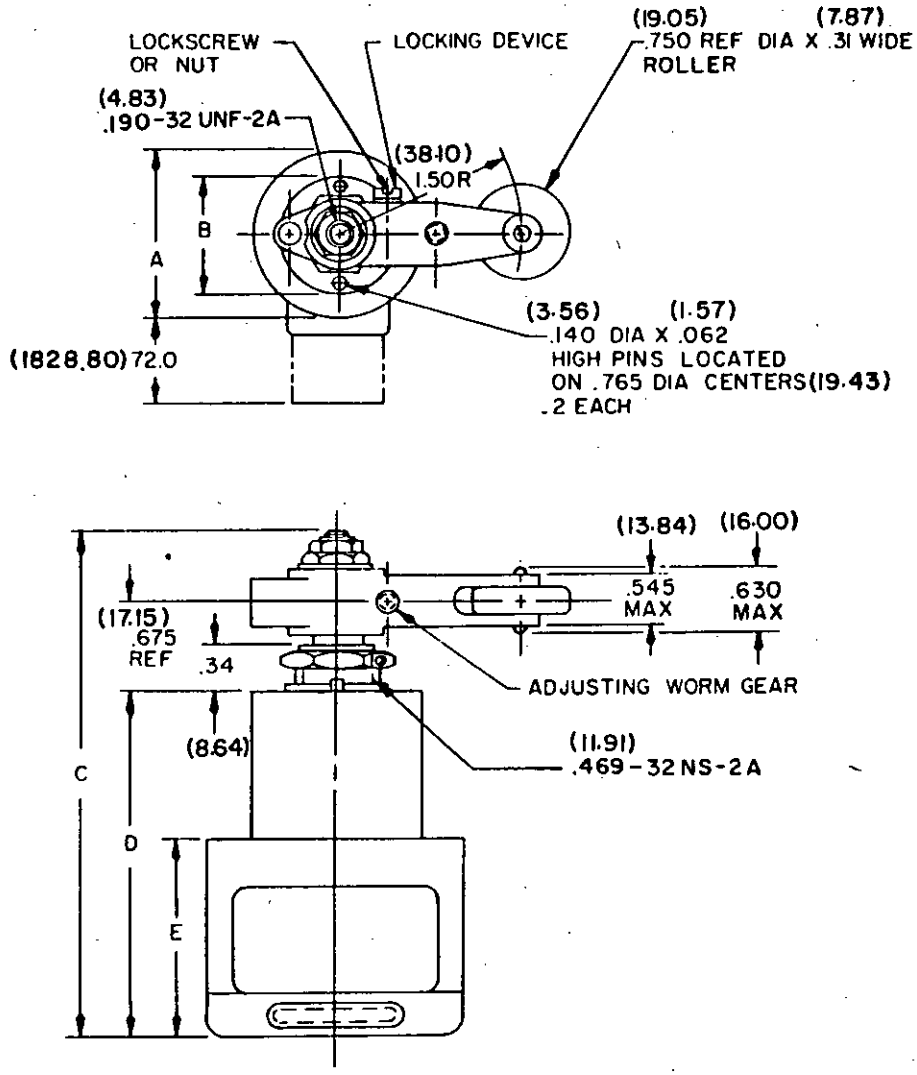


FIGURE 110-28. Switches, sensitive, roller lever, self return, resilient seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

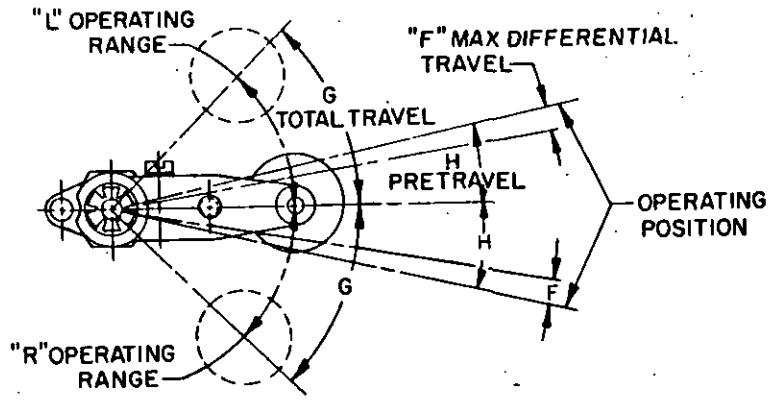

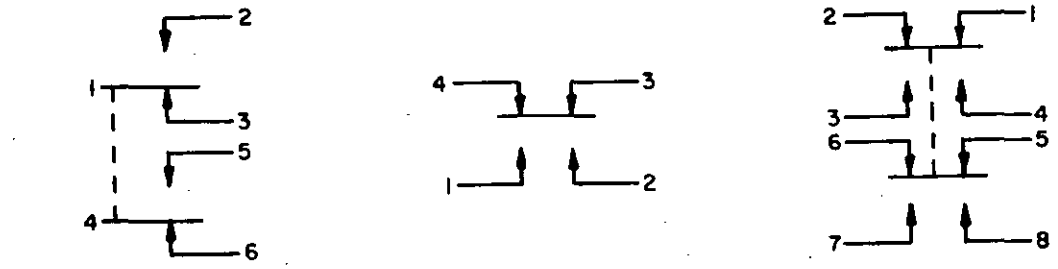

MS21320-1,-2,-3,&-4 MS21320-5&-6 MS21320-7&-8

CIRCUIT SCHEMATIC

FIGURE 110-28. Switches, sensitive, roller lever, self return, resilient seal - Continued.

Procurement document: MIL-S-8805/48.

Part numbers: See table XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Part number	Load				
	Sea level 28 Vdc			50,000 feet 28 Vdc	
	Resistive	Inductive	Motor	Resistive	Inductive
	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)
MS21320-1, -2	5	3	4	5	2
MS21320-3, -4	10	6	6	10	3
MS21320-5, -6	15	10	5	15	10
MS21320-7, -8	15	10	5	15	10

Operating characteristics:

Operating torque:	12-25 inch-lbs.
Release torque:	
MS21320-1, -2:	9 inch-lbs minimum.
MS21320-3, -4:	4 inch-lbs minimum.
MS21320-5, -6, -7, -8:	8 inch-lbs minimum.
Full overtravel torque:	40 inch-lbs maximum.
Coincidence of operating and releasing point:	Not applicable.

TABLE 110.XIV. Part number and characteristics.

Part number	Opr. range	A dia max	B dia max	C max	D max	E max	F max	G ±3°	H	Lead Wires Size	Lead Wires No. Req'd
MS21320-1	R	1.030 (26.16)	1.030 (26.16)	3.41 (86.61)	2.16 (54.86)	- - -	4°	45°	13° ±3°	No. 20	6
MS21320-2	L										
MS21320-3	R	1.530 (38.86)		4.10 (104.14)	2.82 (71.63)	1.86 (47.24)	10°		20° ±4°	No. 18	
MS21320-4	L										
MS21320-5	R			3.68 (93.47)	2.44 (61.98)	1.46 (37.08)	5°		15° ±4°		4
MS21320-6	L										
MS21320-7	R			4.10 (104.14)	2.82 (71.63)	1.86 (47.24)	10°		15° ±5°		8
MS21320-8	L										

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.



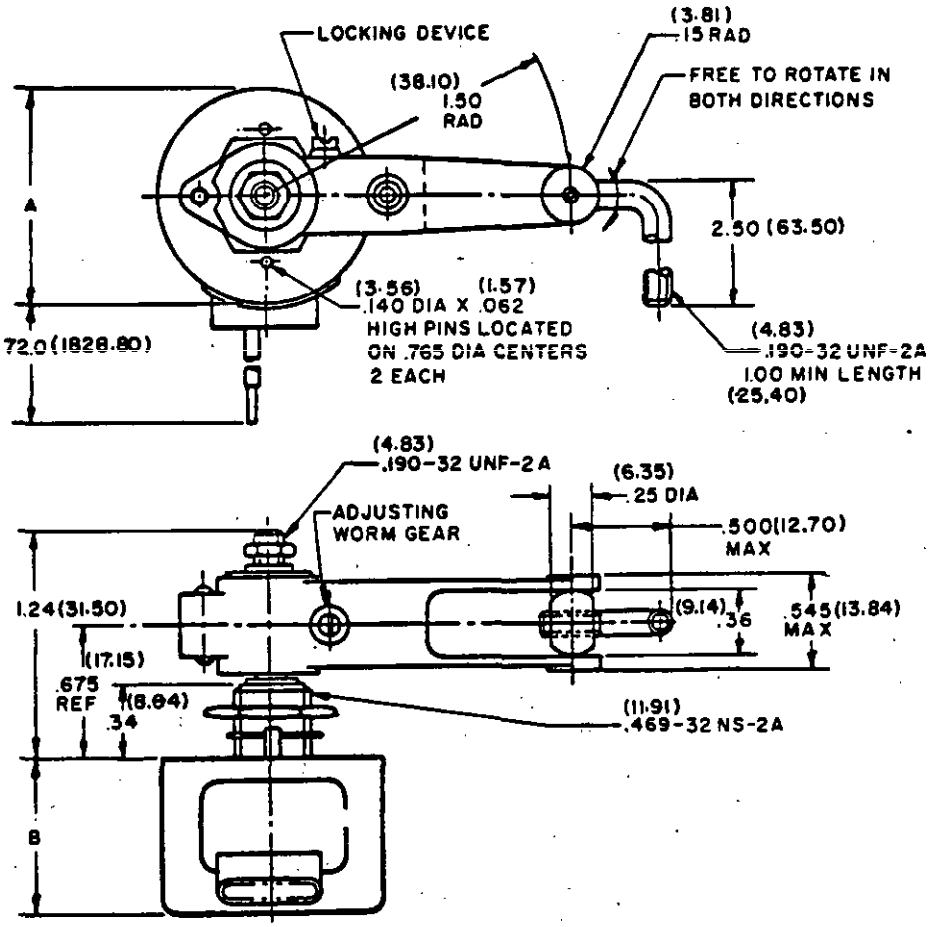


FIGURE 110-29. Switches, sensitive, rotary linkage lever (nonself-return), resilient seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

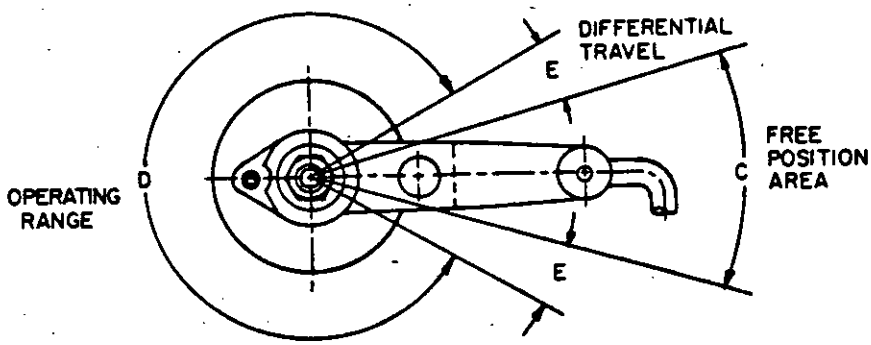

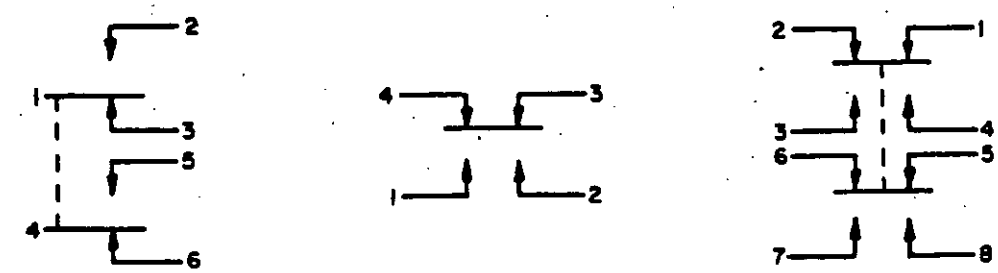

MS 24420-1 & -2 MS 24420-3 MS 24420-4 & -5

CIRCUIT SCHEMATIC

FIGURE 110-29. Switches, sensitive, rotary linkage lever (nonself-return), resilient seal - Continued.

Procurement document: MIL-S-8805/49.

Part numbers: See table 110.XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Part number	Load							
	Sea level - 28 Vdc				50,000 feet - 28 Vdc			
	Resistive	Inductive	Lamp	Motor	Resistive	Inductive	Lamp	Motor 1/
	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)
MS24420-1	4	3	2.4	4	4	1	2.4	4
MS24420-2	10	6	3.6	6	10	3	3.6	6
MS24420-3	15	10	3.0	5	15	10	3.0	5
MS24420-4	15	10	3.0	5	15	10	3.0	5
MS24420-5	10	6	3.6	6	10	3	3.6	6

1/ Application information only.

TABLE 110.XV. Part numbers, dimensions and operation characteristics.

Part number	Maximum dimensions 1/		Wire leads		Operating characteristics					
					C		D		E	Maximum operating torque (lb inches)
	A	B	Wire size	No. Req'd	Free position area	Circuits made	Operating range	Circuits made	Maximum differential travel	
MS24420-1	1.030 (26.16)	1.050 (26.67)	20	6	35° ± 15°	1-3 & 4-6	301° REF	1-2 & 4-5	12°	3
MS24420-2	1.530 (38.86)	1.680 (42.67)	18	6		1-3 & 4-6	301° REF	1-2 & 4-5	12°	5
MS24420-3		1.430 (36.32)		4		3&4	285° REF	1&2	20°	10
MS24420-4		1.820 (46.23)		8		1-2 & 5-6	285° REF	3-4 & 7-8	20°	10
MS24420-5			20	8		1-2 & 5-6	285° REF	3-4 & 7-8	20°	10

1/ Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

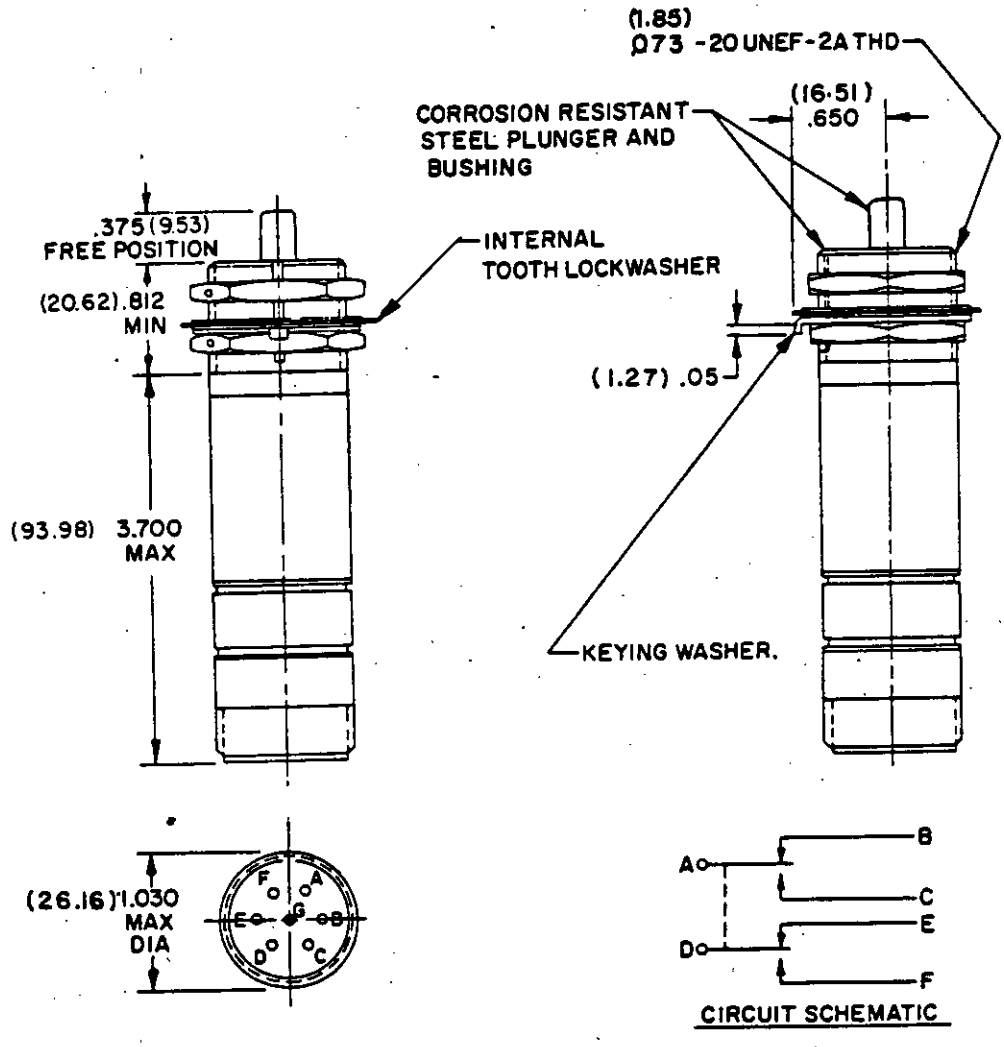


FIGURE 110-30. Switch, sensitive, DPDT, plunger, 5 amperes, resilient seal.

Procurement document: MIL-S-8805/65.

Part number: M8805/65-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


Electrical ratings.

Load	Sea level 28 Vdc
	amperes
Resistive	5
Inductive	3
Motor	4


Operating characteristics:

Actuating force:	6 to 12 pounds.
Pretravel:	0.040 inch maximum.
Movement differential:	0.020 inch maximum.
Overtravel:	0.250 inch minimum.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

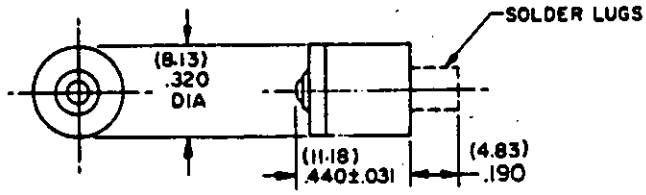

TYPE A
BASIC SWITCH

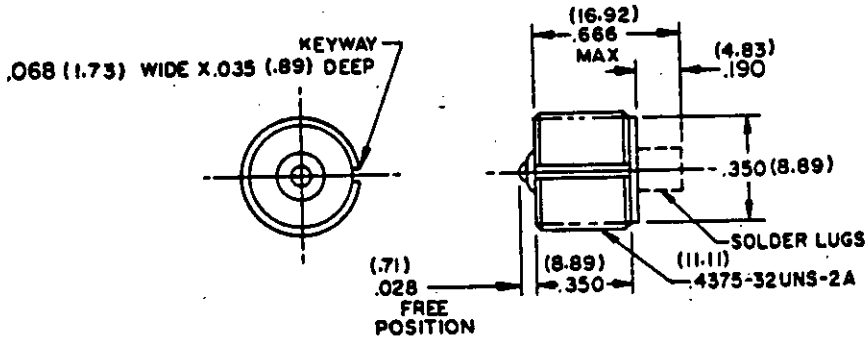


TYPE B
THREADED BUSHING MOUNT

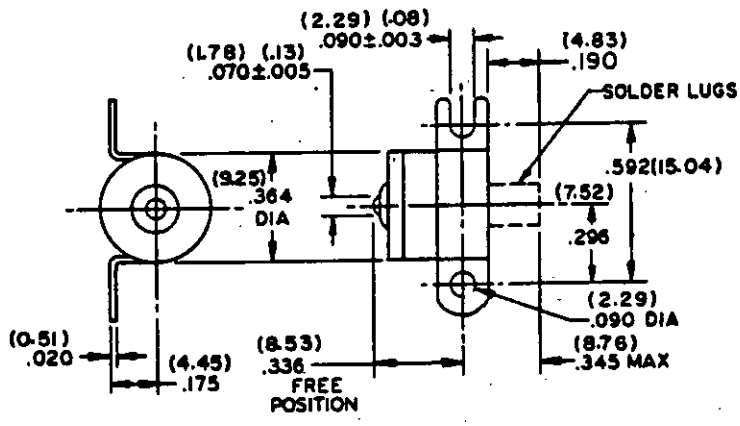


TYPE C
BRACKET MOUNT

FIGURE 110-31. Switches, sensitive, SPDT, 7 amperes, hermetic.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

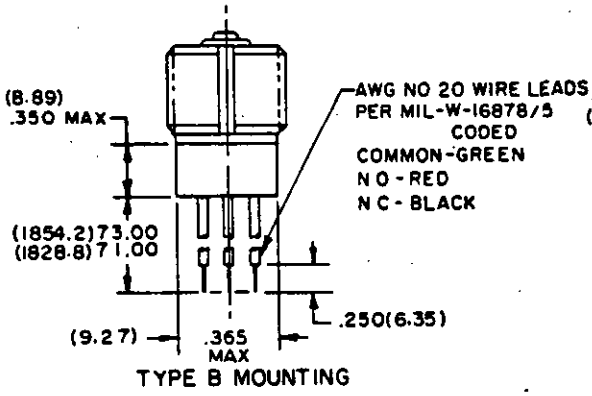


TYPE B MOUNTING

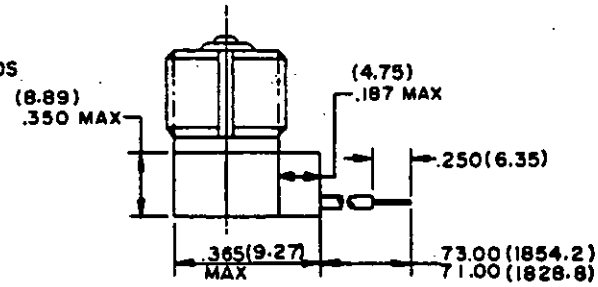

TYPE B MOUNTING

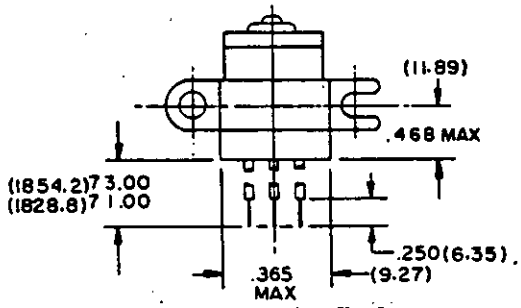

TYPE C MOUNTING
WIRE LEADS - BOTTOM

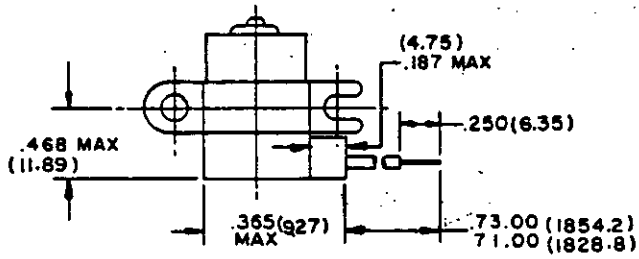

TYPE C MOUNTING
WIRE LEADS - SIDE

FIGURE 110-31. Switches, sensitive, SPDT, 7 amperes, hermetic - Continued.

Procurement document: MIL-S-8805/68.

Part numbers: See table 110.XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level and 70,000 feet	
	28 VDC	115 VAC, 400 Hz
	amperes	amperes
Resistive	7	5
Inductive	3	3
Lamp	2	2

Operating characteristics:		
Actuating force:	30 oz maximum.	At standard temperature and pressure (21°C and 14.7 psia)
Releasing force:	4 oz minimum.	
Movement differential:	.005 inch maximum.	
Pretravel:	.009 inch maximum.	
Overtravel:	.003 inch minimum.	

TABLE 110.XVI. Part numbers and configuration.

Part number	Type mounting	Terminals
M8805/68-001	A	Solder
M8805/68-002	B	Solder
M8805/68-003	B	Wire lead - bottom
M8805/68-004	B	Wire lead - side
M8805/68-005	C	Solder
M8805/68-006	C	Wire lead - bottom
M8805/68-007	C	Wire lead - side

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.



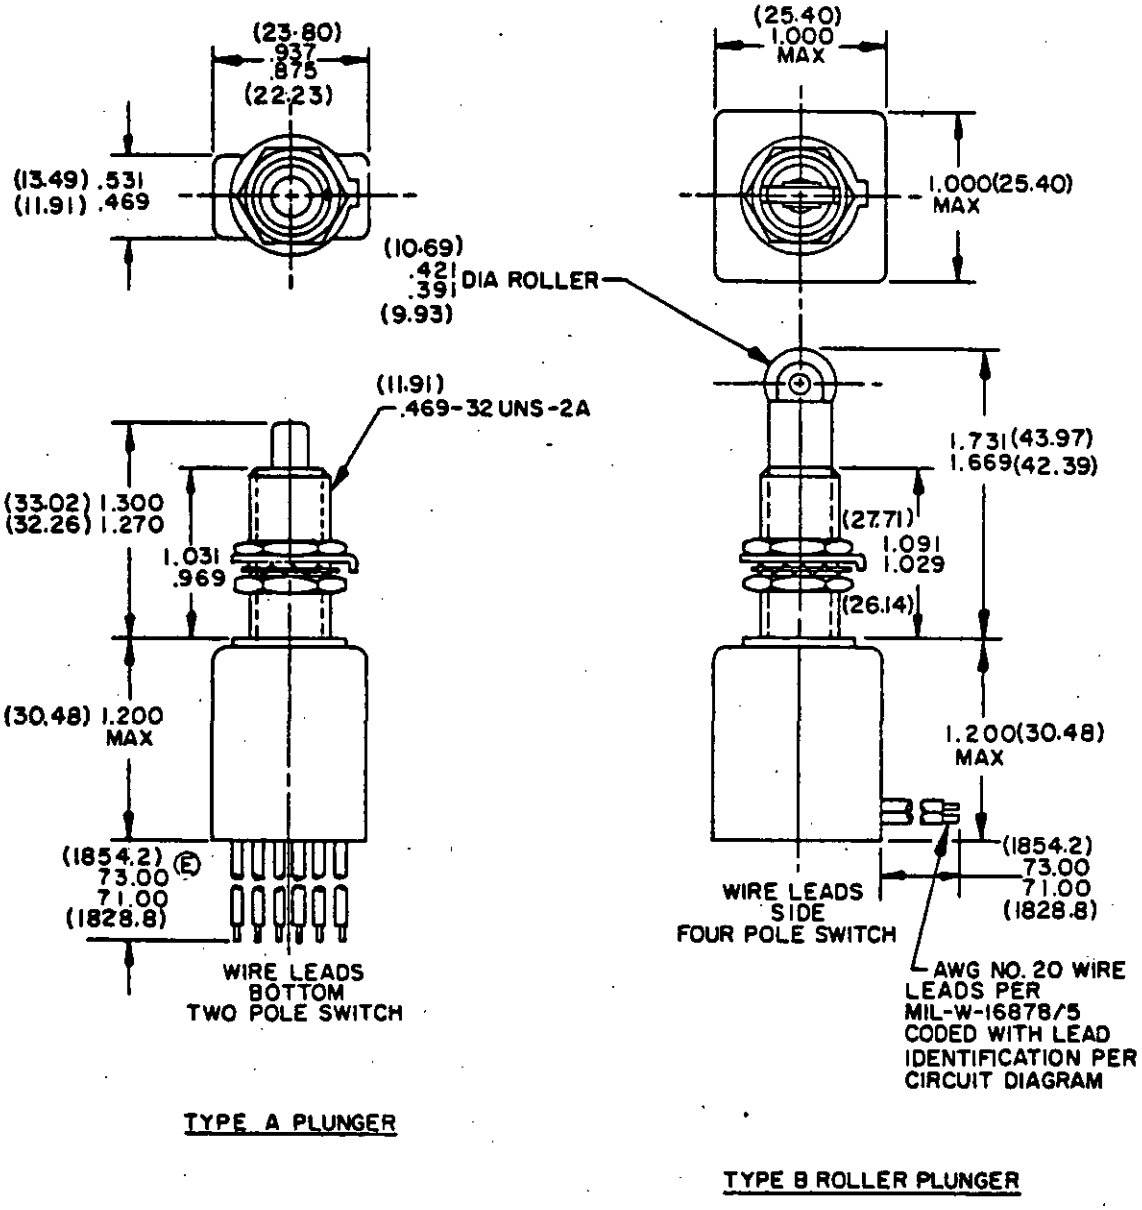


FIGURE 110-32. Switches, sensitive, DPDT and 4PDT, plunger or roller, 7 amperes, hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

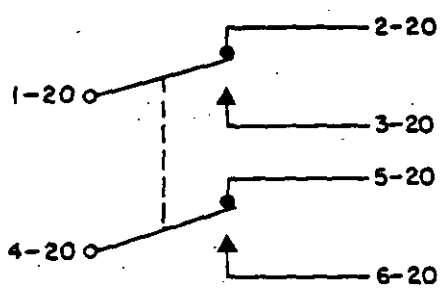

CIRCUIT DIAGRAM 1

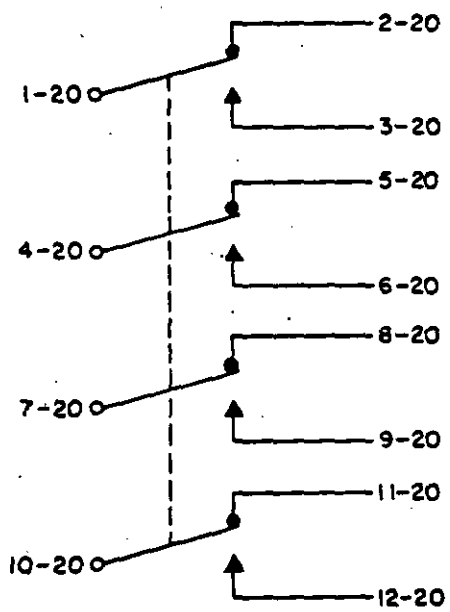

CIRCUIT DIAGRAM 2

FIGURE 110-32. Switches, sensitive, DPDT and 4PDT, plunger or roller, 7 amperes, hermetic - Continued.

Procurement document: MIL-S-8805/70.

Part numbers: See table 110.XVII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level and 70,000 feet	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	7	5
Inductive	3	3
Lamp	2	2

TABLE 110.XVII. Part numbers and operating characteristics.

Part number M8805/70	Actuating force maximum (pounds)	Releasing force minimum (pounds)	Movement differential maximum (inches)	Pretravel maximum (inches)	Overtravel minimum (inches)	Circuit diagram	Type of actuating mechanism	Plunger seal	Terminals
-015	10	1.0	.020	.030	.200	I	A	Resilient seal	Wire leads - bottom
-016						I	B		Wire leads - bottom
-017						I	A		Wire leads - side
-018						I	B		Wire leads - side
-021						II	A		Wire leads - bottom
-022						II	B		Wire leads - bottom
-023						II	A		Wire leads - side
-024						II	B		Wire leads - side

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

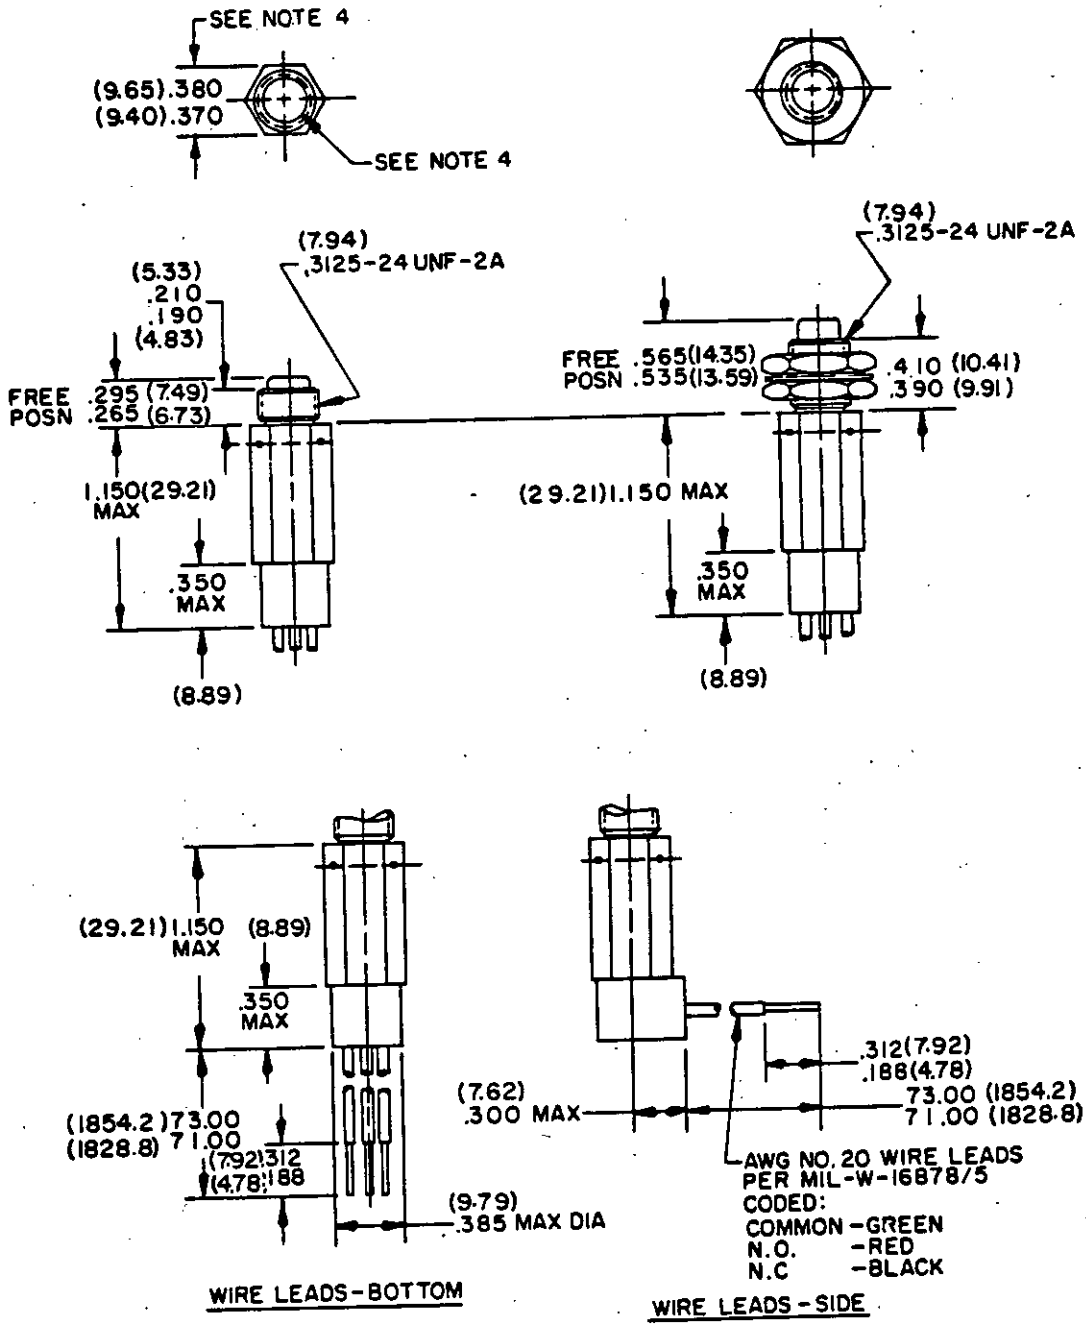


FIGURE 110-33. Switches, sensitive, SPDT, plunger, 7 amperes, hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

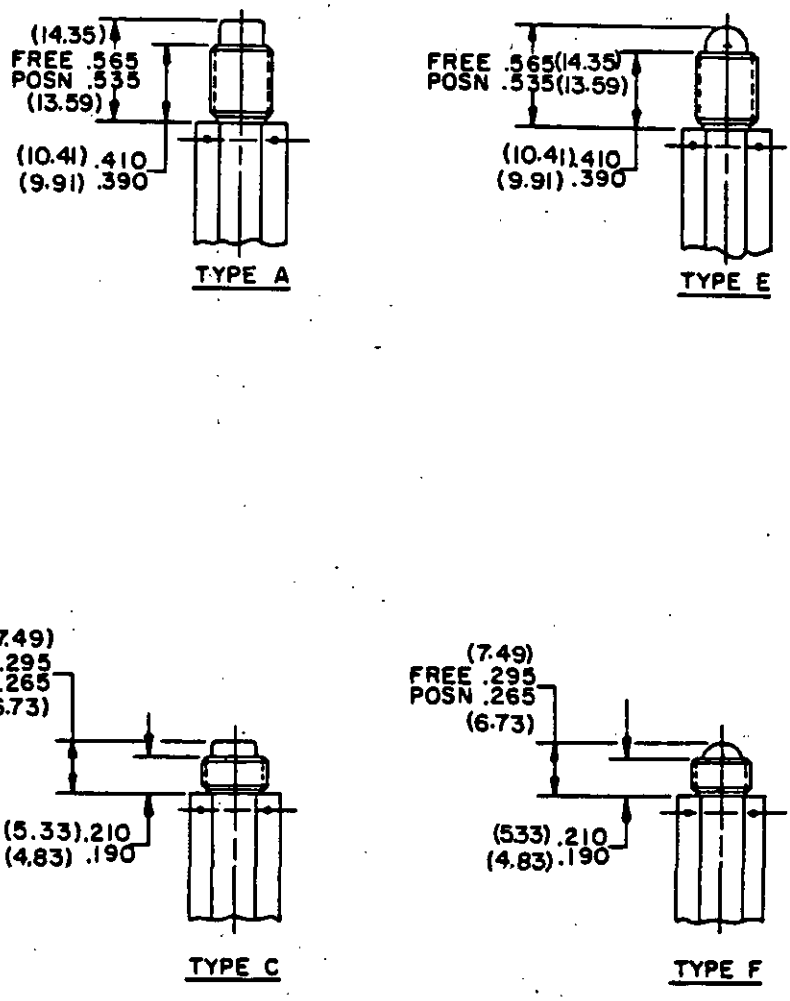


FIGURE 110-33. Switches, sensitive, SPDT, plunger, 7 amperes, hermetic - Continued.

Procurement document: MIL-S-8805/72.

Part numbers: See table 110.XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level and 70,000 feet	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	7	5
Inductive	3	3
Lamp	2	2

Operating characteristics:

Actuating force:	30 ounces maximum.	At standard temperature and pressure (21°C and 14.7 psia)
Releasing force:	4 ounces minimum.	
Movement differential:	.005 inch maximum.	
Pretravel:	.010 inch maximum.	
Overtravel:		
Types A and B:	.125 inch minimum.	
Types C and D:	.060 inch minimum.	

TABLE 110.XVIII. Part numbers and configuration.

Part number	Type of actuating mechanism	Terminals	Plunger seal
M8805/72-005	A	Wire leads - bottom	None
M8805/72-007	C	Wire leads - bottom	
M8805/72-009	A	Wire leads - side	
M8805/72-011	C	Wire leads - side	
M8805/72-013	E	Wire leads - bottom	
M8805/72-014	F	Wire leads - bottom	
M8805/72-015	E	Wire leads - side	
M8805/72-016	F	Wire leads - side	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

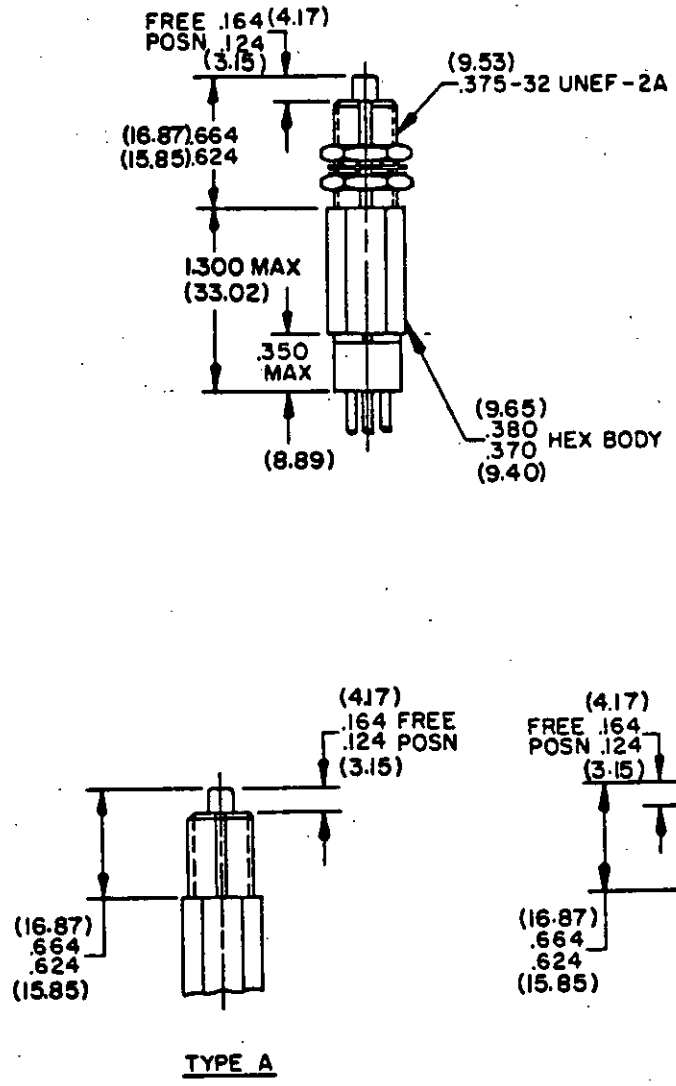


FIGURE 110-34. Switches, sensitive, SPDT, plunger, 7 amperes, hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

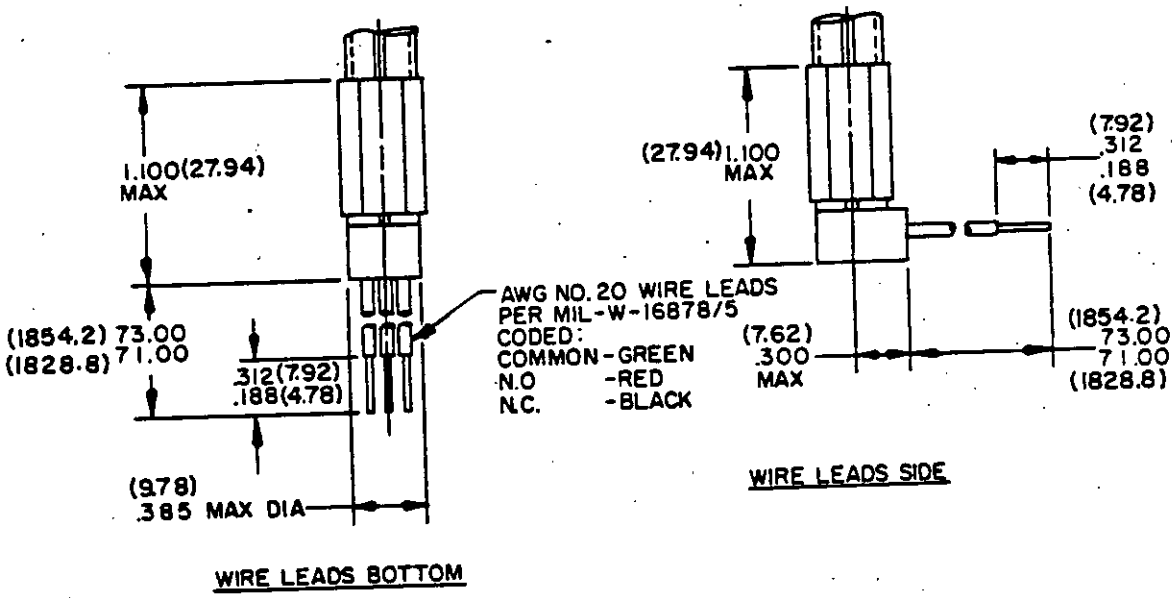


FIGURE 110-34. Switches, sensitive, SPDT, plunger, 7 amperes, hermetic - Continued.

Procurement document: MIL-S-8805/73.

Part numbers: See table 110.XIX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level and 70,000 feet	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	7	5
Inductive	3	3
Lamp	2	2

Operating characteristics:

Actuating force:	6.5 pounds maximum.
Releasing force:	1.5 pounds minimum.
Pretravel:	.020 inch maximum.
Movement differential:	.005 inch maximum.
Overtravel:	.125 inch minimum.

TABLE 110.XIX. Part numbers and configuration.

Part number	Type of actuating mechanism	Plunger seal	Terminals
M8805/73-003	A	Resilient seal	Wire leads - bottom
M8805/73-005	A	Resilient seal	Wire leads - side
M8805/73-007	C	Resilient seal	Wire leads - bottom
M8805/73-008	C	Resilient seal	Wire leads - side

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

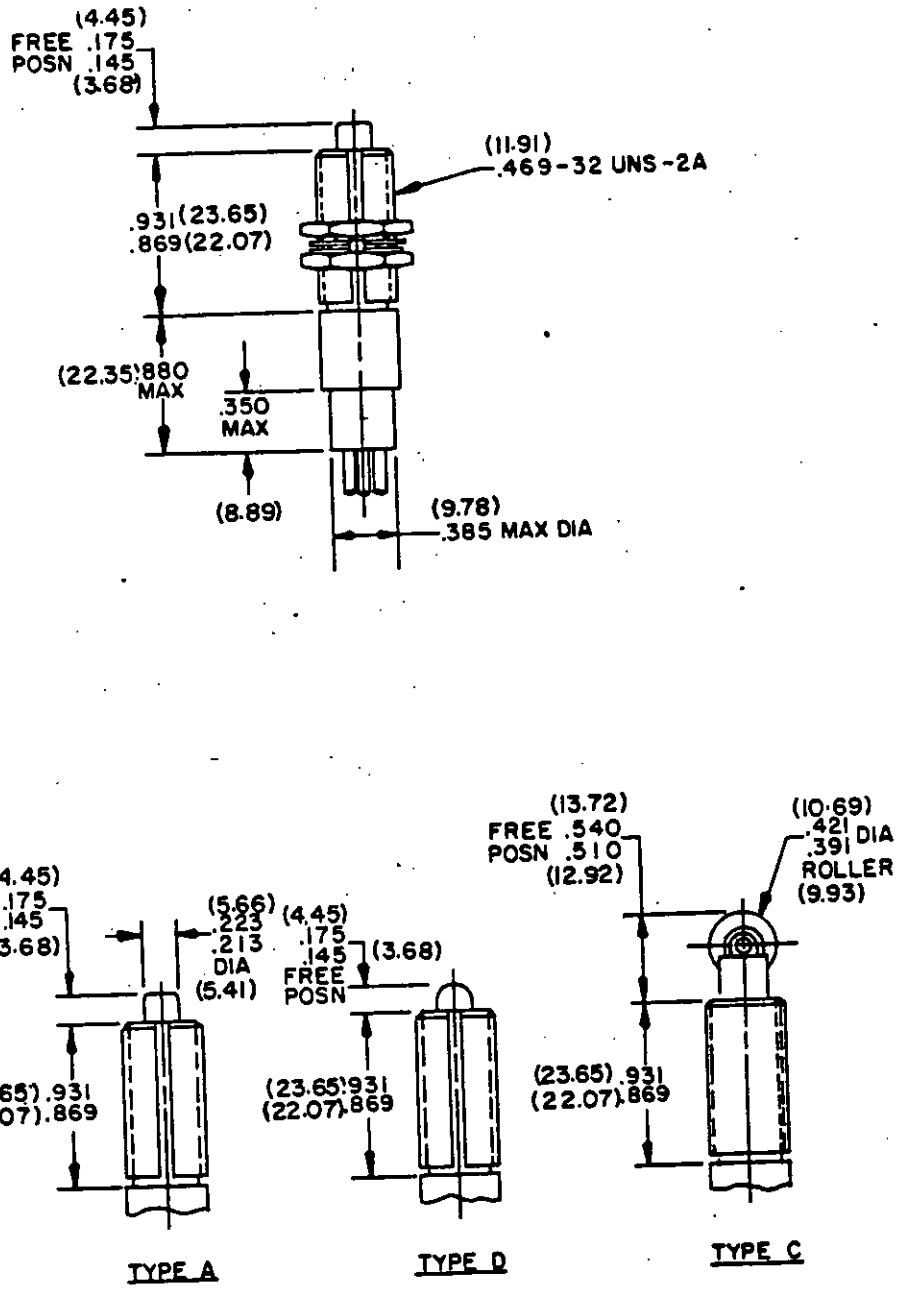


FIGURE 110-35. Switches, sensitive, SPDT, plunger or roller, 7 amperes, hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

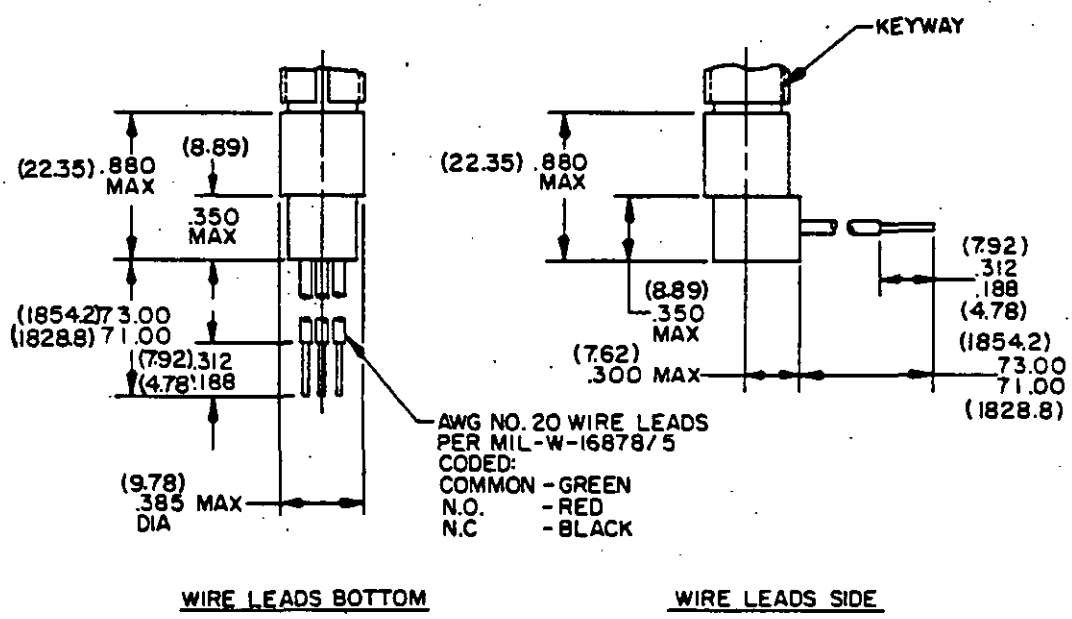


FIGURE 110-35. Switches, sensitive, SPDT, plunger or roller, 7 amperes, hermetic - Continued.

Procurement document: MIL-S-8805/74.

Part numbers: See table 110.XX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level and 70,000 feet	
	28 Vdc	115 Vac, 400 Hz
	amperes	amperes
Resistive	7	5
Inductive	3	3
Lamp	2	2

Operating characteristics.

	Actuating force maximum	Releasing force minimum	Movement differential	Pretravel inches maximum	Overtravel
Without plunger seal	30 ounces 1/	4 ounces 1/	.005 inch max	.010	.125 inch min
Resilient plunger seal	7.0 pounds	1.5 pounds	.005 inch max	.020	.125 inch min

1/ At standard temperature and pressure (21° C and 14.7 psia).

TABLE 110.XX. Part numbers and configuration.

Part number 1/	Plunger seal	Type of actuating mechanism	Terminals
M8805/74-004	None	A	Wire leads - bottom
M8805/74-006		C	Wire leads - bottom
M8805/74-007		A	Wire leads - side
M8805/74-009		C	Wire leads - side
M8805/74-013	Resilient seal	A	Wire leads - bottom
M8805/74-015		C	Wire leads - bottom
M8805/74-016		A	Wire leads - side
M8805/74-018		C	Wire leads - side
M8805/74-019	None	D	Wire leads - bottom
M8805/74-020		D	Wire leads - side
M8805/74-021	Resilient seal	D	Wire leads - bottom
M8805/74-022		D	Wire leads - side

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

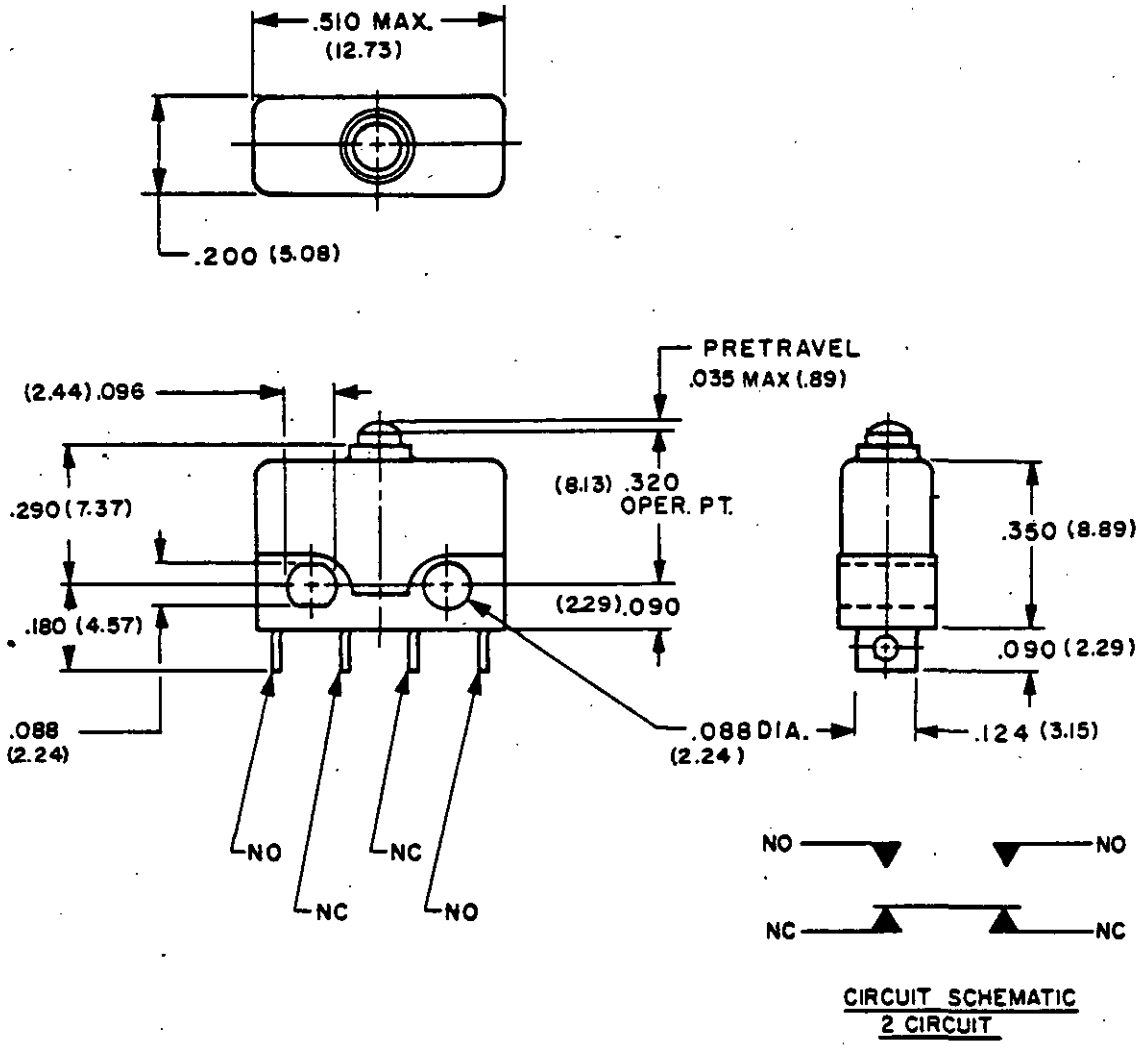


FIGURE 110-36. Switches, sensitive, 2 circuit (5 amperes) or SPST (8 amperes), unsealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level, 28 VDC		70,000 feet, 28 VDC	
	SPST (NO or NC)	2 Circuit	SPST (NO or NC)	2 Circuit
	amperes	amperes	amperes	amperes
Resistive	8	5	8	5
Inductive	5	3	3	2
Motor	5	---	---	---
Lamp	1	---	---	---

Operating characteristics:

Actuating force:	8 ounces maximum.	±20 percent variation from specified values acceptable after test
Pretravel:	.035 inch maximum.	
Overtravel:	.004 inch minimum.	
Movement differential:	.010 inch minimum.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

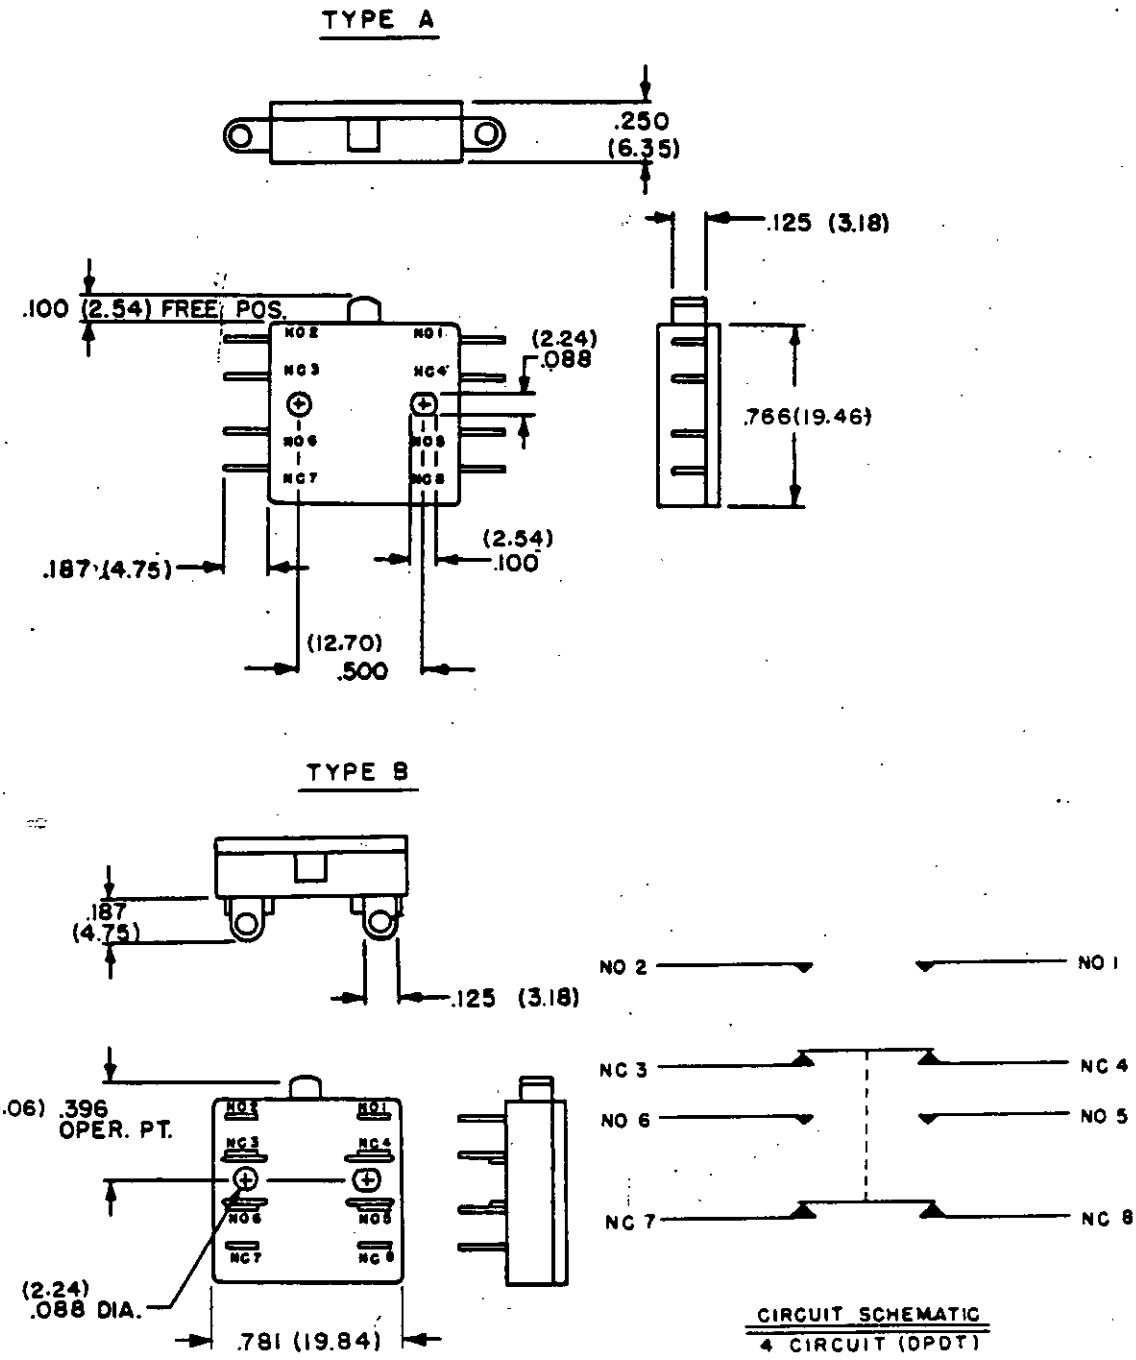


FIGURE 110-37. Switch, sensitive, momentary, 4 circuit or DPDT, unsealed.

Procurement document: MIL-S-8805/77.

Part numbers: See table 110.XXI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level				70,000 feet	
	28 VDC DPDT	28 VDC 4 Circuit	115 VAC, 60 Hz DPDT	115 VAC, 60 Hz 4 Circuit	28 VDC DPDT	28 VDC 4 Circuit
	amperes	amperes	amperes	amperes	amperes	amperes
Resistive - - -	10	10	7.5	5	10	10
Inductive - - -	7.5	5	5	5	3.5	2
Lamp- - - - - -	4	3	3	1.5	---	---

Operating characteristics:

Actuating force:	1.5 pounds maximum.	±20 percent variation from specified values acceptable after test
Pretravel:	.060 inch maximum.	
Overtravel:	.012 inch minimum.	
Movement differential:	.025 ±.010 inch.	

TABLE 110.XXI. Part numbers and configuration.

Part number	Terminal configuration
M8805/77-001	A (End-solder type)
M8805/77-002	B (Side-solder type)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

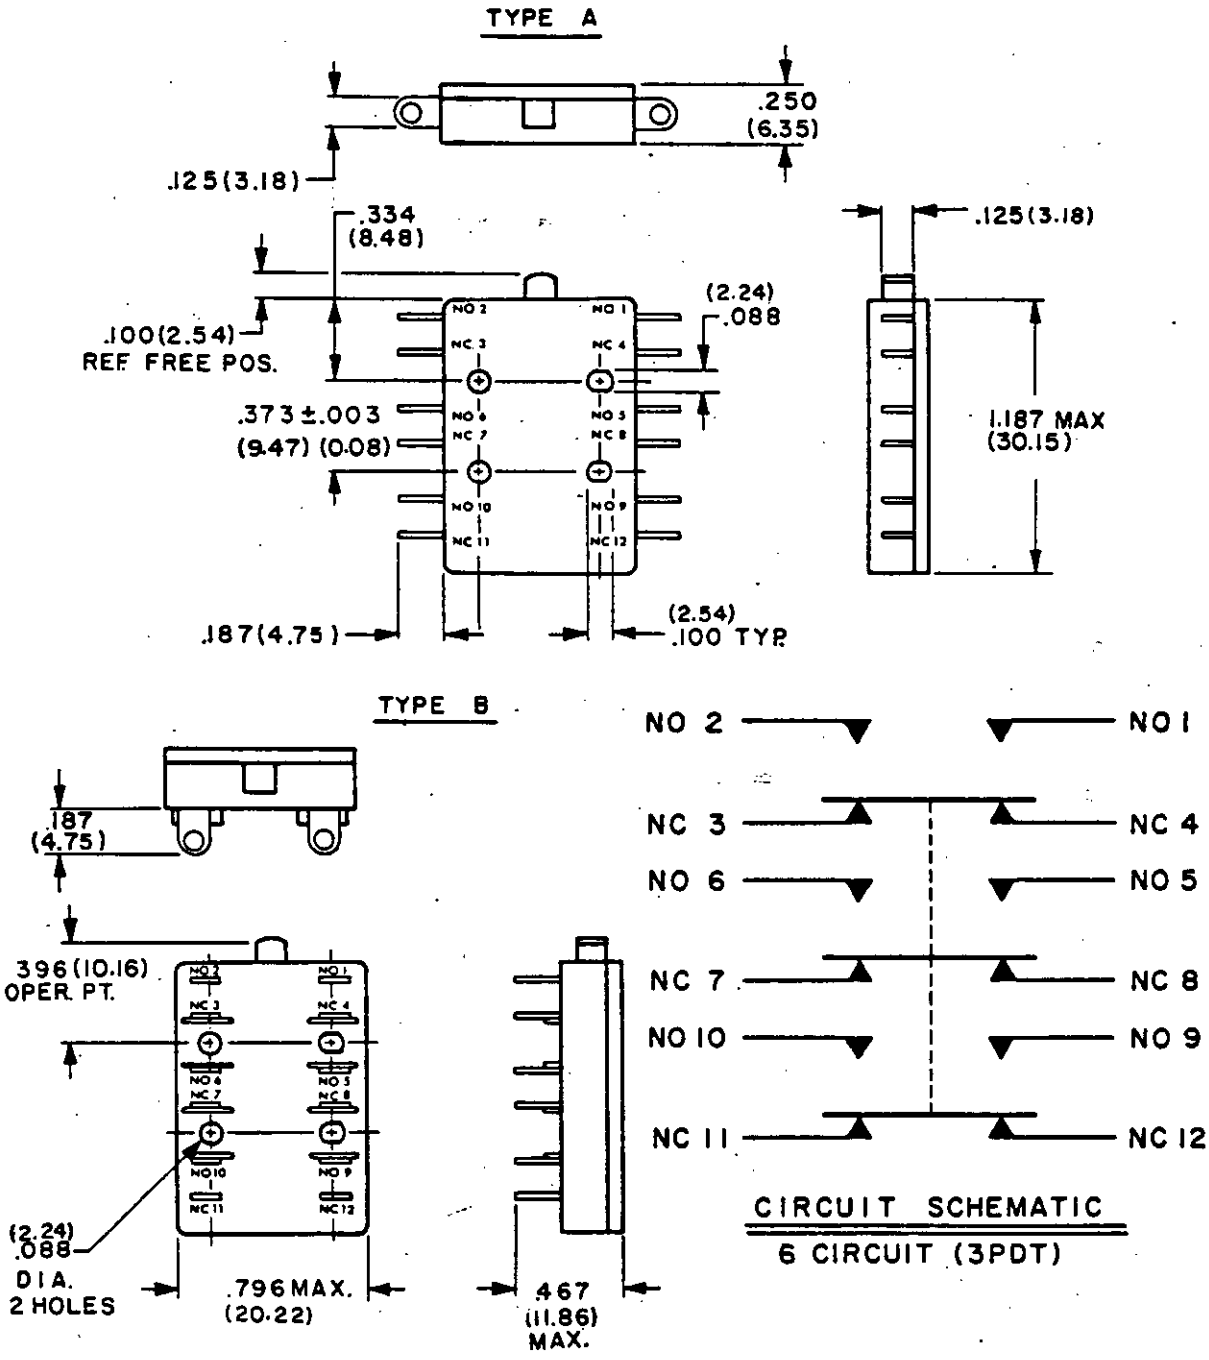


FIGURE 110-38. Switch, sensitive, momentary, 6 circuit or 3PDT, unsealed.

Procurement document: MIL-S-8805/78.

Part numbers: See table 110.XXII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load		Sea level			70,000 feet	
	28 VDC 3PDT	28 VDC 6 Circuit	115 VAC, 60 Hz 3PDT	115 VAC, 60 Hz 6 Circuit	28 VDC 3PDT	28 VDC 6 Circuit
	amperes	amperes	amperes	amperes	amperes	amperes
Resistive - - -	10	10	7.5	5	10	10
Inductive - - -	7.5	5	5	5	3.5	2
Lamp- - - - - -	4	3	3	1.5	---	---


Operating characteristics:


Actuating force:	1.5 pounds maximum.
Pretravel:	.060 inch maximum.
Overtravel:	.012 inch minimum.
Movement differential:	.025 ±.010 inch.

TABLE 110.XXII. Part numbers and configuration.

Part number	Terminal configuration
M8805/78-001	A (End-solder type)
M8805/78-002	B (Side-solder type)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

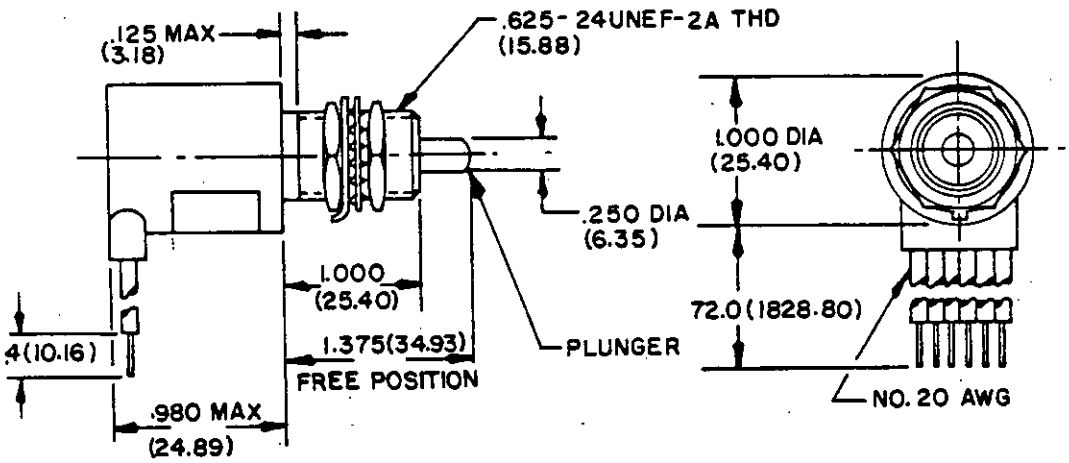



CIRCUIT SCHEMATIC

FIGURE 110-39. Switch, sensitive, limit, hermetic.

Procurement document: MIL-S-8805/80.

Part number: M8805/80-01.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.


Load	28 Vdc Sea Level and 100,000 ft.
	amperes
Resistive - - - - - - -	5
Inductive - - - - - - -	3
Motor - - - - - - - - -	4

Operating characteristics:	
Operating force:	9 ±3 pounds.
Full overtravel force:	30 pounds maximum.
Release force:	4 pounds minimum.
Pretravel:	.040 inch maximum.
Movement differential:	.020 inch maximum.
Overtravel:	.250 inch minimum.
Coincidence of operating and releasing points:	.010 inch maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

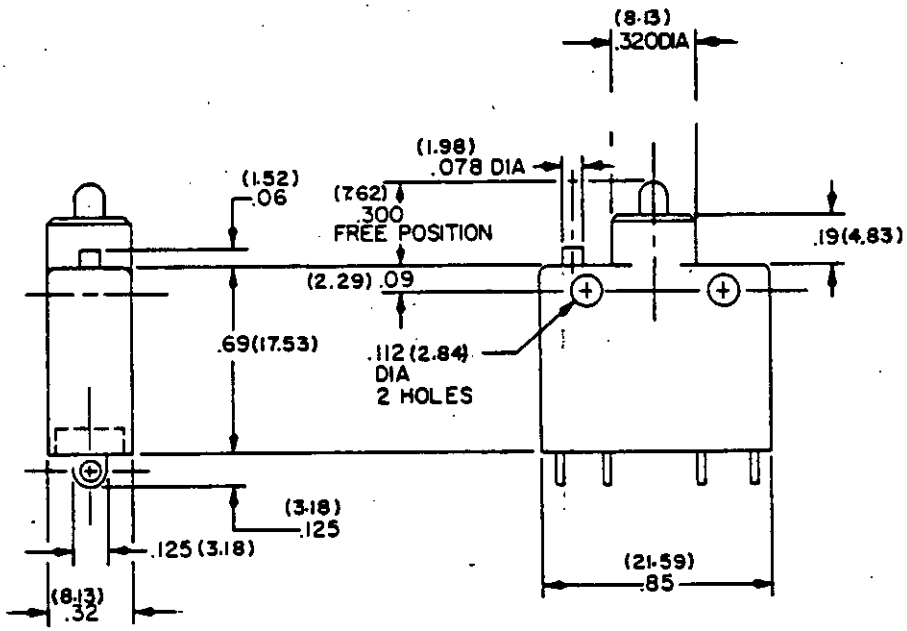

M8805/84-001

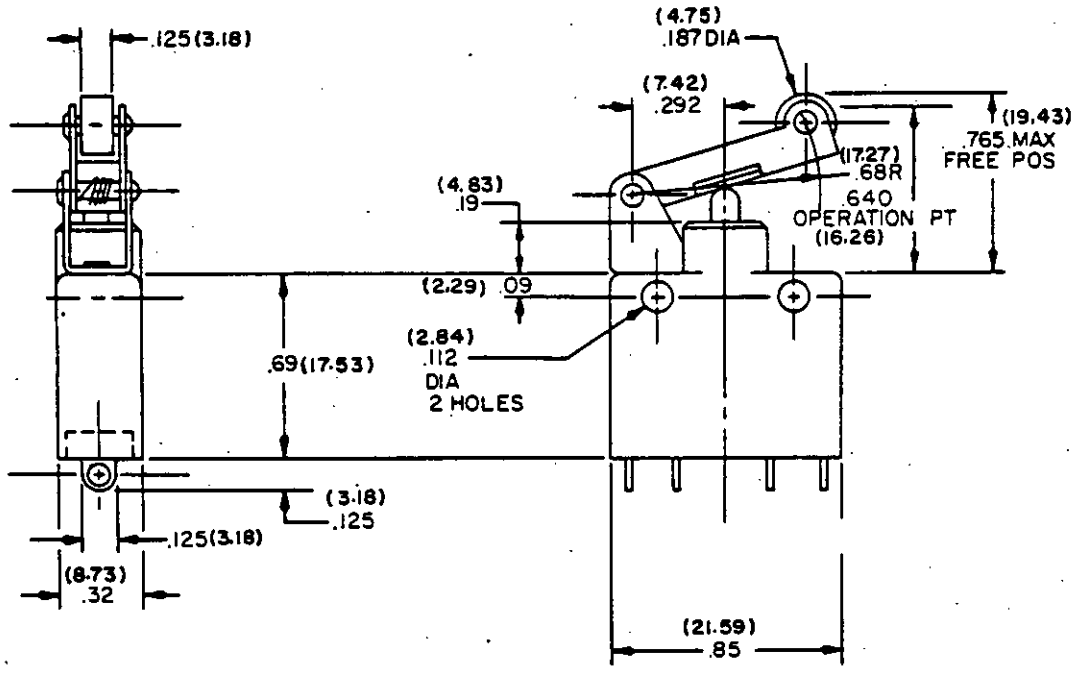

M8805/84-002

FIGURE 110-40. Switches, sensitive, watertight, 10 amperes, double break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

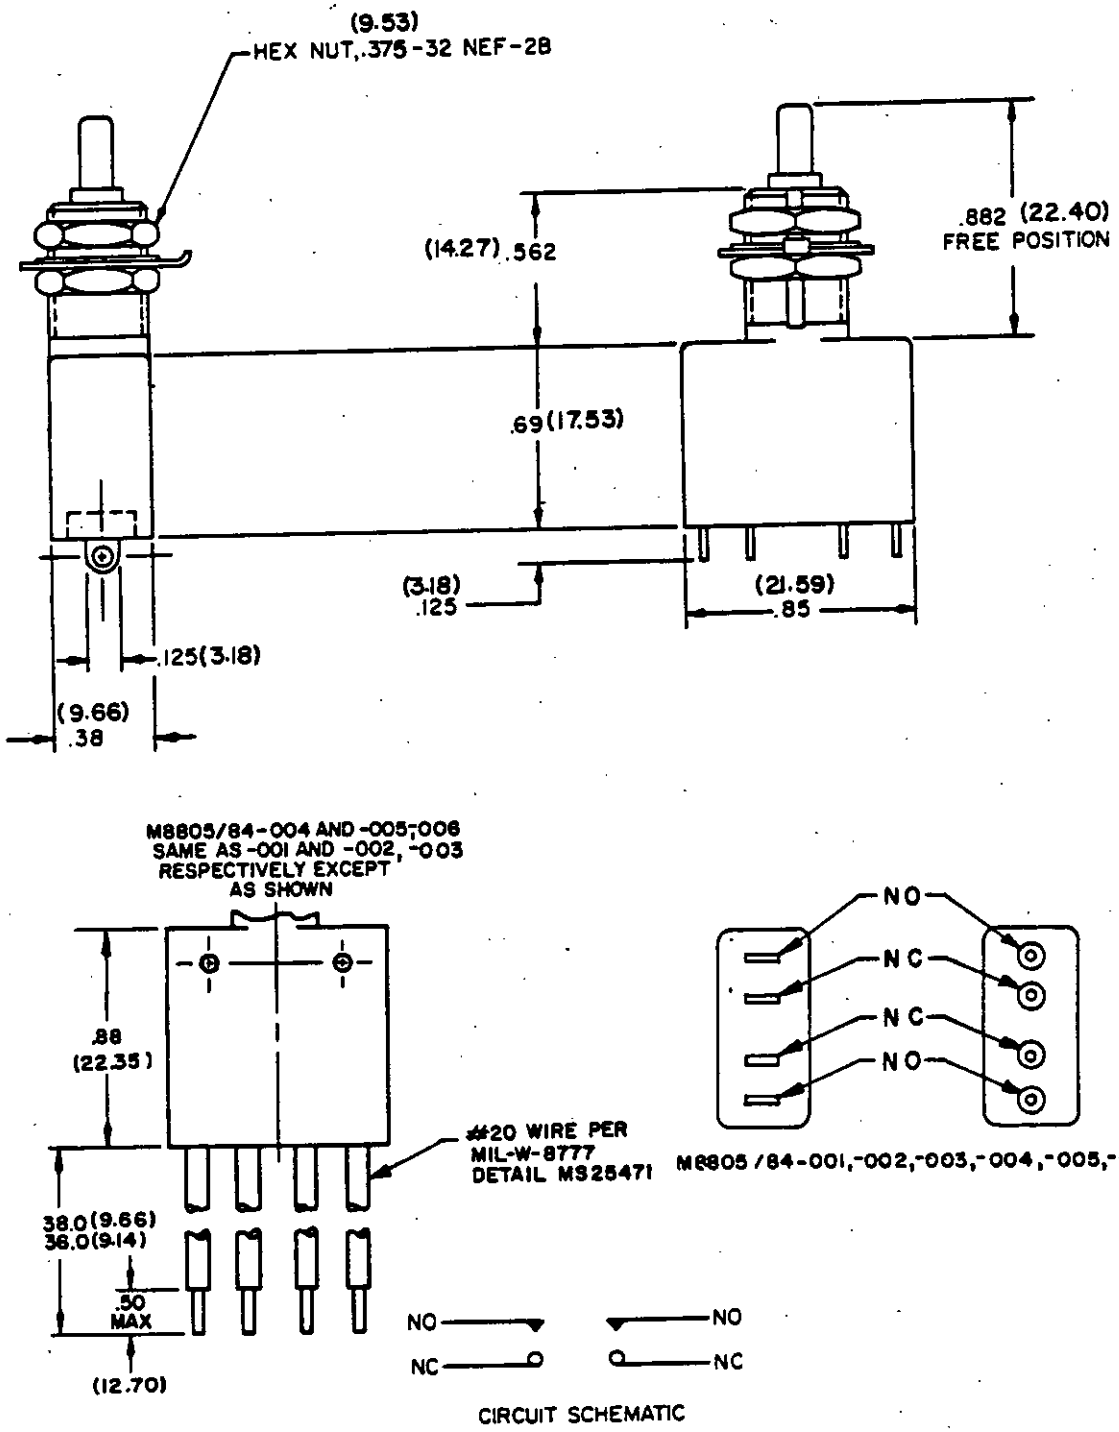


FIGURE 110-40. Switches, sensitive, watertight, 10 amperes, double break - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Procurement document: MIL-S-8805/84.

Part numbers: See table 110-XXIII.


Electrical ratings.

Load	Sea level - 28 vdc		50,000 feet - 28 vdc	
	Single circuit NO or NC	2 circuit	Single circuit NO or NC	2 circuit
	(amperes)	(amperes)	(amperes)	(amperes)
Resistive	10	10	10	10
Inductive	7.5	5	3.5	2
Motor	4	2	---	---
Minimum	.04	.04	.04	.04

TABLE 110.XXIII. Part number and operating characteristics.

Part number M8805/84	Type of actuator	Actuating force (maximum)	Releasing force (minimum)	Pretravel (maximum)	Movement differential	Over-travel (minimum)	Strength of actuator
				(inch)	(inch)	(inch)	(lbs)
-001 -004	Pin plunger	2.5 lbs	.5 lb	.050	.020 ±.010	.012	25
-002 -005	Roller-lever	20 oz	4 oz	.125	.060 max	.025	10
-003 -006	Over-travel plunger	2.5 lbs	.5 lb	.070	.020 ±.010	.187	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

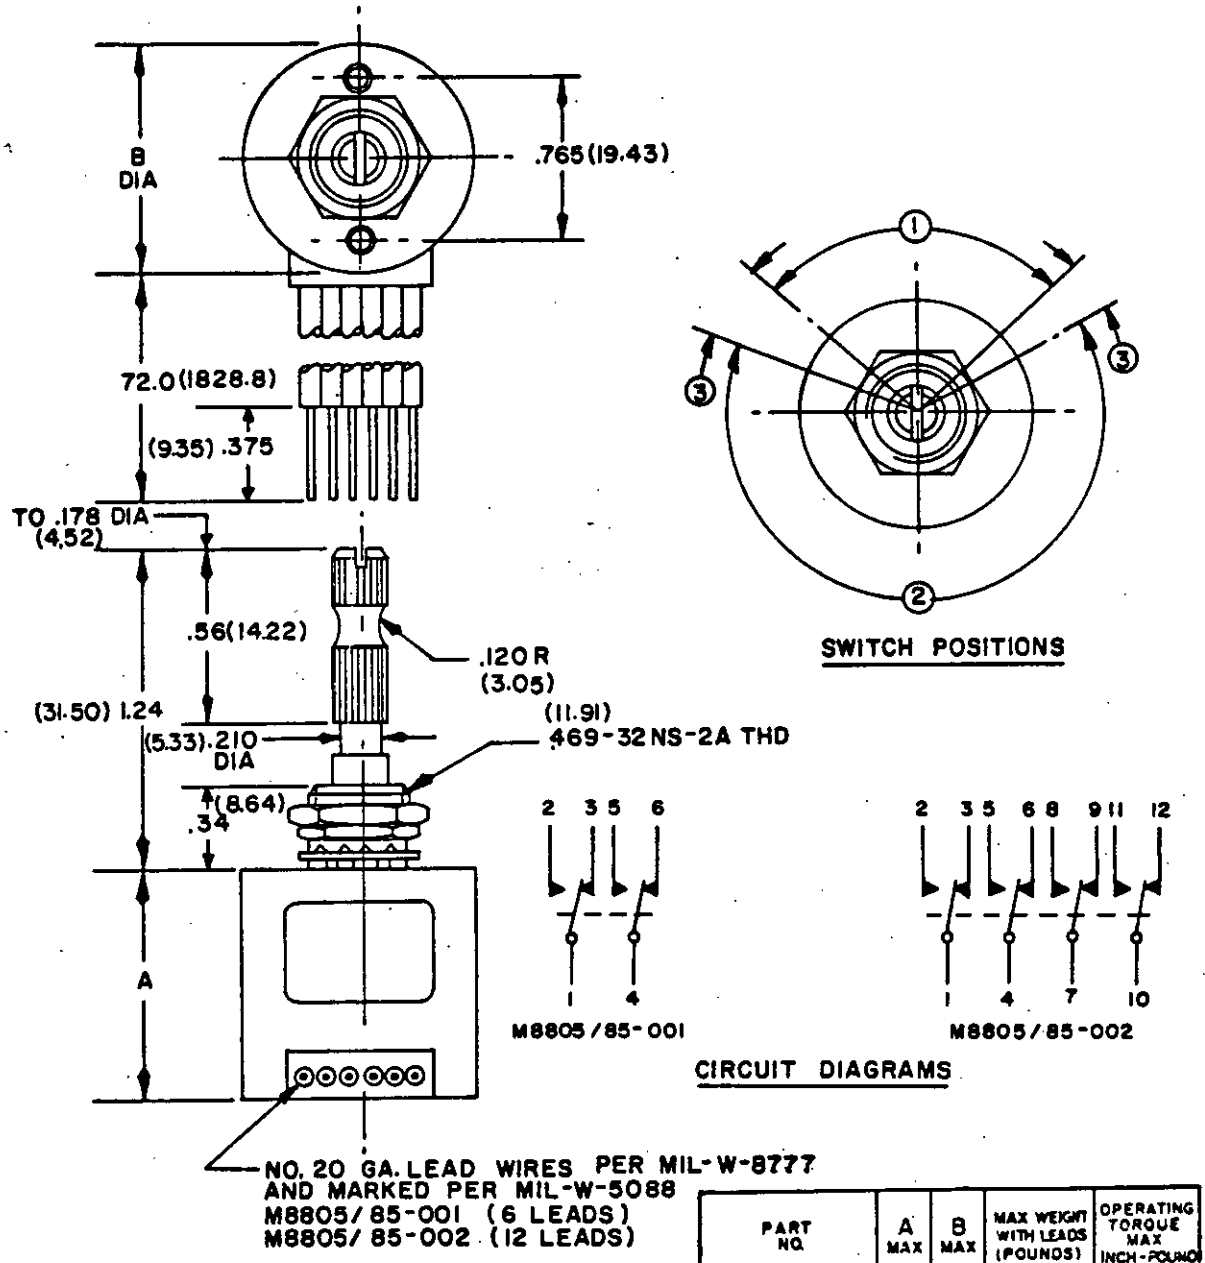

PART NO.	A MAX	B MAX	MAX WEIGHT WITH LEADS (POUNDS)	OPERATING TORQUE MAX INCH-POUND
M8805/85-001	1.03	1.03	.47	1
M8805/85-002	1.30	1.53	.88	3

FIGURE 110-41. Switch, sensitive, rotary (non-self return), 4 amperes, resilient.

Procurement document: MIL-S-8805/85.

Part numbers: See table 110.XXIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	28 Vdc	
	Sea level	100,000 feet
Resistive	4A	4A
Inductive	3A	1A
Motor	4A	4A
Lamp	2.4A	2.4A

TABLE 110.XXIV. Part numbers and operating characteristics.

Range		M8805/85-001	M8805/85-002
1	Free position area circuits made	90° ±15° 1-3 and 4-6	90° ±15° 1-3, 4-6, 7-9, and 10-12
2	Reference circuits made	250° 1-2 and 4-5	250° 1-2, 4-5, 7-8, and 10-11
3	Differential travel	10° max	10° max
N/A	Simultaneity	2° max make of 1-3 & 4-6 only	3° max make of 1-3, 4-6, 7-9 & 10-12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

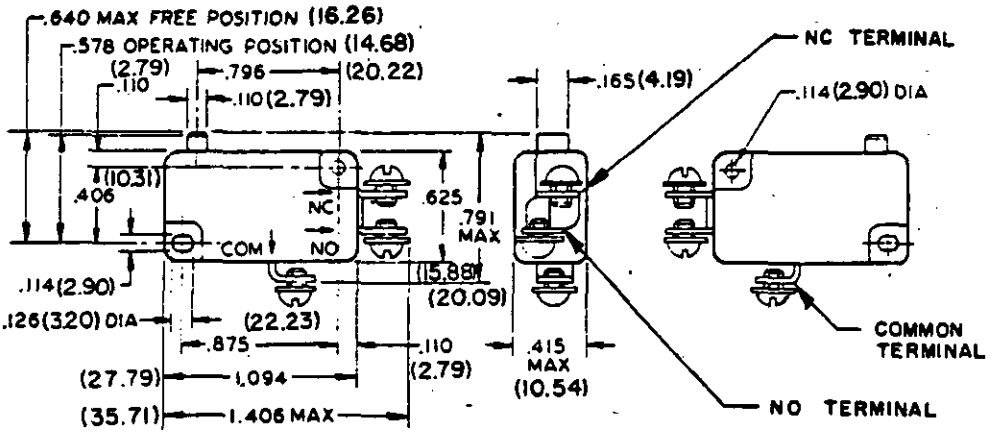


FIGURE 110-42. Switch, sensitive, SPDT, 10 amperes, unsealed.

Procurement document: MIL-S-8805/90.

Part numbers: See table 110.XXV.

Electrical ratings.

Load	Sea level		50,000 feet	
	28 Vdc	115 Vac, 60 Hz	28 Vdc	115 Vac, 60 Hz
	amperes	amperes	amperes	amperes
Resistive - - - - - -	10	10	10	10
Inductive - - - - - -	6	10	6	10
Motor - - - - - - - -	6	3	---	---

Operating characteristics:

Actuating force:	75 grams maximum.
Pretravel:	0.050 inch maximum.
Movement differential:	0.010 inch maximum.
Overtravel:	0.050 inch maximum.

TABLE 110.XXV. Part numbers and characteristics.

Part number M8805/90	Terminals	Switching characteristics
-001	NC, NO & Common	SPDT
-002	NO & Common	SPNO
-003	NC & Common	SPNC

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

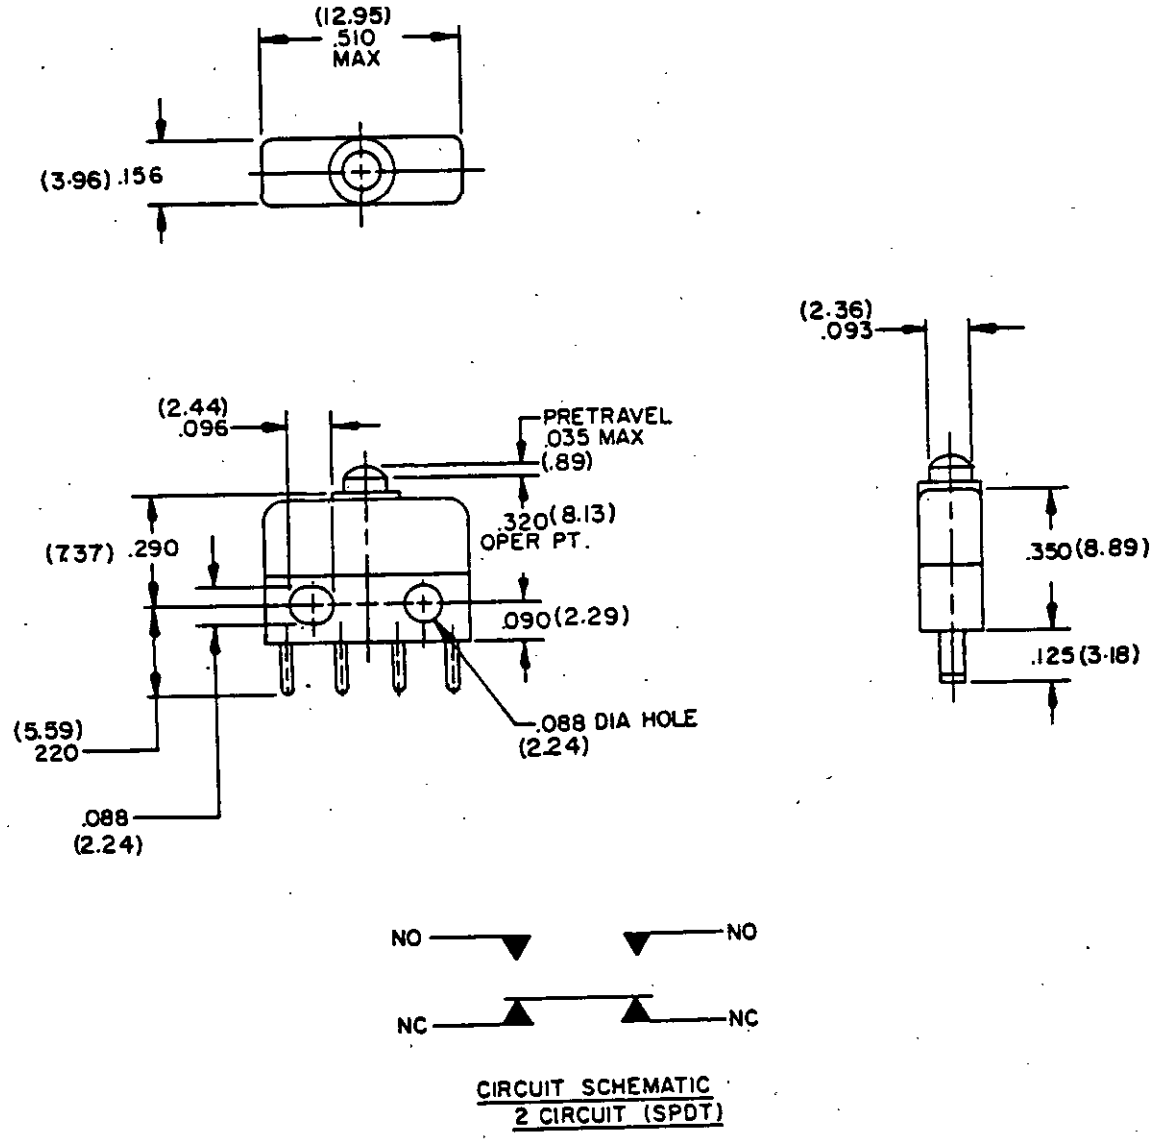


FIGURE 110-43. Switch, sensitive, 2 circuit (5 amperes) or SPDT (8 amperes), unsealed.

Procurement document: MIL-S-8805/101.

Part number: M8805/101-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level, 28 Vdc		70,000 feet, 28 Vdc	
	NO or NC	2 circuit	NO or NC	2 circuit
	amperes	amperes	amperes	amperes
Resistive - - - -	8	5	8	5
Inductive - - - -	5	3	3	2
Motor - - - - - -	5	---	---	---

Operating characteristics:

Actuating force:	8 ounces maximum
Pretravel:	.035 inch maximum
Overtravel:	.004 inch minimum
Movement differential:	.010 inch minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


SECTION 111

SWITCHES, THERMOSTATIC
(Applicable specification: MIL-S-24236)

FIGURE NO.	SWITCH CHARACTERISTICS			PAGE
	Specification sheet number	Circuitry	Electrical rating	
111-1	MIL-S-24236/11	SPST	1 ampere	111.2
111-2	MIL-S-24236/13	SPST	1 ampere	111.4
111-3	MIL-S-24236/19	SPST	1 ampere	111.6
111-4	MIL-S-24236/20	SPST	2 amperes	111.8
111-5	MIL-S-24236/2	SPST	5 amperes	111.10
111-6	MIL-S-24236/1	SPST	5 amperes	111.12
111-7	MIL-S-24236/24	SPDT	5 amperes	111.21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS			ENDURANCE
	Sea level		70,000 ft	
	28 V	115 V, 60 Hz	28 V	
	(ampere)	(ampere)	(ampere)	(cycles)
Resistive - - -	1.0	1.0	1.0	10,000
Inductive - - -	.5	.5	.5	10,000
Lamp- - - - - -	.2	.2	.2	10,000

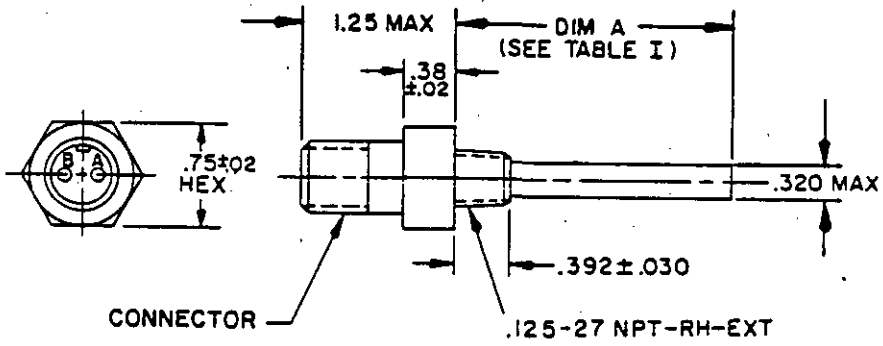

INCHES	MM
.02	.51
.030	.76
.125	3.18
.320	8.13
.38	9.65
.392	9.96
.75	19.05
1.25	31.75

FIGURE 111-1. Switches, thermostatic (MIL-S-24236/11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TEMPERATURE SETTING RANGES AND TOLERANCES:

Temperature (°F)	Tolerance (±°F)
80 - 200	7
205 - 300	10
305 - 400	15

PART NUMBER: Consists of "M24236/11" followed by a dash and a five-letter code as shown in the following example:

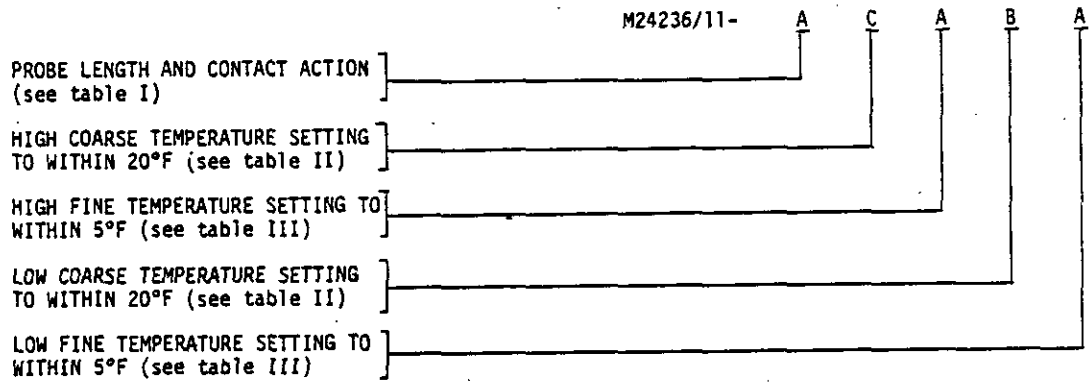


TABLE I. Probe length and contact action.

	Probe length (dimension A ±.030 (.76))					Contact action
	1.500 (38.10)	2.000 (50.80)	2.500 (63.50)	3.000 (76.20)	4.000 (101.60)	
Code - - -	A	C	E	G	J	Open on increasing temperature
Code - - -	B	D	F	H	K	Open on decreasing temperature

TABLE II. Coarse temperature setting (to within 20°F).

Code	Temperature (°F)	Code	Temperature (°F)	Code	Temperature (°F)
A - - -	80	G - - -	200	N - - -	320
B - - -	100	H - - -	220	P - - -	340
C - - -	120	J - - -	240	Q - - -	360
D - - -	140	K - - -	260	R - - -	380
E - - -	160	L - - -	280	S - - -	400
F - - -	180	M - - -	300		

TABLE III. Fine temperature setting (to within 5°F).


Code	Temperature (°F)
A - - - - - -	0
B - - - - - -	5
C - - - - - -	10
D - - - - - -	15

FIGURE 111-1. Switches, thermostatic (MIL-S-24236/11) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

ELECTRICAL RATINGS: 1.0 ampere resistive at 115 Vac, 60 Hz.
0.5 ampere resistive at 28 Vdc.

ENDURANCE: 10,000 cycles.

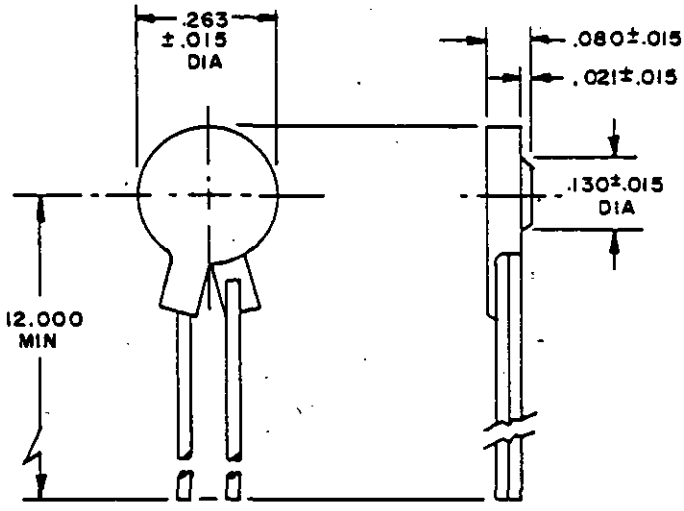

INCHES	MM
.015	.38
.021	.53
.080	2.03
.130	3.30
.263	6.68
12.000	304.80

FIGURE 111-2. Switches, thermostatic (MIL-S-24236/13).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Operating point		Part No.	Operating point		Part No.	Operating point		Part No.
Open on incr temp (±8°F)	Close on decr temp (±8°F)	M24236/13-	Open on incr temp (±8°F)	Close on decr temp (±8°F)	M24236/13-	Open on incr temp (±8°F)	Close on decr temp (±8°F)	M24236/13-
0	-30	10	120	90	34	240	210	58
5	-25	11	125	95	35	245	215	59
10	-20	12	130	100	36	250	220	60
15	-15	13	135	105	37	255	225	61
20	-10	14	140	110	38	260	230	62
25	-5	15	145	115	39	265	235	63
30	0	16	150	120	40	270	240	64
35	5	17	155	125	41	275	245	65
40	10	18	160	130	42	280	250	66
45	15	19	165	135	43	285	255	67
50	20	20	170	140	44	290	260	68
55	25	21	175	145	45	295	265	69
60	30	22	180	150	46	300	270	70
65	35	23	185	155	47	305	275	71
70	40	24	190	160	48	310	280	72
75	45	25	195	165	49	315	285	73
80	50	26	200	170	50	320	290	74
85	55	27	205	175	51	325	295	75
90	60	28	210	180	52	330	300	76
95	65	29	215	185	53	335	305	77
100	70	30	220	190	54	340	310	78
105	75	31	225	195	55	345	315	79
110	80	32	230	200	56	350	320	80
115	85	33	235	205	57			

Operating point		Part No.	Operating point		Part No.	Operating point		Part No.
Open on decr temp (±8°F)	Close on incr temp (±8°F)	M24236/13-	Open on decr temp (±8°F)	Close on incr temp (±8°F)	M24236/13-	Open on decr temp (±8°F)	Close on incr temp (±8°F)	M24236/13-
-30	0	81	90	120	105	210	240	07
-25	5	82	95	125	106	215	245	123
-20	10	83	100	130	107	220	250	124
-15	15	84	105	135	108	225	255	08
-10	20	85	110	140	109	230	260	125
-5	25	86	115	145	110	235	265	126
0	30	87	120	150	111	240	270	127
5	35	88	125	155	112	245	275	09
10	40	89	130	160	113	250	280	128
15	45	90	135	165	114	255	285	129
20	50	91	140	170	115	260	290	130
25	55	92	145	175	01	265	295	131
30	60	93	150	180	116	270	300	132
35	65	94	155	185	02	275	305	133
40	70	95	160	190	117	280	310	134
45	75	96	165	195	03	285	315	135
50	80	97	170	200	04	290	320	136
55	85	98	175	205	118	295	325	137
60	90	99	180	210	119	300	330	138
65	95	100	185	215	120	305	335	139
70	100	101	190	220	05	310	340	140
75	105	102	195	225	121	315	345	141
80	110	103	200	230	06	320	350	142
85	115	104	205	235	122			

FIGURE 111-2. Switches, thermostatic (MIL-S-24236/13) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

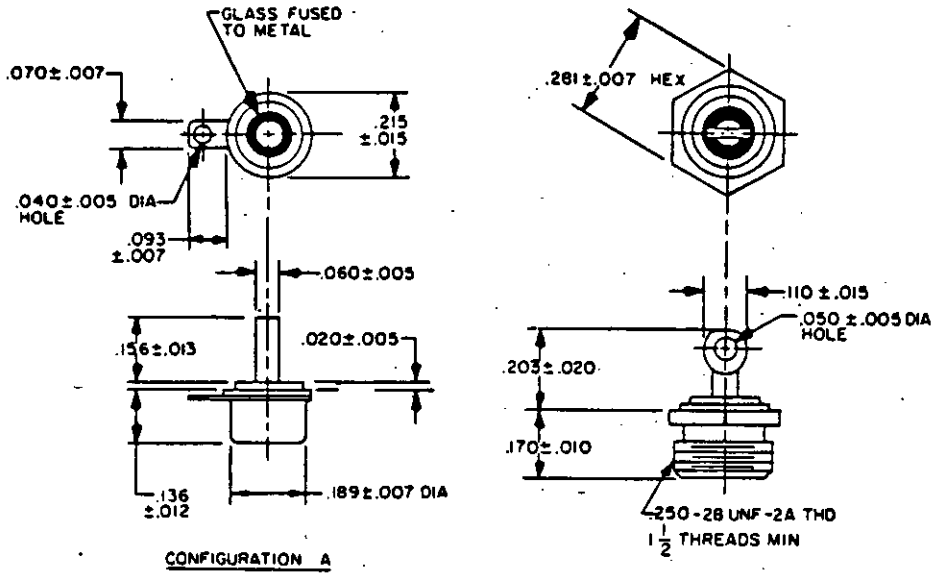

INCHES	MM
.005	.13
.007	.18
.012	.30
.013	.33
.015	.38
.020	.51
.040	1.02
.050	1.27
.060	1.52
.070	1.78
.093	2.36
.110	2.79
.112	2.84
.136	3.45
.156	3.96
.168	4.27
.170	4.32
.189	4.80
.203	5.16
.215	5.46
.250	6.35
.281	7.14
.290	7.37

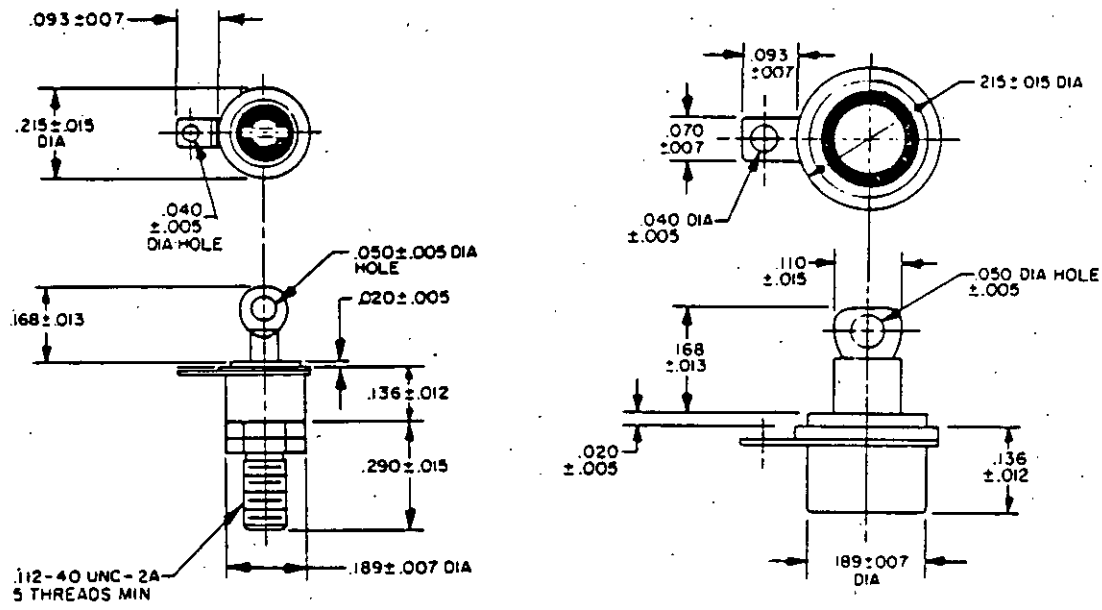


FIGURE 111-3. Switches, thermostatic (MIL-S-24236/19).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Operating point		Part No. M24236/19- Configuration				Operating point		Part No. M24236/19- Configuration			
Open on decreasing temperature (±8°F)	Close on increasing temperature (±8°F)	A	B	C	D	Open on increasing temperature (±8°F)	Close on decreasing temperature (±8°F)	A	B	C	D
-30	0	001	143	285	427	0	-30	072	214	356	498
-25	5	002	144	286	428	5	-25	073	215	357	499
-20	10	003	145	287	429	10	-20	074	216	358	500
-15	15	004	146	288	430	15	-15	075	217	359	501
-10	20	005	147	289	431	20	-10	076	218	360	502
-5	25	006	148	290	432	25	-5	077	219	361	503
0	30	007	149	291	433	30	0	078	220	362	504
5	35	008	150	292	434	35	5	079	221	363	505
10	40	009	151	293	435	40	10	080	222	364	506
15	45	010	152	294	436	45	15	081	223	365	507
20	50	011	153	295	437	50	20	082	224	366	508
25	55	012	154	296	438	55	25	083	225	367	509
30	60	013	155	297	439	60	30	084	226	368	510
35	65	014	156	298	440	65	35	085	227	369	511
40	70	015	157	299	441	70	40	086	228	370	512
45	75	016	158	300	442	75	45	087	229	371	513
50	80	017	159	301	443	80	50	088	230	372	514
55	85	018	160	302	444	85	55	089	231	373	515
60	90	019	161	303	445	90	60	090	232	374	516
65	95	020	162	304	446	95	65	091	233	375	517
70	100	021	163	305	447	100	70	092	234	376	518
75	105	022	164	306	448	105	75	093	235	377	519
80	110	023	165	307	449	110	80	094	236	378	520
85	115	024	166	308	450	115	85	095	237	379	521
90	120	025	167	309	451	120	90	096	238	380	522
95	125	026	168	310	452	125	95	097	239	381	523
100	130	027	169	311	453	130	100	098	240	382	524
105	135	028	170	312	454	135	105	099	241	383	525
110	140	029	171	313	455	140	110	100	242	384	526
115	145	030	172	314	456	145	115	101	243	385	527
120	150	031	173	315	457	150	120	102	244	386	528
125	155	032	174	316	458	155	125	103	245	387	529
130	160	033	175	317	459	160	130	104	246	388	530
135	165	034	176	318	460	165	135	105	247	389	531
140	170	035	177	319	461	170	140	106	248	390	532
145	175	036	178	320	462	175	145	107	249	391	533
150	180	037	179	321	463	180	150	108	250	392	534
155	185	038	180	322	464	185	155	109	251	393	535
160	190	039	181	323	465	190	160	110	252	394	536
165	195	040	182	324	466	195	165	111	253	395	537
170	200	041	183	325	467	200	170	112	254	396	538
175	205	042	184	326	468	205	175	113	255	397	539
180	210	043	185	327	469	210	180	114	256	398	540
185	215	044	186	328	470	215	185	115	257	399	541
190	220	045	187	329	471	220	190	116	258	400	542
195	225	046	188	330	472	225	195	117	259	401	543
200	230	047	189	331	473	230	200	118	260	402	544
205	235	048	190	332	474	235	205	119	261	403	545
210	240	049	191	333	475	240	210	120	262	404	546
215	245	050	192	334	476	245	215	121	263	405	547
220	250	051	193	335	477	250	220	122	264	406	548
225	255	052	194	336	478	255	225	123	265	407	549
230	260	053	195	337	479	260	230	124	266	408	550
235	265	054	196	338	480	265	235	125	267	409	551
240	270	055	197	339	481	270	240	126	268	410	552
245	275	056	198	340	482	275	245	127	269	411	553
250	280	057	199	341	483	280	250	128	270	412	554
255	285	058	200	342	484	285	255	129	271	413	555
260	290	059	201	343	485	290	260	130	272	414	556
265	295	060	202	344	486	295	265	131	273	415	557
270	300	061	203	345	487	300	270	132	274	416	558
275	305	062	204	346	488	305	275	133	275	417	559
280	310	063	205	347	489	310	280	134	276	418	560
285	315	064	206	348	490	315	285	135	277	419	561
290	320	065	207	349	491	320	290	136	278	420	562
295	325	066	208	350	492	325	295	137	279	421	563
300	330	067	209	351	493	330	300	138	280	422	564
305	335	068	210	352	494	335	305	139	281	423	565
310	340	069	211	353	495	340	310	140	282	424	566
315	345	070	212	354	496	345	315	141	283	425	567
320	350	071	213	355	497	350	320	142	284	426	568


FIGURE 111-3. Switches, thermostatic (MIL-S-24236/19) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.


LOAD	ELECTRICAL RATINGS		ENDURANCE
	28 Vdc	115 Vac, 60 Hz	
	(amperes)	(amperes)	(cycles)
Resistive - - -	2.0	2.0	250,000
Inductive - - -	1.0	1.5	250,000
Lamp	1.0	0.5	250,000

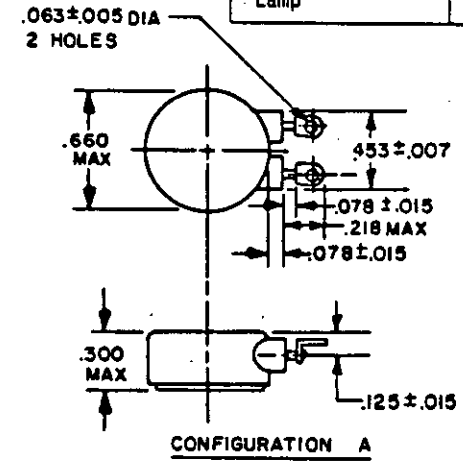


CONFIGURATION A

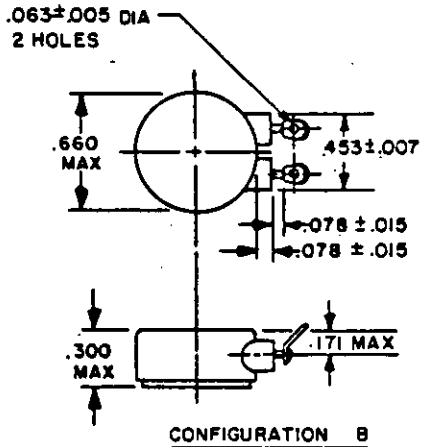

CONFIGURATION B

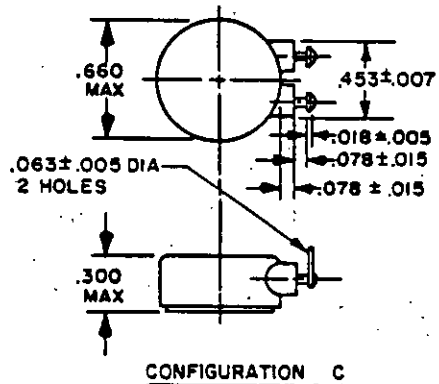

CONFIGURATION C

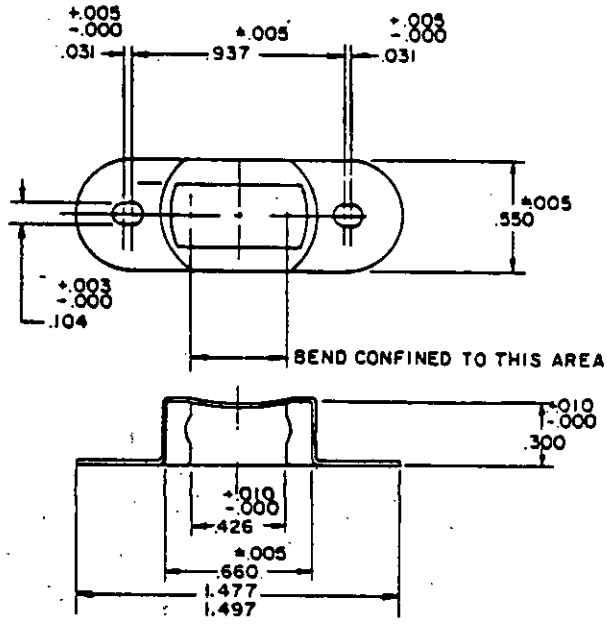

MOUNTING BRACKET
(CONFIGURATIONS A1, B1, AND C1)

INCHES	MM	INCHES	MM
.003	.08	.171	4.34
.005	.13	.218	5.54
.007	.18	.300	7.62
.010	.25	.426	10.82
.015	.38	.453	11.51
.031	.79	.550	13.97
.063	1.60	.660	16.76
.078	1.98	.937	23.80
.104	2.64	1.477	37.52
.125	3.18	1.497	38.02

FIGURE 111-4. Switches, thermostatic (MIL-S-24236/20).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of "M24236/20" followed by a dash and a four-letter code. The four-letter code used in the following example identifies a switch of configuration A which closes on increasing temperature at 140 ±4°F and closes on decreasing temperature 2 to 5°F below the actual closing temperature. EXAMPLE:

M24236/20- A GF B

CONFIGURATION AND CONTACT ACTION (see table I)

OPERATING TEMPERATURE (see tables II and III)

TEMPERATURE DIFFERENTIAL (see table IV)

TABLE I. Configuration and contact action.

	Configuration						Contact action
	A	A1	B	B1	C	C1	
Code - - -	A	C	E	G	J	L	Close on increasing temperature
Code - - -	B	D	F	H	K	M	Close on decreasing temperature
Code 1/- -	N	Q	S	U	W	Y	Open on increasing temperature
Code 1/- -	P	R	T	V	X	Z	Open on decreasing temperature

1/ Available tolerance is ±5°F only (see table III).

TABLE II. Temperature setting to the nearest 25°F.

Code	Temperature	Code	Temperature
	°F		°F
A - - -	0	K - - -	225
B - - -	25	L - - -	250
C - - -	50	M - - -	275
D - - -	75	N - - -	300
E - - -	100	P - - -	325
F - - -	125	Q - - -	350
G - - -	150	R - - -	375
H - - -	175	S - - -	400
J - - -	200		

TABLE III. Temperature setting to the nearest 5°F.

	Unit					Tolerance
	-10	-5	0	+5	+10	
Code - - -	A 1/	B	C	D	E	±3°F
Code - - -	F	G	H	J	K	±4°F
Code - - -	L	M	N	P	Q	±5°F

1/ Available to 250°F only.

TABLE IV. Temperature differential.


Code	Available differential	Operating temp. range
A - - -	2 - 4°F	-10° to +250°F
B - - -	2 - 5°F	
C - - -	3 - 7°F	+251° to +400°F

FIGURE 111-4. Switches, thermostatic (MIL-S-24236/20) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS		ENDURANCE
	28 V	115 V, 60 Hz	
	(amperes)	(amperes)	(cycles)
Resistive - - -	5.0	2.0	100,000
Inductive - - -	2.5	1.0	100,000
Lamp- - - - - -	1.0	0.5	100,000

NOTE: Do not use in applications where basic switch will be exposed to pressures over 50 psig.

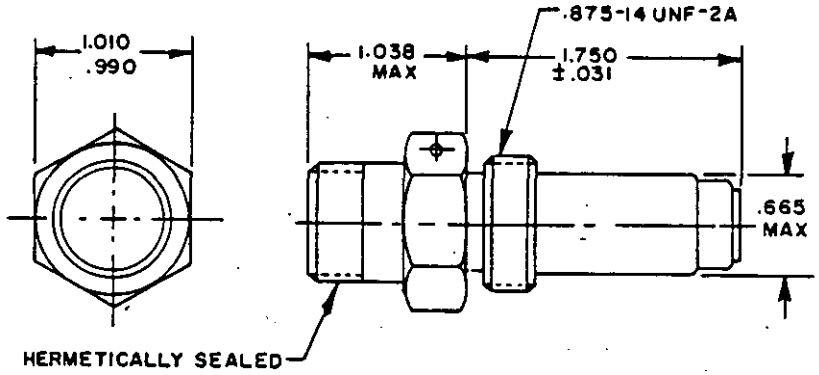


INCHES	MM
.031	.79
.665	16.89
.875	22.23
.990	25.15
1.010	25.65
1.038	26.37
1.750	44.45

Operating point		Part No. M24236/2-	Operating point		Part No. M24236/2-
Open on increasing temperature	Close on decreasing temperature		Open on decreasing temperature	Close on increasing temperature	
(°F)	(°F)		(°F)	(°F)	
23 ±15	15 ±14	001	-10 ±5	10 ±5	003
169 ±5	160 ±4	002	90 ±5	105 ±4	004

FIGURE 111-5. Switches, thermostatic (MIL-S-24236/2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

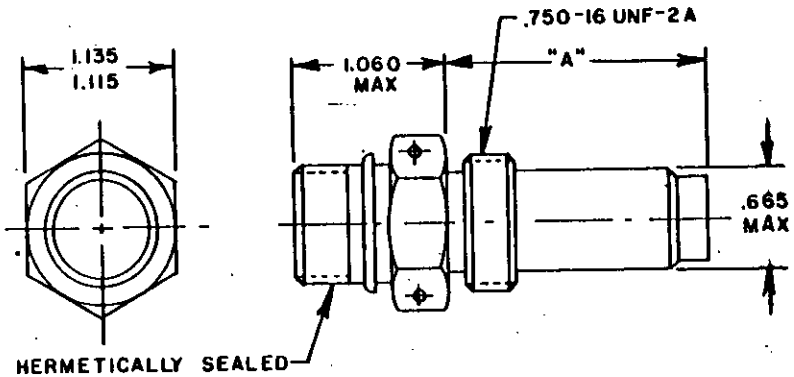

INCHES	MM
.665	16.89
.750	19.05
1.060	26.92
1.115	28.32
1.135	28.83


Operating point		Part No. M24236/2- Dimension "A" ±.030 (.76)				
Open on increasing temperature (°F)	Close on decreasing temperature (°F)	1.500 (38.10)	2.000 (50.80)	2.500 (63.50)	3.000 (76.20)	4.000 (101.60)
100 ±7	80 ±7	005	037	069	101	133
120	100	006	038	070	102	134
140	120	007	039	071	103	135
160	140	008	040	072	104	136
180	160	009	041	073	105	137
200	180	010	042	074	106	138
220 ±10	190 ±10	011	043	075	107	139
240	210	012	044	076	108	140
260	230	013	045	077	109	141
280	250	014	046	078	110	142
300	270	015	047	079	111	143
320 ±15	280 ±15	016	048	080	112	144
340	300	017	049	081	113	145
360	320	018	050	082	114	146
380	340	019	051	083	115	147
400	360	020	052	084	116	148

Operating point		Part No. M24236/2- Dimension "A" ±.030 (.76)				
Open on decreasing temperature (°F)	Close on increasing temperature (°F)	1.500 (38.10)	2.000 (50.80)	2.500 (63.50)	3.000 (76.20)	4.000 (101.60)
80 ±7	100 ±7	021	053	085	117	149
100	120	022	054	086	118	150
120	140	023	055	087	119	151
140	160	024	056	088	120	152
160	180	025	057	089	121	153
180	200	026	058	090	122	154
190 ±10	220 ±10	027	059	091	123	155
210	240	028	060	092	124	156
230	260	029	061	093	125	157
250	280	030	062	094	126	158
270	300	031	063	095	127	159
280 ±15	320 ±15	032	064	096	128	160
300	340	033	065	097	129	161
320	360	034	066	098	130	162
340	380	035	067	099	131	163
360	400	036	068	100	132	164

FIGURE 111-5. Switches, thermostatic (MIL-S-24236/2) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:41Z
Check the source to verify that this is the current version before use.


LOAD	ELECTRICAL RATINGS			ENDURANCE
	Sea level		80,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(amperes)	(amperes)	(amperes)	(cycles)
Resistive - - -	5.0	2.0	5.0	100,000
Inductive - - -	2.5	1.0	2.6	100,000
Lamp- - - - - -	1.0	0.5	1.0	100,000

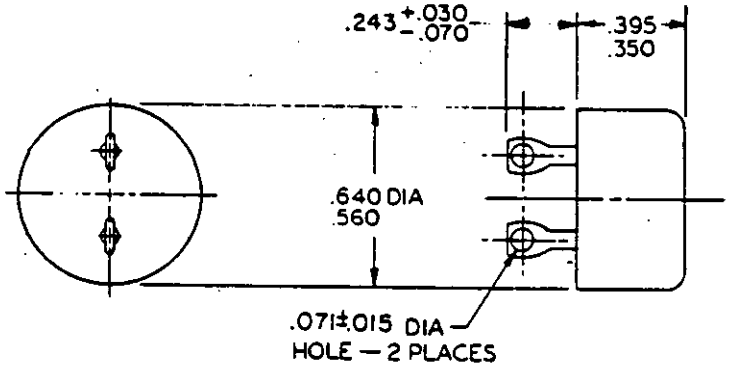

CONFIGURATION A

(MOUNTING BRACKETS NOT FURNISHED)


INCHES	MM
.005	.13
.007	.18
.015	.38
.021	.53
.030	.76
.070	1.78
.071	1.80
.140	3.56
.243	6.17
.350	8.76
.395	10.03
.560	14.22
.640	16.26
1.190	30.23
1.260	32.00

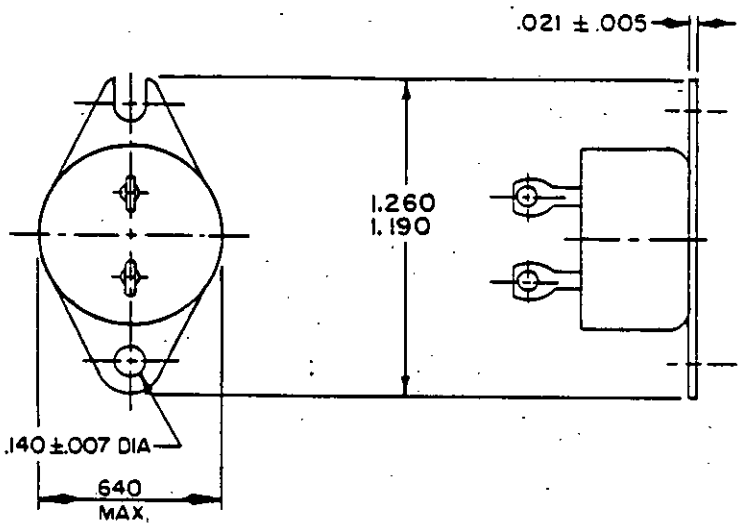

CONFIGURATION A1


FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

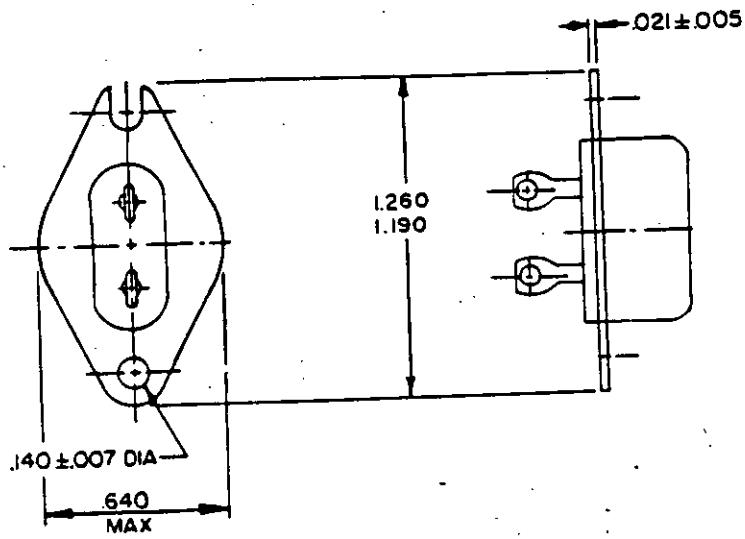


CONFIGURATION A2

INCHES	MM
.005	.13
.007	.18
.021	.53
.071	1.80
.140	3.56
.187	4.75
.350	8.76
.395	10.03
.500	12.70
.560	14.22
.640	16.26
1.190	30.23
1.260	32.00

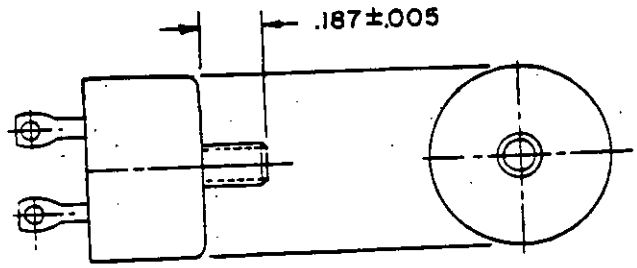

CONFIGURATION A3

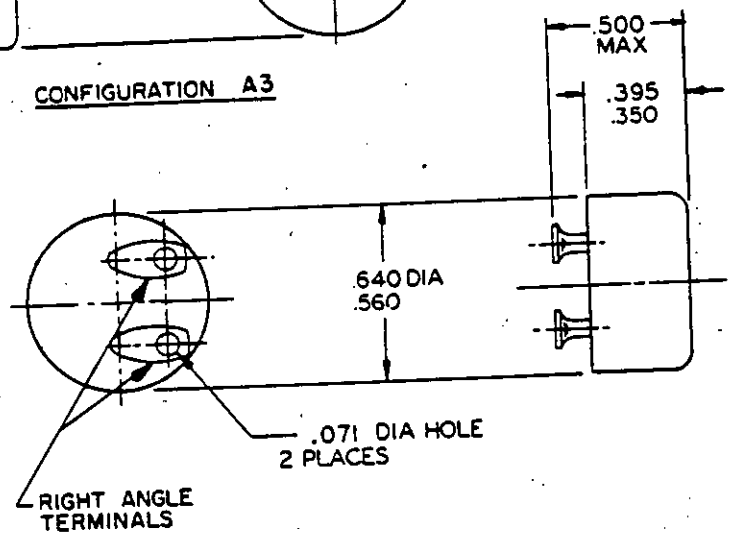


CONFIGURATION B

(MOUNTING BRACKETS NOT FURNISHED)

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

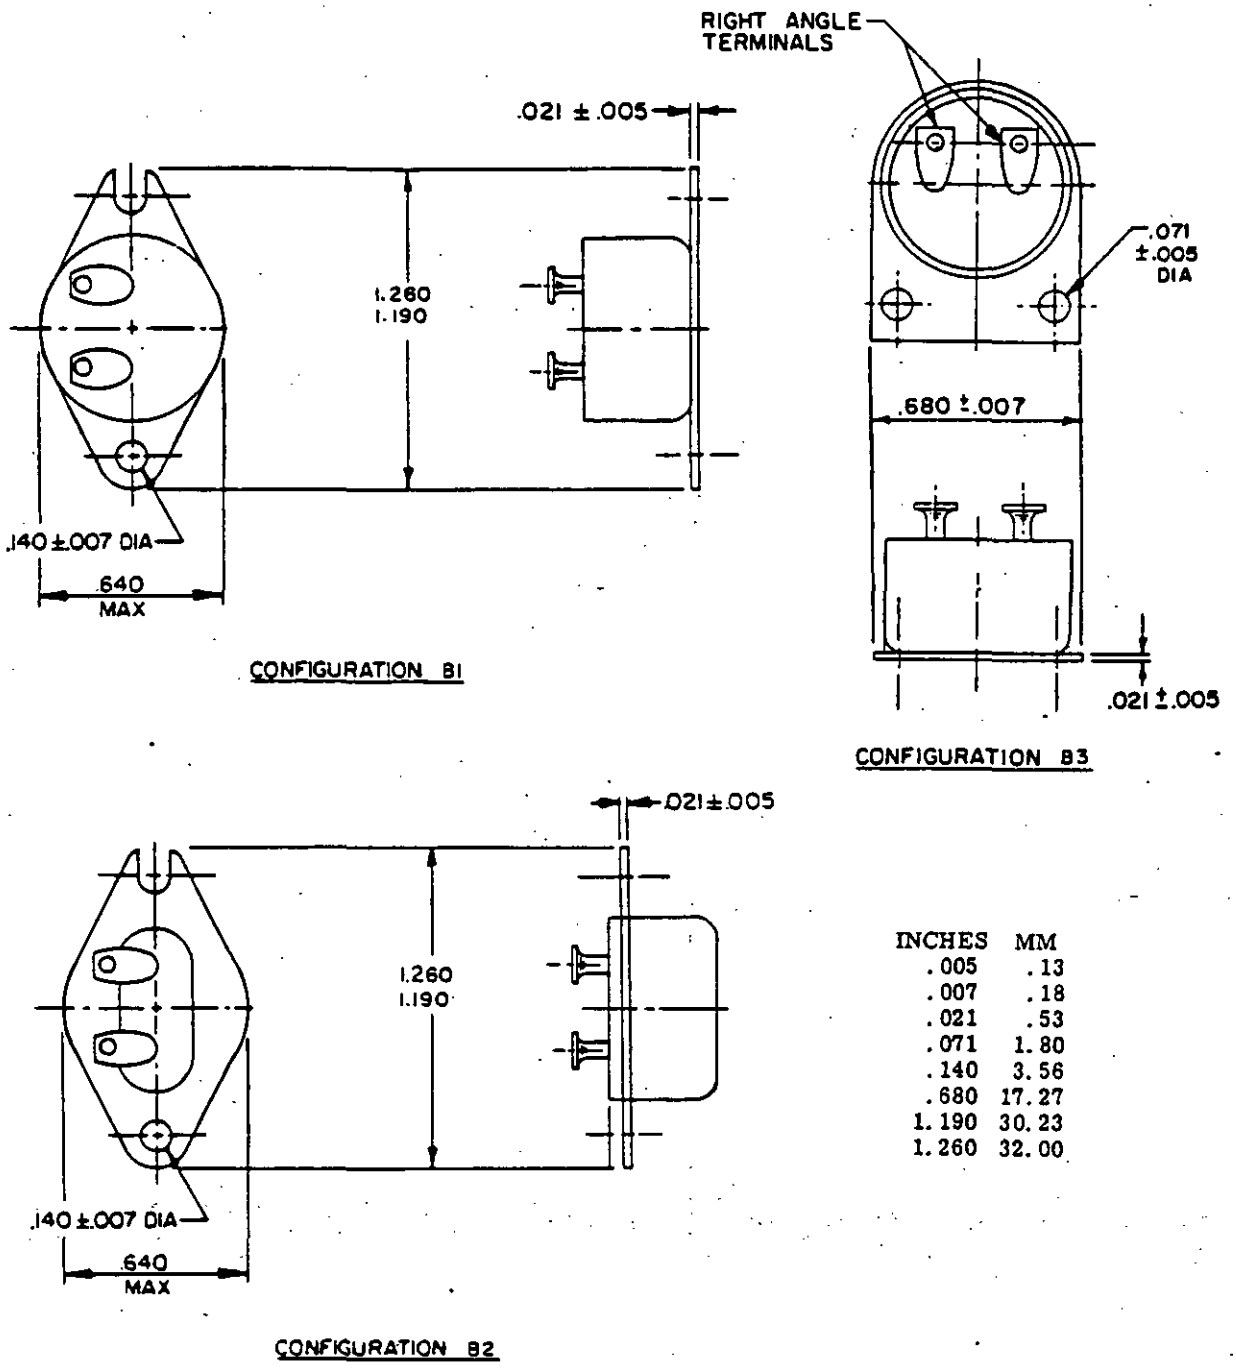

INCHES	MM
.005	.13
.007	.18
.021	.53
.071	1.80
.140	3.56
.680	17.27
1.190	30.23
1.260	32.00

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONFIGURATION A

Operating points				Part No. M24236/1-	Operating points				Part No. M24236/1-
Open on incr temp	Close on decr temp	Open on decr temp	Close on incr temp		Open on incr temp	Close on decr temp	Open on decr temp	Close on incr temp	
(°F)	(°F)	(°F)	(°F)		(°F)	(°F)	(°F)	(°F)	
60 ±5	35 ±5	---	---	0105	115 ±5	80 ±7	---	---	0130
60 ±8	40 ±5	---	---	0100	165 ±5	145 ±5	---	---	0131
70 ±8	50 ±5	---	---	0110	180 ±5	160 ±5	---	---	0132
75 ±8	45 ±8	---	---	0115	215 ±5	195 ±5	---	---	0133
80 ±5	60 ±7	---	---	0120	---	---	150 ±5	170 ±7	0135
90 ±8	70 ±5	---	---	0125	---	---	275 ±10	325 ±12	0140

CONFIGURATION A1

Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)		(°F)	(°F)	
35 ±5	15 ±5	0200	158 ±5	131 ±5	0320
37	20	0205	160 ±3	150	026
45	32	0210	160 ±5	140	0321
50	30	0214	160	145	0325
50	35	0215	167	158	0330
50	40	0220	170	158	0329
55	40	0230	170	160	0331
60	40	0250	173 ±3	149	0335
60	45	0255	173 ±5	158	0336
60	50	0245	176	160	0340
65	50	0260	180	135	0345
70	40	0262	180	170	0350
75	60	0265	185	165	0355
77	72	0590	185	170	0356
85	65	0270	190	170	0360
95	85	0275	194	176	0365
120	100	0280	200	160	0370
125	110	004	200	180	0371
125	120	0281	200	185	0372
128	112	0285	210 ±8	175	0375
131 ±3	120	024	212 ±8	192	0380
135 ±5	110 ±10	0290	230 ±5	205	0379
140	130 ±5	0295	230	220	0381
145	135	025	235	215	032
147	132	0300	250 ±8	210 ±8	0383
150	120	0304	265	180 ±5	0385
150	135	0305	270	230 ±6	0390
150	140	0306	272	220 ±6	0395
155	135	0310	275	200 ±6	0400
158	123	0315	350 ±12	310 ±10	0405
Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-	Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-
(°F)	(°F)		(°F)	(°F)	
17 ±5	31 ±5	027	50 ±5	65 ±5	0435
19	36	0410	62	77	0440
28	38	0415	80	95	0450
28	45	0420	85	95	0451
32 ±9	54 ±9	0425	86	112	0455
40 ±5	60 ±5	0430	86	120	0460

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONFIGURATION A1					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on decreasing temperature	Close on increasing temperature		Open on decreasing temperature	Close on increasing temperature	
(°F)	(°F)		(°F)	(°F)	
95 ±5	115 ±7	0465	144 ±5	158 ±5	0507
110 ±8	130 ±6	0470	149 ±8	165 ±6	0510
120 ±5	130 ±5	028	150 ±5	160 ±5	0515
120	140	0475	151	167	0520
120	160	0480	165	185	0523
125 ±7	150	0485	170	200	0525
130 ±5	140	0476	174	194	0530
130 ±8	145 ±6	0490	175	190	0535
131 ±5	151 ±3	0495	176	185	0540
133	158 ±5	003	180	200	0549
140	150	0486	180	210 ±6	0545
145	155	0496	185	200 ±5	0550
135	175	0500	192	219	0555
155	175	0501	200	250	0560
138	153	0506	230 ±8	260	0565
138 ±8	153 ±6	0505			

CONFIGURATION A2					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)		(°F)	(°F)	
80 ±5	60 ±5	0600	150 ±5	141 ±5	0640
80	65	0605	158	140	0645
90	75	0610	175	160	0650
100	85	0611	181	165	0655
120	111	0615	185	120	0660
130	110	0620	212 ±9	185 ±9	0665
131	116 ±7	0625	225 ±8	150 ±5	0670
140	105 ±7	0630	239 ±5	221 ±5	0675
145	130 ±5	0635	250 ±8	220 ±6	0680
145	135 ±5	0636	480 ±25	420 ±25	0684
Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-	Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-
(°F)	(°F)		(°F)	(°F)	
45 ±5	73 ±5	0685	140 ±5	155 ±5	0710
80	100 ±5	0686	140	160	0715
85	105 ±7	0690	145	160	0720
95	100 ±5	0687	160	180	0725
111	120	0695	170	185	0730
116	125	0700	175	225	0735
120	130	0701	240	255	0736
140	150 ±7	0705	200	280	0740

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONFIGURATION A3					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)		(°F)	(°F)	
50 ±5	30 ±5	0800	225 ±10	195 ±8	0830
80	55	0805	230 ±5	210 ±5	0835
158	140	001	239	221	002
170	140	0815	240	227	0836
170	150	0810	248 ±14	194 ±10	0840
190	170	0818	299 ±8	280 ±6	0845
197	177	0820	302 ±12	202 ±6	0850
212 ±8	176	0825			
Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-	Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-
(°F)	(°F)		(°F)	(°F)	
40 ±10	60 ±5	0855	165 ±5	195 ±5	0883
100 ±5	120	0860	175 ±5	205	0884
105	120	0865	180 ±6	210	0885
130	160	0871	185 ±5	210	0886
140	165	0872	195 ±5	220	0887
149	158 ±4	0870	200 ±8	230 ±8	0888
150	175 ±5	0876	205	230	0889
155	170	0875	210	240	0891
155	185	0881	220	250	0892
160	185	0882	248	266 ±6	0890
165	180	0880			

CONFIGURATION B					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)		(°F)	(°F)	
75 ±5	55 ±5	0895	212 ±8	194 ±5	0935
100 ±8	85	0900	224 ±4	See 1/	0940
125 ±5	100	0905	229 ±3	199 ±5	0945
160 ±3	See 1/	0915	275 ±8	235 ±6	0948
160 ±5	40 ±5	0910	290 ±8	250 ±6	0949
176 ±3	See 1/	0920	350 ±12	310 ±10	0950
194 ±15	175 ±15	0925	420 ±15	350 ±10	0955
205 ±3	See 1/	0930			
Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-	Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-
(°F)	(°F)		(°F)	(°F)	
115 ±5	130 ±5	0960	See 2/	88 ±3	0985
173	203	0965	See 2/	124 ±3	0990
180	200	0970	See 2/	153 ±5	0995
215 ±8	250 ±8	0975	See 2/	176 ±5	1000
215 ±8	245 ±8	0980	See 2/	205 ±4	1005

1/ 9-14 below open.
2/ 9-14 below close.

FIGURE III-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONFIGURATION B1					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)		(°F)	(°F)	
25 ±5	10 ±5	1100	160 ±5	150 ±5	1275
30	20	1105	164	149	006
43	28	1110	165	155 ↓	1280
45	30	1115	170	130 ±10	1290
50	30	1116	172	159 ±5	1295
50	35	1120	175	150	1296
50	40	1121	178	158	1305
55 ↓	40 ↓	1125	180	160	1310
See 1/	60 ±3	1130	180	165	1315
60 ±5	40 ±7	1135	185	175	1320
65	50 ±5	1140	190	175	1325
70	40	1145	190	180	1330
70	55 ↓	1150	194	180	1335
75	35 ±10	1155	196	176 ↓	1340
77	37 ±5	1159	198	170 ±7	1345
78	58	1160	200	180 ±5	1350
80	70	1165	200	185 ±5	1355
90	80	1170	205 ↓	182 ±7	1360
95	60	1175	205 ±6	230 ±8	1365
95	81	1180	207 ±8	192 ±5	1370
95	85	1185	212	150	1375
99	90	1195	215	195	1380
115 ↓	100 ↓	1200	220	176	1385
115 ±4	105 ±4	1205	220	200 ↓	1395
130 ±5	115 ±5	1210	230 ↓	210 ±6	1400
135	120	1215	239 ±6	180 ±12	1405
135	125	1220	239 ±8	209 ±6	1410
140	120	1225	240	220	1415
140	125 ↓	1230	240	230	1420
145	135 ±4	1235	250	230	1425
150	130 ±5	1240	260 ↓	230 ↓	1430
150	135 ±5	1245	260 ±5	248 ±5	1431
155	100 ±10	1250	274 ±7	194 ±15	1435
155	140 ±5	1255	275 ±7	245 ±10	1440
158	138 ±5	1260	280 ±8	250 ±6	1445
160	120 ±7	1265	320 ±7	305 ±7	1451
160 ↓	140 ±5	1270	400 ±10	350 ±10	005
Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-	Open on decreasing temperature	Close on increasing temperature	Part No. M24236/1-
(°F)	(°F)		(°F)	(°F)	
32 ±5	77 ±5	1455	70 ±5	100 ±5	1505
35	50	1460	70	105	1510
45	55	1465	80	100	1515
50 ↓	68	1475	85	95	1520
50 ±6	65	1470	95	105	1525
55 ±5	65 ↓	1480	105 ↓	120 ↓	1530
See 2/	66 ±3	1485	See 2/	115 ±3	1535
See 2/	87 ±3	1490	115 ±5	130 ±5	1540
68 ±5	95 ±5	1495	See 2/	124 ±3	1545
See 2/	97 ±3	1500	140 ±5	160 ±5	1550

See footnotes at end of configuration B1.

FIGURE 111-6. *Switches, thermostatic (MIL-S-24236/1)* - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

CONFIGURATION B1					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on decreasing temperature	Close on increasing temperature		Open on decreasing temperature	Close on increasing temperature	
(°F)	(°F)		(°F)	(°F)	
140 ±5	165 ±5	1555	185 ±5	215 ±6	1585
140 ↓	180 ±5	1560	190 ↓	210 ↓	1590
165 ↓	175 ±4	1285	200 ↓	250 ↓	1595
145 ↓	160 ±5	1565	210 ±8	240 ↓	1600
See 3/	156 ±3	1570	230 ±8	265 ↓	1605
156 ±6	176 ±5	1575	255 ±8	300 ↓	1610
174 ±5	194 ↓	1580	305 ±10	330 ±10	1611
185 ±5	195 ↓	1581			

1/ 3-7 above close.
2/ 2-6 below close.
3/ 1-4 below close.

CONFIGURATION B2					
Operating points		Part No. M24236/1-	Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature		Open on decreasing temperature	Close on increasing temperature	
(°F)	(°F)		(°F)	(°F)	
70 ±5	61 ±5	1700	75 ±5	125 ±5	1725
160 ↓	140 ↓	1705	96 ±5	110 ±5	1730
162 ↓	153 ↓	1706	125 ±5	140 ±5	1735
200 ↓	180 ↓	031	145 ±5	160 ±5	030
248 ±8	218 ±6	1710	240 ±8	260 ±6	1755
255 ±8	220 ↓	1715			
325 ±12	285 ↓	1720			
482 ±25	420 ±25	1723			

CONFIGURATION B3		
Operating points		Part No. M24236/1-
Open on increasing temperature	Close on decreasing temperature	
(°F)	(°F)	
75 ±8	55 ±5	1800
252 ±9	203 ±9	1805
325 ±12	275 ±12	1810

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER (if not in tabulation): Shall consist of "M24236/1" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a temperature switch of configuration A which opens on increasing temperature at 65° ±5°F and closes on decreasing temperature at 25° ±5°F. EXAMPLE:

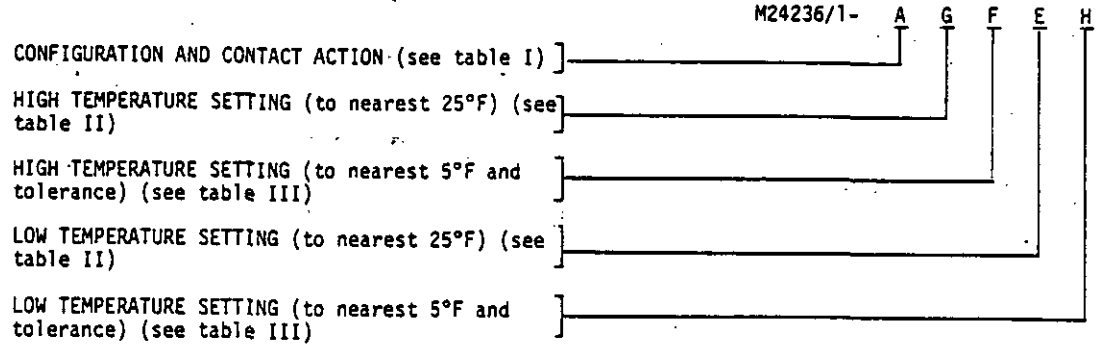


TABLE I. Configuration and contact action.

	Configuration								Contact action
	A	A1	A2	A3	B	B1	B2	B3	
Code - - -	A	C	E	G	J	L	N	Q	Open on increasing temperature
Code - - -	B	D	F	H	K	M	P	R	Open on decreasing temperature

TABLE II. Temperature setting to the nearest 25°F.

Code	Temperature (°F)	Code	Temperature (°F)	Code	Temperature (°F)
A - - -	-75	J - - -	125	S - - -	325
B - - -	-50	K - - -	150	T - - -	350
C - - -	-25	L - - -	175	U - - -	375
D - - -	0	M - - -	200	V - - -	400
E - - -	25	N - - -	225	W - - -	425
F - - -	50	P - - -	250	X - - -	450
G - - -	75	Q - - -	275	Y - - -	475
H - - -	100	R - - -	300	Z - - -	500


TABLE III. Temperature setting to the nearest 5°F.

	Tolerance						Units
	±3°F	±5°F	±8°F	±10°F	±15°F	±25°F	
Code - - -	A	F	L	R	W	2	-10
Code - - -	B	G	M	S	X	3	-5
Code - - -	C	H	N	T	Y	4	0
Code - - -	D	J	P	U	Z	5	+5
Code - - -	E	K	Q	V	1	6	+10

FIGURE 111-6. Switches, thermostatic (MIL-S-24236/1) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS			ENDURANCE
	Sea level		80,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(amperes)	(amperes)	(amperes)	(cycles)
Resistive - - -	2.0	2.0	2.0	100,000
Inductive - - -	1.0	1.0	1.0	100,000
Lamp- - - - - -	0.5	0.5	0.5	100,000

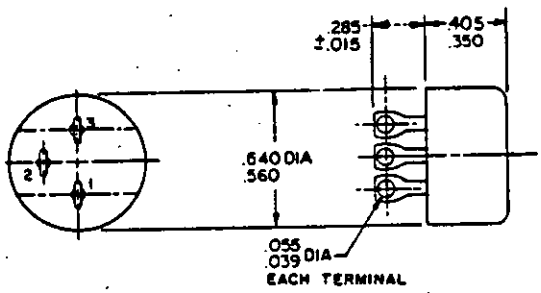


CONFIGURATION A

(MOUNTING BRACKETS NOT FURNISHED)

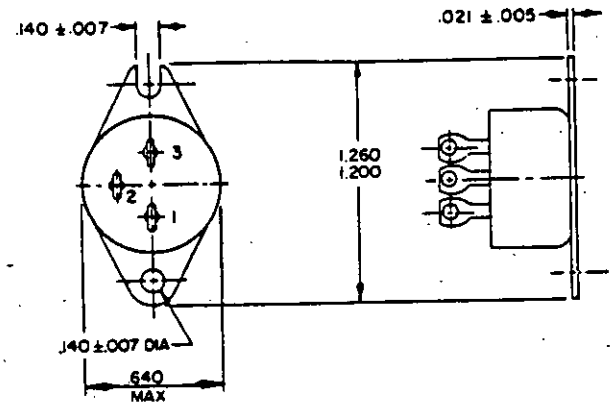

CONFIGURATION A1

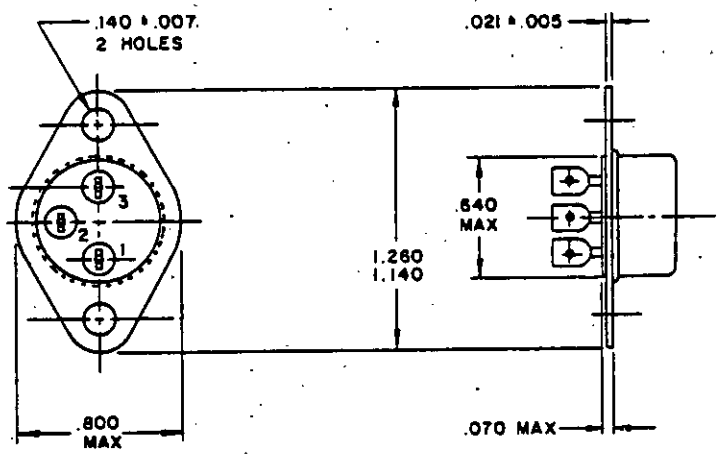


CONFIGURATION A2

INCHES	MM
.005	.13
.007	.18
.015	.38
.021	.53
.039	1.00
.055	1.40
.070	1.78
.140	3.56
.285	7.24
.405	10.29
.560	14.22
.640	16.26
.800	20.32
1.140	28.96
1.200	30.48
1.260	32.00


FIGURE 111-7. Switches, thermostatic (MIL-S-24236/24).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

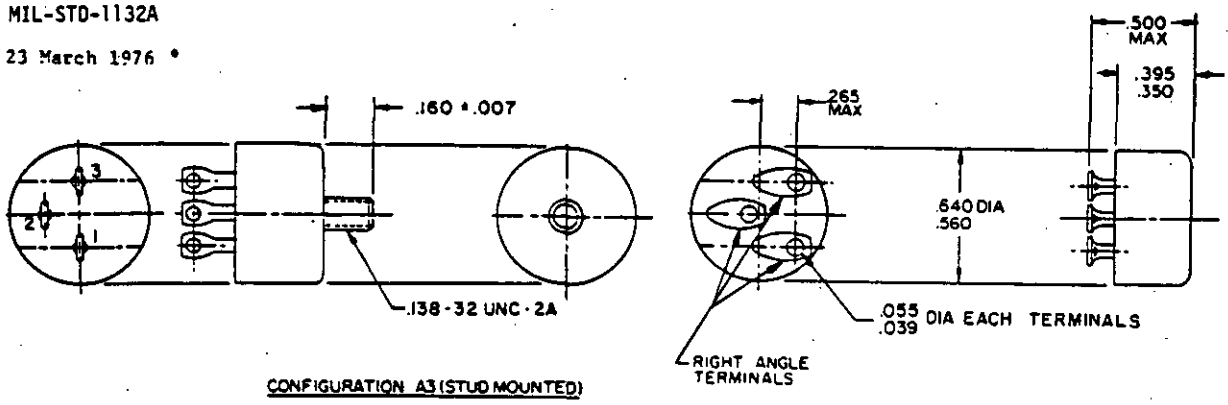


CONFIGURATION A3 (STUD MOUNTED)

CONFIGURATION B
(MOUNTING BRACKETS NOT FURNISHED)

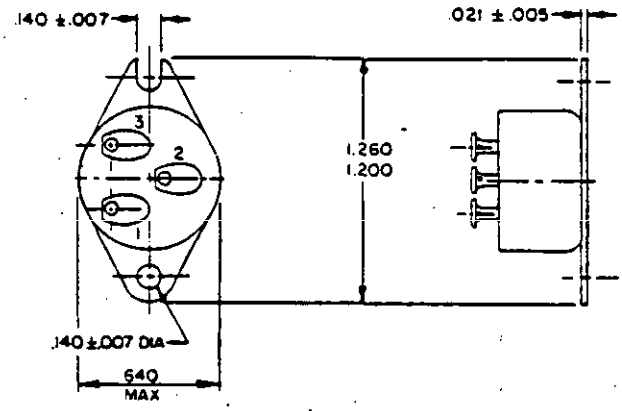

CONFIGURATION B1

INCHES	MM
.005	.13
.007	.18
.021	.53
.039	1.00
.055	1.40
.070	1.78
.138	3.51
.140	3.56
.160	4.06
.265	6.73
.350	8.76
.395	10.03
.560	14.22
.640	16.26
.800	20.32
1.200	30.48
1.260	32.00

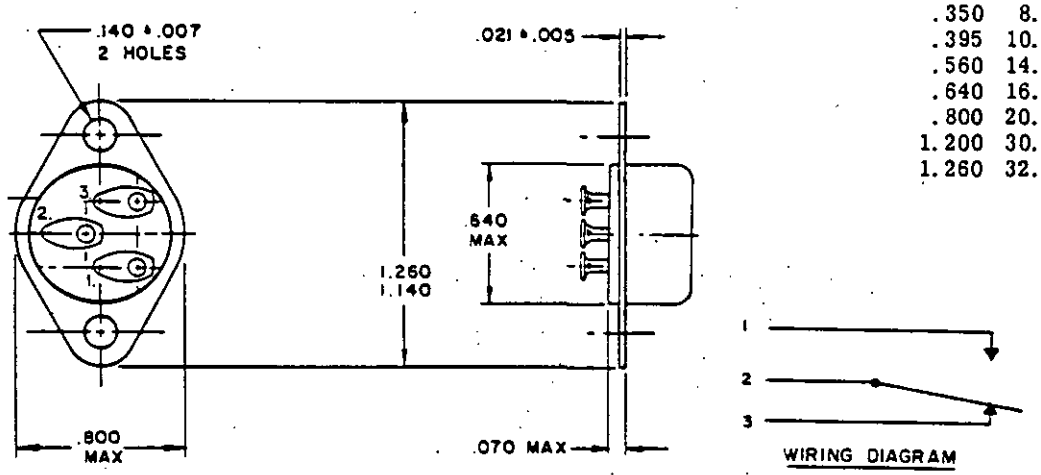

CONFIGURATION B2

WIRING DIAGRAM

BELOW LOW TEMPERATURE SETTING, CIRCUIT 1-2 IS OPEN
ABOVE HIGH TEMPERATURE SETTING, CIRCUIT 2-3 IS OPEN

FIGURE 111-7. Switches, thermostatic (MIL-S-24236/24) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

PART NUMBER: Consists of "M24236/24" followed by a dash and a five-letter code. The five-letter code used in the following example identifies a switch of configuration A which actuates at 65 ±6°F and deactuates at 25 ±6°F. EXAMPLE:

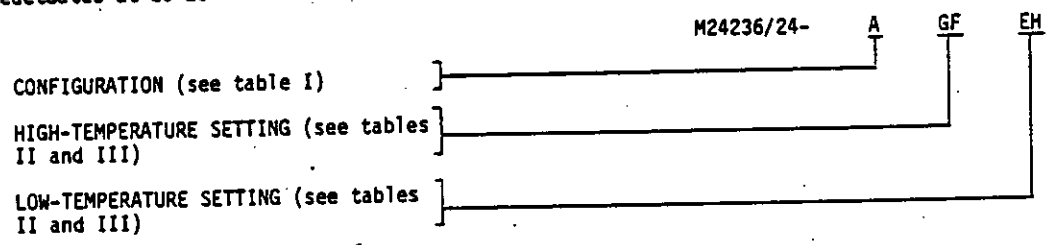


TABLE I. Configuration.

	Configuration						
	A	A1	A2	A3	B	B1	B2
Code - - -	A	B	C	D	E	F	G

TABLE II. Temperature setting to the nearest 25°F.

Code	Temperature (°F)	Code	Temperature (°F)	Code	Temperature (°F)	Code	Temperature (°F)
A- - -	-75	F- - -	50	L- - -	175	R- - -	300
B- - -	-50	G- - -	75	M- - -	200	S- - -	325
C- - -	-25	H- - -	100	N- - -	225	T- - -	350
D- - -	0	J- - -	125	P- - -	250	U- - -	375
E- - -	25	K- - -	150	Q- - -	275	V- - -	400

TABLE III. Temperature setting to the nearest 5°F.

	Unit					Tolerance
	-10	-5	0	+5	+10	
Code - - -	A	B	C	D	E	±4°F
Code - - -	F	G	H	J	K	±6°F
Code - - -	L	M	N	P	Q	±8°F
Code - - -	R	S	T	U	V	±10°F
Code - - -	W	X	Y	Z	1	±12°F

FIGURE 111-7. Switches, thermostatic (MIL-S-24236/24) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 112

SWITCHES, TOGGLE
(Applicable specifications: MIL-S-3950, MIL-S-8834, and MIL-S-8805)

FIGURE AND SPEC NUMBER	MS NUMBER (see NOTE)	SWITCH CHARACTERISTICS			PAGE
		Dash No. for:		Circuit characteristics	
		3 Position	2 Position		
112-1 - MIL-S-3950	MS24523	21,27,31	22,23,26,29,30	One pole	112.3
112-2 - MIL-S-3950	MS24524	21,27,31	22,23,26,29,30	Two pole	112.4
	MS24525	21,27,31	22,23,26,29,30	Four pole	
	MS27406	1,2,3	---	Four pole	
	MS27407	1,2,3	---	Two pole	
112-3 - MIL-S-3950	* MS24658	21,27,31	22,23,26,28,29, 30,32	One pole	112.5
112-4 - MIL-S-3950	* MS24659	21,27,31	22,23,26,28,29, 30,32	Two pole	112.6
	* MS24660	21,27,31	22,23,26,28,29, 30,32	Four pole	
	* MS27408	1,2,3	---	Two pole	
	* MS27409	1,2,3	---	Four pole	
112-5 - MIL-S-3950	MS27722	21,27,31	22,23,26,28,29, 30,32	One pole	112.7
	MS27784	21,27,31	22,23,26,28,29, 30,32	One pole	
112-6 - MIL-S-3950	MS27723	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.8
	MS27724	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-7 - MIL-S-3950	MS27785	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.9
	MS27786	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-8 - MIL-S-3950	* MS27782	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.10
	* MS27783	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-9 - MIL-S-3950	* MS27788	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.11
	* MS27789	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-10 - MIL-S-3950	* MS27781	21,27,31	22,23,26,28,29, 30,32	One pole	112.12
	* MS27787	21,27,31	22,23,26,28,29, 30,32	One pole	
112-11 - MIL-S-3950	MS27734	21,27,31	22,23,26,28,29, 30,32	One pole	112.13
112-12 - MIL-S-3950	MS27735	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.14
	MS27736	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-13 - MIL-S-3950	* MS27737	21,27,31	22,23,26,28,29, 30,32	One pole	112.15
112-14 - MIL-S-3950	* MS27738	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Two pole	112.16
	* MS27739	1,2,3,21, 27,31	22,23,26,28,29, 30,32	Four pole	
112-15 - MIL-S-8834	MS14001	212,272,312	222,232,242, 262,282,292,302	One pole	112.17
	MS14002	212,272,312	222,232,242, 262,282,292,302	Two pole	
	MS14003	212,272,312	222,232,242, 262,282,292,302	Four pole	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

FIGURE AND SPEC NUMBER	MS NUMBER (see NOTE)	SWITCH CHARACTERISTICS			PAGE
		Dash No. for:		Circuit characteristics	
		3 Position	2 Position		
112-16 - MIL-S-8834	* MS21026	211,271,311	221,231,241,281	One pole	112.18
	* MS21027	211,271,311	221,231,241,281	Two pole	
112-17 - MIL-S-8834	MS21346	211,271,311	221,231,241,281	One pole	112.19
	MS21347	211,271,311	221,231,241,281	Two pole	
112-18 - MIL-S-8834	MS21350	---	321	One pole	112.20
	MS21351	---	321	One pole	
112-19 - MIL-S-8834	MS21352	331,341,351	321	Two pole	112.21
	MS21353	331,341,351	321	Two pole	
112-20 - MIL-S-8834	MS21354	211,271,311	221,231,241,281	One pole	112.22
	MS21355	211,271,311	221,231,241,281	Two pole	
112-21 - MIL-S-8834	MS21356	211,271,311	221,231,241,281	One pole	112.23
	MS21357	211,271,311	221,231,241,281	Two pole	
112-22 - MIL-S-8834	* MS24612	212,272,312	222,232,242, 262,282,292,302	One pole	112.24
	* MS24613	212,272,312	222,232,242, 262,282,292,302	Two pole	
	* MS24614	212,272,312	222,232,242, 262,282,292,302	Four pole	
112-23 - MIL-S-8834	MS24655	211,271,311	221,231,241,281	One pole	112.25
	MS24656	211,271,311	221,231,241,281	Two pole	
112-24 - MIL-S-8834	MS25306	212,272,312	222,232,242, 262,282,292,302	One pole	112.26
	MS25307	212,272,312	222,232,242, 262,282,292,302	Two pole	
	MS25308	212,272,312	222,232,242, 262,282,292,302	Four pole	
112-25 - MIL-S-8834	MS90310	211,271,311	221,231,241,281	One pole	112.27
	MS90311	211,271,311	221,231,241,281	Two pole	
112-26 - MIL-S-8805/26	*	005,006,007, 008,009,010	001,003	Two pole	112.28
		011,012,013, 014	---	Three pole	
		---	002,004	Four pole	
112-27 - MIL-S-8805/92	*	005,006,007, 008,009,010, 011,012,013, 014,015,016, 017,018	001	Two pole	112.30
		019	---	Three pole	
		---	002,003,004	Four pole	

NOTE: The part number consists of the MS number followed by the dash number; however, an asterisk (*) indicates that the "MS" part number will require an additional letter, or an "M" part number is applicable, as shown in the figure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)					
	28 Vdc Load			115 Vac, 60 & 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, & -23	5	20	15	3	15	10
-26, -27, -29, -30, & -31	4	15	10	2	15	7

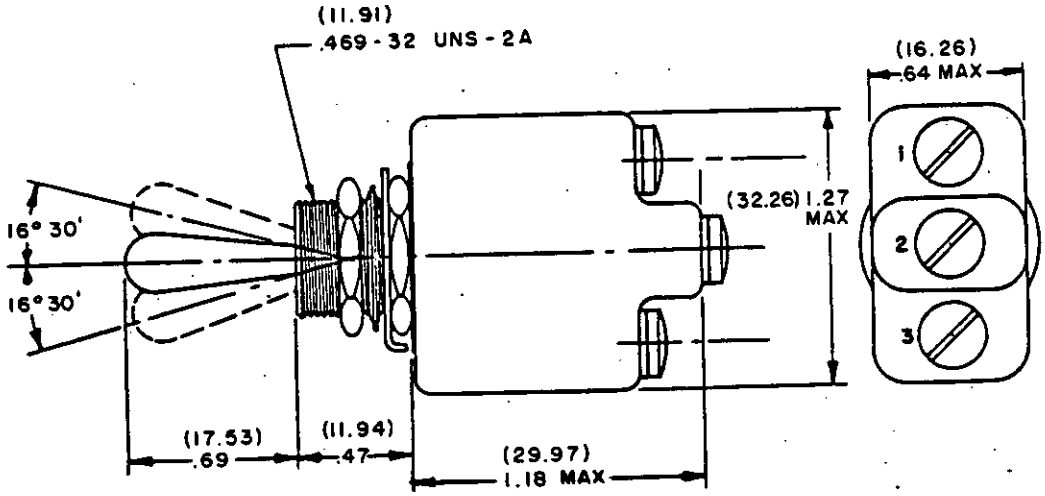

Dash No.	1/ Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side
-21	ON	OFF	ON
-22	ON	NONE	OFF
-23	ON	NONE	ON
-26	ON	NONE	MOM ON
-27	MOM ON	OFF	MOM ON
-29	ON	NONE	MOM OFF
-30	OFF	NONE	MOM ON
-31	ON	OFF	MON ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of "MS24523" followed by the dash number as shown in the tabulation.

FIGURE 112-1. MS24523 toggle switches, environmentally sealed (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)							
	28 Vdc					115 Vac, 60 & 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -29, -30, & -31	5	4	18	10	10	2	11	8

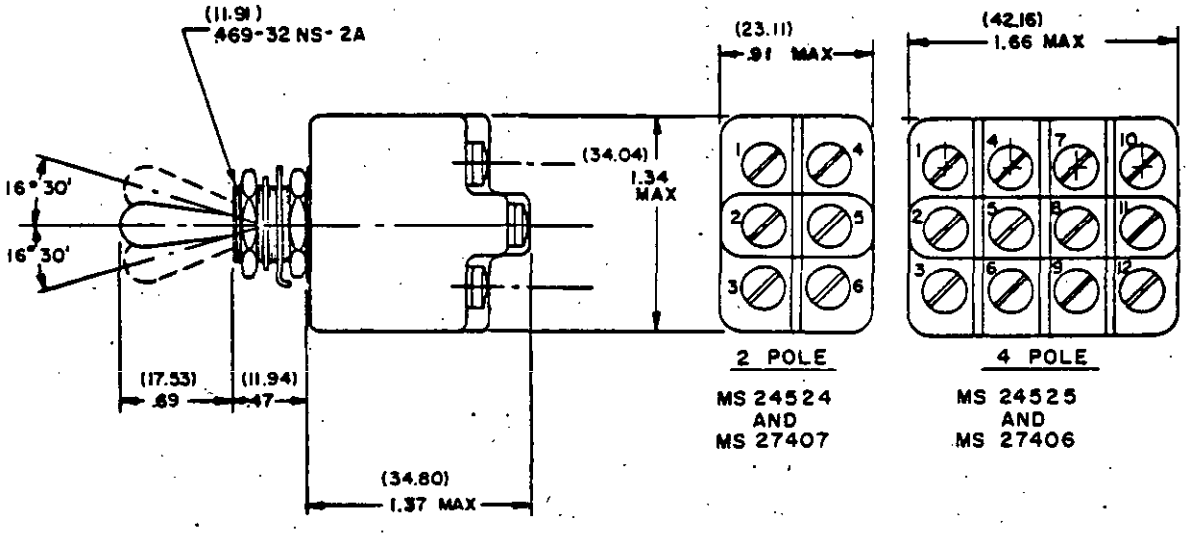

1/ Dash No.	2/ Circuit with toggle lever in			1/ Dash No.	2/ Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side		Opposite keyway side	Center	Keyway side
-1	ON	ON	ON	-26	ON	NONE	MOM ON
-2	ON	ON	MOM ON	-27	MOM ON	OFF	MOM ON
-3	MOM ON	ON	MOM ON	-29	ON	NONE	MOM OFF
-21	ON	OFF	ON	-30	OFF	NONE	MOM ON
-22	ON	NONE	OFF	-31	ON	OFF	MOM ON
-23	ON	NONE	ON				


1/ -1, -2, and -3 applicable to MS27406 and MS27407; -21 through -31 applicable to MS24524 and MS24525.
2/ Applicable terminal numbers are marked on the switch.


PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-2. MS24524, MS24525, MS27406, and MS27407 toggle switches, environmentally sealed (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)					
	28 Vdc Load			115 Vac, 60 & 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, & -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, & -32	4	15	10	2	15	7

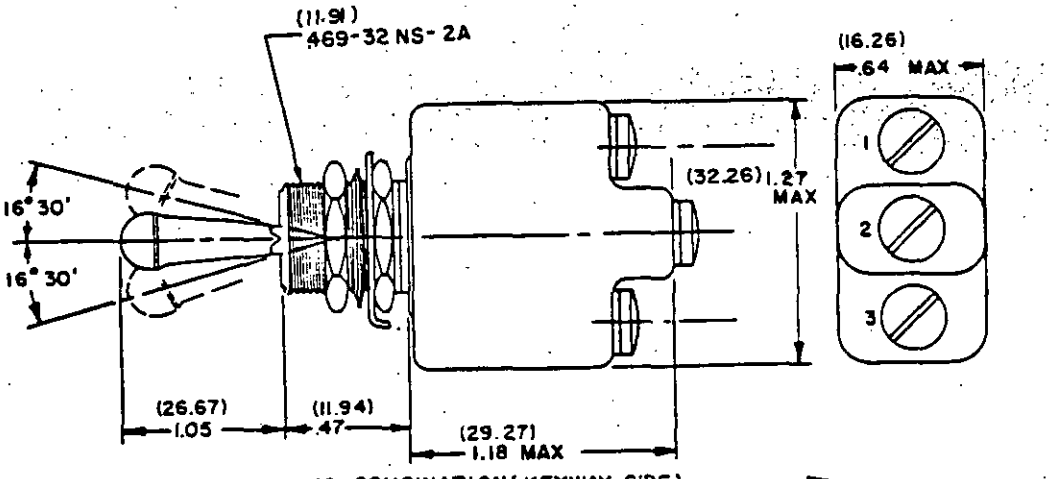

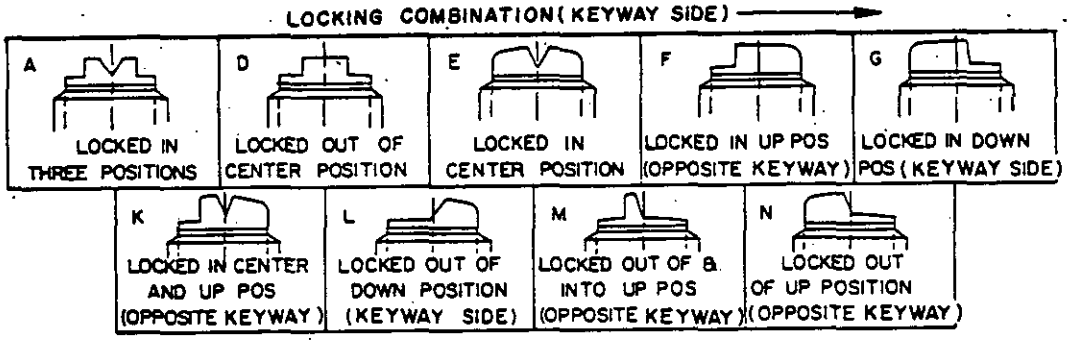

Dash No.	Available locking combinations	1/ Circuit with toggle lever in			Dash No.	Available locking combinations	1/ Circuit with toggle lever in		
		Opposite keyway side	Center	Keyway side			Opposite keyway side	Center	Keyway side
-21	A	ON	OFF	ON	-28	E	NONE	OFF	MOM ON
-22	D,F,G	ON	NONE	OFF	-29	F	ON	NONE	MOM OFF
-23	D,F,G	ON	NONE	ON	-30	F	OFF	NONE	MOM ON
-26	F	ON	NONE	MOM ON	-31	E,F,K,L,M,N	ON	OFF	MOM ON
-27	E,L,N	MOM ON.	OFF	MOM ON	-32	E	MOM ON	ON	NONE


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of "MS24658" followed by the dash number and locking combination letter from the tabulation.


FIGURE 112-3. MS24658 toggle switches, environmentally sealed, lever lock (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)							
	28 Vdc					115 Vac, 60 & 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, & -32	5	4	18	10	10	2	11	8

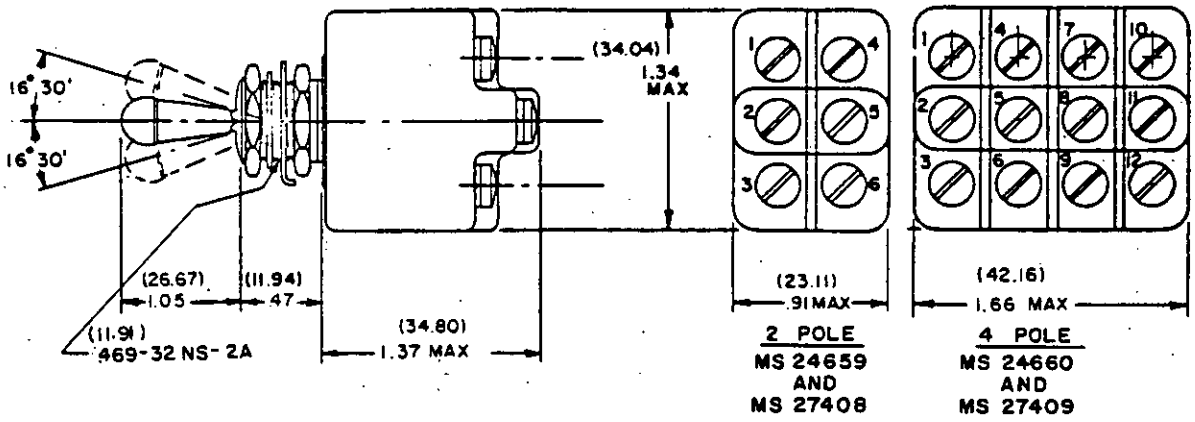

LOCKING COMBINATION (KEYWAY SIDE) →

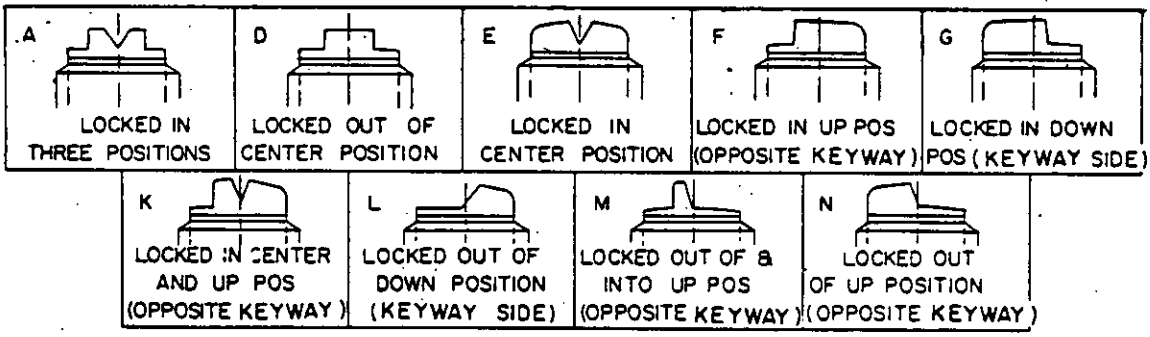

1/ Dash No.	Available locking combination	2/ Circuit with toggle lever in			1/ Dash No.	Available locking combination	2/ Circuit with toggle lever in		
		Opposite keyway side	Center	Keyway side			Opposite keyway side	Center	Keyway side
-1	A	ON	ON	ON	-27	E,L,N	MOM ON	OFF	MOM ON
-2	E,F,K,L,M,N	ON	ON	ON	-28	E	NONE	OFF	MOM ON
-3	E,L,N	MOM ON	ON	MOM ON	-29	F	ON	NONE	MOM OFF
-21	A	ON	OFF	ON	-30	F	OFF	NONE	MOM ON
-22	D,F,G	ON	NONE	OFF	-31	E,F,K,L,M,N	ON	OFF	MOM ON
-23	D,F,G	ON	NONE	ON	-32	E	MOM ON	ON	NONE
-26	F	ON	NONE	MOM ON					


1/ -1, -2, and -3 applicable to MS27408 and MS27409; -21 through -32 applicable to MS24659 and MS24660.
2/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation.

FIGURE 112-4. MS24659, MS24660, MS27408, and MS27409 toggle switches, environmentally sealed, lever lock (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)									
	28 Vdc					115 Vac, 60 & 400 Hz				
	Lamp	Resistive		Inductive		Lamp	Resistive		Inductive	
		MS27722	MS27784	MS27722	MS27784		MS27722	MS27784	MS27722	MS27784
-21, -22, & -23	5	20	7.5	15	7.5	3	15	7.5	10	7.5
-26, -27, -28, -29, -30, -31, & -32	4	15	7.5	10	7.5	2	15	7.5	7	7

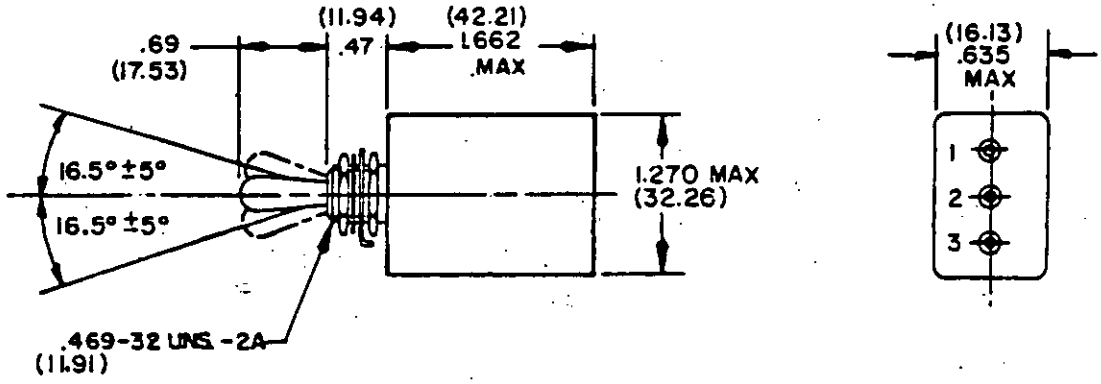

Dash No.	1/ Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-5. MS27722 and MS27784 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes) 28 Vdc Load					115 Vac, 60 & 400 Hz Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -29, -30, & -31	5	4	18	10	10	2	11	8

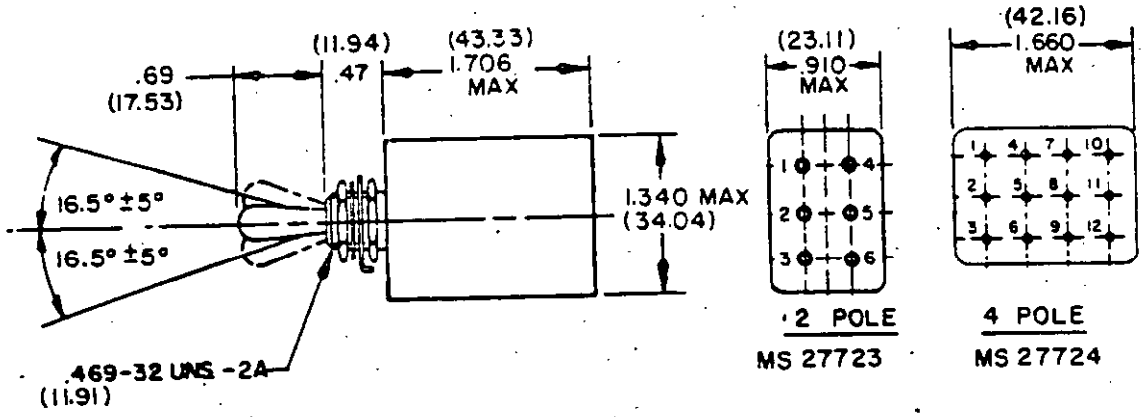

DASH NO.	1/ Circuit with toggle lever in		
	Opposite keyway side	Center	Keyway side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-29	MOM ON	OFF	NONE
-30	MOM OFF	NONE	ON
-31	MOM ON	NONE	OFF
-32	NONE	OFF	ON
			MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 1132-8. MS27723 and MS27724 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes) 28 Vdc Load				115 Vac, 60 & 400 Hz Load		
	Lamp		Resistive	Inductive	Lamp	Resistive	Inductive
	2 Pole	4 Pole					
-1, -21, -22, & -23	7	5	7.5	7.5	4	7.5	7.5
-2, -3, -26, -27, -28, -29, -30, -31, & -32	5	4	7.5	7.5	2	7.5	7.5

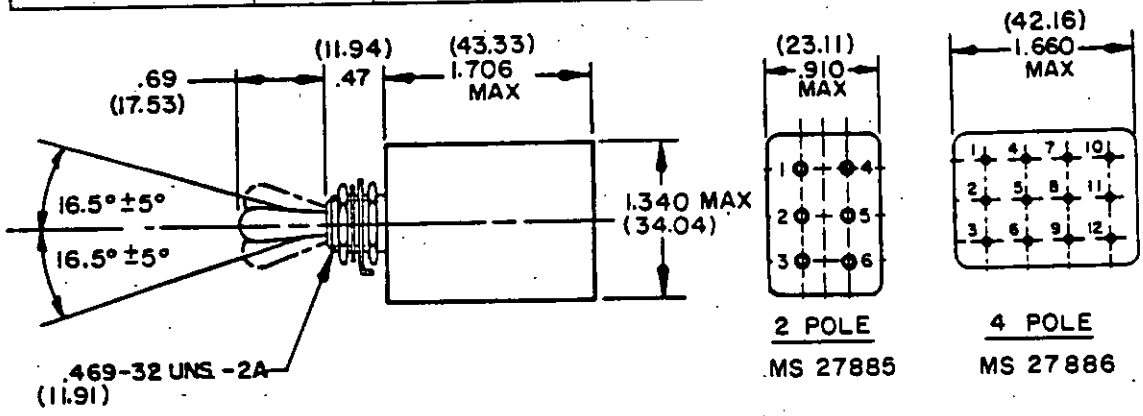

Dash No.	1/ Circuit with toggle lever in		
	Keying side	Center	Opposite keying side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.


FIGURE 112-7. MS27785 and MS27786 toggle switches, environmentally sealed, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)							
	28 Vdc					115 Vac, 60 & 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, & & -32	5	4	18	10	10	2	11	8

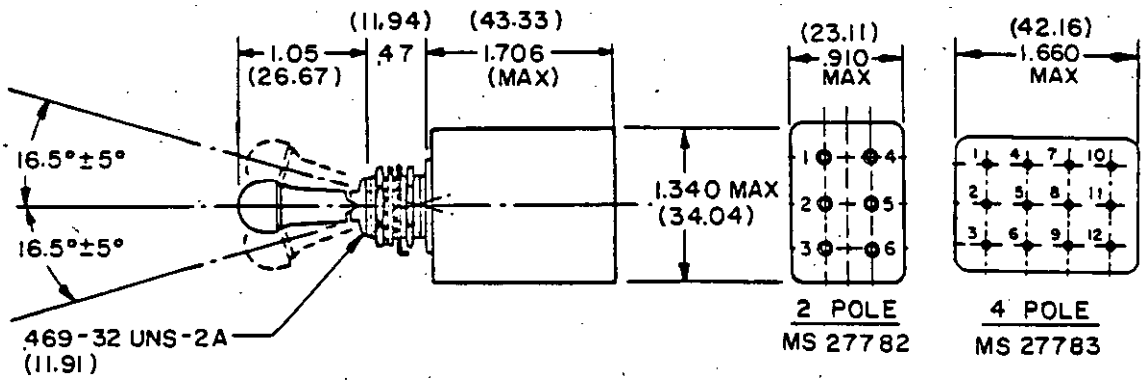

LOCKING COMBINATIONS
(KEYING SIDE)

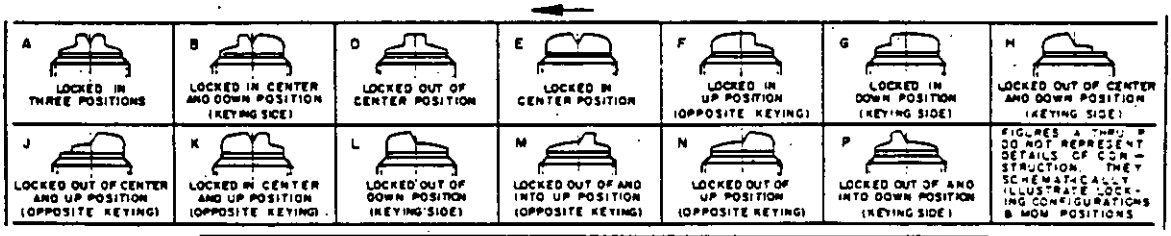

Dash No.	Available locking combinations	1/ Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-1	All	ON	ON	ON
-2	E,F,K,L,M,N	MOM ON	ON	ON
-3	E,L,N	MOM ON	ON	MOM ON
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON


1/ *Applicable terminal numbers are marked on the switch.*

PART NUMBER: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation.


FIGURE 112-8. MS27782 and MS27783 toggle switches, environmentally sealed, lever-lock, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes) 28 Vdc Load				115 Vac, 60 & 400 Hz Load		
	Lamp		Resistive	Inductive	Lamp	Resistive	Inductive
	2 Pole	4 Pole					
-1, -21, -22, & -23	7	5	7.5	7.5	4	7.5	7.5
-2, -3, -26, -27, -28, -29, -30, -31, & -32	5	4	7.5	7.5	2	7.5	7.5

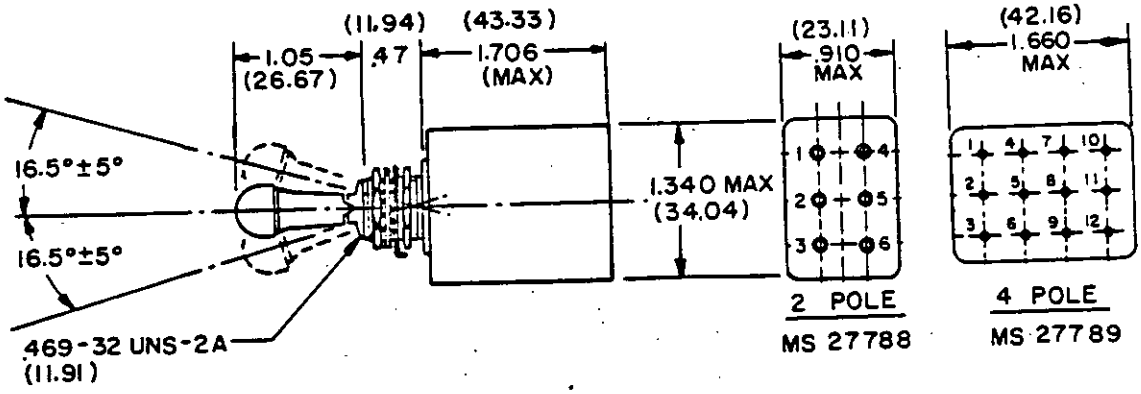

LOCKING COMBINATIONS
(KEYING SIDE)

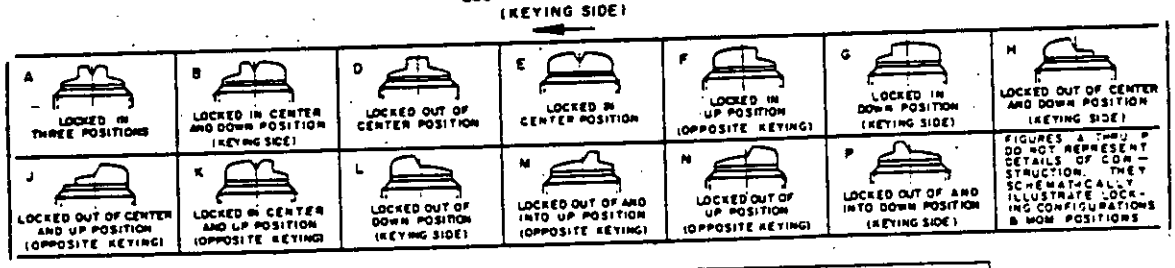

DASH NO.	Available locking combinations	1/ Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-1	All	ON	ON	ON
-2	E,F,K,L,M,N	MOM ON	ON	ON
-3	E,L,N	MOM ON	ON	MOM ON
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation.


FIGURE 112-9. MS27788 and MS27789 toggle switches, environmentally sealed, lever-lock, integrated wire terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)									
	28 Vdc Load					115 Vac, 60 & 400 Hz Load				
	Lamp	Resistive		Inductive		Lamp	Resistive		Inductive	
		MS27781	MS27787	MS27781	MS27787		MS27781	MS27787	MS27781	MS27787
-21, -22, & -23	5	20	7.5	15	7.5	3	15	7.5	10	7.5
-26, -27, -28, -29, -30, -31, & -32	4	15	7.5	10	7.5	2	15	7.5	7	7

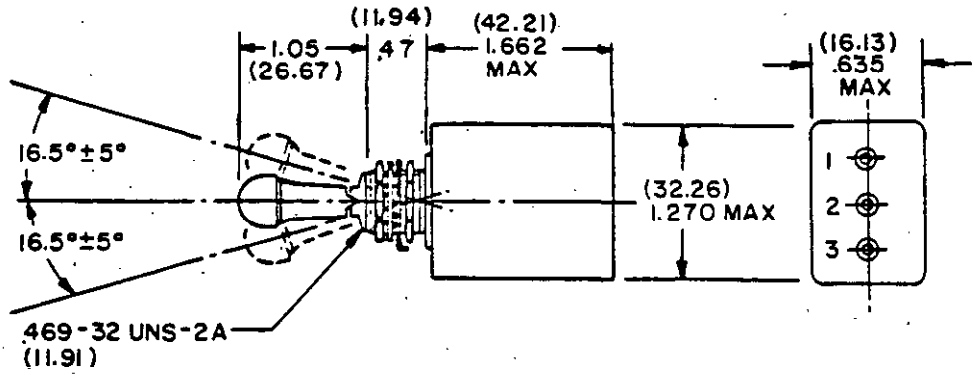

LOCKING COMBINATIONS
(KEYING SIDE)

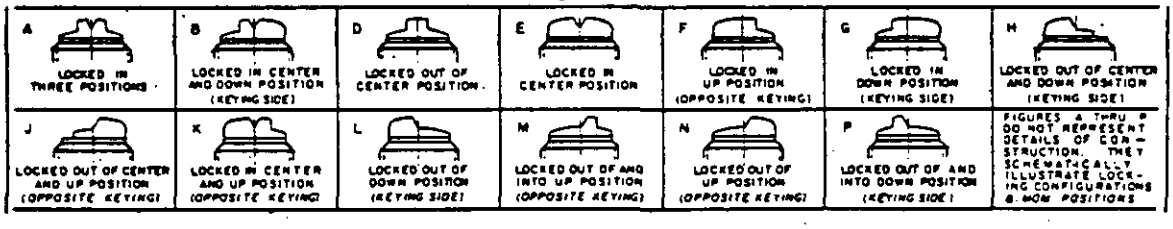

Dash No.	Available locking combinations	1/ Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation.

FIGURE 112-10. MS27781 and MS27787 toggle switches, environmentally sealed, lever-lock, integrated wire terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes) 28 Vdc Load			115 Vac, 60 & 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, & -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, & -32	4	15	10	2	15	7

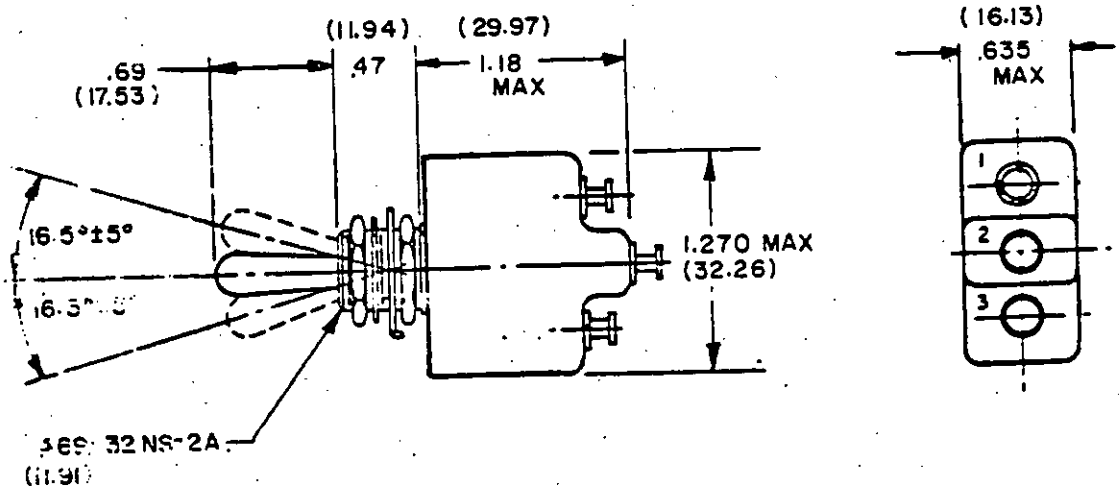

Dash No.	1/ Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of "MS27734" followed by the dash number as shown in the tabulation.

FIGURE 112-11. MS27734 toggle switches, environmentally sealed, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)							
	28 Vdc					115 Vac, 60 & 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, & -32	5	4	18	10	10	2	11	8

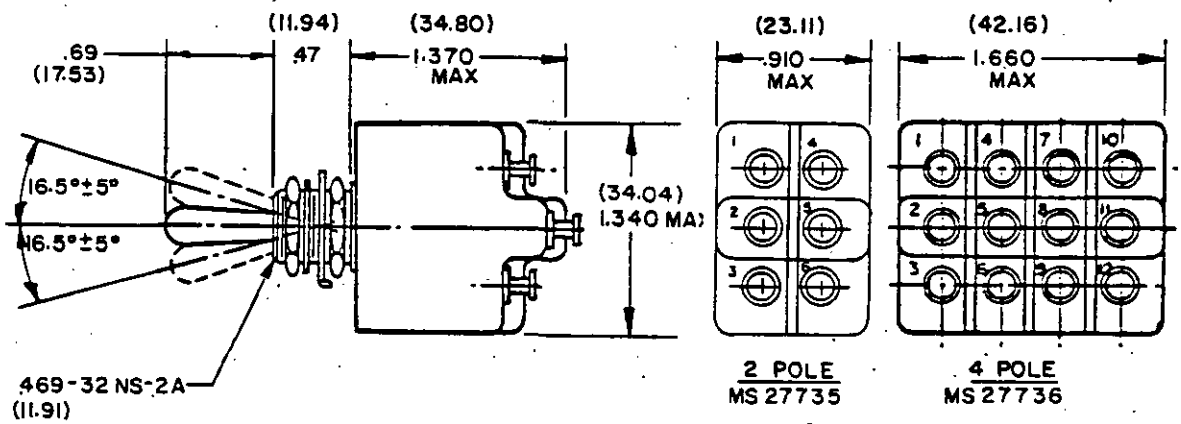

Dash No.	1/ Circuit with toggle lever in		
	Keyway side	Center	Opposite keyway side
-1	ON	ON	ON
-2	MOM ON	ON	ON
-3	MOM ON	ON	MOM ON
-21	ON	OFF	ON
-22	OFF	NONE	ON
-23	ON	NONE	ON
-26	MOM ON	NONE	ON
-27	MOM ON	OFF	MOM ON
-28	MOM ON	OFF	NONE
-29	MOM OFF	NONE	ON
-30	MOM ON	NONE	OFF
-31	MOM ON	OFF	ON
-32	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.


FIGURE 112-12. MS27735 and MS27736 toggle switches, environmentally sealed, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes) 28 Vdc Load			115 Vac, 60 & 400 Hz Load		
	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-21, -22, & -23	5	20	15	3	15	10
-26, -27, -28, -29, -30, -31, & -32	4	15	10	2	15	7

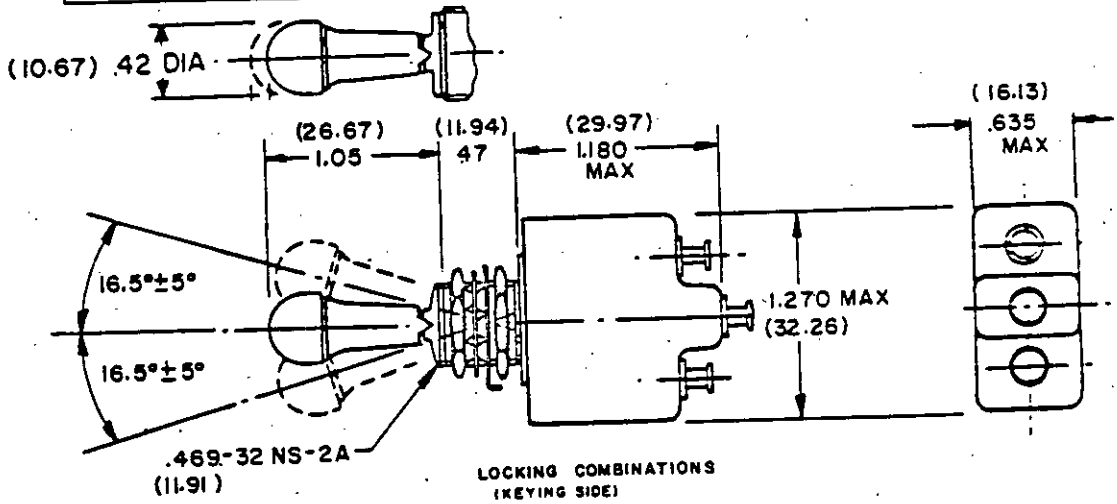

LOCKING COMBINATIONS (KEYING SIDE)

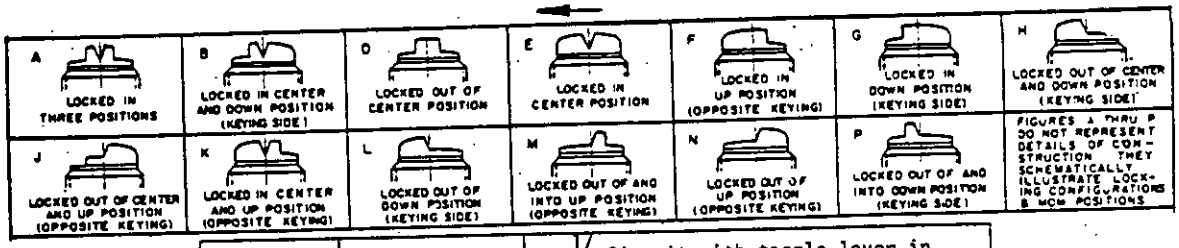

Dash No.	Available locking combinations	1/ Circuit with toggle lever in		
		Keying side	Center	Opposite keying side
-21	All	ON	OFF	ON
-22	D,F,G	OFF	NONE	ON
-23	D,F,G	ON	NONE	ON
-26	F	MOM ON	NONE	ON
-27	E,L,N	MOM ON	OFF	MOM ON
-28	E	MOM ON	OFF	NONE
-29	F	MOM OFF	NONE	ON
-30	F	MOM ON	NONE	OFF
-31	E,F,K,L,M,N	MOM ON	OFF	ON
-32	E	NONE	ON	MOM ON


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consist of "MS27737" followed by the dash number and locking combination letter as shown in the tabulation.


FIGURE 112-13. MS27737 toggle switches, environmentally sealed, lever-lock, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

DASH NO.	CURRENT CAPACITY (amperes)							
	28 Vdc					115 Vac, 60 & 400 Hz		
	Load					Load		
	Lamp		Resistive	Inductive		Lamp	Resistive	Inductive
	2 Pole	4 Pole		2 Pole	4 Pole			
-1, -21, -22, & -23	7	5	20	15	12	4	15	15
-2, -3, -26, -27, -28, -29, -30, -31, & -32	5	4	18	10	10	2	11	8

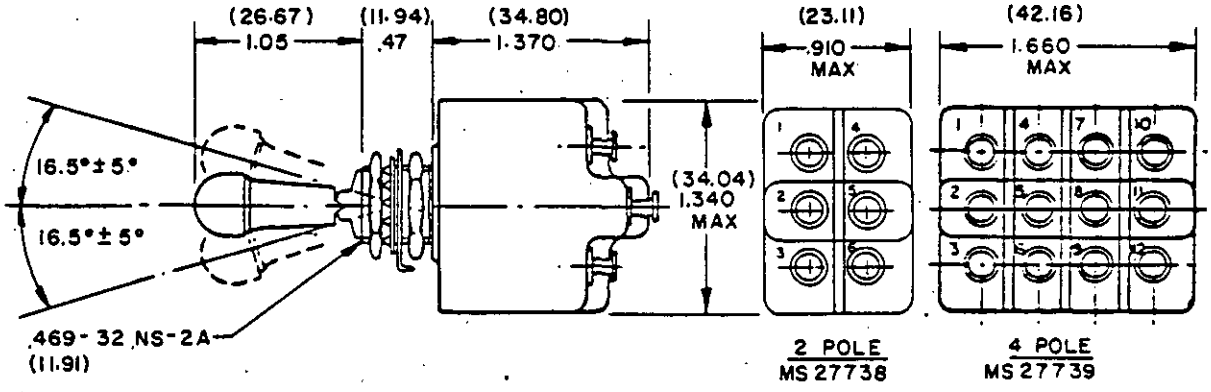

LOCKING COMBINATIONS
(KEYING SIDE)

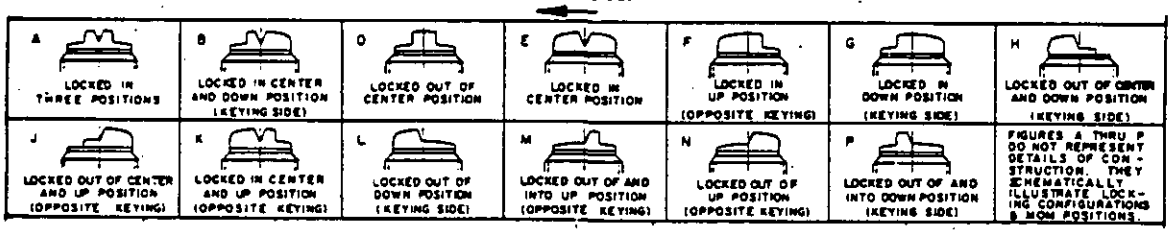


Dash No.	Available locking combinations	1/ Circuit with toggle lever in			Dash No.	Available locking combinations	1/ Circuit with toggle lever in		
		Keying side	Center	Opposite keying side			Keying side	Center	Opposite keying side
-1	All	ON	ON	ON	-27	E,L,N	MOM ON	OFF	MOM ON
-2	E,F,K,L,M,N	MOM ON	ON	ON	-28	E	MOM ON	OFF	NONE
-3	E,L,N	MOM ON	ON	MOM ON	-29	F	MOM OFF	NONE	ON
-21	All	ON	OFF	ON	-30	F	MOM ON	NONE	OFF
-22	D,F,G	OFF	NONE	ON	-31	E,F,K,L,M,N	MOM ON	OFF	ON
-23	D,F,G	ON	NONE	ON	-32	E	NONE	ON	MOM ON
-26	F	MOM ON	NONE	ON					

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of applicable MS number followed by the dash number and locking combination letter as shown in the tabulation.

FIGURE 112-14. MS27738 and MS27739 toggle switches, environmentally sealed, lever-lock, solder terminals (MIL-S-3950).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

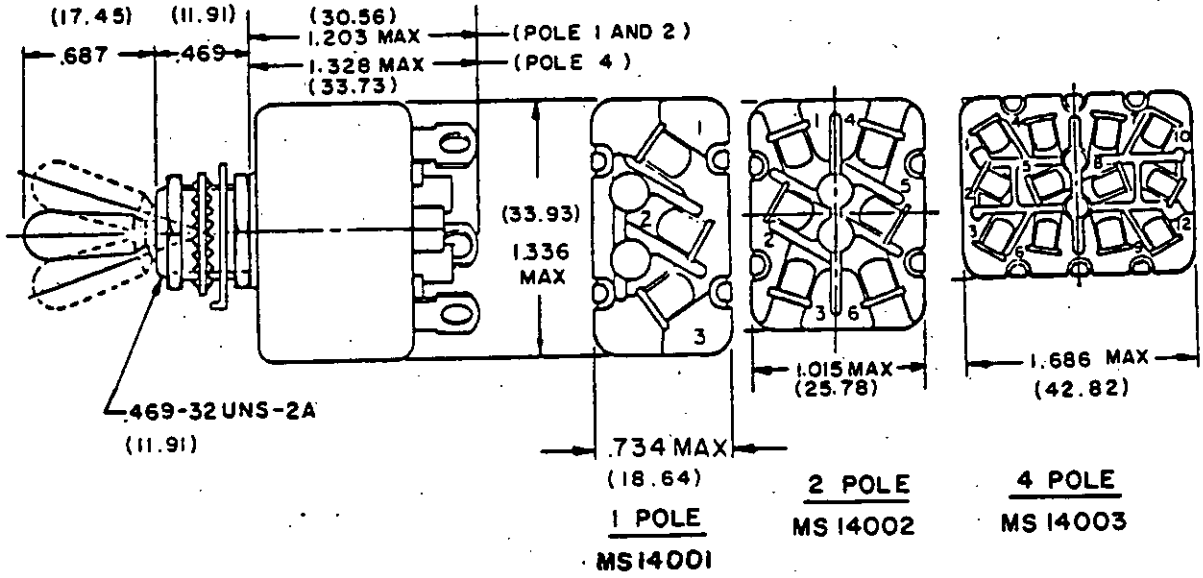


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					
	Opposite keyway side	Center	Keyway side	28 Vdc and 115 Vac, 400 Hz Load			115 Vac, 60 Hz Load		
				Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-212	ON	OFF	ON	7	25	15	7	20	15
-222	ON	NONE	OFF						
-232	ON	NONE	ON						
-242	ON	OFF	NONE						
-262	ON	NONE	MOM-ON						
-272	MOM-ON	OFF	MOM-ON						
-282	NONE	OFF	MOM-ON						
-292	ON	NONE	MOM-OFF						
-302	OFF	NONE	MOM-ON						
-312	ON	OFF	MOM-ON						


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-15. MS14001, MS14402, and MS14003 toggle switches, positive break, environmentally sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

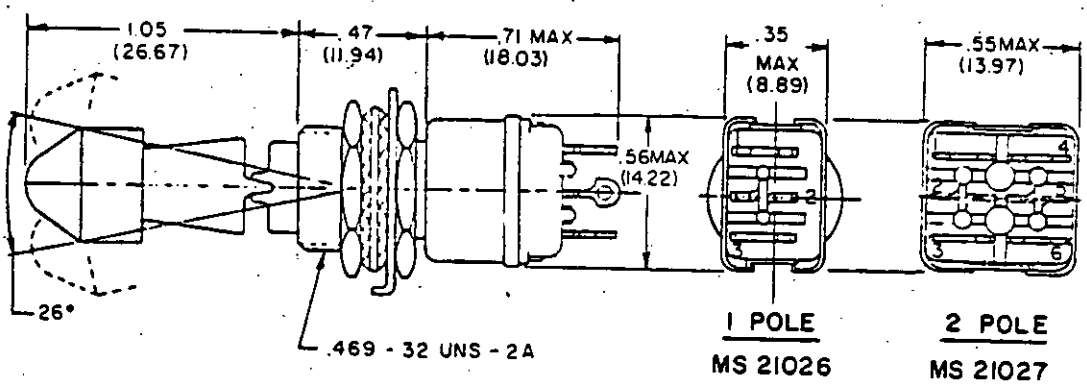

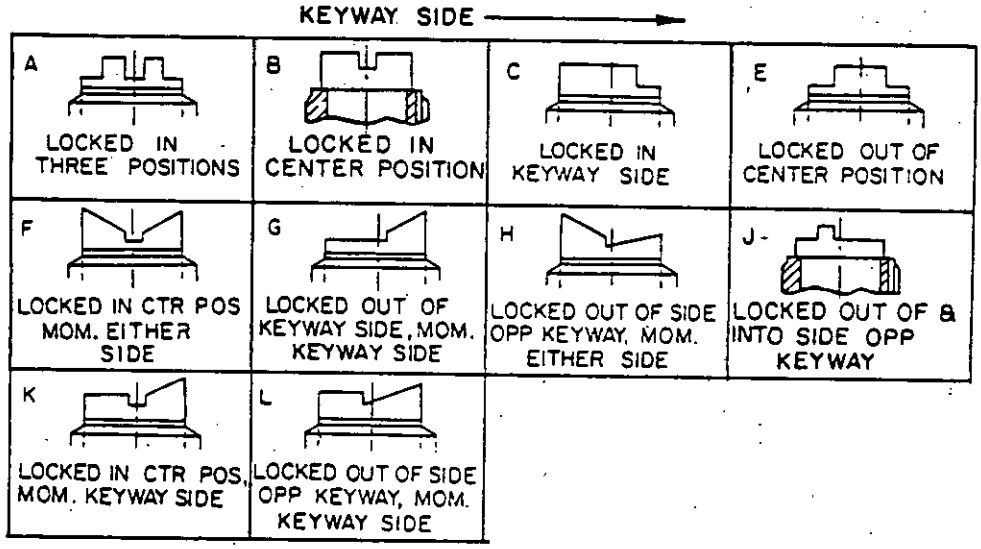


Number	Locking comb.	1/ Circuit with toggle lever in			Current capacity (amperes)					Minimum current capacity per pole 5 mV ac-dc
					Resistive load			Inductive load		
		Opposite keyway side	Center	Keyway side	28 Vdc	50 Vdc	115 Vac, 60 Hz	28 Vdc	115 Vac, 60 Hz	(μA)
211	A	ON	OFF	ON	4	1	3	1	1	25
221	C,E	ON	NONE	OFF						
231	C,E	ON	NONE	ON						
241	J,B	ON	OFF	NONE						
271	F,H	MOM-ON	OFF	MOM-ON						
281	K	NONE	OFF	MOM-ON						
311	G,K,L	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the locking combination letter and the three-digit number as shown in the tabulation.

FIGURE 112-16. MS21026 and MS21027 toggle switches, positive break, lever lock, miniature, toggle sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

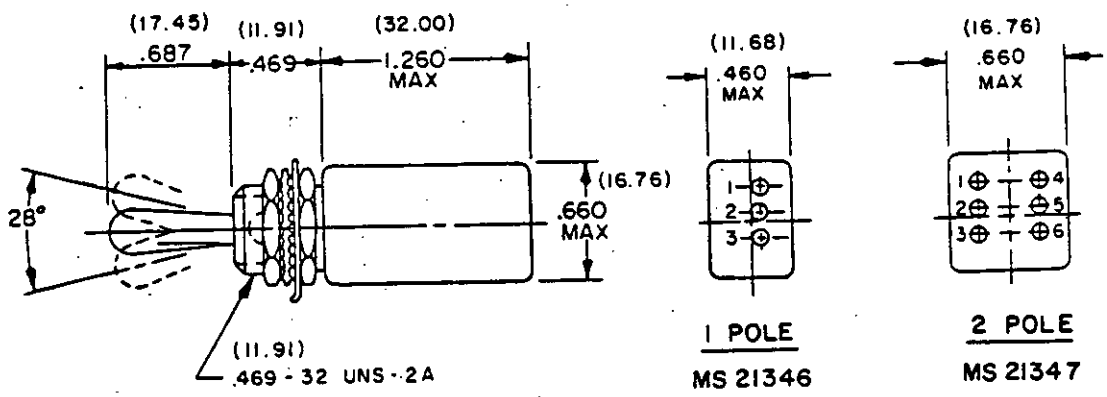


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite keyway side	Center	Keyway side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 400 Hz	(μA)
-211	ON	OFF	ON	4	2	3	1	1	25
-221	ON	NONE	OFF						
-231	ON	NONE	ON						
-241	ON	OFF	NONE						
-271	MOM-ON	OFF	MOM-ON						
-281	NONE	OFF	MOM-ON						
-311	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.


PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-17. MS21346 and MS21347 toggle switches, positive break, miniature, toggle sealed, integrated wire terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

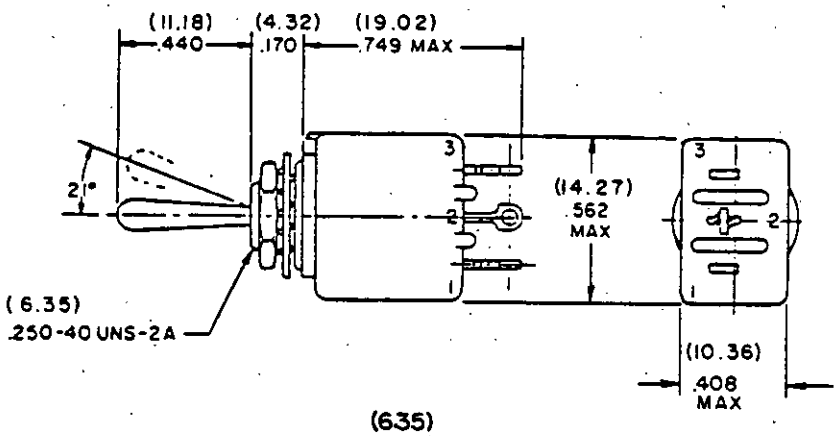

(635)
MS 21350 (.250 MOUNTING BUSHING)

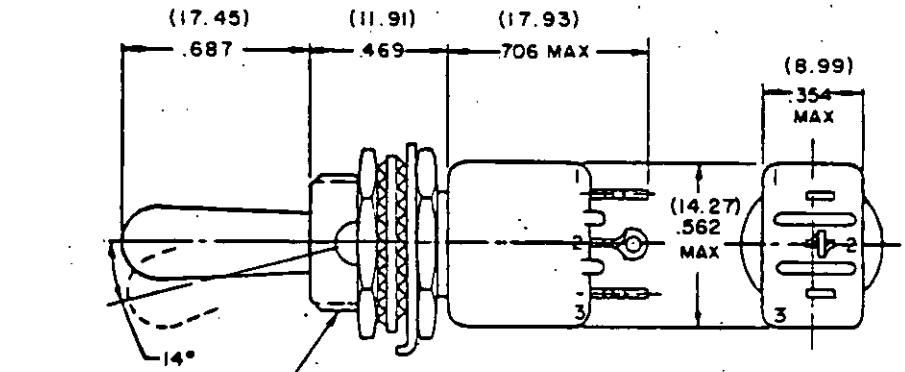

(11.91)
MS 21351 (.469 MOUNTING BUSHING)


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite keyway side	Center	Keyway side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	
									(μA)
-321	NONE	ON	MOM-ON	4	2	3	1	1	25

1/ Applicable terminal numbers are marked on the switch.


PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-18. MS21350 and MS21351 toggle switches, positive break, special circuit, miniature, toggle sealed, solder lug, single pole (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

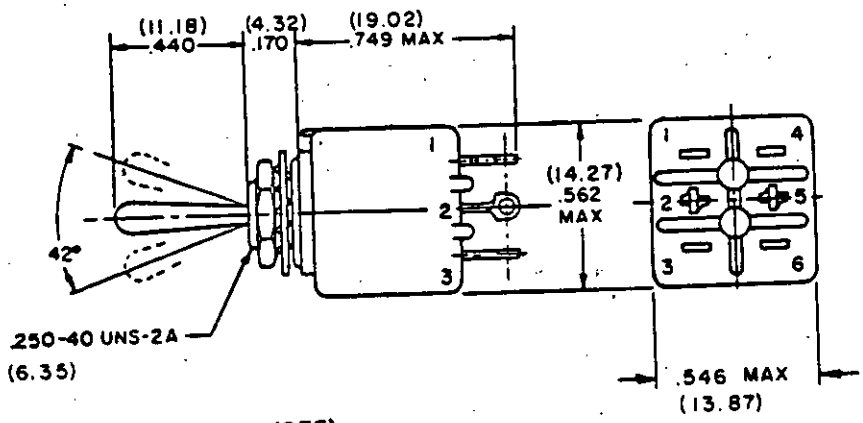

(635)
MS 21352 (.250 MOUNTING BUSHING)

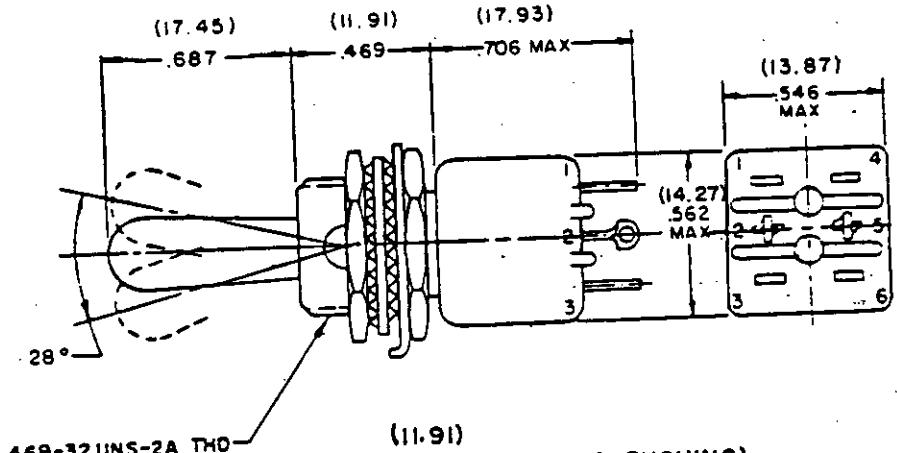

(11.91)
MS 21353 (.469 MOUNTING BUSHING)


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite keyway side	Center	Keyway side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	
									(μA)
-321 -331 -341 -351	NONE ON MOM-ON ON	ON ON ON ON	MOM-ON ON MOM-ON MOM-ON	4	2	3	1	1	25

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-19. MS21352 and MS21353 toggle switches, positive break, special circuit, miniature, toggle sealed, solder lug, double pole (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

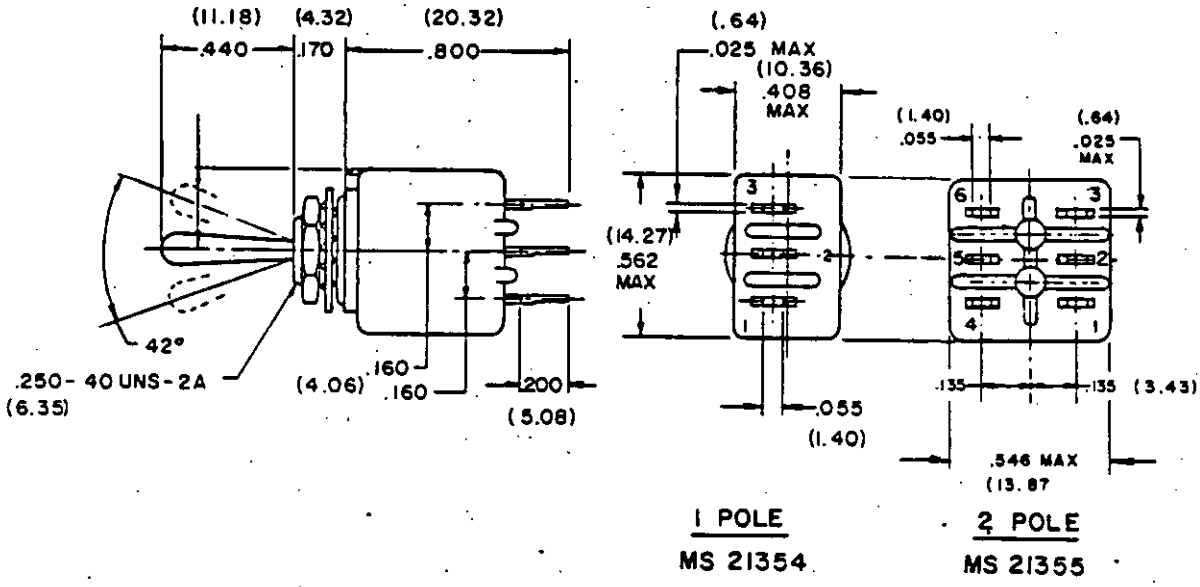


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite locking tab side	Center	Locking tab side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	
									(μA)
-211	ON	OFF	ON						
-221	ON	NONE	OFF						
-231	ON	NONE	ON						
-241	ON	OFF	NONE	4	2	3	1	1	25
-271	MOM-ON	OFF	MOM-ON						
-281	NONE	OFF	MOM-ON						
-311	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-20. MS21354 and MS21355 toggle switches, positive break, miniature, toggle sealed, printed circuit board terminals, .250 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

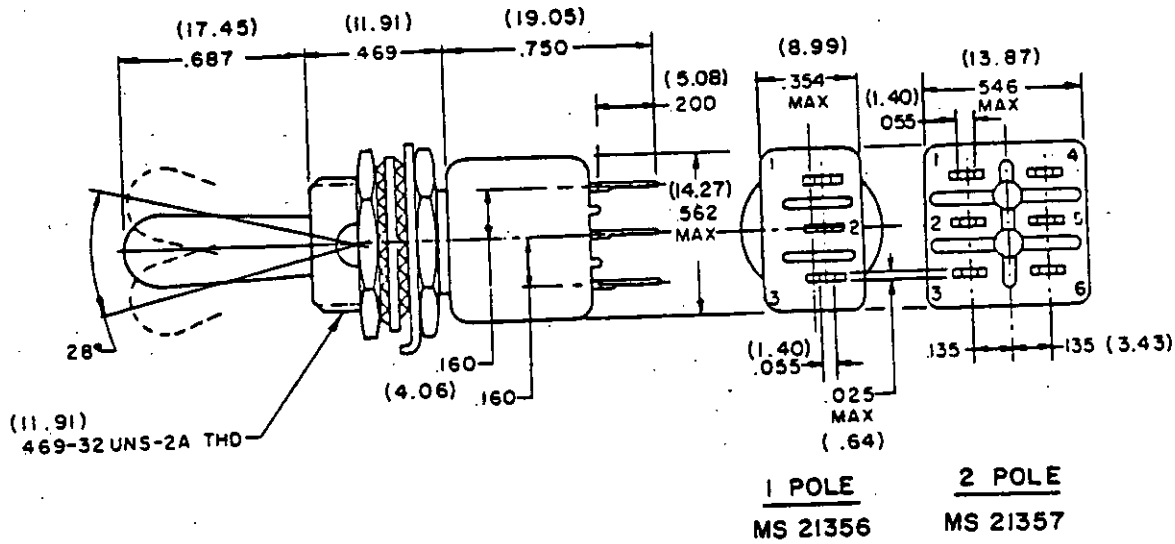


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite keyway side	Center	Keyway side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	(μA)
-211	ON	OFF	ON	4	2	3	1	1	25
-221	ON	NONE	OFF						
-231	ON	NONE	ON						
-241	ON	OFF	NONE						
-271	MOM-ON	OFF	MOM-ON						
-281	NONE	OFF	MOM-ON						
-311	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-21. MS21356 and MS21357 toggle switches, positive break, miniature, toggle sealed, printed circuit board terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

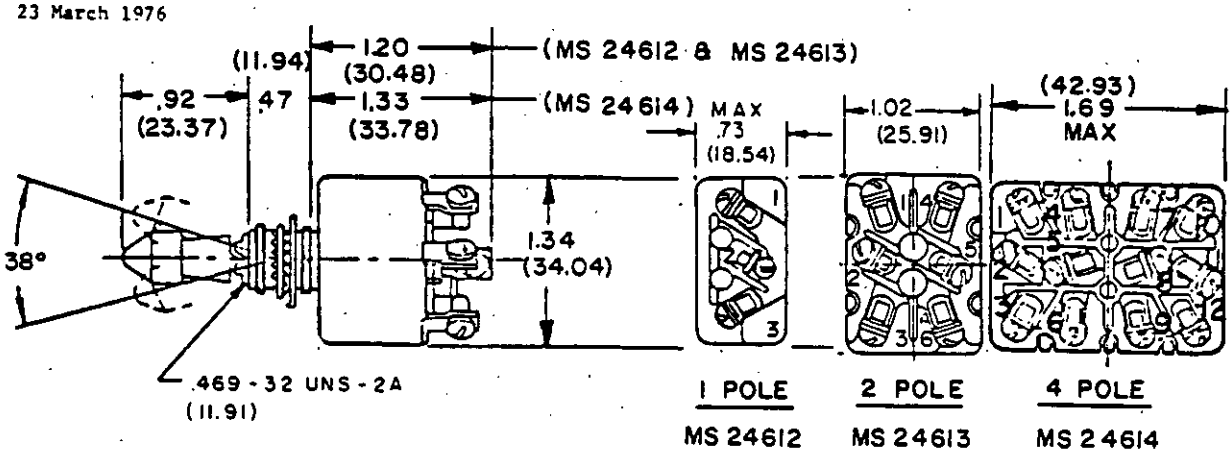

KEYWAY SIDE →

A LOCKED IN THREE POSITIONS	B LOCKED IN CENTER POSITION	C LOCKED IN KEYWAY SIDE	E LOCKED OUT OF CENTER POSITION
F LOCKED IN CTR POS MOM. EITHER SIDE	G LOCKED OUT OF KEYWAY SIDE, MOM. KEYWAY SIDE	H LOCKED OUT OF SIDE OPP KEYWAY, MOM. EITHER SIDE	J LOCKED OUT OF & INTO SIDE OPP KEYWAY
K LOCKED IN CTR POS, MOM. KEYWAY SIDE	L LOCKED OUT OF SIDE OPP KEYWAY, MOM. KEYWAY SIDE	M LOCKED OUT OF SIDE OPP KEYWAY, MOM. KEYWAY SIDE	N LOCKED OUT OF & INTO SIDE OPP KEY-WAY, MOM KWY SIDE


Number	Available locking combinations	1/ Circuit with toggle lever in			Current capacity (amperes)					
					28 Vdc and 115 Vac, 400 Hz			115 Vac, 60 Hz		
					Load			Load		
		Opposite keyway side	Center	Keyway side	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
212	A	ON	OFF	ON	7	25	15	7	20	15
222	C,E	ON	NONE	OFF						
232	C,E	ON	NONE	ON						
242	J,B	ON	OFF	NONE						
262	L	ON	NONE	MOM-ON						
272	F,H	MOM-ON	OFF	MOM-ON						
282	K	NONE	OFF	MOM-ON						
292	L	ON	NONE	MOM-OFF						
302	L	OFF	NONE	MOM-ON						
312	G,K,M,N	ON	OFF	MOM-ON						


1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the locking combination letter and the three-digit number as shown in the tabulation.

FIGURE 112-22. MS24612, MS24613, and MS24614 toggle switches, positive break, lever lock, environmentally sealed, screw terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

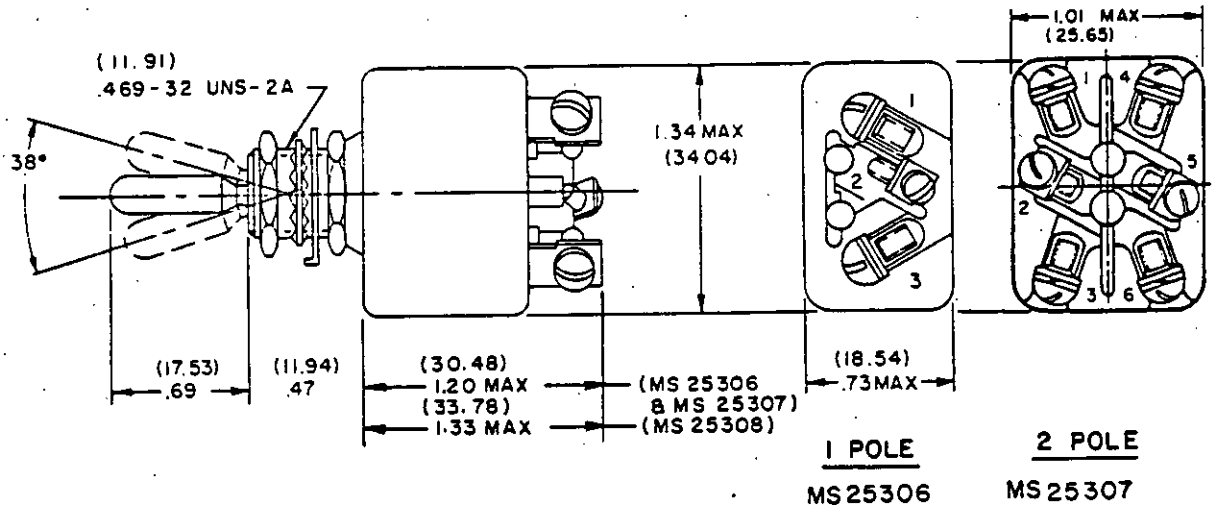

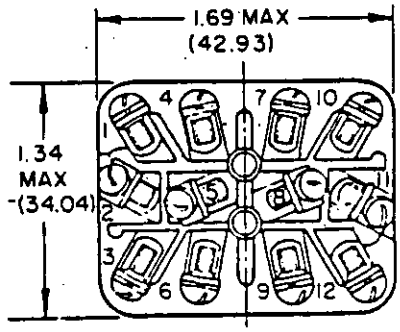


Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					
				28 Vdc and 115 Vac, 400 Hz			115 Vac, 60 Hz		
				Load			Load		
	Opposite keyway side	Center	Keyway side	Lamp	Resistive	Inductive	Lamp	Resistive	Inductive
-212	ON	OFF	ON	7	25	15	7	20	15
-222	ON	NONE	OFF						
-232	ON	NONE	ON						
-242	ON	OFF	NONE						
-262	ON	NONE	MOM-ON						
-272	MOM-ON	OFF	MOM-ON						
-282	NONE	OFF	MOM-ON						
-292	ON	NONE	MOM-OFF						
-302	OFF	NONE	MOM-ON						
-312	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-24. MS25306, MS25307, and MS25308 toggle switches, positive break, environmentally sealed, screw terminals, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

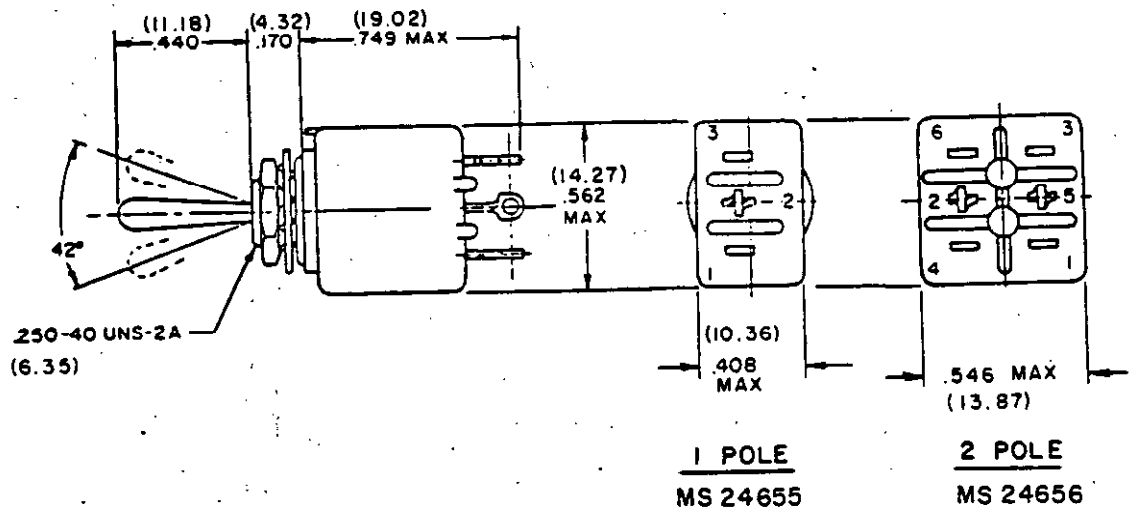

Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Life low current level switching 5 mV
				Resistive load			Inductive load		
	Opposite locking tab side	Center	Locking tab side	28 Vdc	115 Vac, 60 Hz	115 Vac, 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	(uA)
-211	ON	OFF	ON	4	2	3	1	1	25
-221	ON	NONE	OFF						
-231	ON	NONE	ON						
-241	ON	OFF	NONE						
-271	MOM-ON	OFF	MOM-ON						
-281	NONE	OFF	MOM-ON						
-311	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-23. MS24655 and MS24656 toggle switches, positive break, miniature, toggle sealed, solder lug, .250 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS		
	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp- - - - - -	2.4	1.5	2.4

INCHES	MM
.060	1.52
.115	2.92
.36	9.14
.470	11.94
.500	12.70
.720	18.29
.860	21.84
.990	25.15
1.125	28.58
1.160	29.46


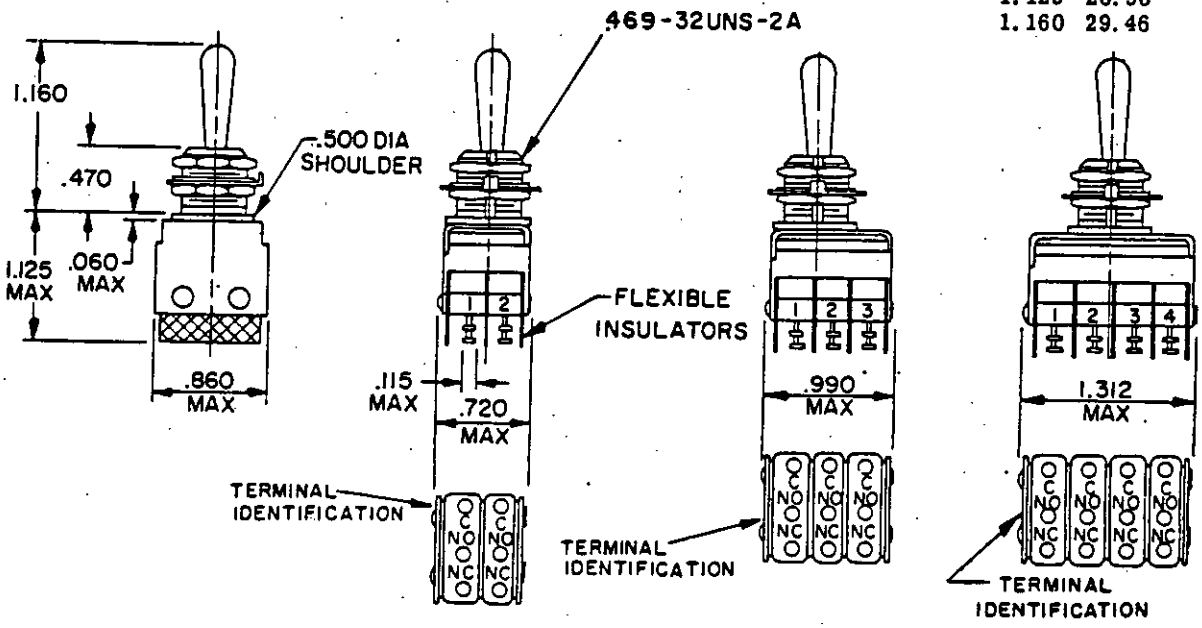



FIGURE A FIGURE B FIGURE C

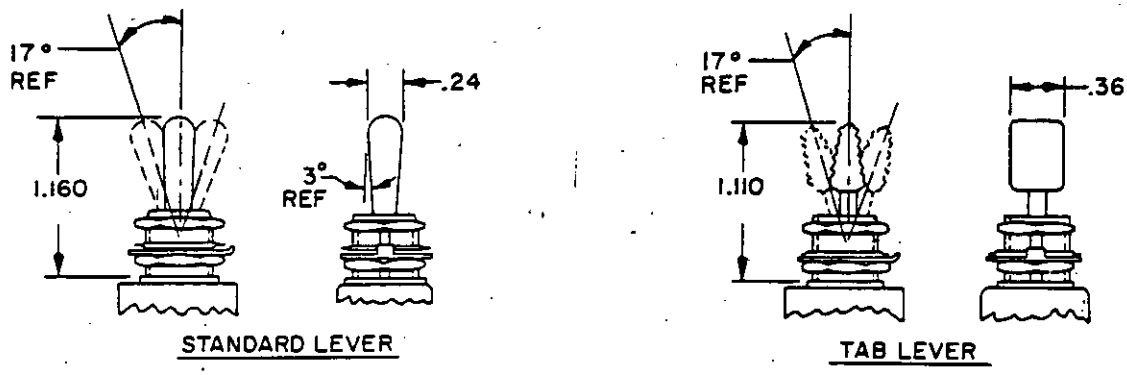

STANDARD LEVER TAB LEVER

FIGURE 112-26. Switch assemblies, sensitive, toggle lever (with integral leaf), 5 amperes, unsealed (MIL-S-8805/26).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

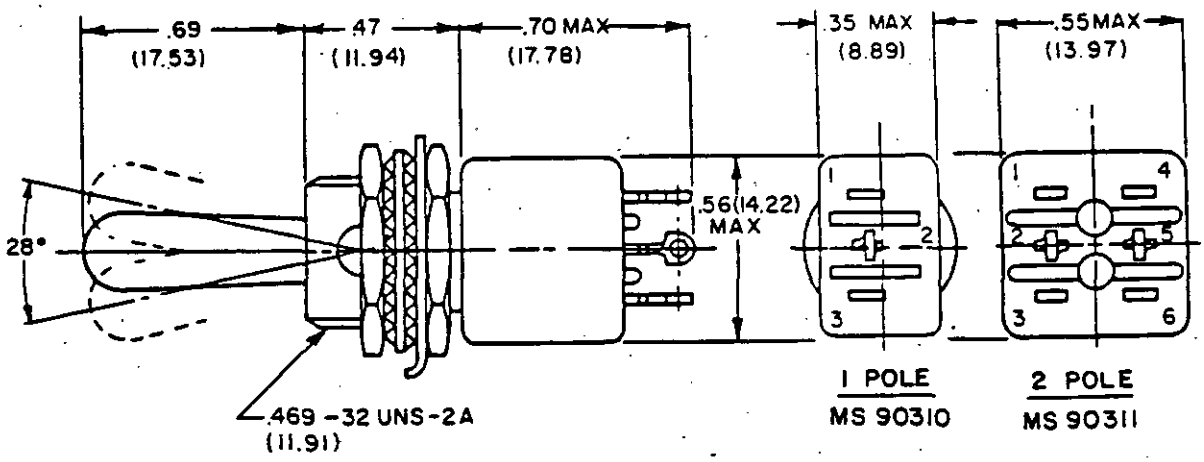

Dash number	1/ Circuit with toggle lever in			Current capacity (amperes)					Minimum current capacity per pole 5 mV ac-dc
				Resistive load			Inductive load		
	Opposite keyway side	Center	Keyway side	28 Vdc	50 Vdc	115 Vac, 60 and 400 Hz	28 Vdc	115 Vac, 60 and 400 Hz	
									(μA)
-211	ON	OFF	ON						
-221	ON	NONE	OFF						
-231	ON	NONE	ON						
-241	ON	OFF	NONE	4	1	3	1	1	25
-271	MOM-ON	OFF	MOM-ON						
-281	NONE	OFF	MOM-ON						
-311	ON	OFF	MOM-ON						

1/ Applicable terminal numbers are marked on the switch.

PART NUMBER: Consists of the applicable MS number followed by the dash number as shown in the tabulation.

FIGURE 112-25. MS90310 and MS90311 toggle switches, miniature, toggle sealed, solder lug, .469 mounting bushing (MIL-S-8834).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and characteristics.

Dash No.	Figure	Lever	Circuit configuration (see table II)	Switch action		
				Opposite keyway	Center	Keyway
-001	A	Standard	1	Main	None	Main
-003	A	Tab	1	Main	None	Main
-002	C	Standard	4	Main	None	Main
-004	C	Tab	4	Main	None	Main
-005	A	Standard	2	Mom	Main	Mom
-006	A	Tab	2	Mom	Main	Mom
-007	A	Standard	2	Main	Main	Main
-008	A	Tab	2	Main	Main	Main
-009	A	Standard	2	Mom	Main	Main
-010	A	Tab	2	Mom	Main	Main
-011	B	Standard	3	Mom	Main	Mom
-012	B	Tab	3	Mom	Main	Mom
-013	B	Standard	3	Main	Main	Main
-014	B	Tab	3	Main	Main	Main

TABLE II. Circuit configuration.

Circuit configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
1	2	C-NC	None	C-NO
2	1	C-NO	C-NC	C-NC
2	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
3	2	C-NC	C-NC	C-NO
3	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
4	2	C-NC	None	C-NO
4	3	C-NC	None	C-NO
4	4	C-NC	None	C-NO

OPERATING CHARACTERISTICS:
Coincidence of operating and releasing points: All poles transfer within ten degrees of lever travel.

PART NUMBER: Consists of "M8805/26" followed by the dash number shown in table I.

FIGURE 112-26. Switch assemblies, sensitive, toggle lever (with integral leaf), 5 amperes, unsealed (MIL-S-8805/26) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

LOAD	ELECTRICAL RATINGS		
	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp- - - - - -	2.4	1.5	2.4

INCHES	MM
.115	2.92
.469	11.91
.720	18.29
.860	21.84
.990	25.15
1.125	28.58
1.312	33.32
1.65	41.91

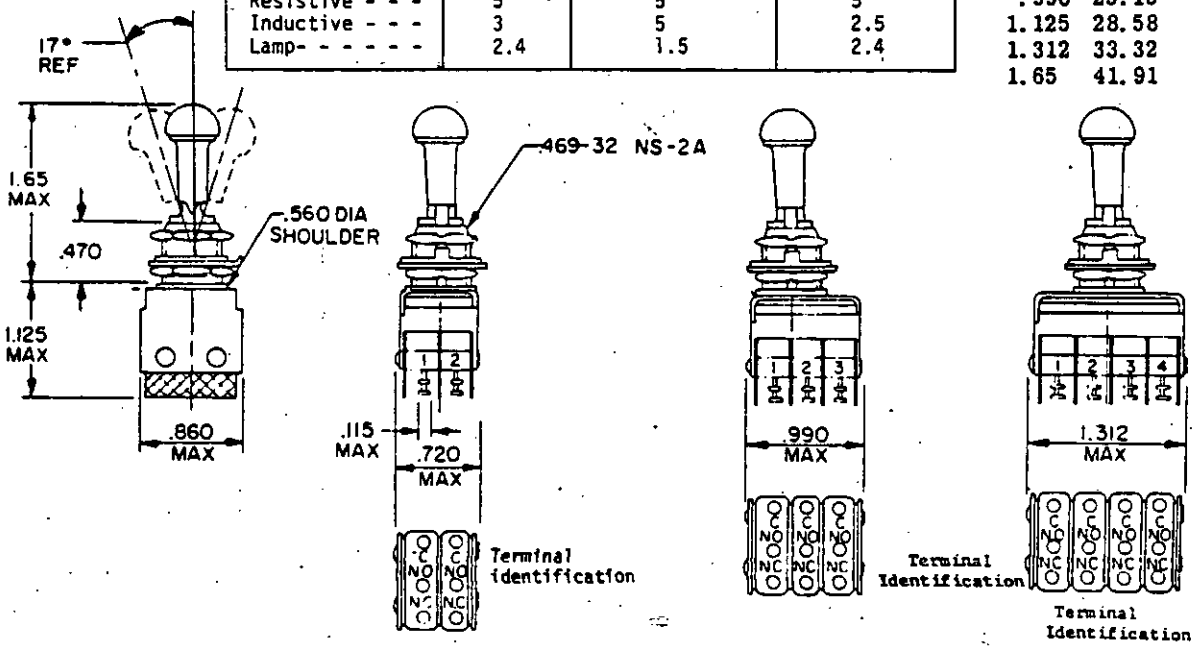


FIGURE A FIGURE B FIGURE C

KEYING SIDE →

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION KEYWAY SIDE	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION
"F" LOCKED IN EXTREME POSITION OPPOSITE KEYWAY	"G" LOCKED IN EXTREME POSITION KEYWAY SIDE	"J" LOCKED OUT OF CENTER AND EXTREME POSITION OPPOSITE KEYWAY	"K" LOCKED IN CENTER AND EXTREME POSITION OPPOSITE KEYWAY
"L" LOCKED OUT OF EXTREME POSITION KEYWAY SIDE	"M" LOCKED OUT OF AND INTO EXTREME POSITION OPPOSITE KEYWAY	"N" LOCKED OUT OF EXTREME POSITION OPPOSITE KEYWAY	"P" LOCKED OUT OF AND INTO EXTREME POSITION KEYWAY SIDE

FIGURE 112-27. Switch assemblies, sensitive, lever lock, 5 amperes, unsealed (MIL-S-8805/92).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers and characteristics.

Dash No.	Figure	Locking combination	Circuit configuration (see table II)	Switch action		
				Opposite keyway	Center	Keyway
-001	A	D	1	Main	None	Main
-002	C	D	4	Main	None	Main
-003	C	F	4	Main	None	Main
-004	C	G	4	Main	None	Main
-005	A	E	2	Mom	Main	Mom
-006	A	A	2	Main	Main	Main
-007	A	D	2	Main	Main	Main
-008	A	E	2	Main	Main	Main
-009	A	F	2	Main	Main	Main
-010	A	G	2	Main	Main	Main
-011	A	J	2	Main	Main	Main
-012	A	K	2	Main	Main	Main
-013	A	L	2	Main	Main	Main
-014	A	M	2	Main	Main	Main
-015	A	N	2	Main	Main	Main
-016	A	B	2	Mom	Main	Main
-017	A	E	2	Mom	Main	Main
-018	A	P	2	Mom	Main	Main
-019	B	A	3	Main	Main	Main

TABLE II. Circuit configuration.

Circuit configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
1	2	C-NC	None	C-NO
2	1	C-NO	C-NC	C-NC
2	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
3	2	C-NC	C-NC	C-NO
3	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
4	2	C-NC	None	C-NO
4	3	C-NC	None	C-NO
4	4	C-NC	None	C-NO

OPERATING CHARACTERISTICS:
Coincidence of operating and releasing points: All poles transfer within 10 degrees of lever travel.
Locking arrangement: Positive locking is accomplished and prevents motion of the toggle lever until the locking mechanism is manually released.
Locking mechanism release: The force required to release the locking mechanism is 3 to 5 pounds.

PART NUMBER: Consists of "M8805/92" followed by the dash number shown in table I.

FIGURE 112-27. Switch assemblies, sensitive, lever lock, 5 amperes, unsealed (MIL-S-8805/92) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 113

SWITCH ASSEMBLIES, MODULAR

(Applicable specification: MIL-S-22885)

TABLE 205.I. Switch assemblies, parameters and characteristic.

Figure number	Applicable specification sheet	Part number	Operation	Circuit characteristic	Operating force (lbs max)
113-1	MIL-S-22885/11	M22885/11			
		-01	Momentary	2PDT	4
		-02	Momentary	4PDT	4
		-03	Alternate	2PDT	6
		-04	Alternate	4PDT	7
113-2	MIL-S-22885/26	M22885/26			
		-01	Momentary	2 two-circuit	4
		-02	Alternate	2 two-circuit	6
		-03	Momentary	4 two-circuit	4
		-04	Alternate	4 two-circuit	7
		-05	Momentary	2 four-circuit	4
		-06	Alternate	2 four-circuit	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

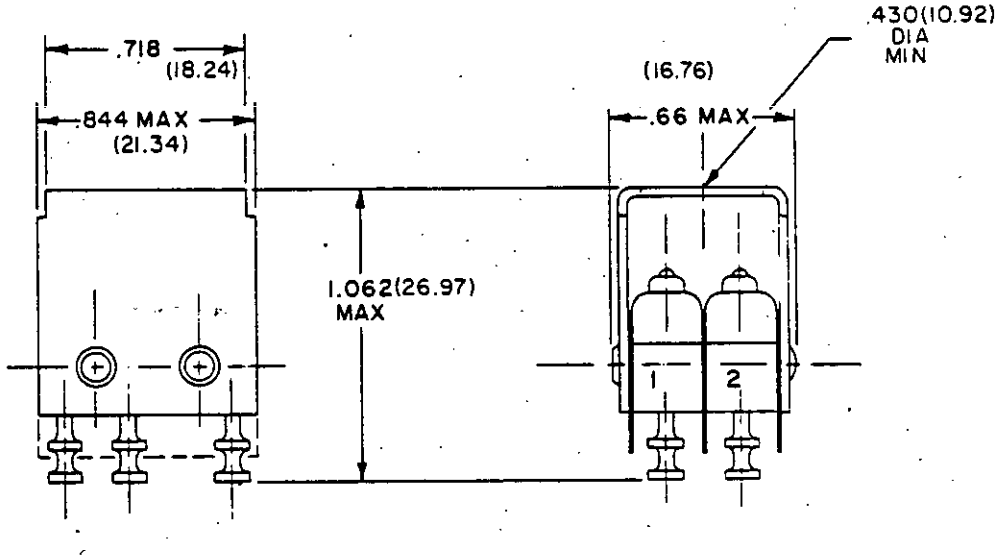


FIGURE 113-1A. Two pole, double throw, momentary action switch, part no. M22885/11-01.

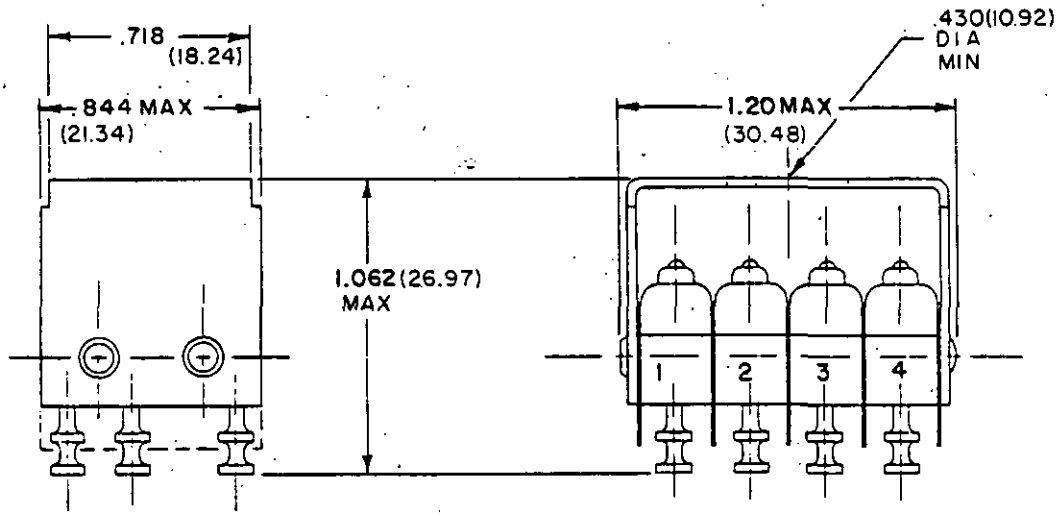


FIGURE 113-1B. Four pole, double throw, momentary action switch, part no. M22885/11-02.

FIGURE 113-1. Switch assemblies (MIL-S-22885/11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

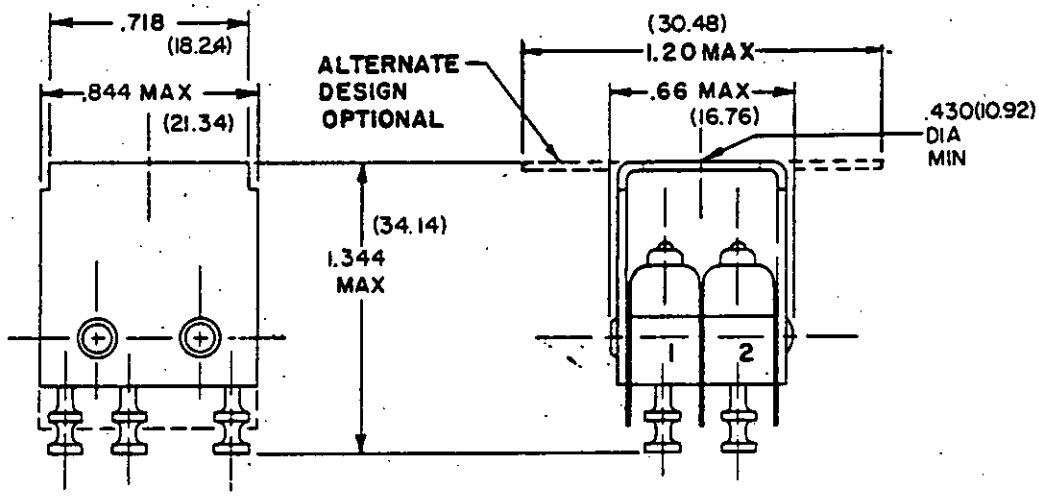


FIGURE 113-1C. Two pole, double throw, alternate action switch, part no. M22885/11-03.

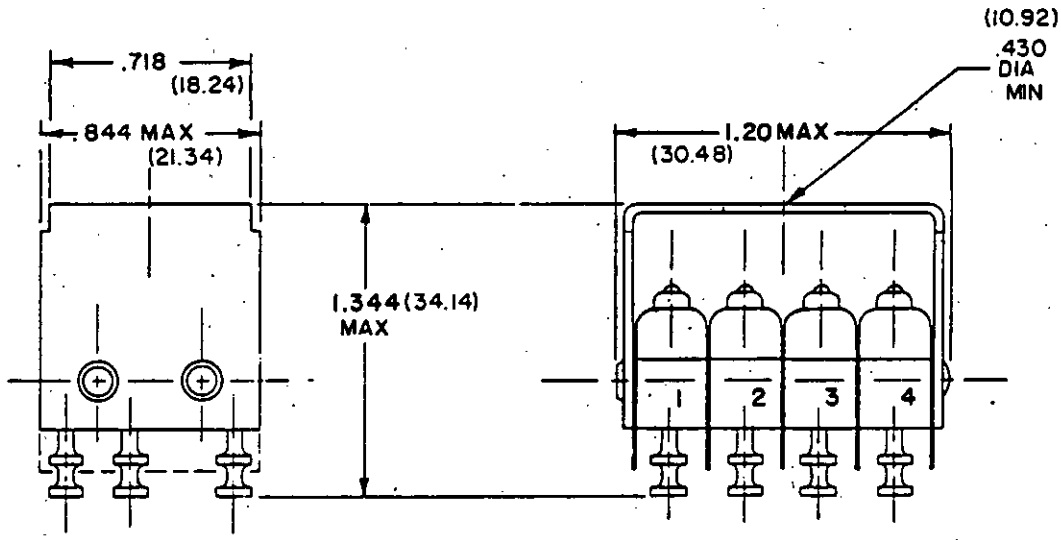


FIGURE 113-1D. Four pole, double throw, alternate action switch, part no. M22885/11-04.

FIGURE 113-1. Switch assemblies (MIL-S-22885/11) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		50, 000 feet
	28 vdc	115 vac	28 vdc
	(amperes)	(amperes)	(amperes)
Resistive	5.0	5.0	5.0
Inductive	3.0	5.0	2.5
Lamp	2.4	1.5	2.4

Procurement document: MIL-S-22885/11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

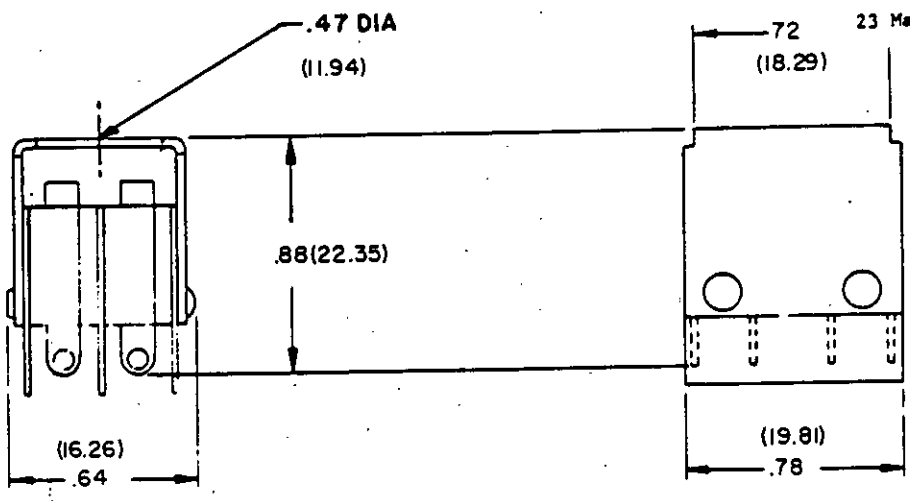


FIGURE 113-2A. Two two-circuit momentary action switch, part no. M22885/26-01.

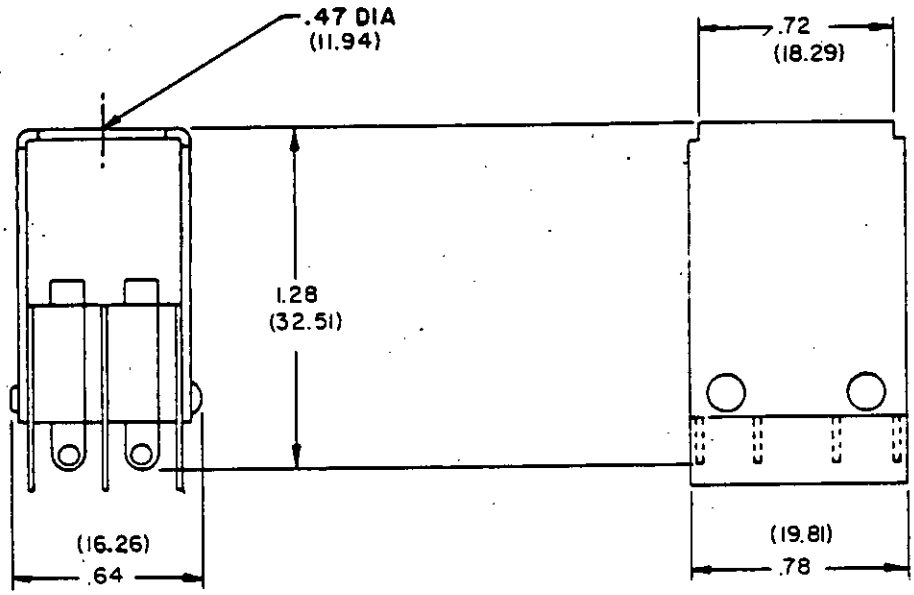


FIGURE 113-2B. Two two-circuit alternate action switch, part no. M22885/26-02.

FIGURE 113-2. Switch assemblies, double break (MIL-S-22885/26).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

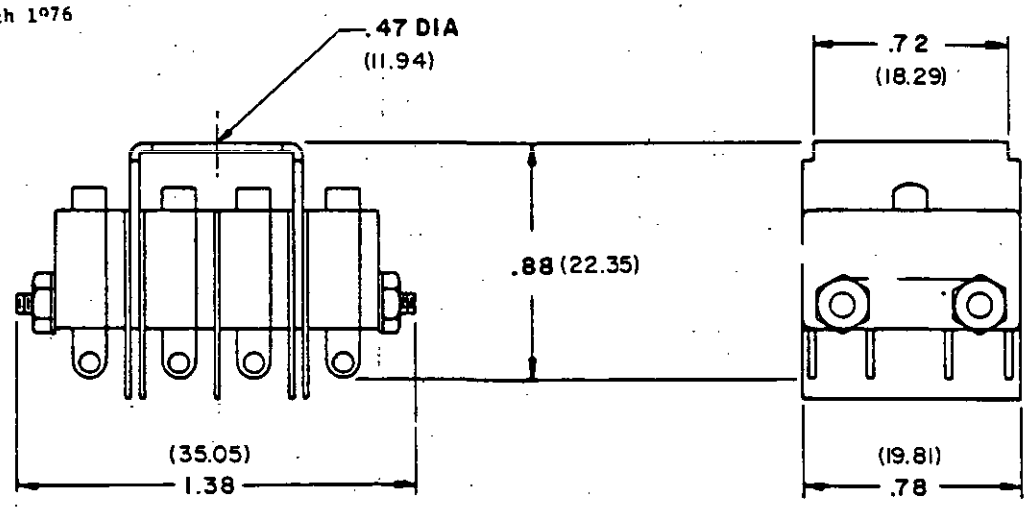


FIGURE 113-2C. Four two-circuit momentary action switch, part no. M22885/26-03.

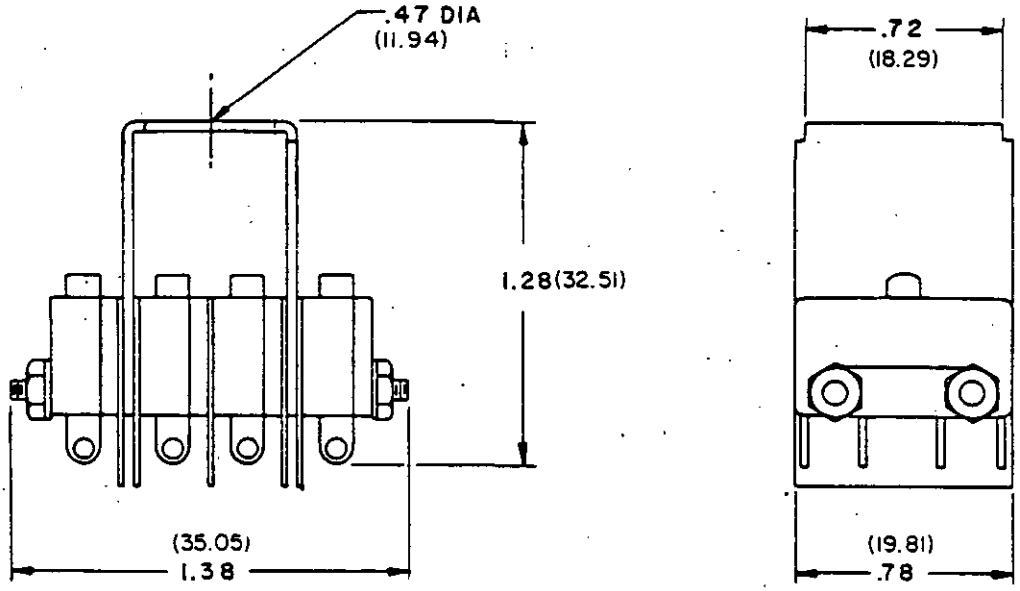


FIGURE 113-2D. Four two-circuit alternate action switch, part no. M22885/26-04.

FIGURE 113-2. Switch assemblies, double break (MIL-S-22885/26) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

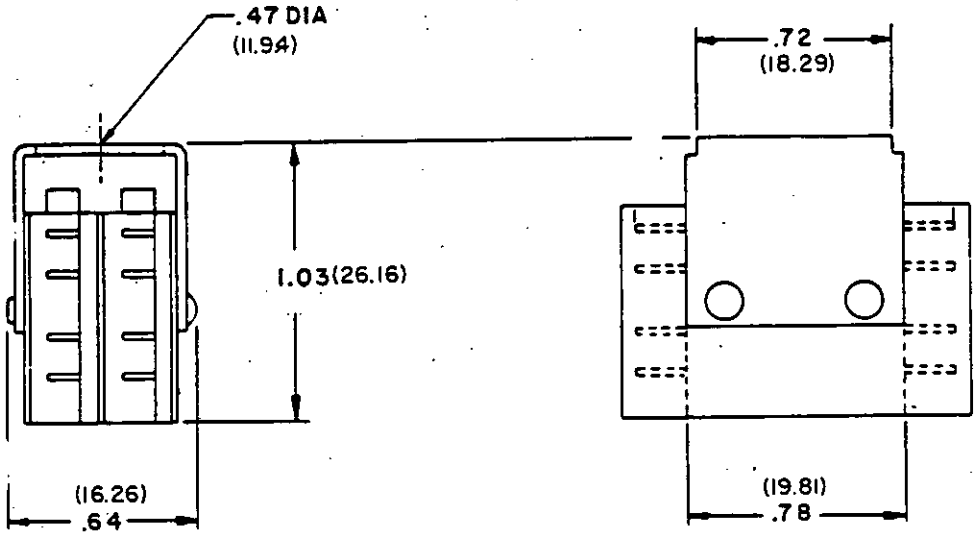


FIGURE 113-2E. Two four-circuit momentary action switch, part no. M22885/26-05.

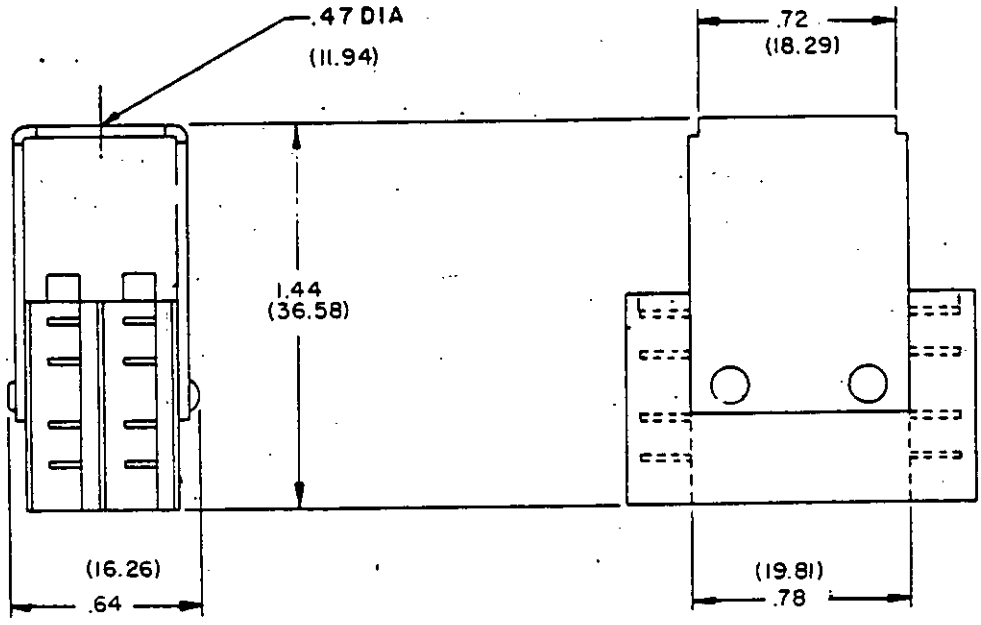


FIGURE 113-2F. Two four-circuit alternate action switch, part no. M22885/26-06.

FIGURE 113-2. Switch assemblies, double break (MIL-S-22885/26) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

Electrical ratings.

Load	Sea level		70,000 feet
	28 vdc	115 vac 60 Hz	28 vdc
	(amperes)	(amperes)	(amperes)
Resistive	10.0	5.0	10.0
Inductive	5.0	5.0	2.0
Lamp	3.0	1.5	---

Procurement document: MIL-S-22885/26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 200

ASSOCIATED SWITCH HARDWARE

Section

201 Actuators
202 Boots and Panel Seals
203 Color Filters
204 Guards

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 201

ACTUATORS

(Applicable specification: MIL-S-8805)

NOTE: As of this date, no selected standard actuators have been selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 202

BOOTS AND PANEL SEALS

(To be used when required)

(Applicable specifications: MIL-B-5423 and MIL-S-22885)

TABLE 202.I. Boots, characteristics.

Figure number	Applicable specification sheet	Part number	Type	Style	Application
202-1	MIL-B-5423/1	M5423/01-01	A	1	Toggle switches, one-hole mounting, enclosed.
202-2	MIL-B-5423/2	M5423/02-01	A	3	Toggle switches, one-hole mounting, through.
202-3	MIL-B-5423/3	M5423/03-01	A	4	Toggle switches, three-hole mounting, through.
202-4	MIL-B-5423/4	M5423/04-01	A	6	Toggle switches, one-hole mounting, miniature, enclosed.
202-5	MIL-B-5423/5	M5423/05-01 M5423/05-02	A	7	Toggle switches, one-hole mounting, subminiature, enclosed.
202-6	MIL-B-5423/6	M5423/06-03 M5423/06-04	B	1	Push-button switches, one-hole mounting, adapter type.
202-7	MIL-B-5423/7	M5423/07-01 M5423/07-02 M5423/07-03 M5423/07-04 M5423/07-05	B	2	Pushbutton switches, one-hole mounting, drilled panel.
202-8	MIL-B-5423/9	M5423/09-01 M5423/09-02 M5423/09-03 M5423/09-04 M5423/09-05 M5423/09-06	C	---	Rotary-shaft seals.
202-9	MIL-B-5423/10	M5423/10-01 M5423/10-02 M5423/10-03	B	4	Push-button switches, one-hole mounting, miniature, drilled panel.
202-10	MIL-B-5423/11	M5423/11-01	A	8	Toggle switches, one-hole mounting, subminiature, through.
202-11	MIL-B-5423/12	M5423/12-A9	A	9	Toggle switches, five-hole mounting, through.
202-12	MIL-B-5423/13	M5423/13-01 M5423/13-02 M5423/13-03	D	1	Circuit breakers, lever operated, panel mounted without mounting frame.
202-13	MIL-B-5423/14	M5423/14-01 M5423/14-02 M5423/14-03 M5423/14-04 M5423/14-05 M5423/14-06 M5423/14-07 M5423/14-08	D	2	Circuit breakers, lever operated, panel mounted with mounting plate.
202-14	MIL-B-5423/15	M5423/15-01 M5423/15-02	---	---	Toggle and push-button switches, circuit breakers and rotary actuated parts. (Handset switches.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

TABLE 202.II. Panel seals, characteristics.

Figure number	Applicable specification sheet	Part number	Application
202-15	MIL-S-22885/13	M22885/13-02	For 4 lamp illuminated push switch, MIL-S-22885/9, and 4 lamp modular indicator light, MIL-S-22885/10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

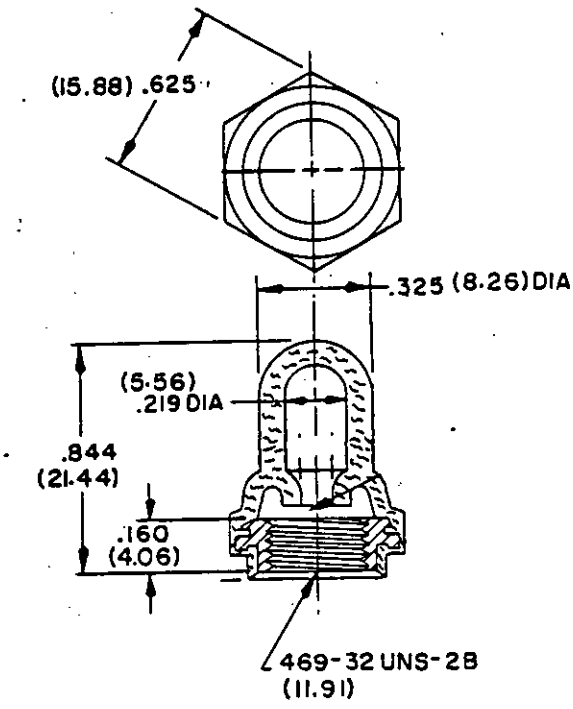


FIGURE 202-1. Boot, dust and water seal, type A, style 1.

Application: For toggle switches, one-hole mounting, enclosed.

Procurement document: MIL-B-5423/1.

Part number: M5423/01-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

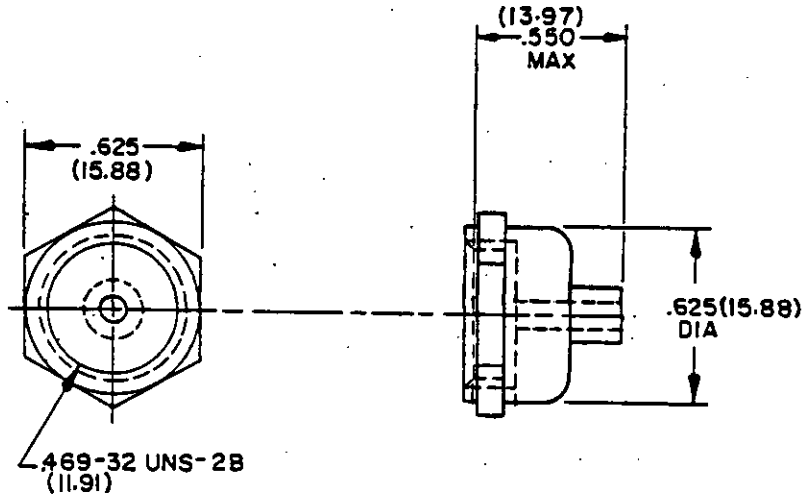


FIGURE 202-2. Boot, dust and water seal, type A, style 3.

Application: For toggle switches, one-hole mounting, through.

Procurement document: MIL-B-5423/2.

Part number: M5423/02-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

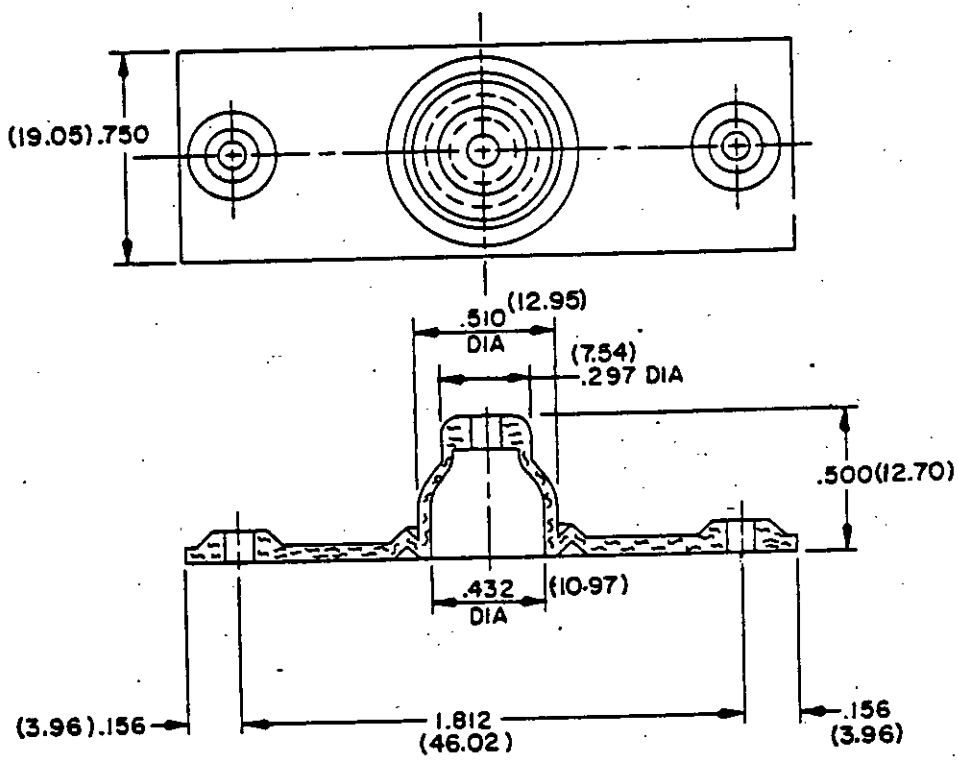


FIGURE 202-3. Boot, dust and water seal, type A, style 4.

Application: For toggle switches, three-hole mounting, through.

Procurement document: MIL-B-5423/3.

Part number: M5423/03-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

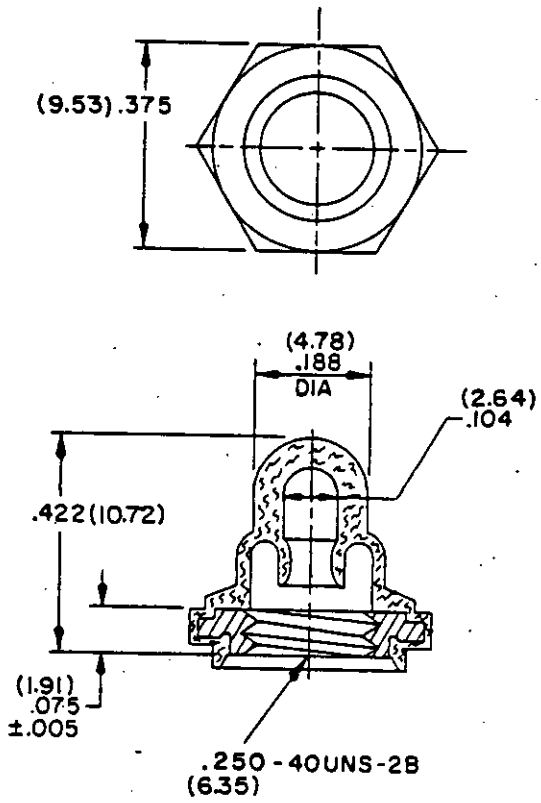



FIGURE 203-4. Boot, dust and water seal, type A, style 6.

Application: For toggle switches, one-hole mounting, miniature, enclosed.

Procurement document: MIL-B-5423/4.

Part number: M5423/04-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

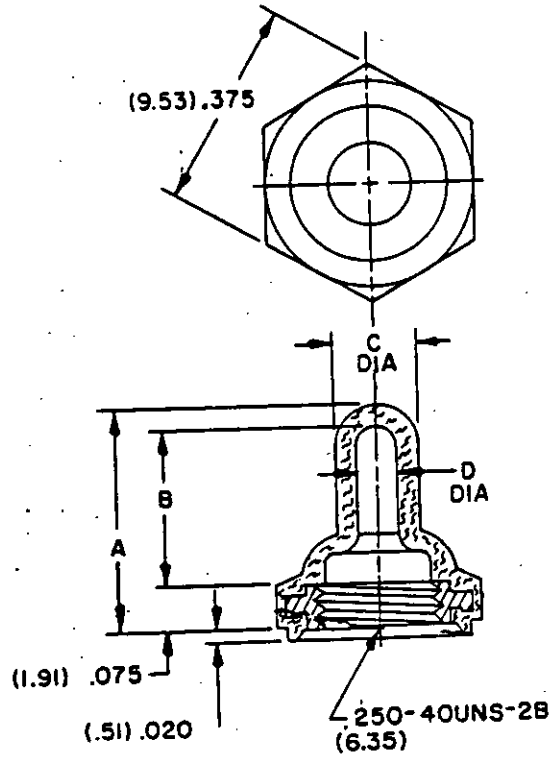


Size	Dimensions ±.015 (.38)				Part number M5423/05-
	A	B	C	D ±.005 (.13)	
1	.500 (12.70)	.359 (9.12)	.203 (5.16)	.064 (1.63)	01
2	.391 (9.93)	.281 (7.14)	.141 (3.58)	.064 (1.63)	02

FIGURE 202-5. Boots, dust and water seal, type A, style 7.

Application: For toggle switches, one-hole mounting, subminiature, enclosed.

Procurement document: MIL-B-5423/5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

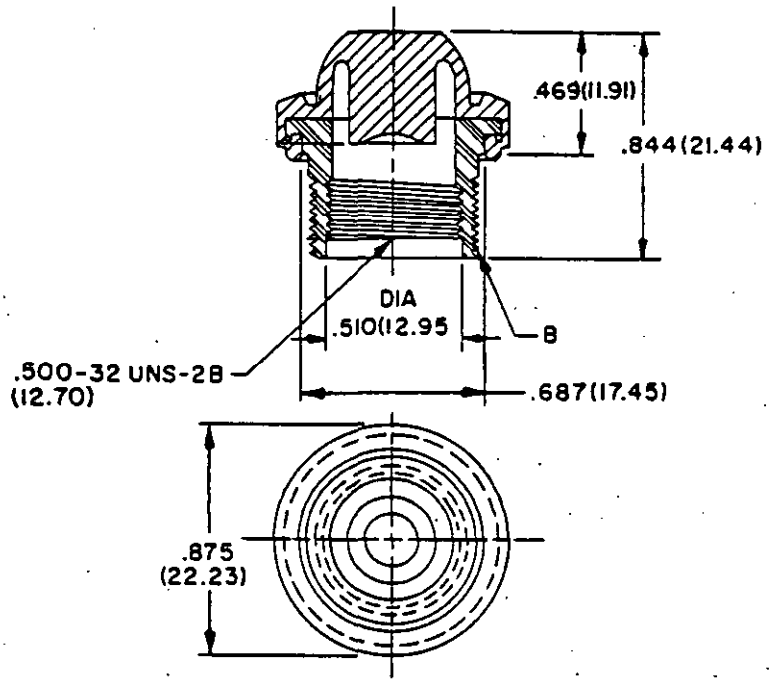


Size	Dimensions		Part number M5423/06-
	A	B	
3	.438 (11.13)	5/8-24 UNS-2A	03
4	.688 (17.48)	5/8-24 UNS-2A	04

FIGURE 202-6. Boots, dust and water seal, type B, style 1.

Application: For push-button switches, one-hole mounting, adapter type.

Procurement document: MIL-B-5423/6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

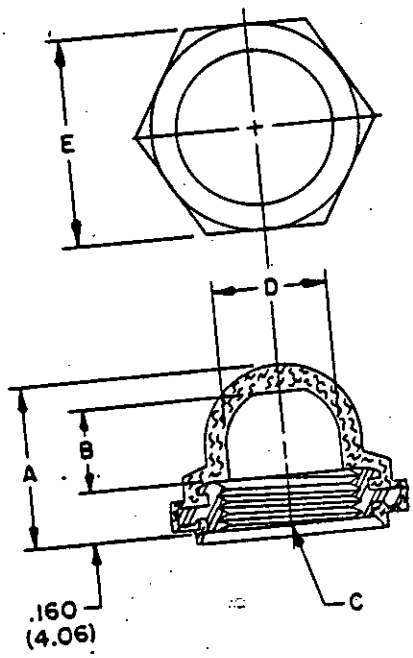


Size	Dimensions					Part number M5423/07-
	A	B (MIN)	C	D	E	
1	.547 (13.89)	.281 (7.14)	15/32-32 UNS-2B	.422 (10.72)	.625 (15.88)	01
2	.719 (18.26)	.438 (11.13)	15/32-32 UNS-2B	.422 (10.72)	.625 (15.88)	02
3	.547 (13.89)	.281 (7.14)	1/2-32 UN-2B	.422 (10.72)	.625 (15.88)	03
4	.609 (15.47)	.281 (7.14)	5/8-24 UNEF-2B	.516 (13.11)	.750 (19.05)	04
5	.547 (13.89)	.188 (4.78)	1/2-32 UN-2B	.422 (10.72)	.625 (15.88)	05

FIGURE 202-7. Boots, dust and water seal, type B, style 2.

Application: For pushbutton switches, one-hole mounting, drilled panel.

Procurement document: MIL-B-5423/7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

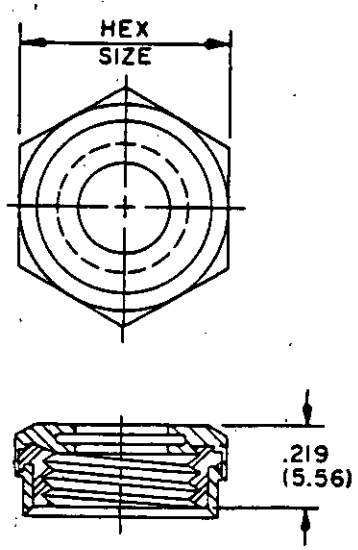


Size	For use with shaft size ±.004 (.10)	Insert thread	Hex size	Part number M5423/09-
1	.125 (3.18)	3/8-32 UNEF-2B	.500 (12.70)	01
2	.250 (6.35)	3/8-32 UNEF-2B	.500 (12.70)	02
4	.125 (3.18)	1/4-32 UNEF-2B	.375 (9.53)	03
6	.250 (6.35)	15/32-32 UNS-2B	.625 (15.88)	04
7	.375 (9.53)	5/8-24 UNEF-2B	.750 (19.05)	05
9	.250 (6.35)	1/2-32 UN-2B	.625 (15.88)	06

FIGURE 202-8. Boots, dust and water seal, type C.

Application: For use as rotary-shaft seals.

Procurement document: MIL-B-5423/9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

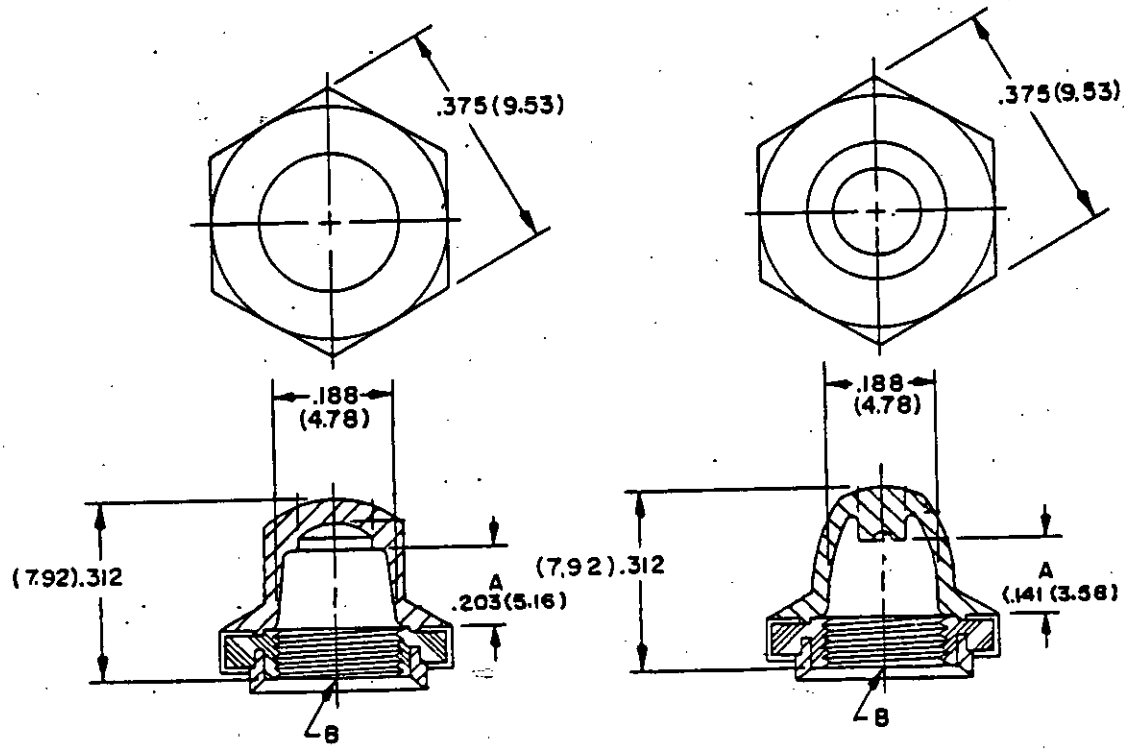

Size	Dimensions		Part number M5423/10-
	A	B	
1	.203	1/4-32 UNS-2B	01
2	.203	1/4-40 UNS-2B	02
3	.141	1/4-40 UNS-2B	03

FIGURE 202-9. Boots, dust and water seal, type B, style 4.

Application: For push button switches, one-hole mounting, miniature, drilled panel.

Procurement document: MIL-B-5423/10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

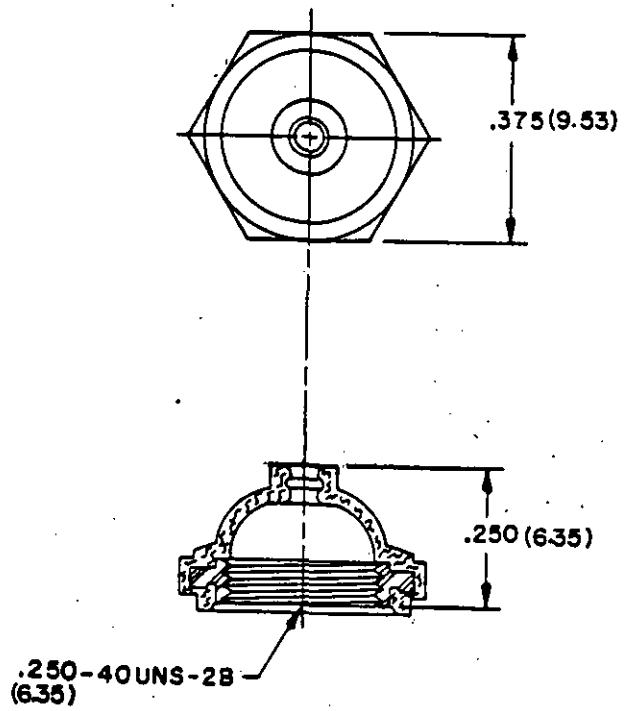


FIGURE 202-10. Boot, dust and water seal, type A, style 8.

Application: For toggle switches, one-hole mounting, subminiature, through.

Procurement document: MIL-S-5423/11.

Part number: M5423/11-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

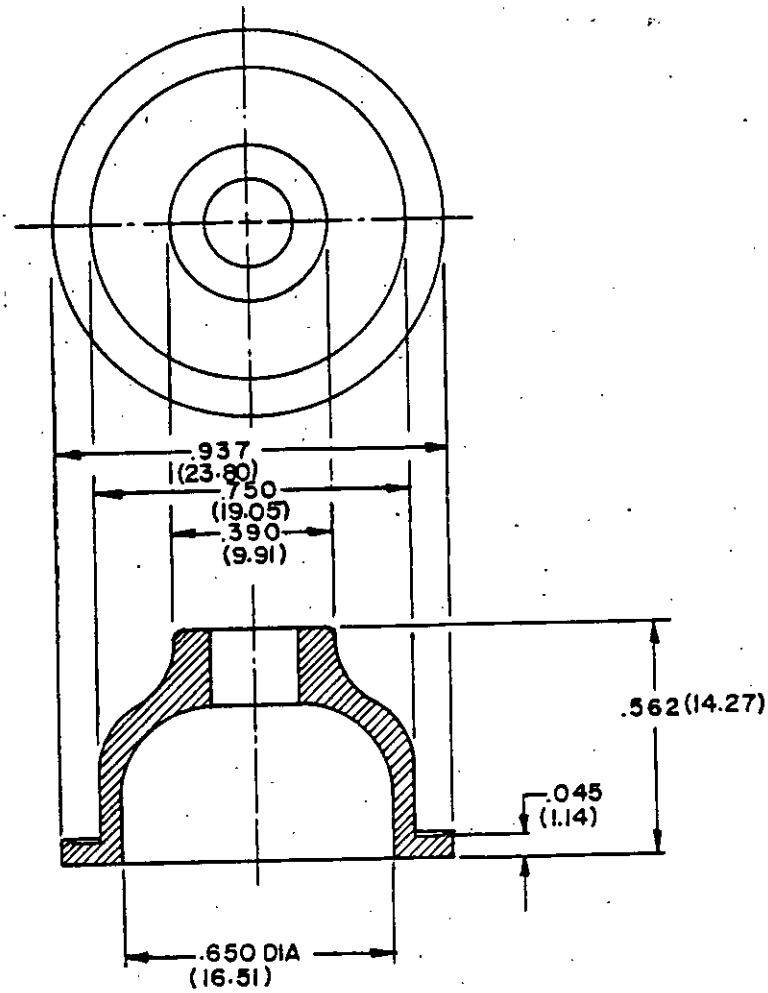



FIGURE 202-11. Boot, dust and water seal, type A, style 9.

Application: For toggle switches, five-hole mounting, through.

Procurement document: MIL-B-5423/12.

Part number: M5423/12-A9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

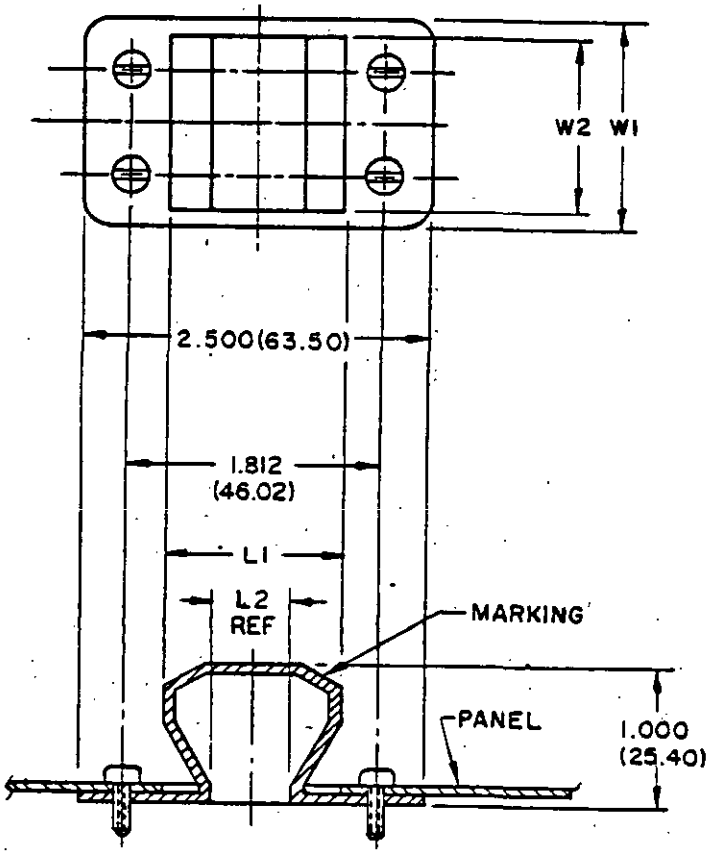


Part number M5423/13-	Dimensions ±.031 (.79)			
	L1	W1	W2	L2
01	1.250 (31.75)	.750 (19.05)	.531 (13.49)	.60 (15.24)
02	1.312 (33.32)	1.500 (38.10)	1.250 (31.75)	.60 (15.24)
03	1.281 (32.54)	2.250 (57.15)	2.000 (50.80)	.60 (15.24)

FIGURE 202-12. Boots, dust and water seal, type D, style 1.

Application: For lever operated circuit breakers.

Procurement document: MIL-B-5423/13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

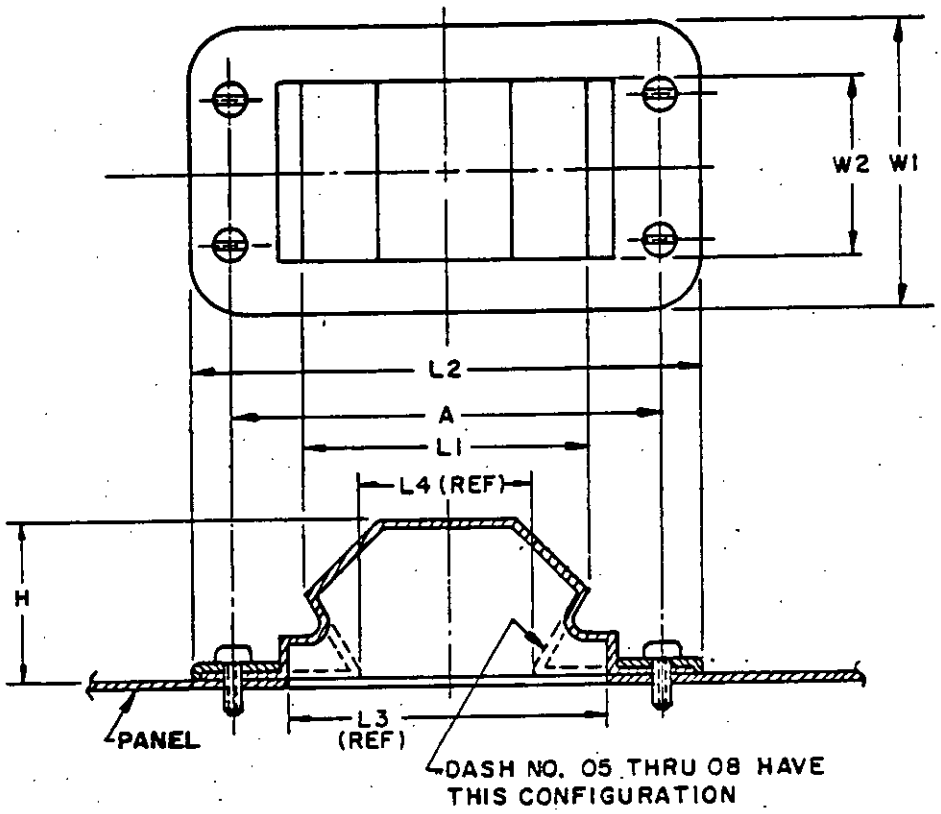


Part number M5423/14-	Dimensions ±.031 (.79 mm)							
	A	L1	L2	W1	W2	H	L3	L4
01	2.750 (69.85)	2.125 (53.98)	3.937 (100.00)	1.500 (38.10)	1.093 (27.76)	1.109 (28.17)	2.25 (57.15)	None
02	3.062 (77.77)	2.000 (50.80)	3.625 (92.08)	2.062 (52.37)	1.343 (34.11)	1.125 (28.58)	2.31 (58.67)	None
03	2.750 (69.85)	2.000 (50.80)	3.718 (94.44)	3.656 (92.86)	3.062 (77.77)	.921 (23.39)	2.25 (57.15)	None
04	3.062 (77.77)	2.000 (50.80)	3.500 (88.90)	4.812 (122.22)	4.312 (109.52)	1.000 (25.40)	2.31 (58.67)	None
05	2.062 (52.37)	1.875 (47.63)	2.625 (66.68)	1.375 (34.93)	.843 (21.41)	.875 (22.23)	None	1.44 (36.58)
06	2.062 (52.37)	1.875 (47.63)	2.656 (67.46)	2.218 (56.34)	1.593 (40.46)	.875 (22.23)	None	1.44 (36.58)
07	2.062 (52.37)	1.875 (47.63)	2.656 (67.46)	2.968 (75.39)	2.343 (59.51)	.875 (22.23)	None	1.44 (36.58)
08	2.062 (52.37)	1.781 (45.24)	2.656 (67.46)	3.718 (94.44)	3.093 (78.56)	.875 (22.23)	None	1.44 (36.58)

FIGURE 202-13. Boots, dust and water seal, type D, style 2.


Application: For lever operated circuit breakers, panel mounted complete with mounting frame.

Procurement document: MIL-B-5423/14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

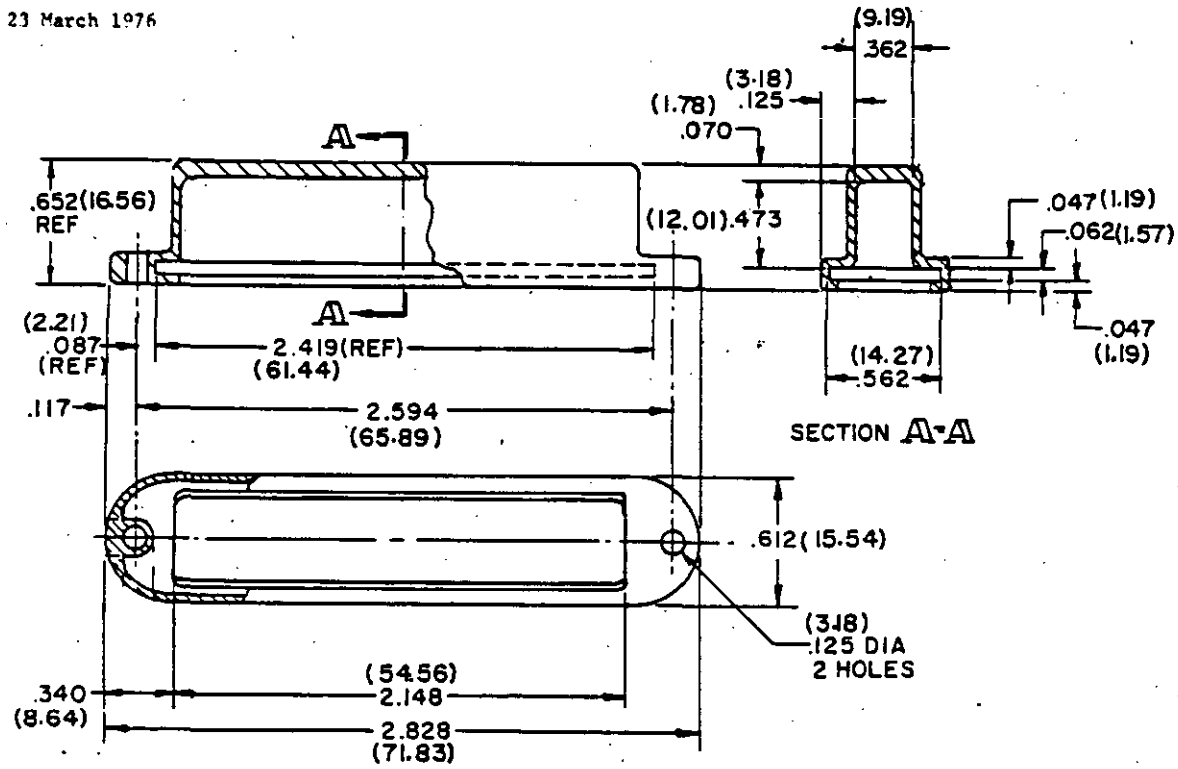

PART NO. M5423/15-01

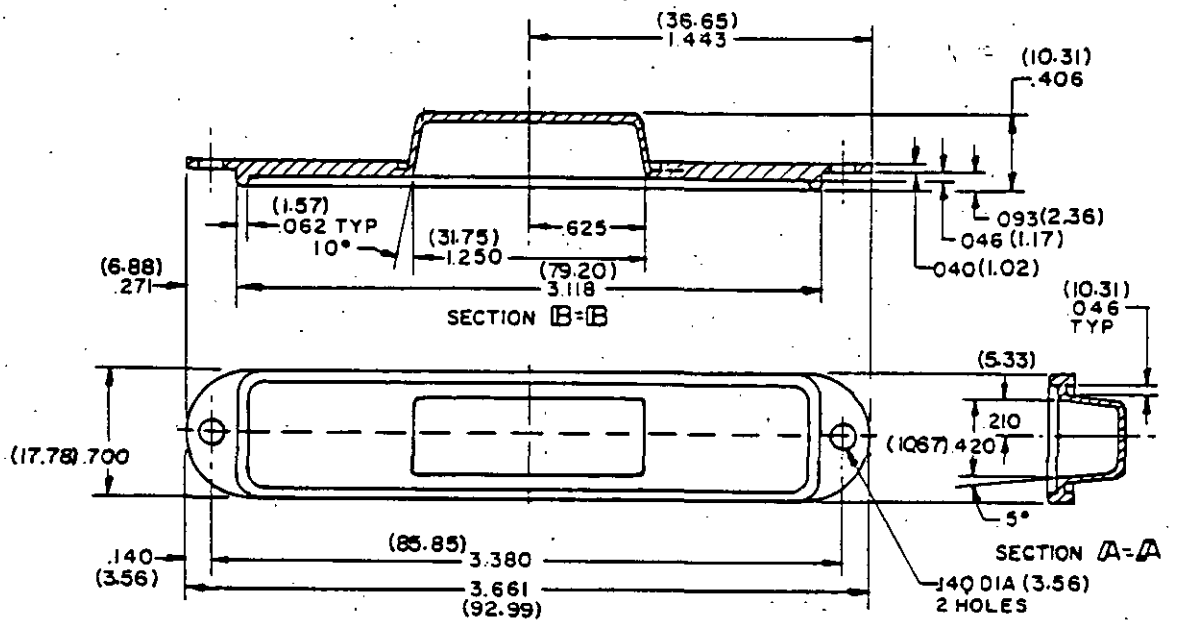

PART NO. M5423/15-02

FIGURE 202-14. Boots, dust and water seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

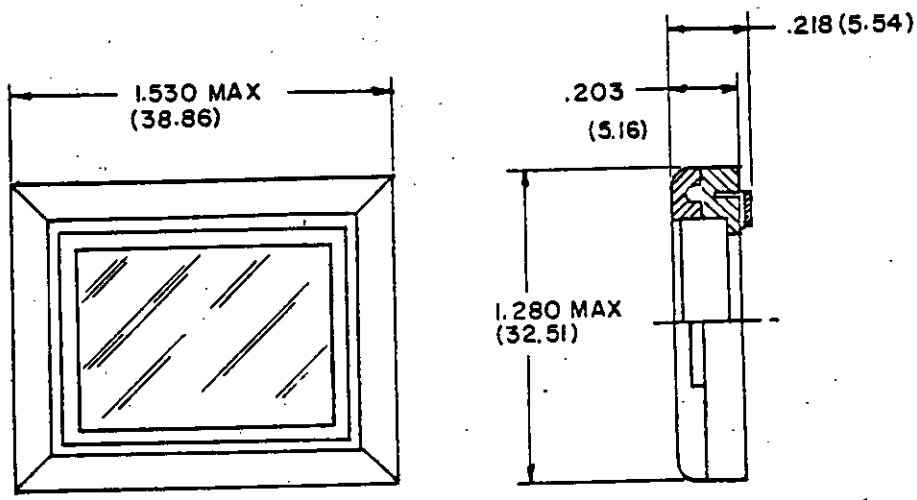


FIGURE 202-15. Panel seal.

Intended use: Panel seal for 4 lamp, illuminated, push switch MIL-S-22885/9, and 4 lamp modular indicator light style L06 in accordance with MIL-S-22885/10.

Procurement document: MIL-S-22885/13.

Part number: M22885/13-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 203

COLOR FILTERS

(Applicable specification: MIL-S-22885)

TABLE 203.1. Color filters, characteristics.

Figure number	Applicable specification sheet	Part number	Color	Material
203-1	MIL-S-22885/12	M22885/12-001 M22885/12-002 M22885/12-003 M22885/12-004 M22885/12-005	Blue Green Red White Yellow	Silicone rubber

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

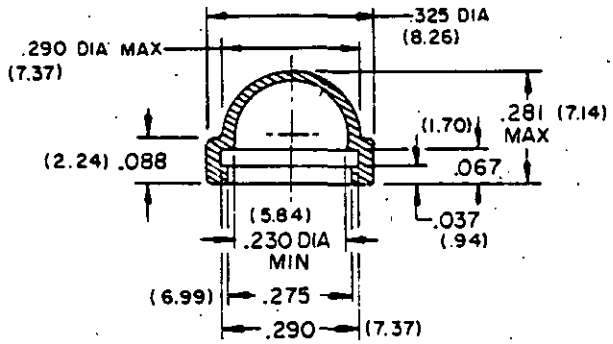


FIGURE 203-1. Cap, color filter.

Colors	Chromaticity limits 1/ 2360° Kelvin		Switch photometric brightness (foot-lamberts) 2/		
			4 lamps illuminated		2 lamps illuminated
	x	y	Minimum	Maximum	Minimum
Red	.695 .703 .655 .660	.285 SL 3/ .325 SL 3/	50	100	20
Green	.260 .300 .160 .200	.570 .630 .660 .720	50	100	20
Yellow	.562 .570 .596 .605	.415 SL 3/ .382 SL 3/	100	200	40
Blue	.150 .220 .220 .150	.260 .260 .320 .320	8	40	4
White	.400 .460 .400 .460	.420 .420 .380 .380	100	200	40

1/ The chromaticities of the diffusing lenses or colored filters expressed as x and y coordinates on the CIE chromaticity diagram shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K.
2/ Switch photometric brightness, when viewed from the front of the applicable light housing.
3/ SL - Spectrum locus (where intersected by other coordinate pair).

Operating temperature: 0° to 225°C.

Intended use: For use with 4-lamp modular indicator light of MIL-S-22885/10.

Procurement document: MIL-S-22885/12.

Part number: See table 203.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.

SECTION 204

GUARDS

(Applicable specification: MIL-G-7703)

NOTE: As of this date, no selected standard guards have been selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:41Z
Check the source to verify that this is the current version before use.