
MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 175-PIN, MISSILE SIDE

The complete requirements for procuring the plug assembly described herein shall consist of this document and the latest issue of MIL-C-22249(SHIPS)

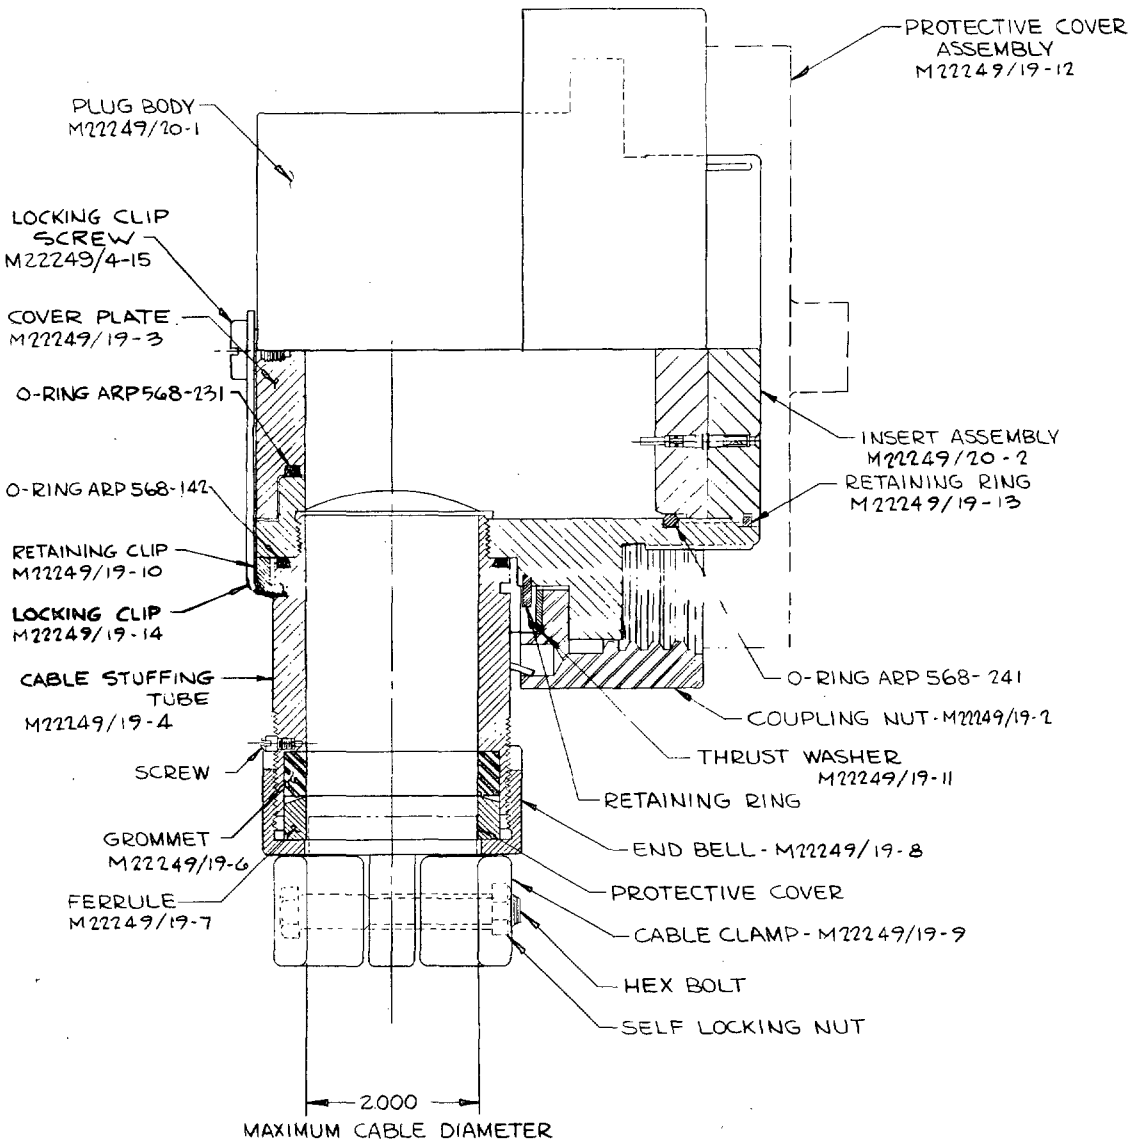


PLUG ORIENTATION: 6 O'CLOCK

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

PLUG BODY
M22249/20-1

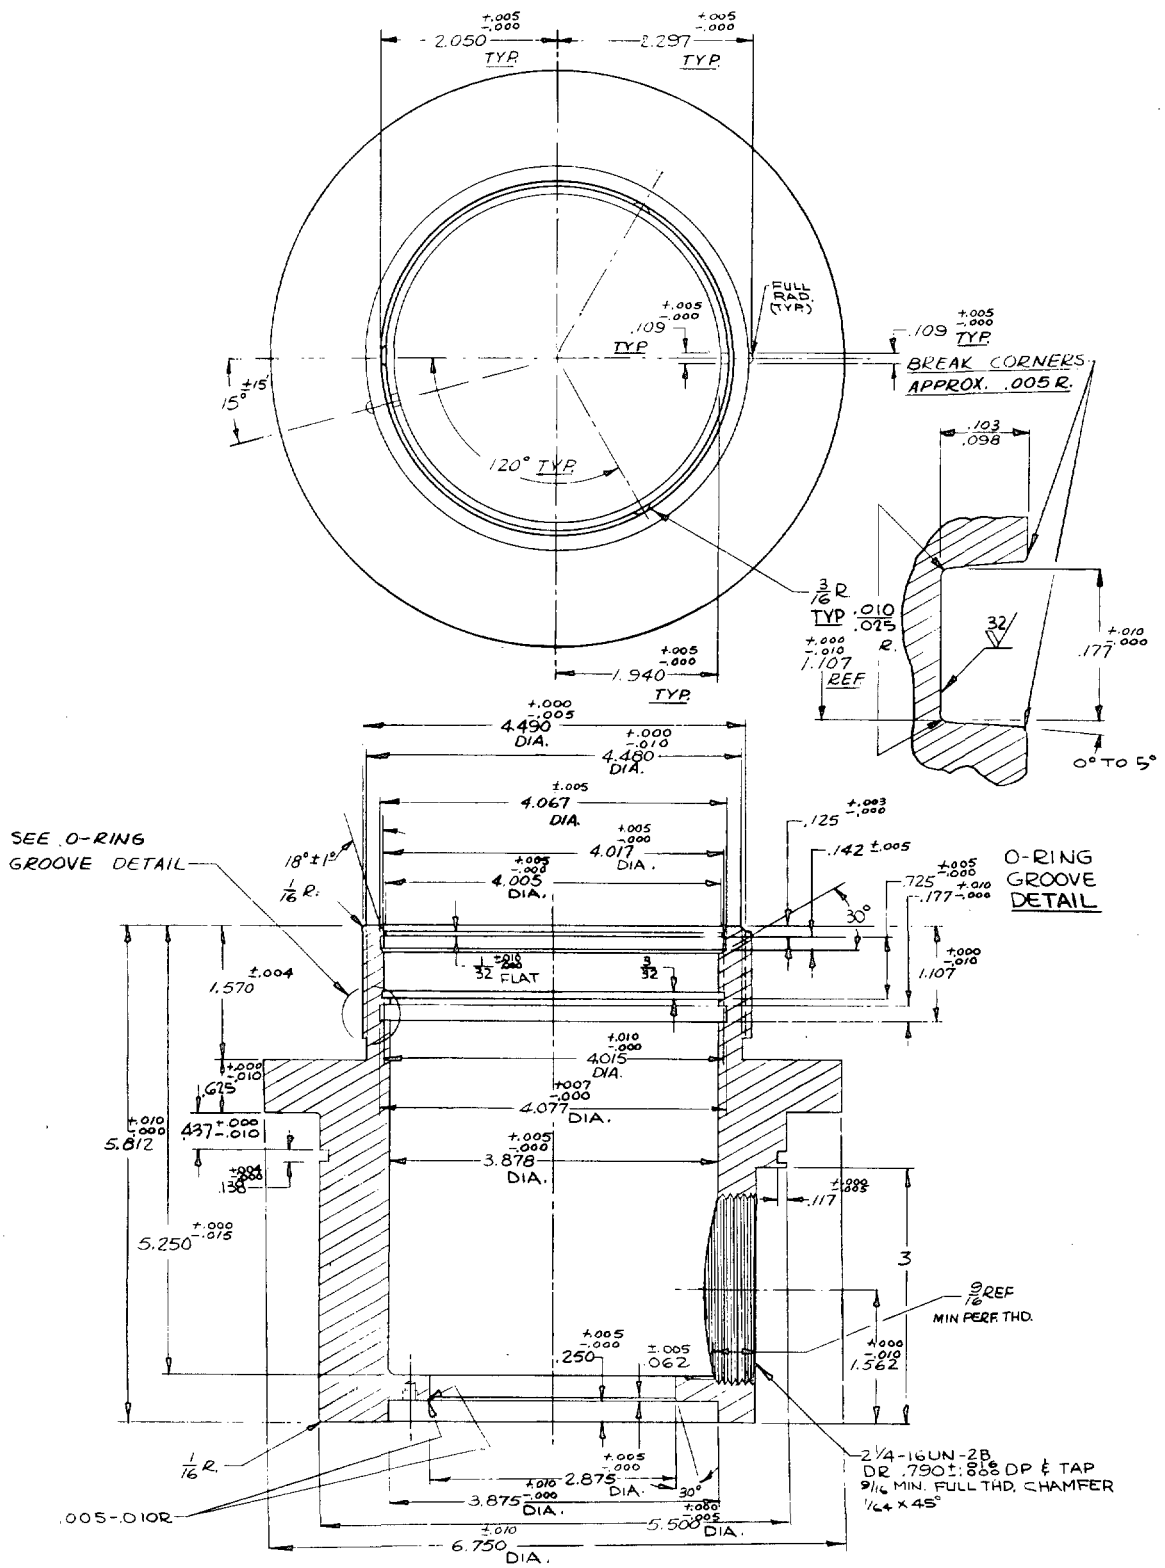


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

PLUG BODY (M22249/20-1)
END VIEW

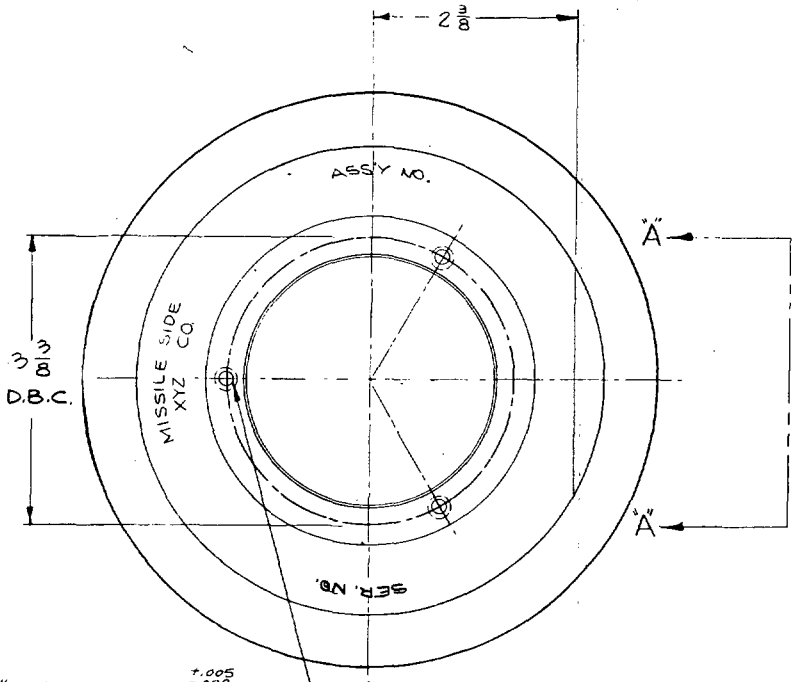

DRILL #21 (.159 DIA.) .250 +.005 -.000 DEEP
BOTTOM TAP #10-32 NF-2B THREAD 3/16 DEEP
3 HOLES EQUALLY SPACED
DO NOT BREAK THRU.

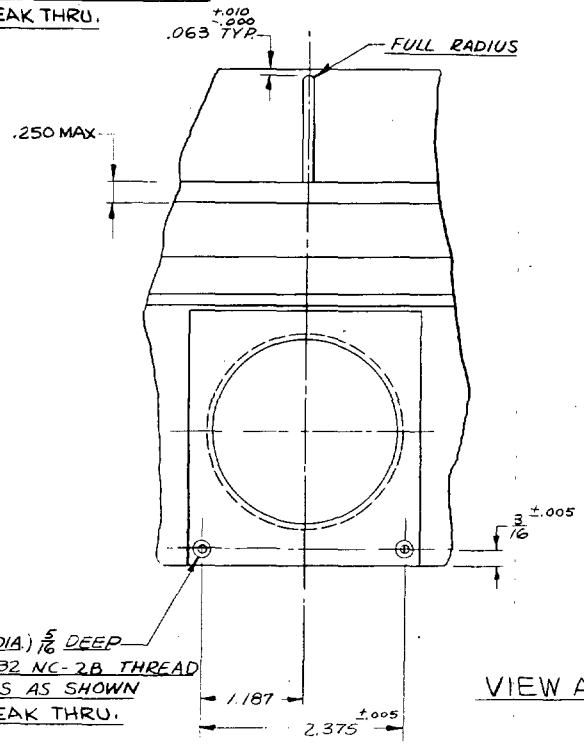


DRILL #36 (.1065 DIA.) 5/16 DEEP
BOTTOM TAP #6-32 NC-2B THREAD
1/4 DEEP 2 PLACES AS SHOWN
DO NOT BREAK THRU.

VIEW A-A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

INSERT ASSEMBLY
MISSILE SIDE
M22249/20-2

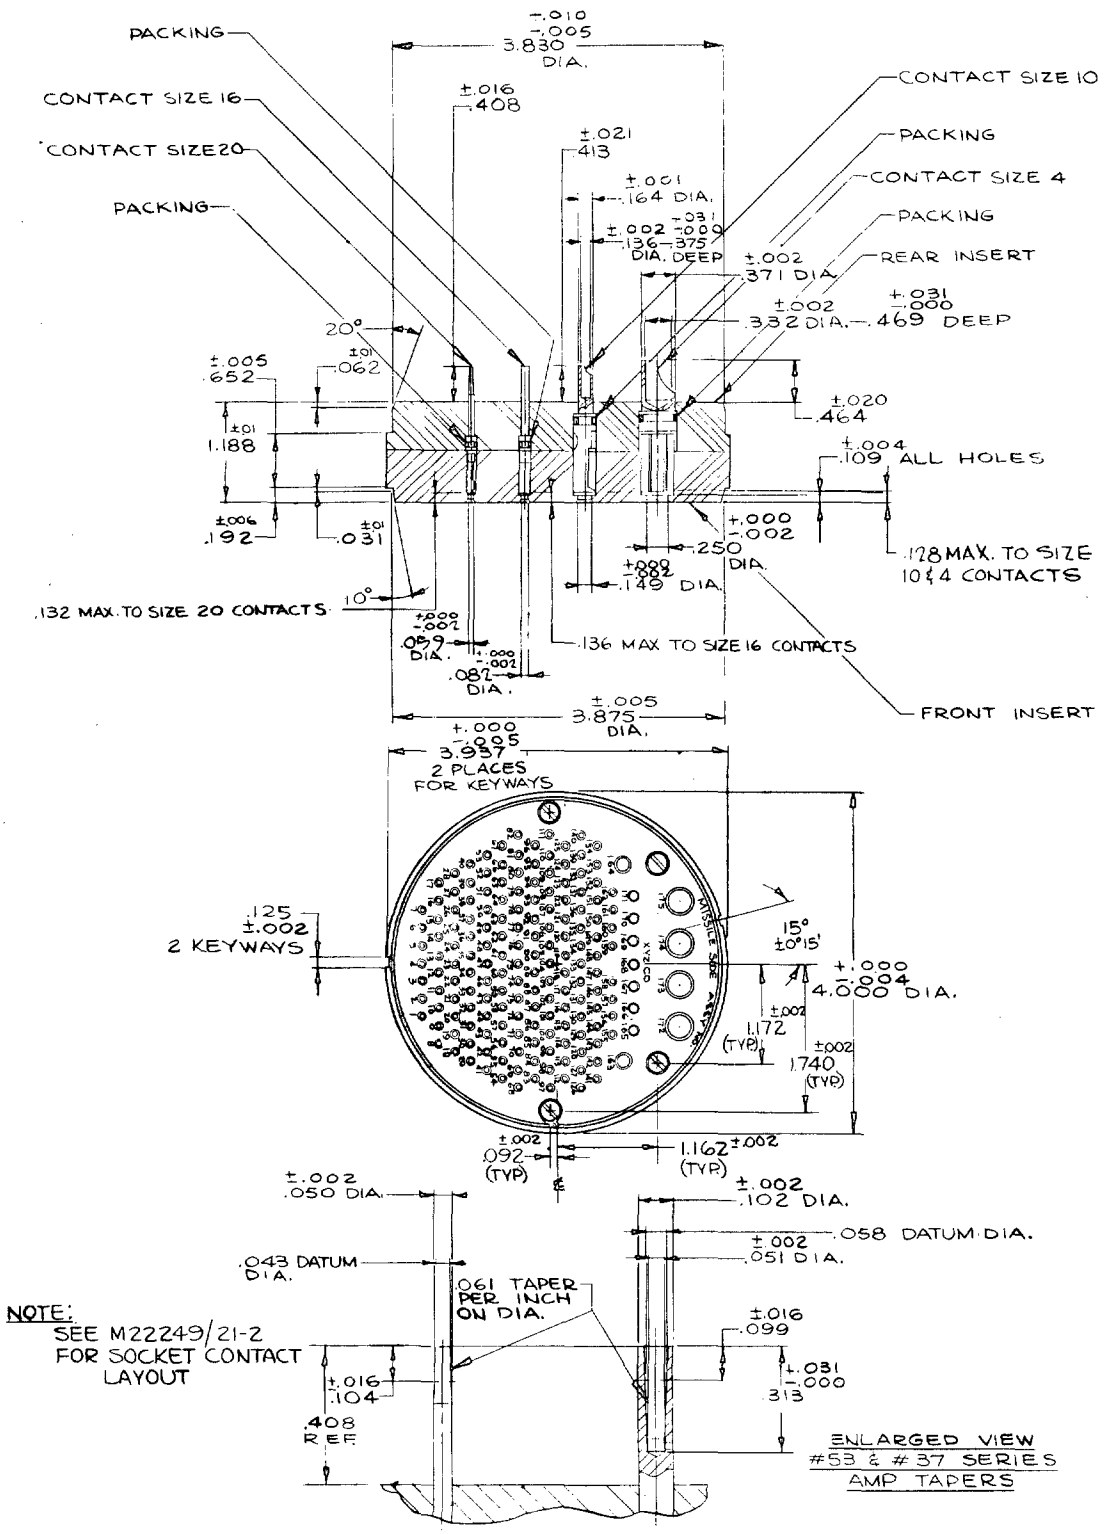

NOTE:
SEE M22249/21-2
FOR SOCKET CONTACT
LAYOUT

Preparing activity:
Navy - SH
(Project 5935-N517-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:58Z
Check the source to verify that this is the current version before use.