
MILITARY SPECIFICATION SHEET

(A) CONNECTOR SETS, PLUG ASSEMBLY, 208-PIN, COMPARTMENT SIDE


This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

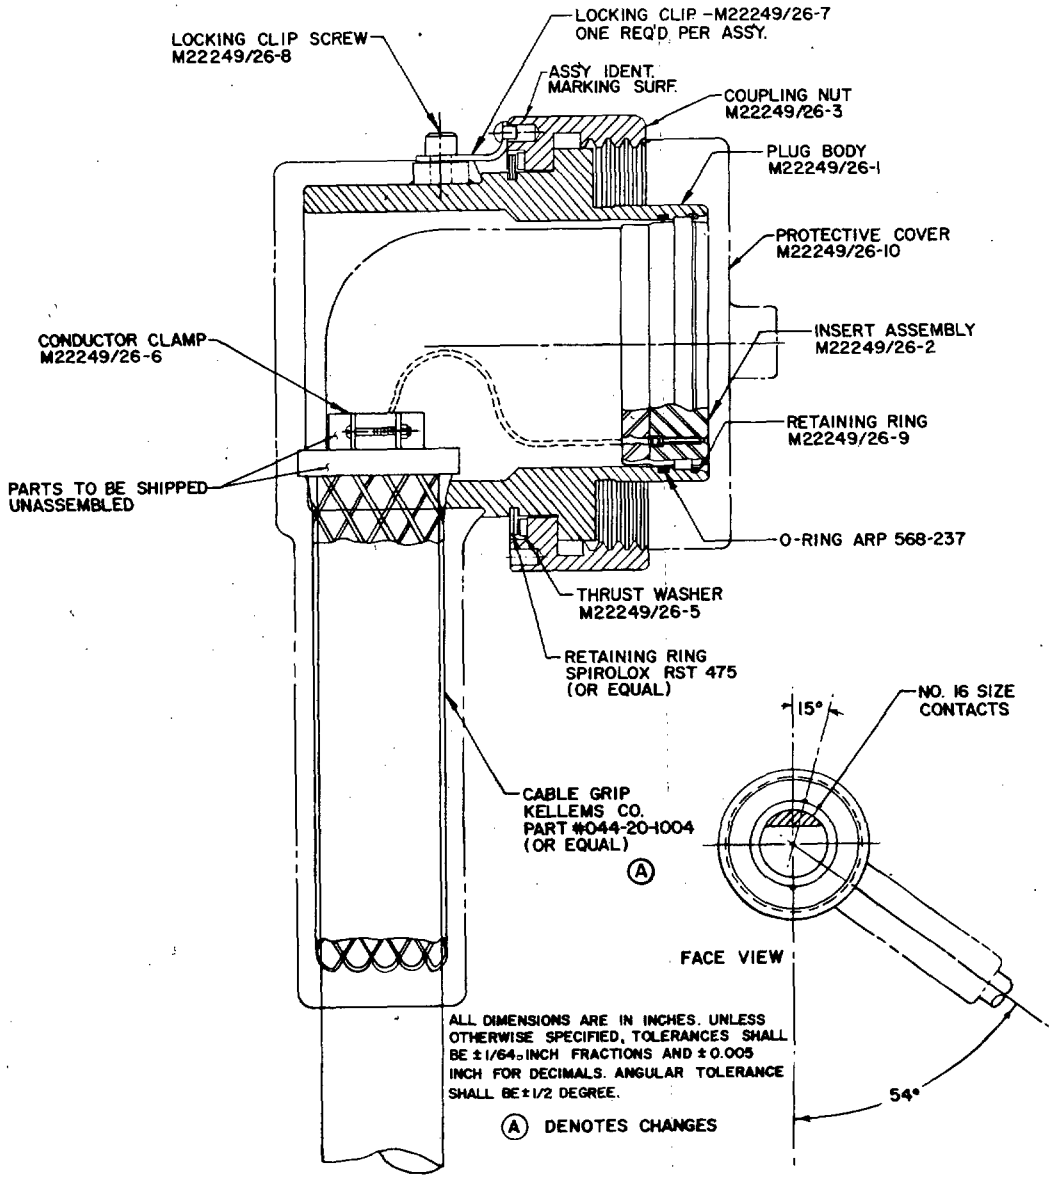


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

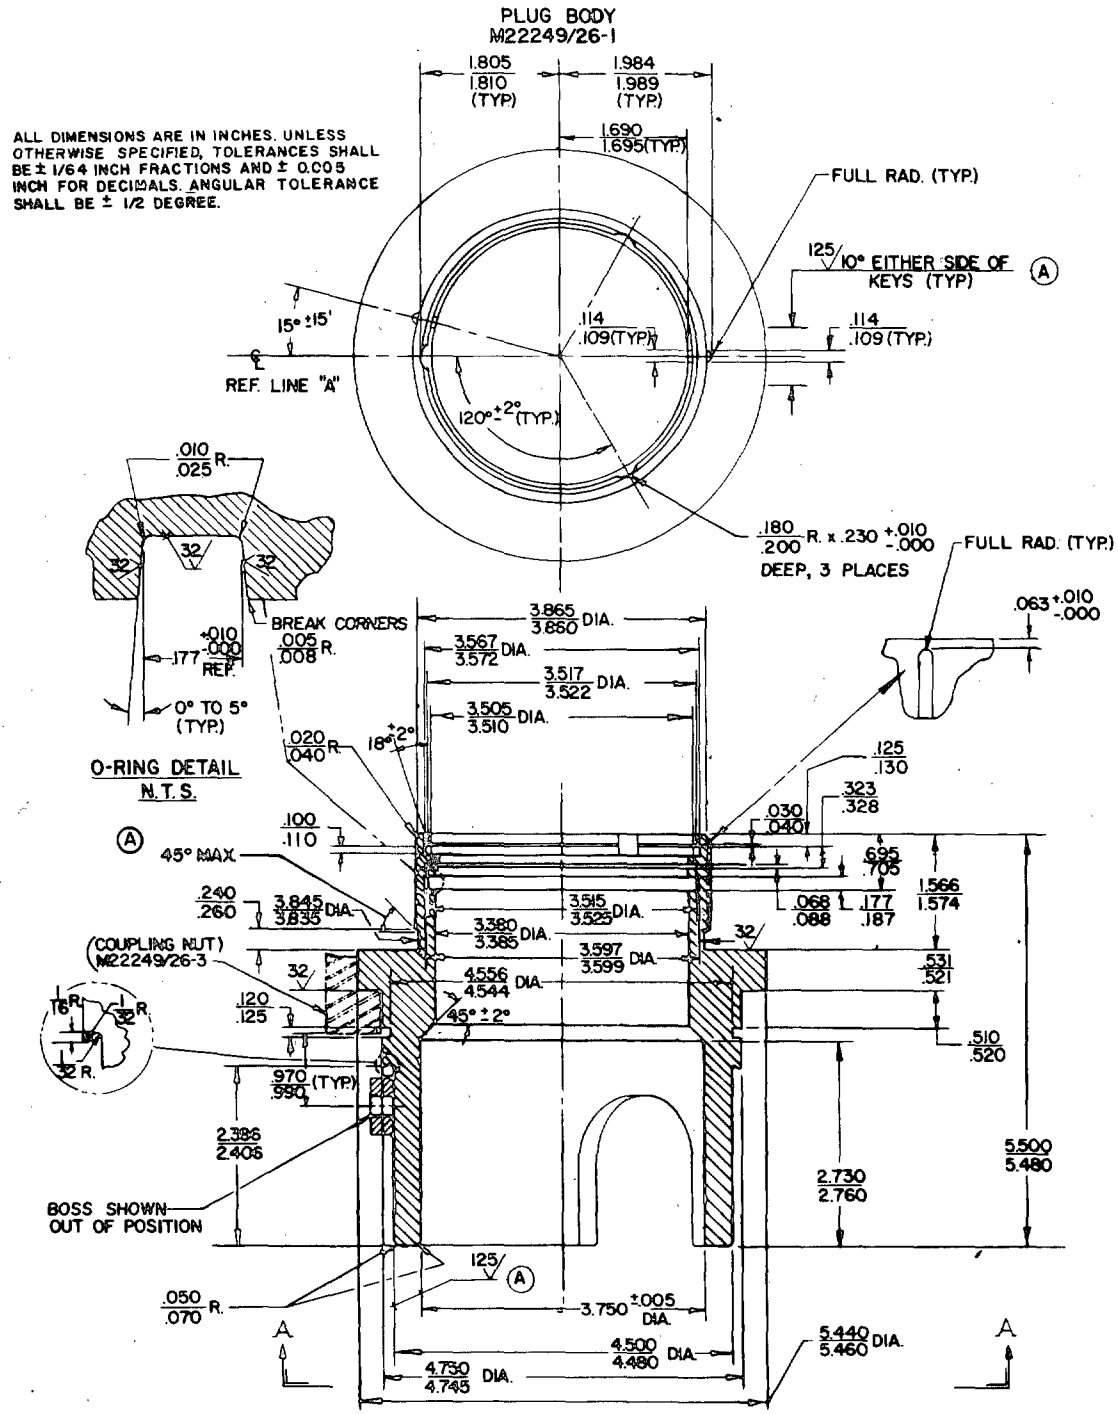


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

PLUG BODY
END VIEW A-A
M22249/26-1

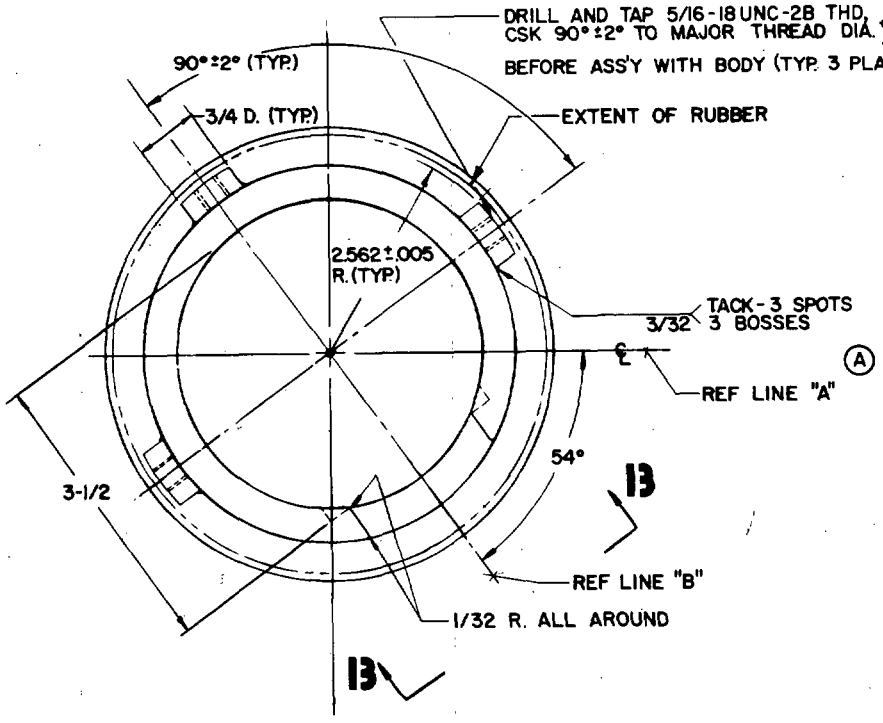


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

PARTIAL VIEW B-B

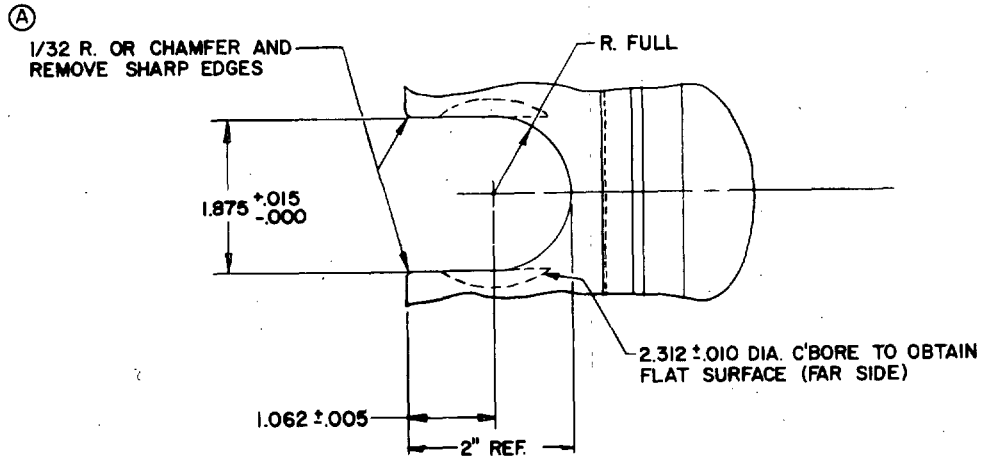

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

INSERT ASSEMBLY
M22249/26-2

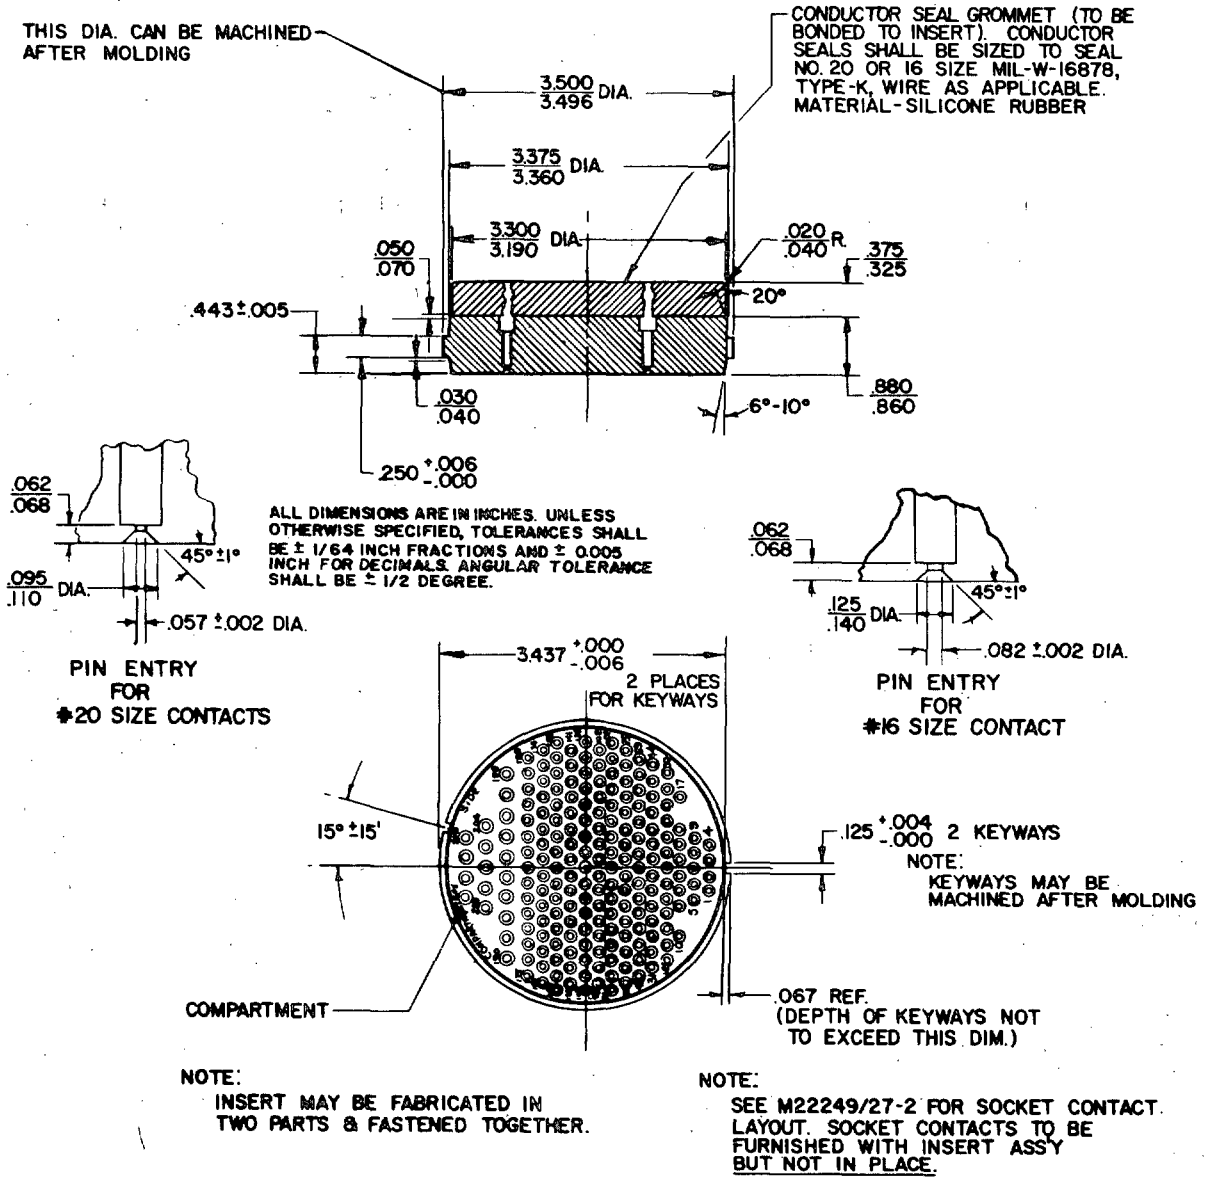


NOTE:
INSERT MAY BE FABRICATED IN TWO PARTS & FASTENED TOGETHER.

NOTE:
SEE M22249/27-2 FOR SOCKET CONTACT LAYOUT. SOCKET CONTACTS TO BE FURNISHED WITH INSERT ASS'Y BUT NOT IN PLACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.


COUPLING NUT
M22249/26-3

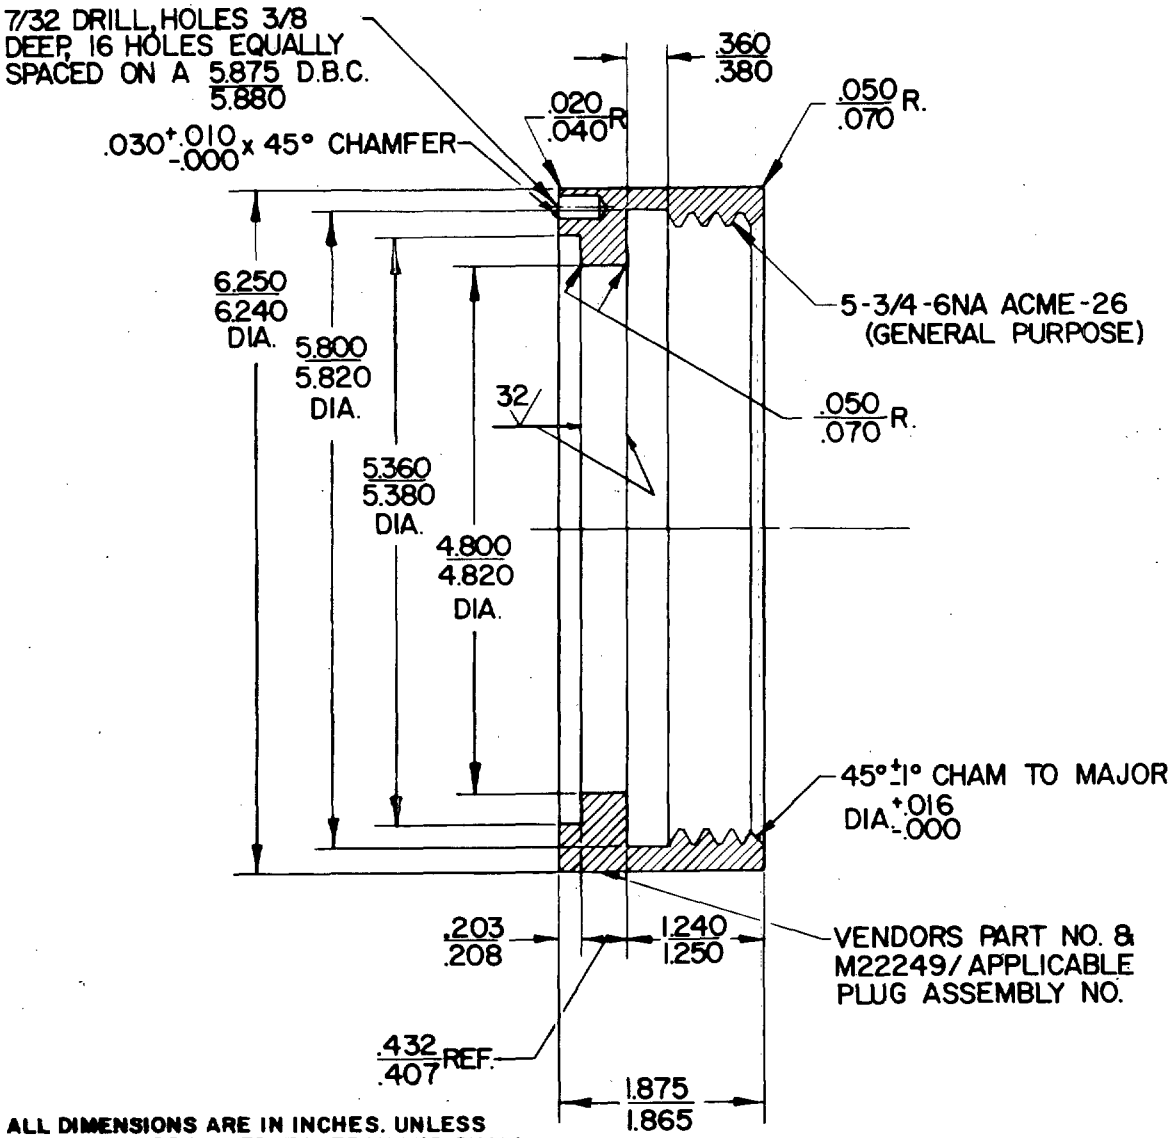

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

THRUST WASHER
M22249/26-5

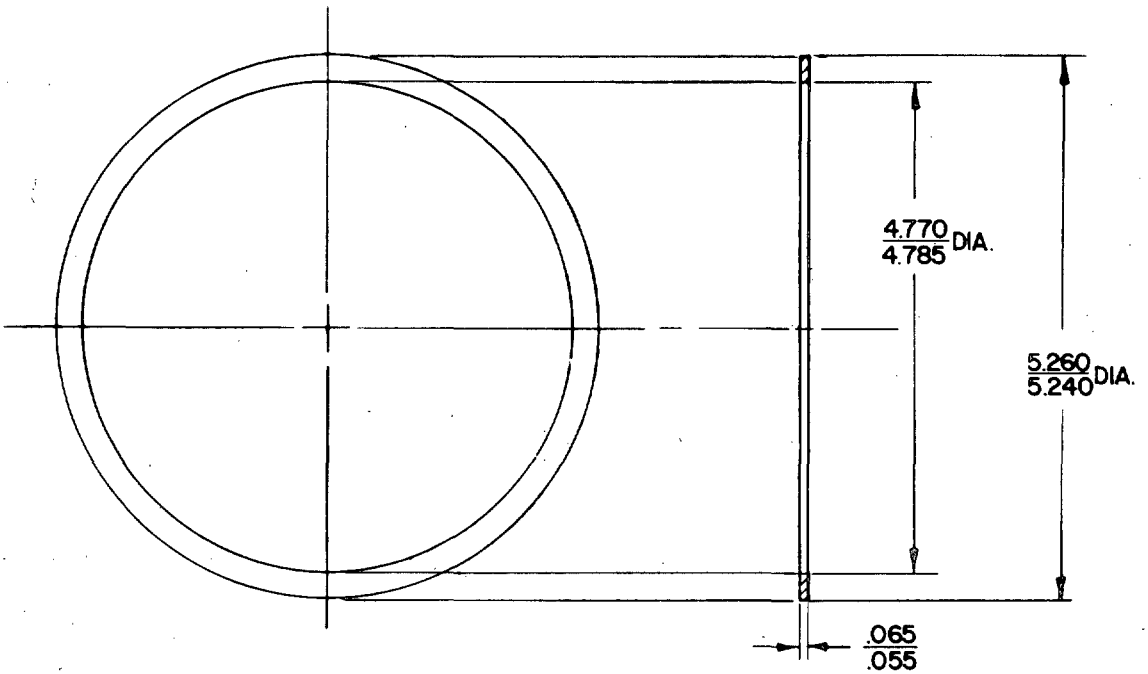


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ±1/64 INCH FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ±1/2 DEGREE.

CONDUCTOR CLAMP
M22249/26-6

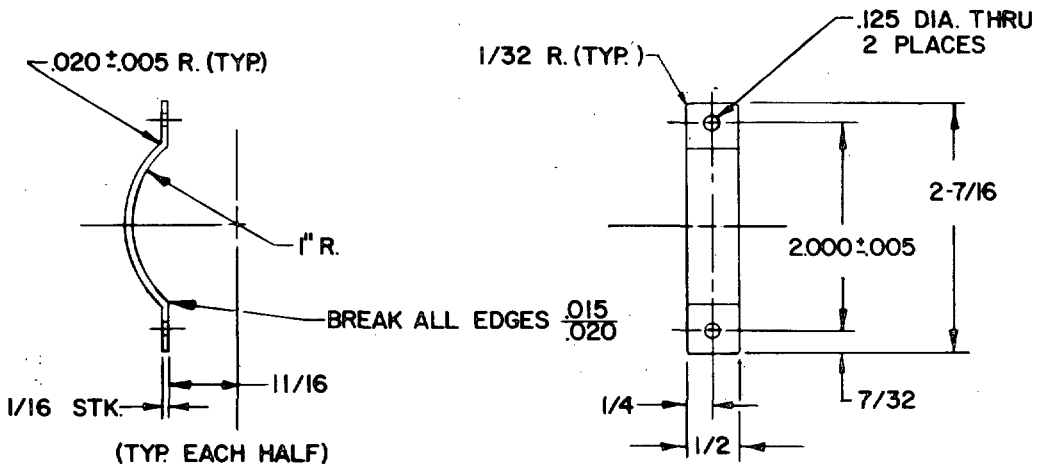


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

LOCKING CLIP
M22249/26-7
(MATL. STA. STL. TY-316)

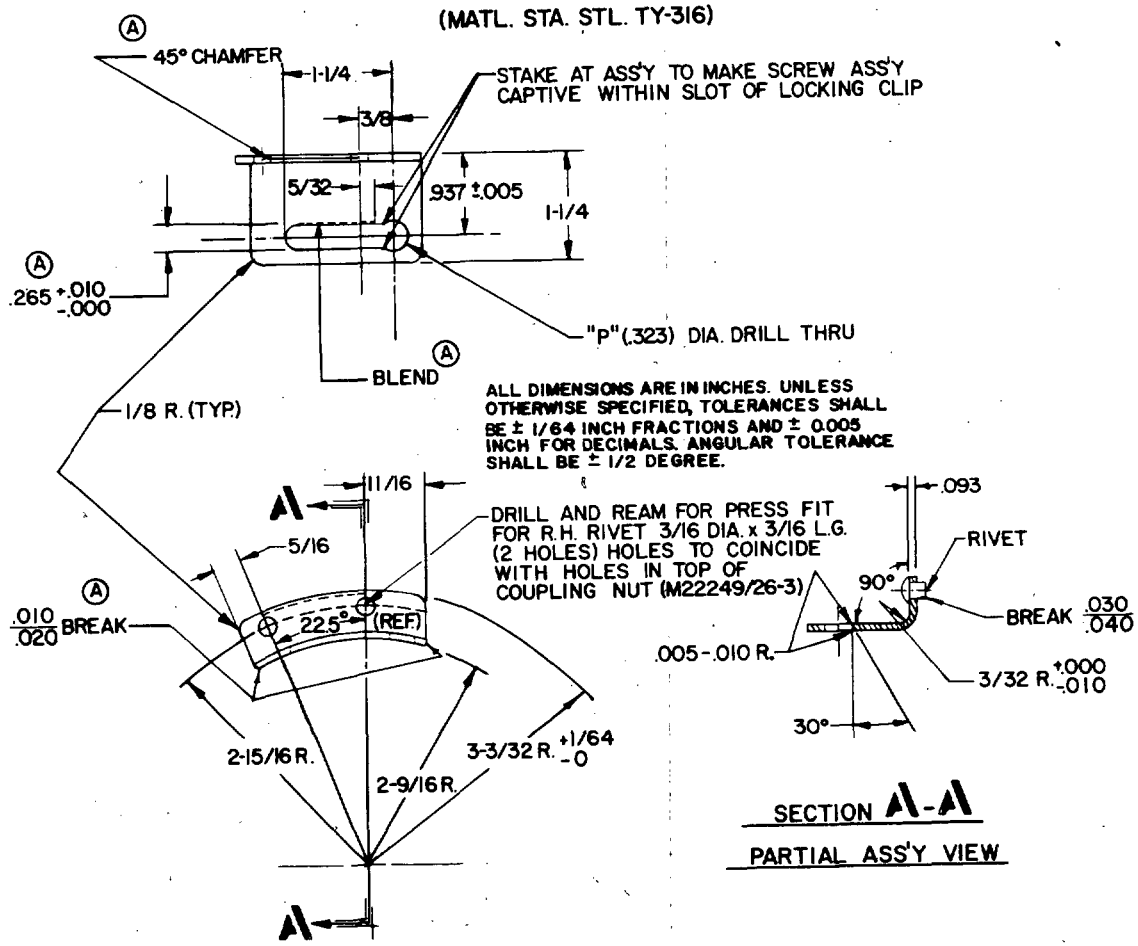

SECTION A-A
PARTIAL ASS'Y VIEW


LOCKING CLIP SCREW
M22249/26-8

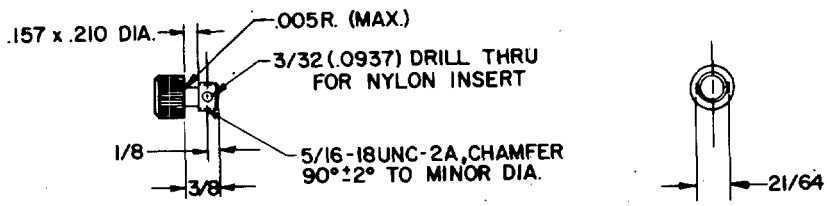

NOTE:
USE A STANDARD SOCKET CAP SCREW 5/16-18UNC-2A MODIFIED AS SHOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.


RETAINING RING
M22249/26-9

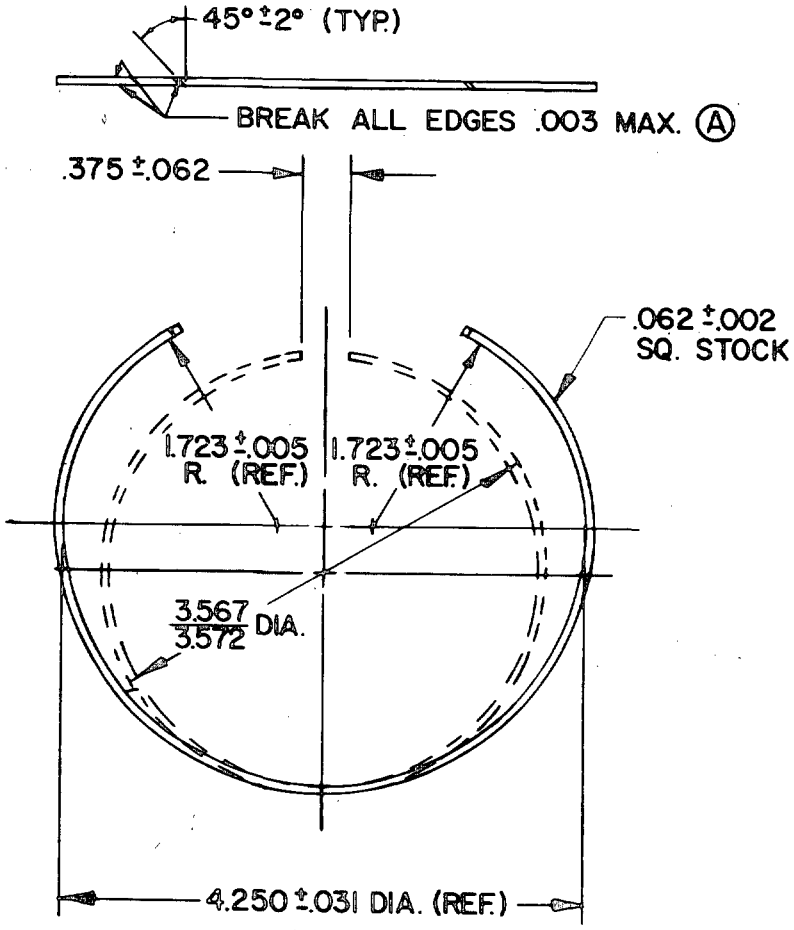

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.

PROTECTIVE COVER
M22249/26-10

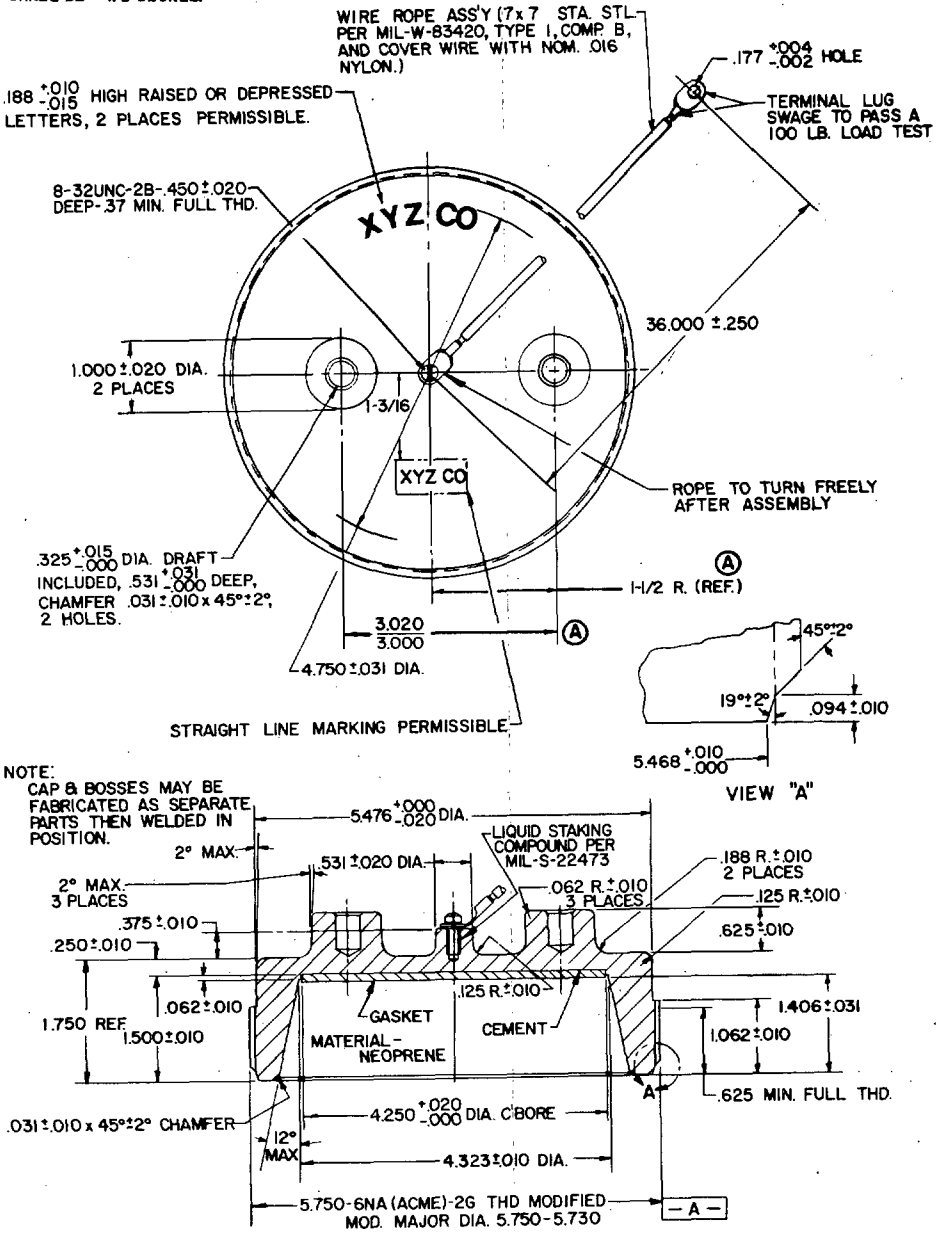

Preparing Activity:
Navy-SH
(Project 5935-N069-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:38Z
Check the source to verify that this is the current version before use.