
MILITARY SPECIFICATION SHEET

CONNECTOR SETS, HEADER ASSEMBLY, 208-PIN, (45° ORIENTATION)

(A)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

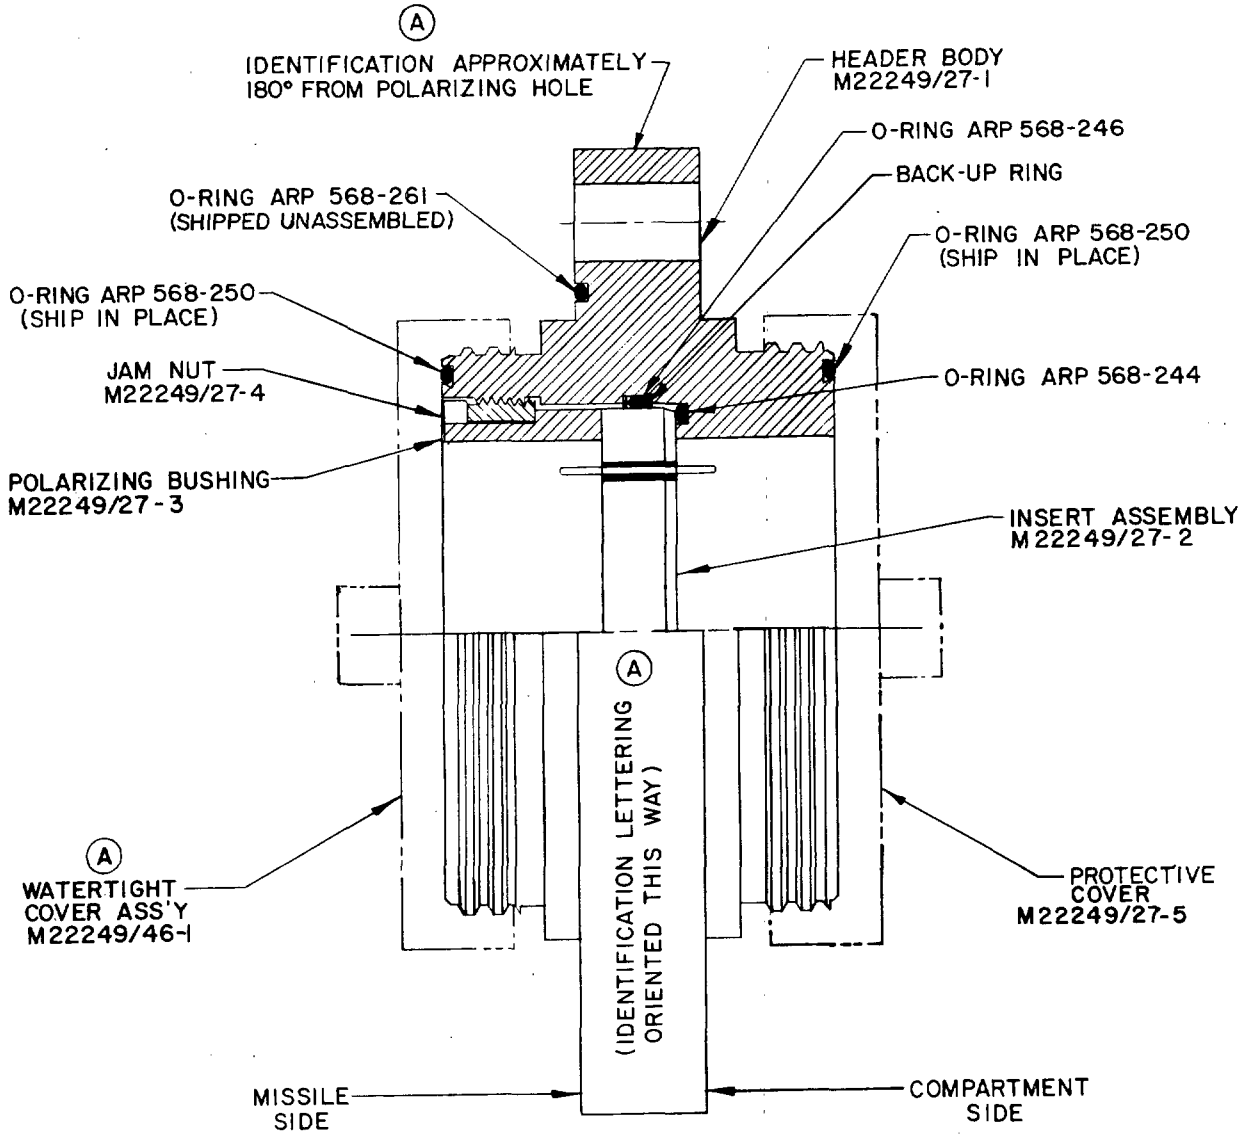


(A) DENOTES CHANGES

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.


HEADER BODY
M22249/27-1

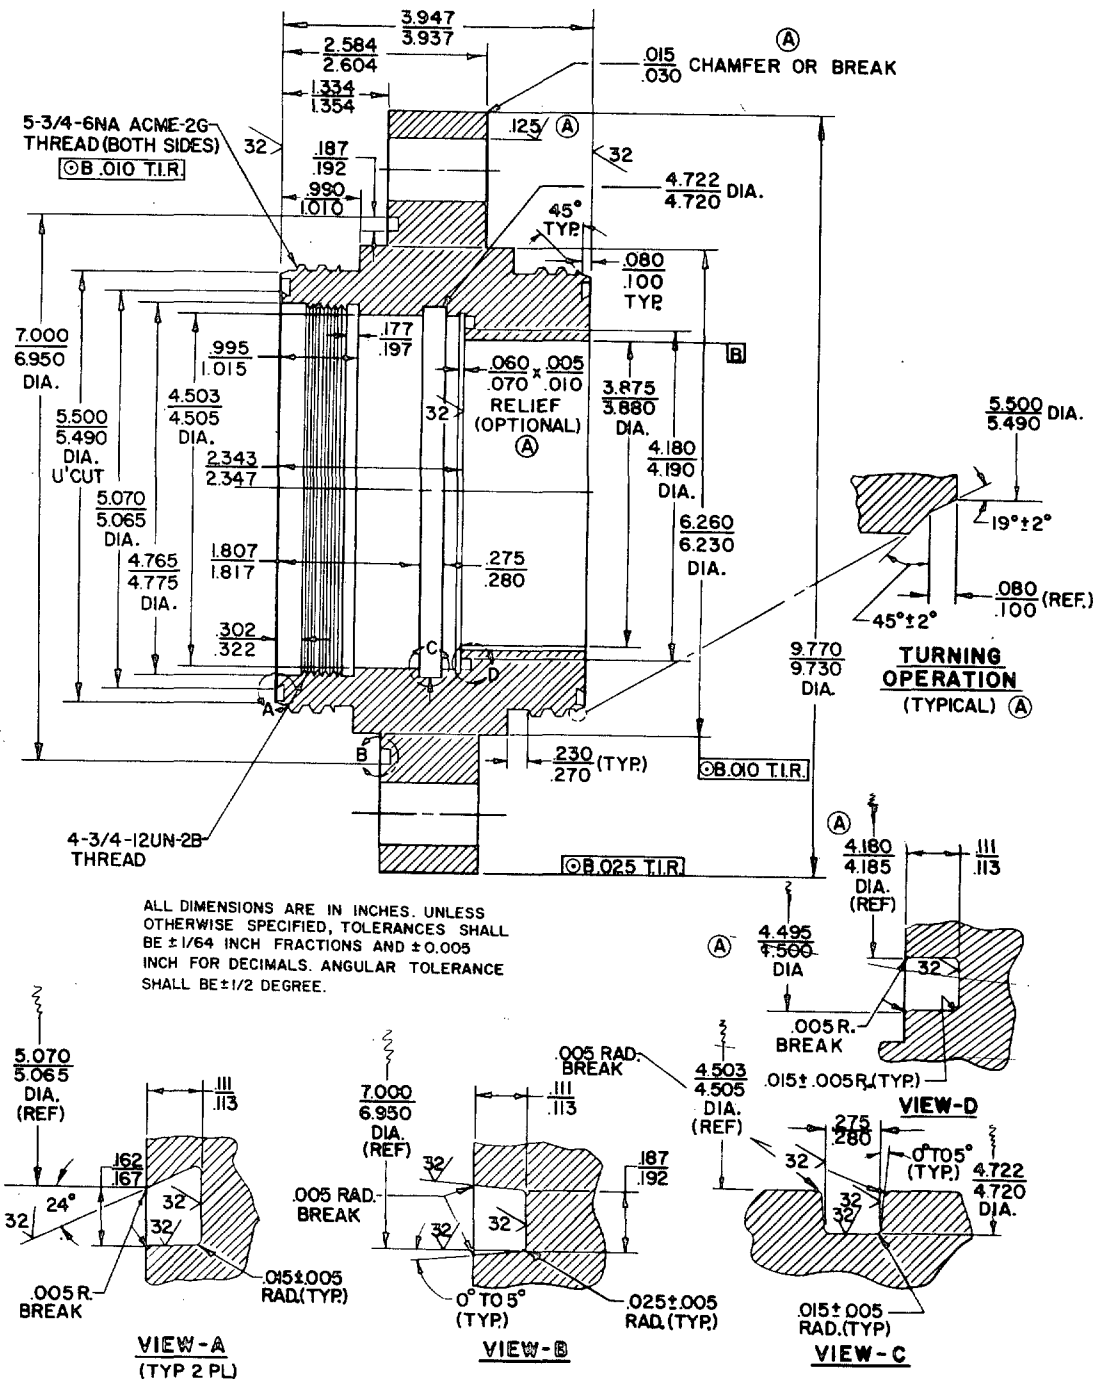

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ±1/64 INCH FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ±1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

HEADER BODY
FACE VIEW
M22249/27-1

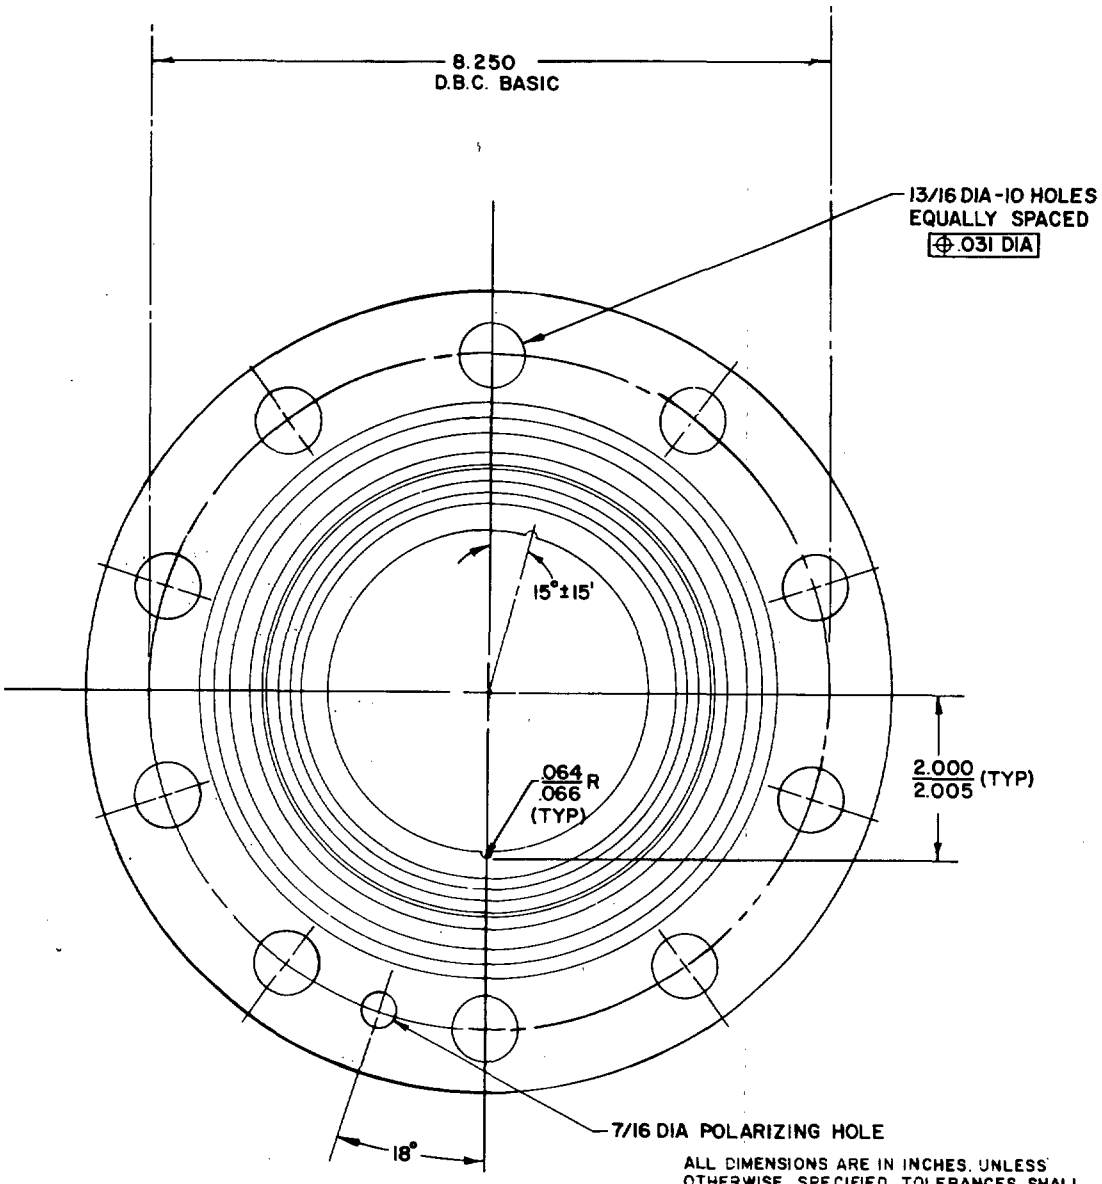


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

(VIEW LOOKING FROM MISSILE SIDE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.


HEADER INSERT ASSEMBLY
M22249/27-2

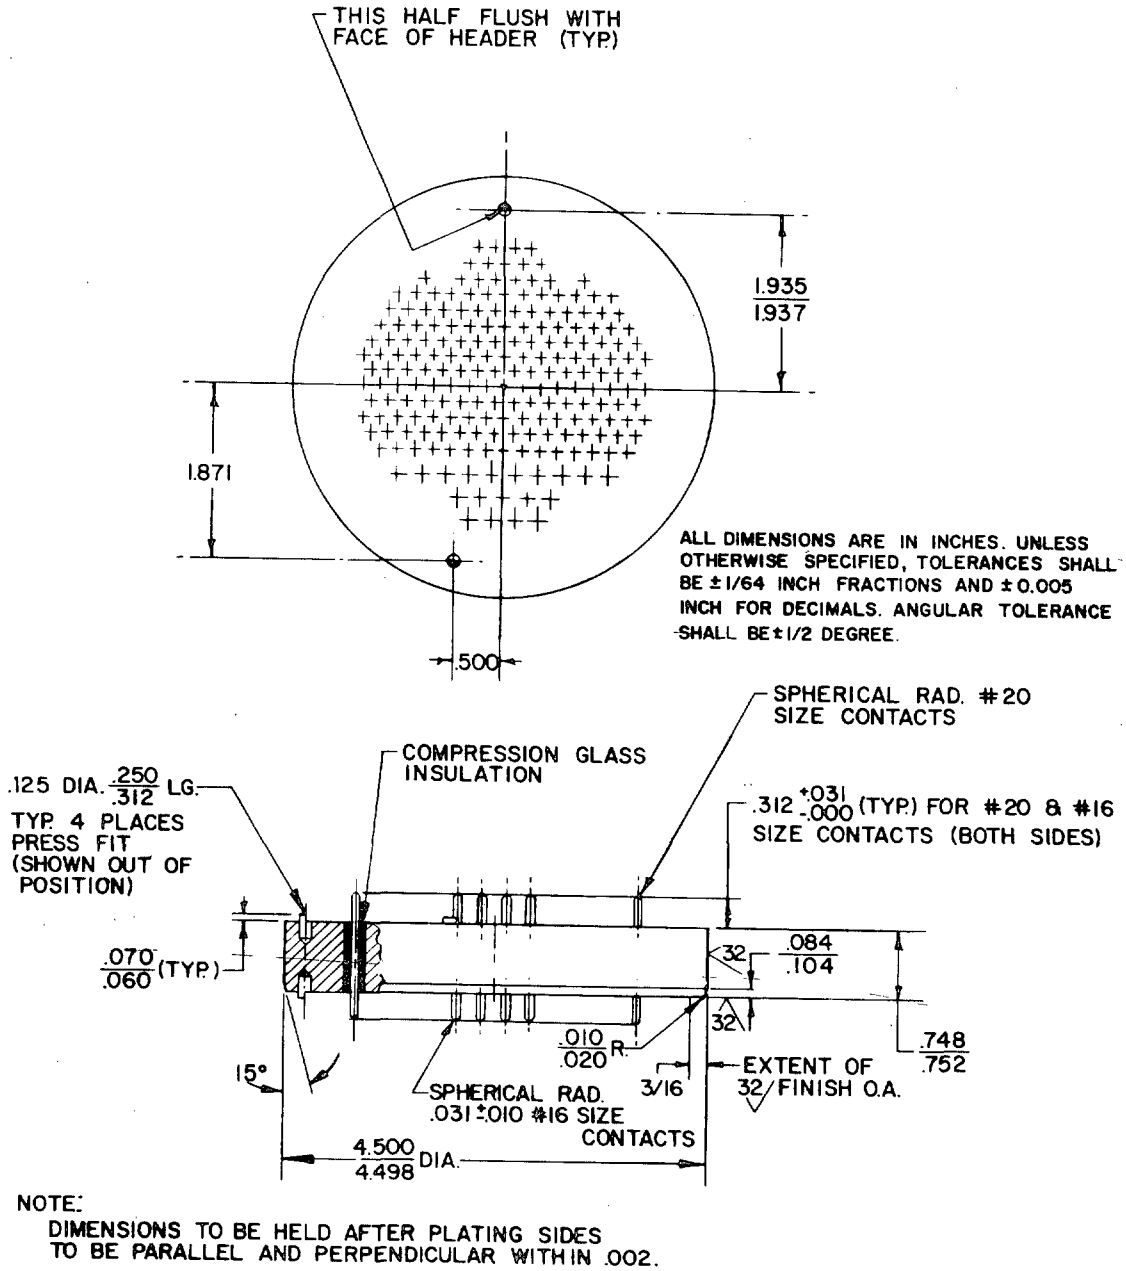

NOTE:
DIMENSIONS TO BE HELD AFTER PLATING SIDES TO BE PARALLEL AND PERPENDICULAR WITHIN .002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.


POLARIZING BUSHING
M22249/27-3

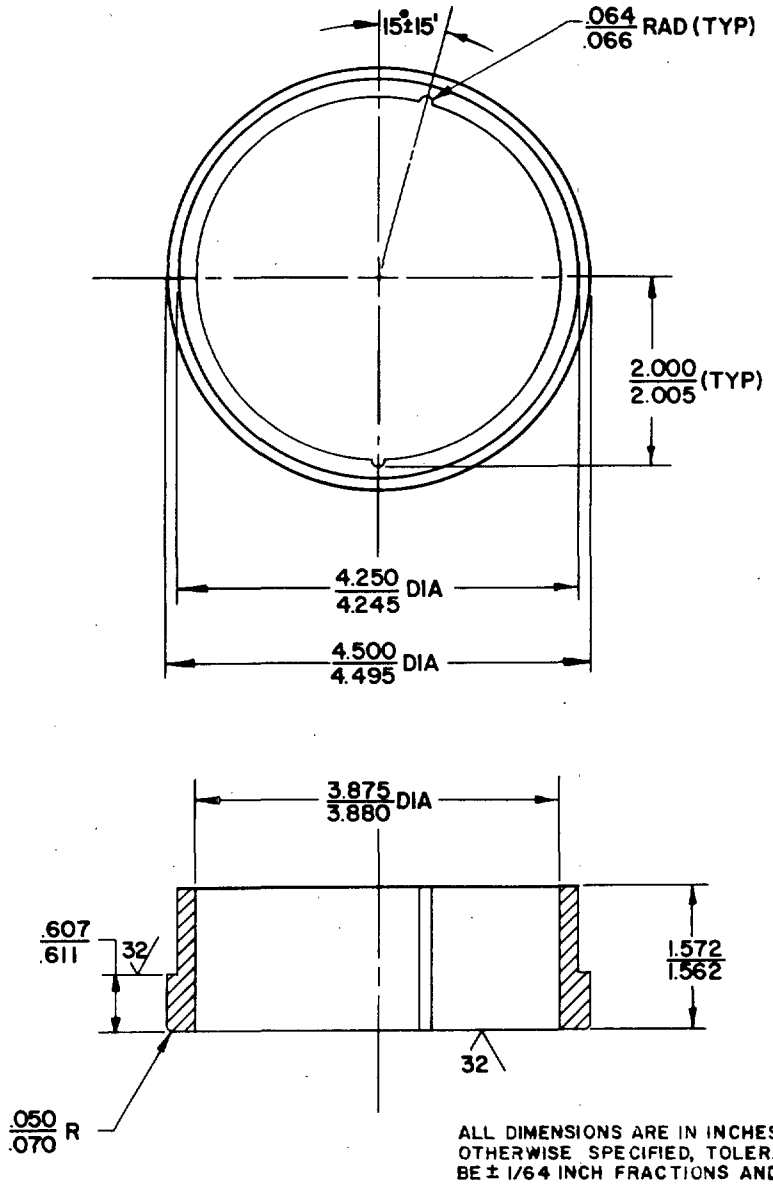


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

JAM NUT
M22249/27-4

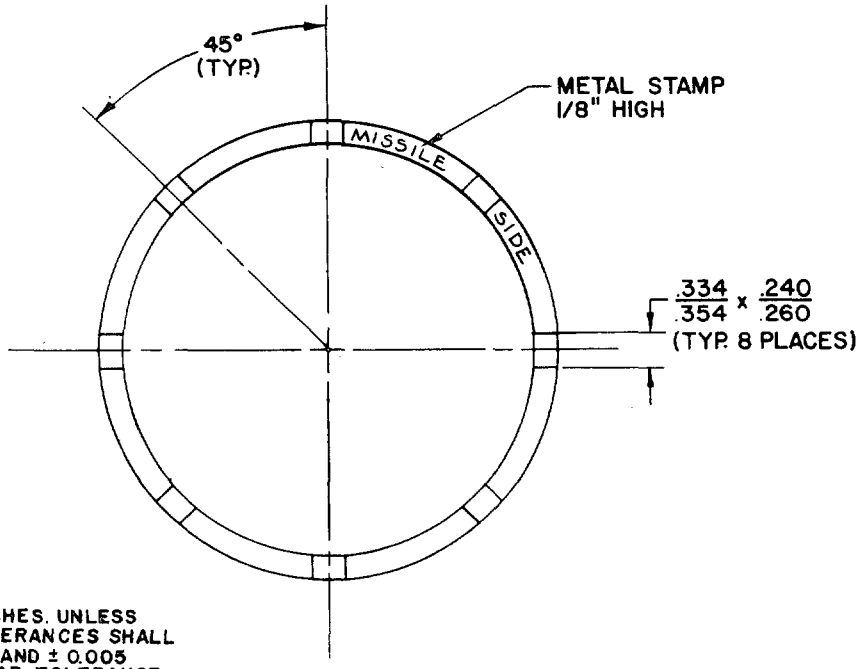


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

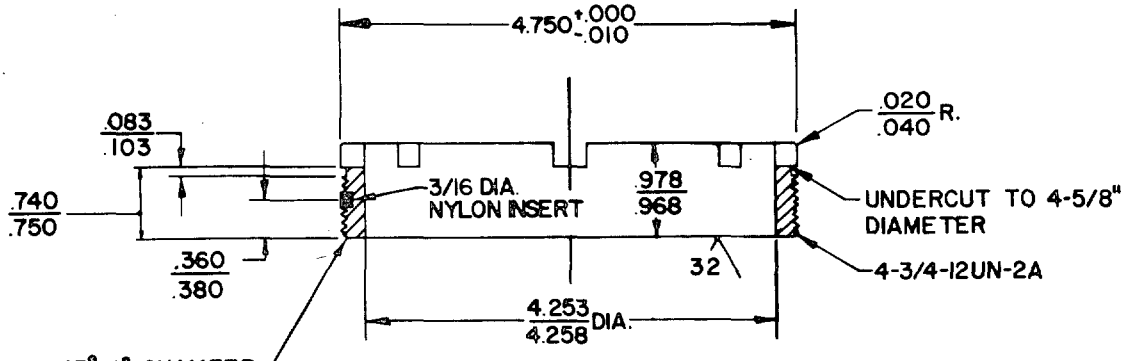

NOTE: NYLON INSERT IS NOT TO EXTEND BEYOND MAJOR THD. DIA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

CONTACT PIN
ARRANGEMENT
M22249/27-2

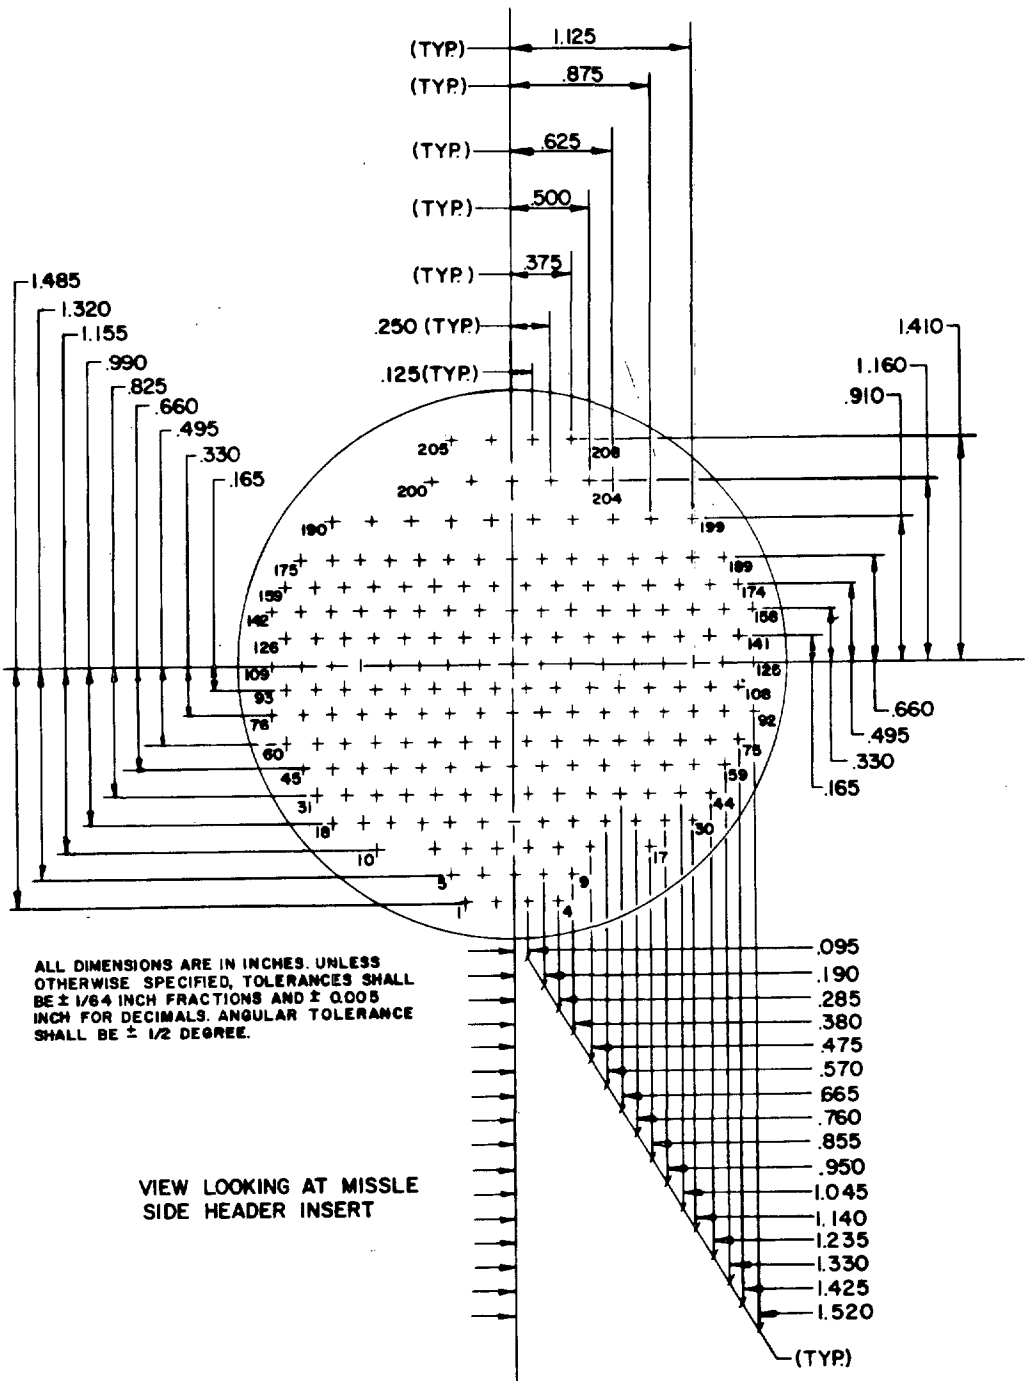


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

VIEW LOOKING AT MISSLE
SIDE HEADER INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

PROTECTIVE COVER
M 22249/27-5

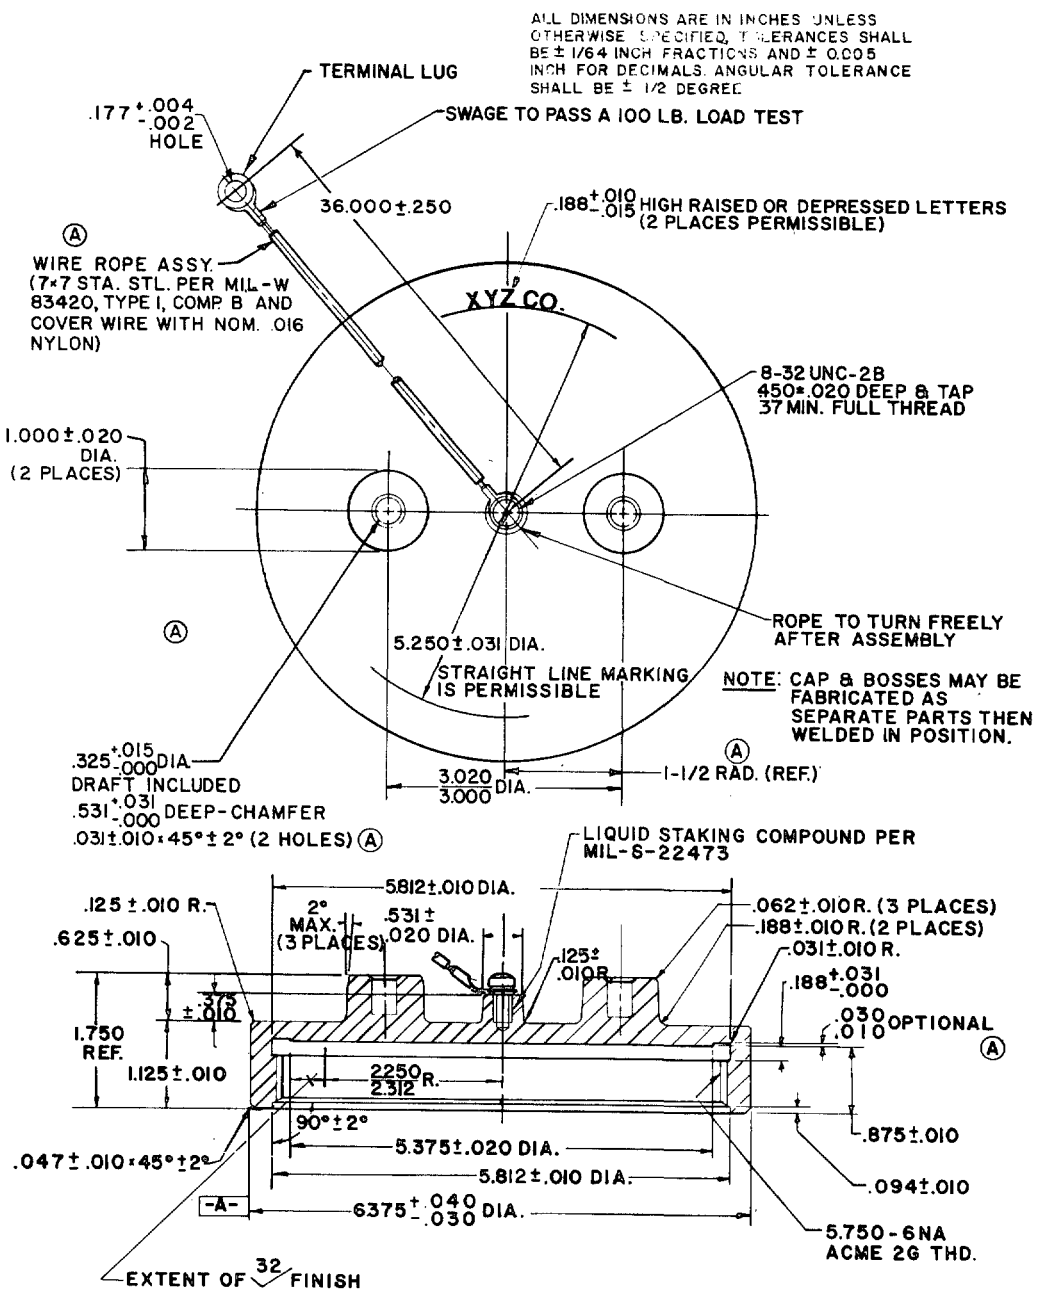

Preparing activity:
Navy-SH
(Project 5935-N069-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.