INCH-POUND
MIL-C-22249/27B(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/27A(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, HEADER ASSEMBLY, 208-PIN (45 DEGREE (°) ORIENTATION)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

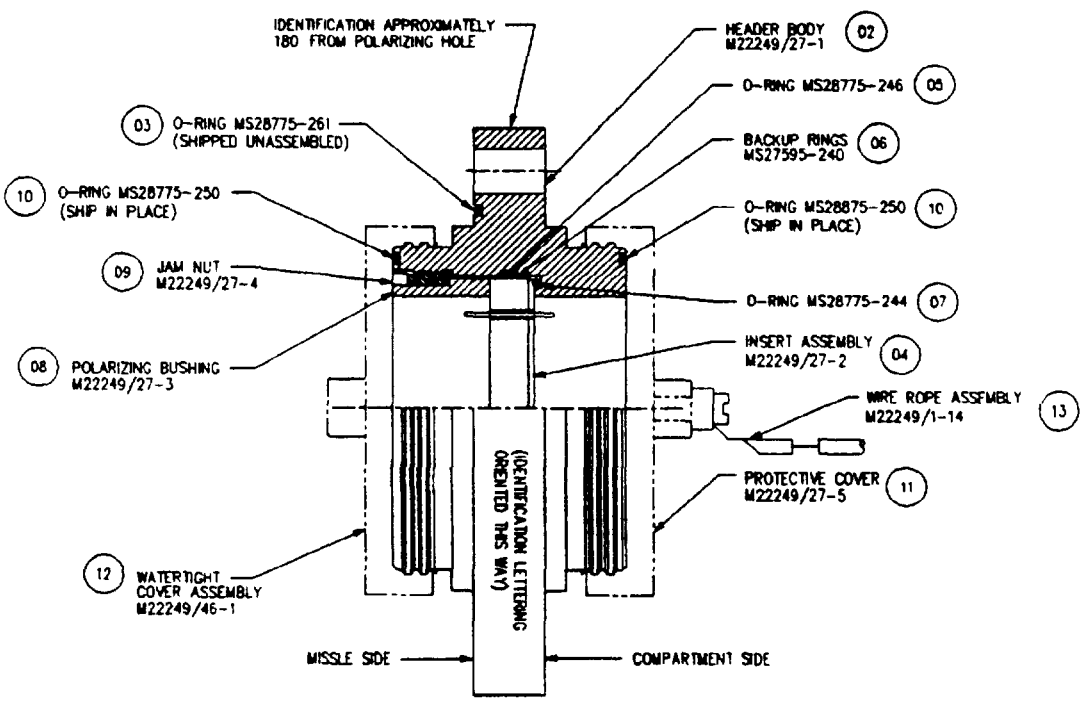


FIGURE 1. Header assembly, 208-pin (45 degree orientation) 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.


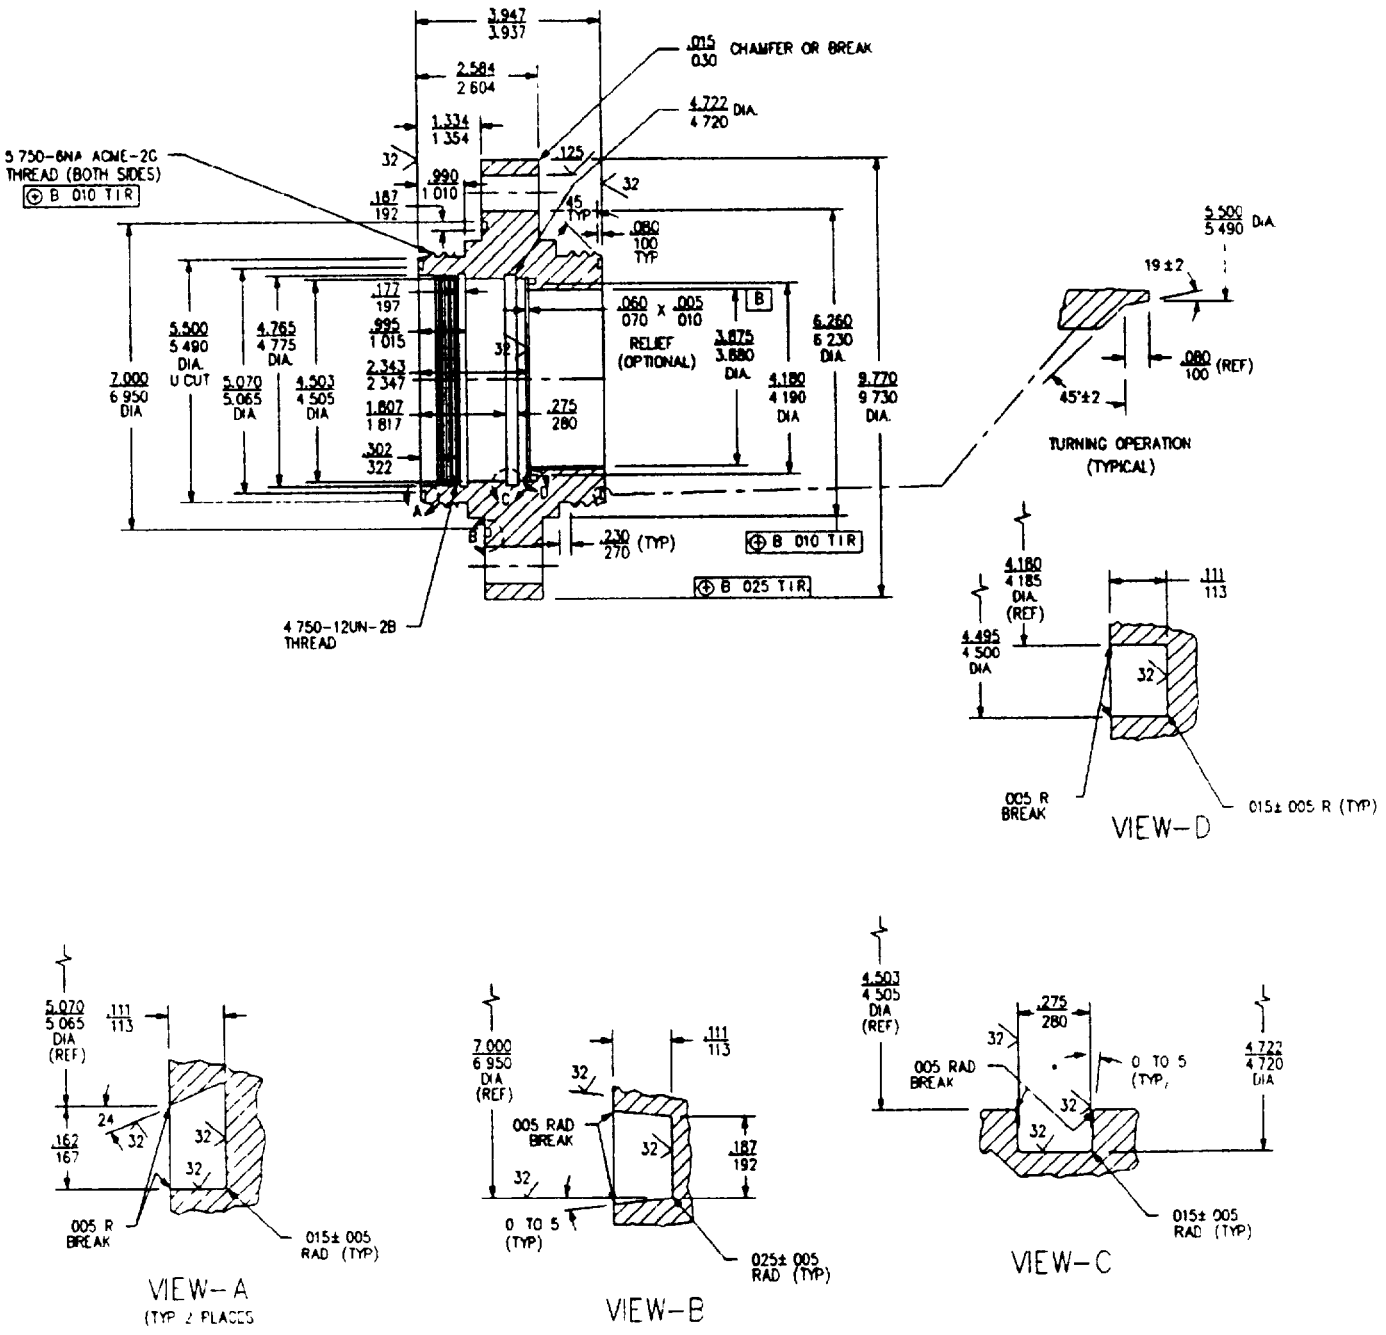


FIGURE 2. Header body M22249/27-1 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

FACE VIEW

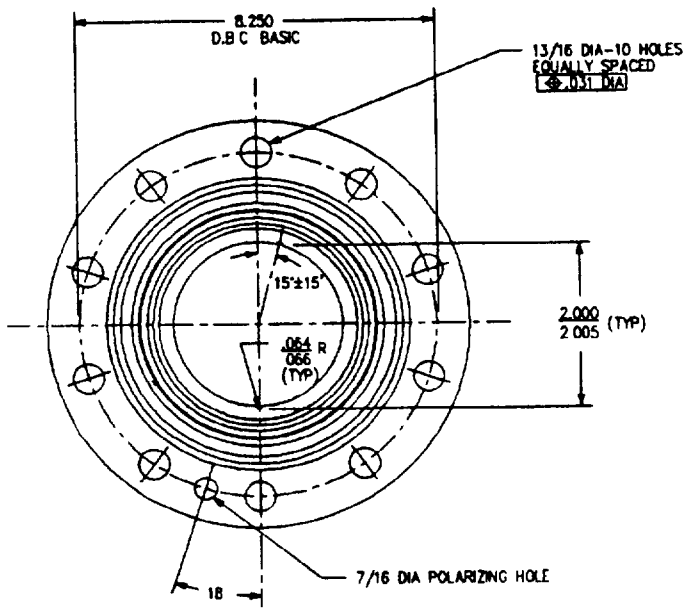

(VIEW LOOKING FROM MISSLE SIDE)

FIGURE 2. Header body M22249/27-1 - Continued. 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

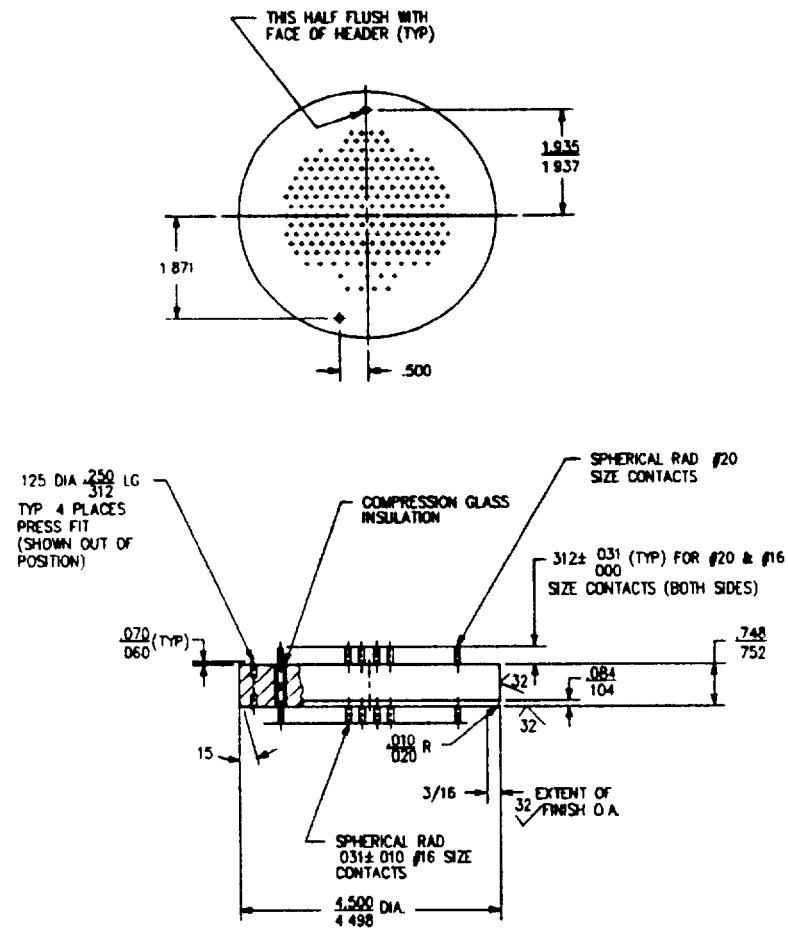


FIGURE 3 Header insert assembly M2249/27-2 04

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

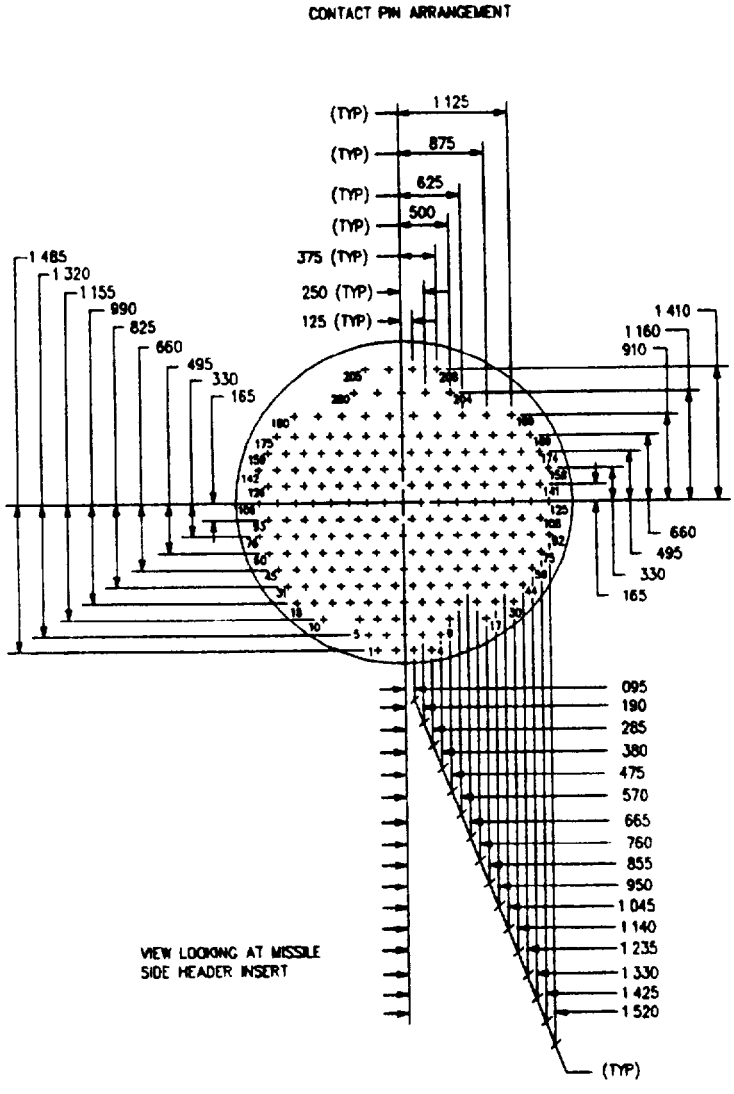


FIGURE 3. Header insert assembly M22249/27-2 - Continued (04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

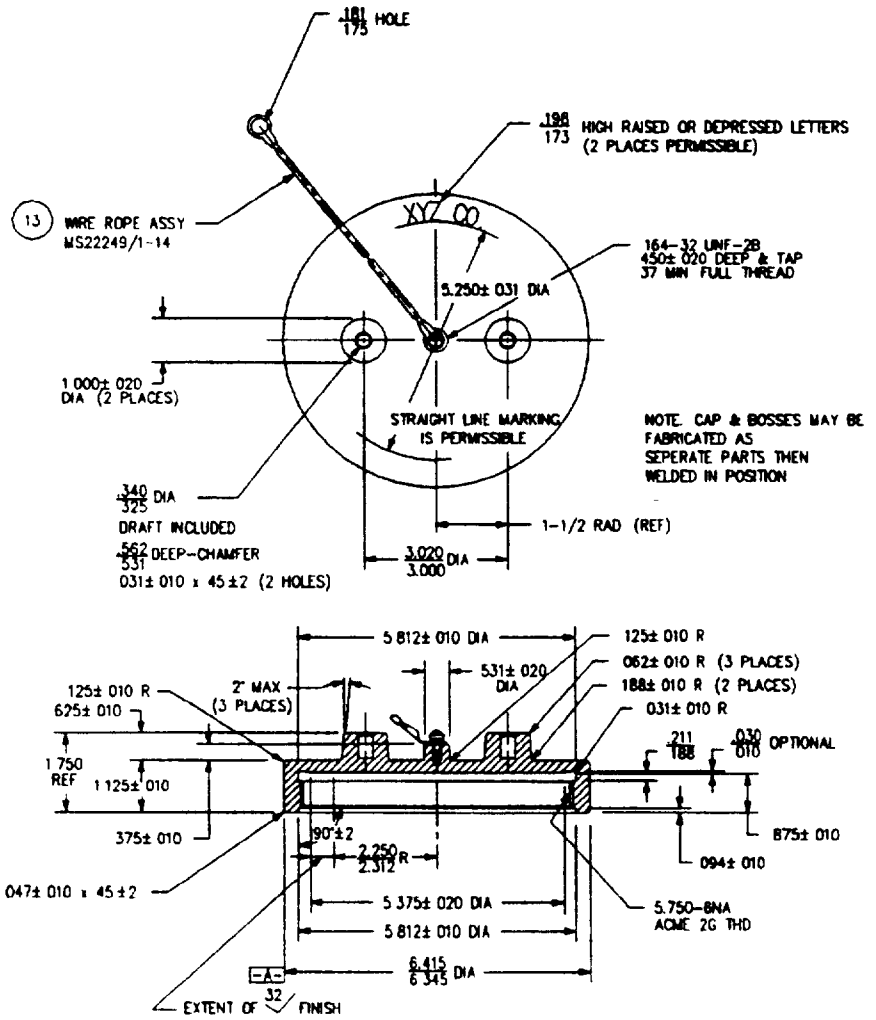


FIGURE 4. Protective cover M22249/27-5. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

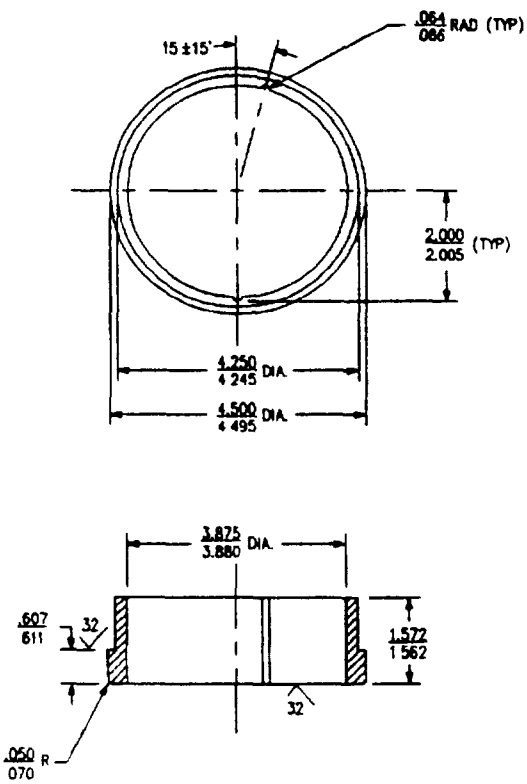


FIGURE 5. Polarizing bushing M2249/27-3. (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

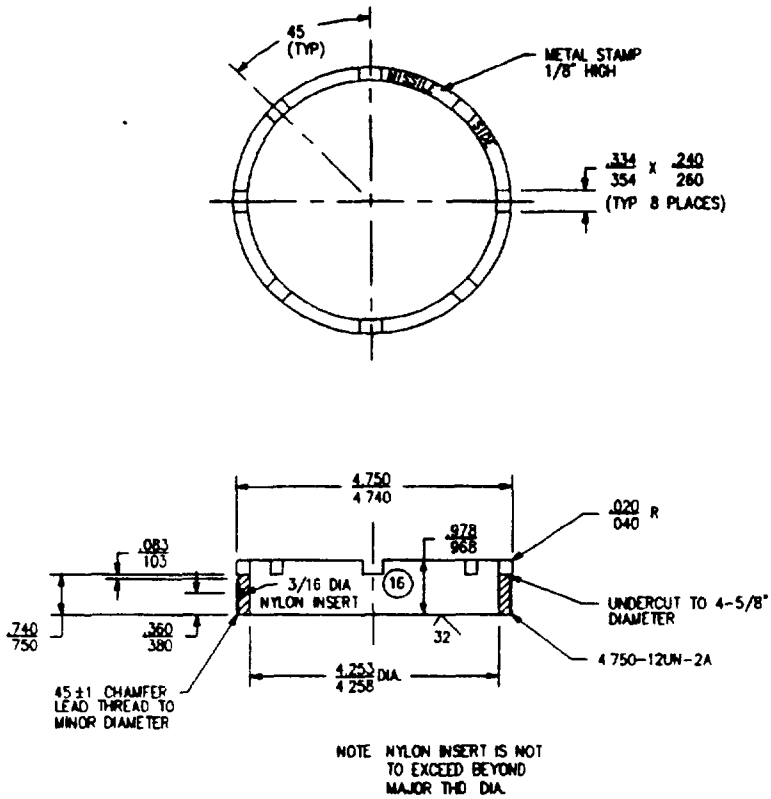


FIGURE 6. Jam nut M22249/27-4. 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Header assembly, 208-pin (45° orientation)			Figure 1
02	Header body	1	CRES/Class 316 QQ-S-763	Figure 2
03	O-ring	1	MS28775-261	
04	Insert assembly	1	CRES/Class 316L of QQ-S-763 or ARMCO 22-13-5 of AMS 5764	Figure 3
05	O-ring	1	MS28775-246	
06	Ring, backup	2	MS27595-246	
07	O-ring	1	MS28775-244	
08	Bushing, polarizing	1	CRES/Class 316 QQ-S-763	Figure 5
09	Nut, jam	1	Manganese bronze, Class A QQ-B-728	Figure 6
10	O-ring	2	MS28775-250	
11	Cover, protective	1	Aluminum casting material alloy A380 or 13, or SC114A QQ-A-591	Figure 4
12	Cover, watertight	1	M22249/46-1	
13[4]	Rope, wire, assembly	1	M22249/1-14	Wire with 016 nylon
14	Insert, size to suit	1	Nylon, COML	Use with 09

[1]Item numbers are the same as shown on figures
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.
[4]Item 13, only when required by acquisition document.

Preparing activity:
Navy - SH
(Project 5935-N278-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.