INCH-POUND
MIL-C-22249/29B(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/29A(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 208-PIN, MISSILE SIDE (45° ORIENTATION)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

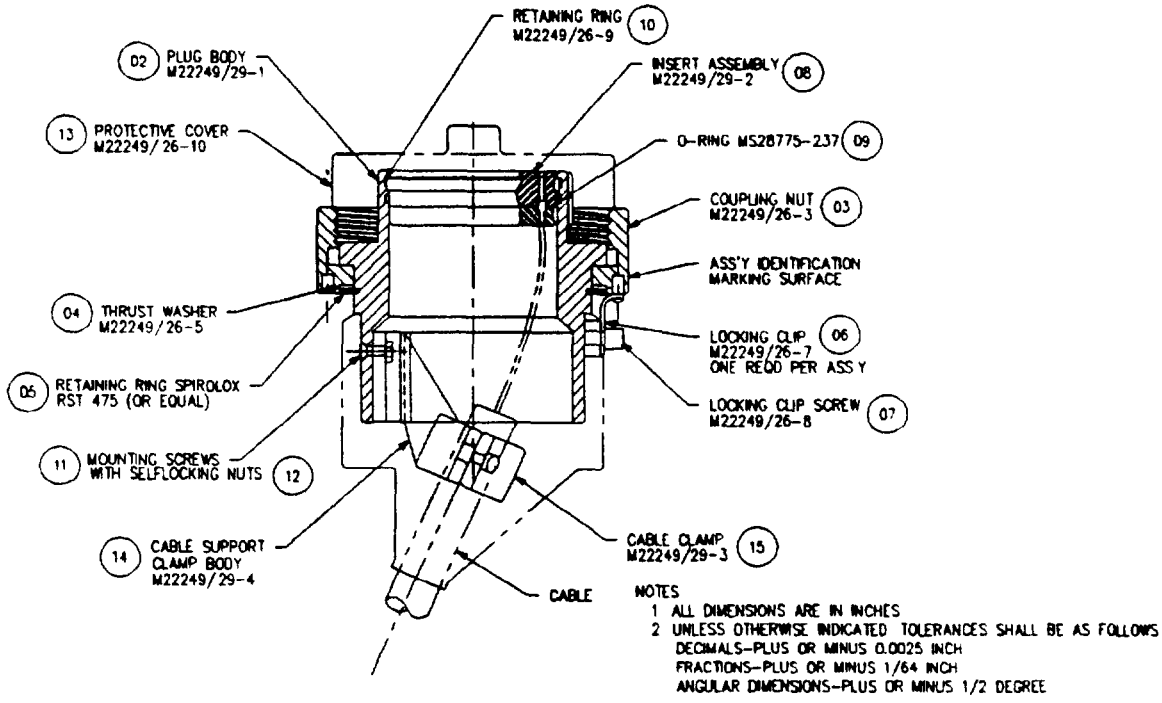


FIGURE 1. Plug assembly, 208-pin, missile side (45 degree orientation). 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

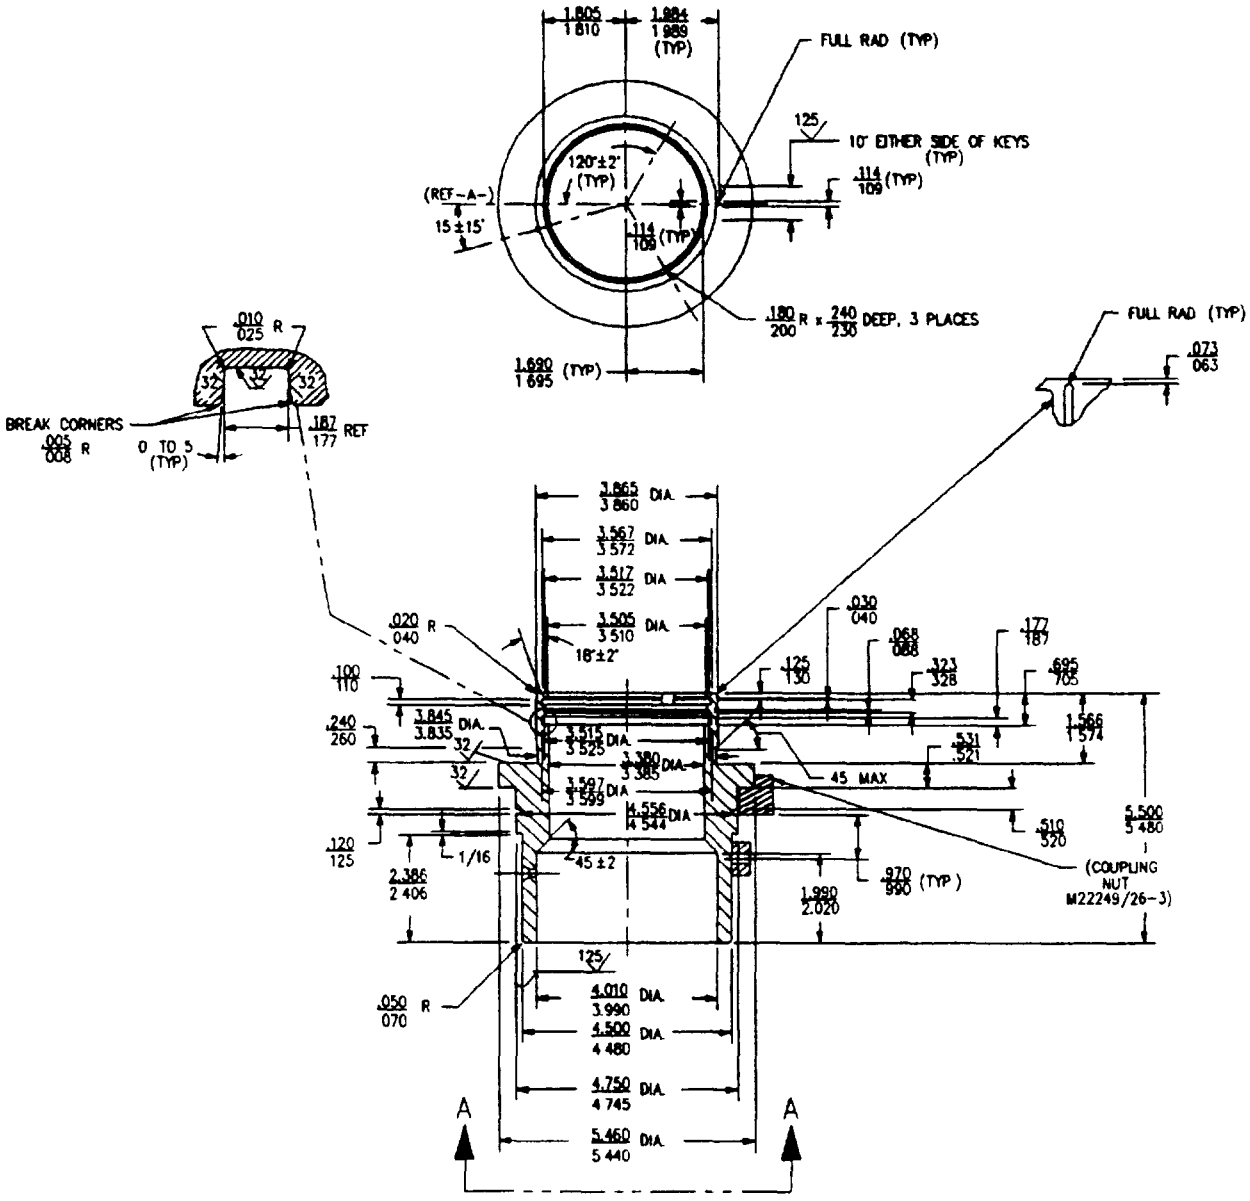


FIGURE 2 Plug body M22249/29-1. (02)

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:39Z
Check the source to verify that this is the current version before use.

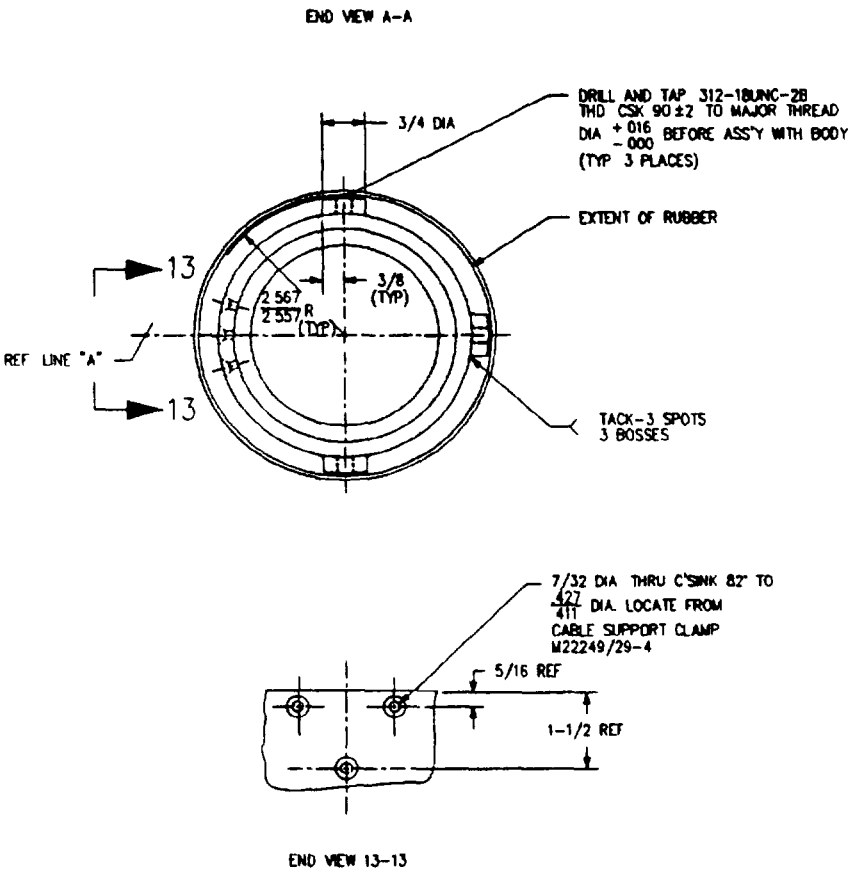


FIGURE 2 Plug body M22249/29-1 - Continued. 02

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:39Z
Check the source to verify that this is the current version before use.

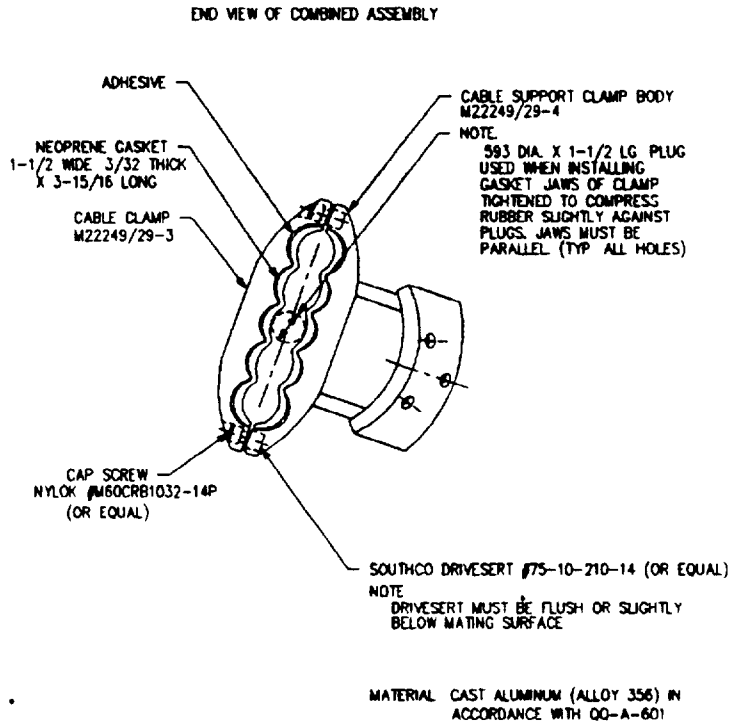


FIGURE 3 Cable support clamp body - M22249/29-4, (14) (15)
Cable clamp M22249/29-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

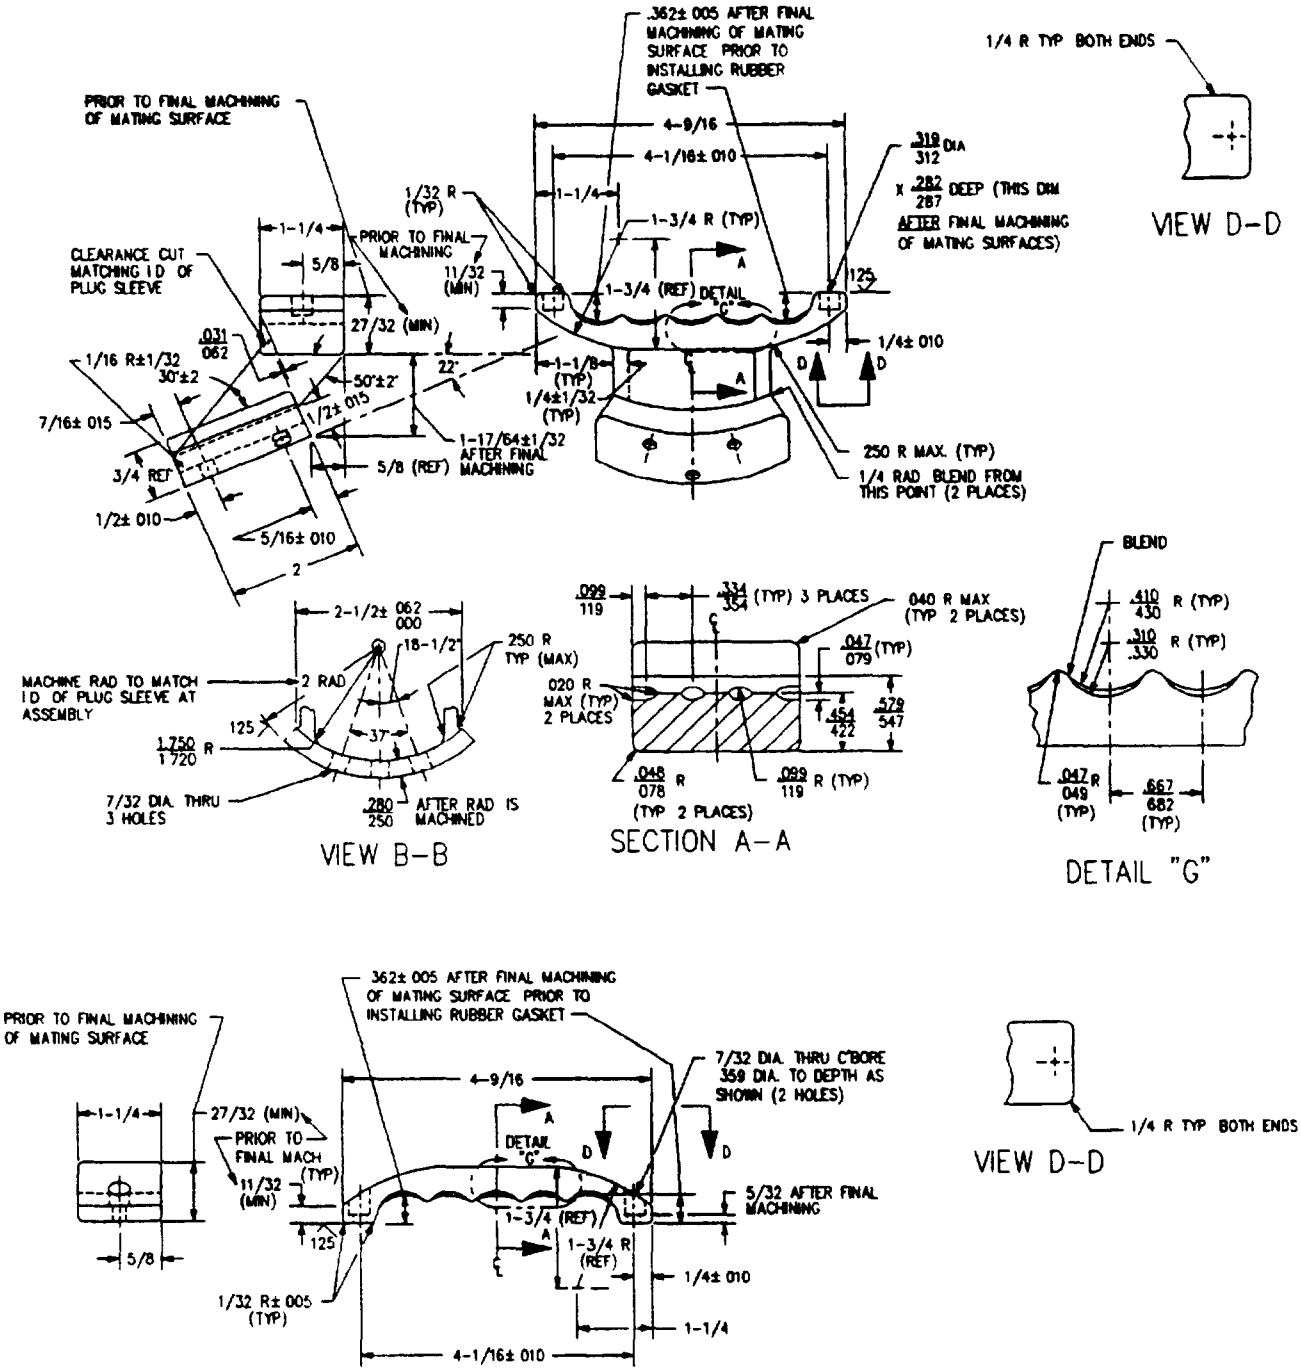


FIGURE 3 Cable support clamp body M22249/29-4 (14) (15)
Cable clamp M22249/29-3. - Continued

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:39Z
Check the source to verify that this is the current version before use.

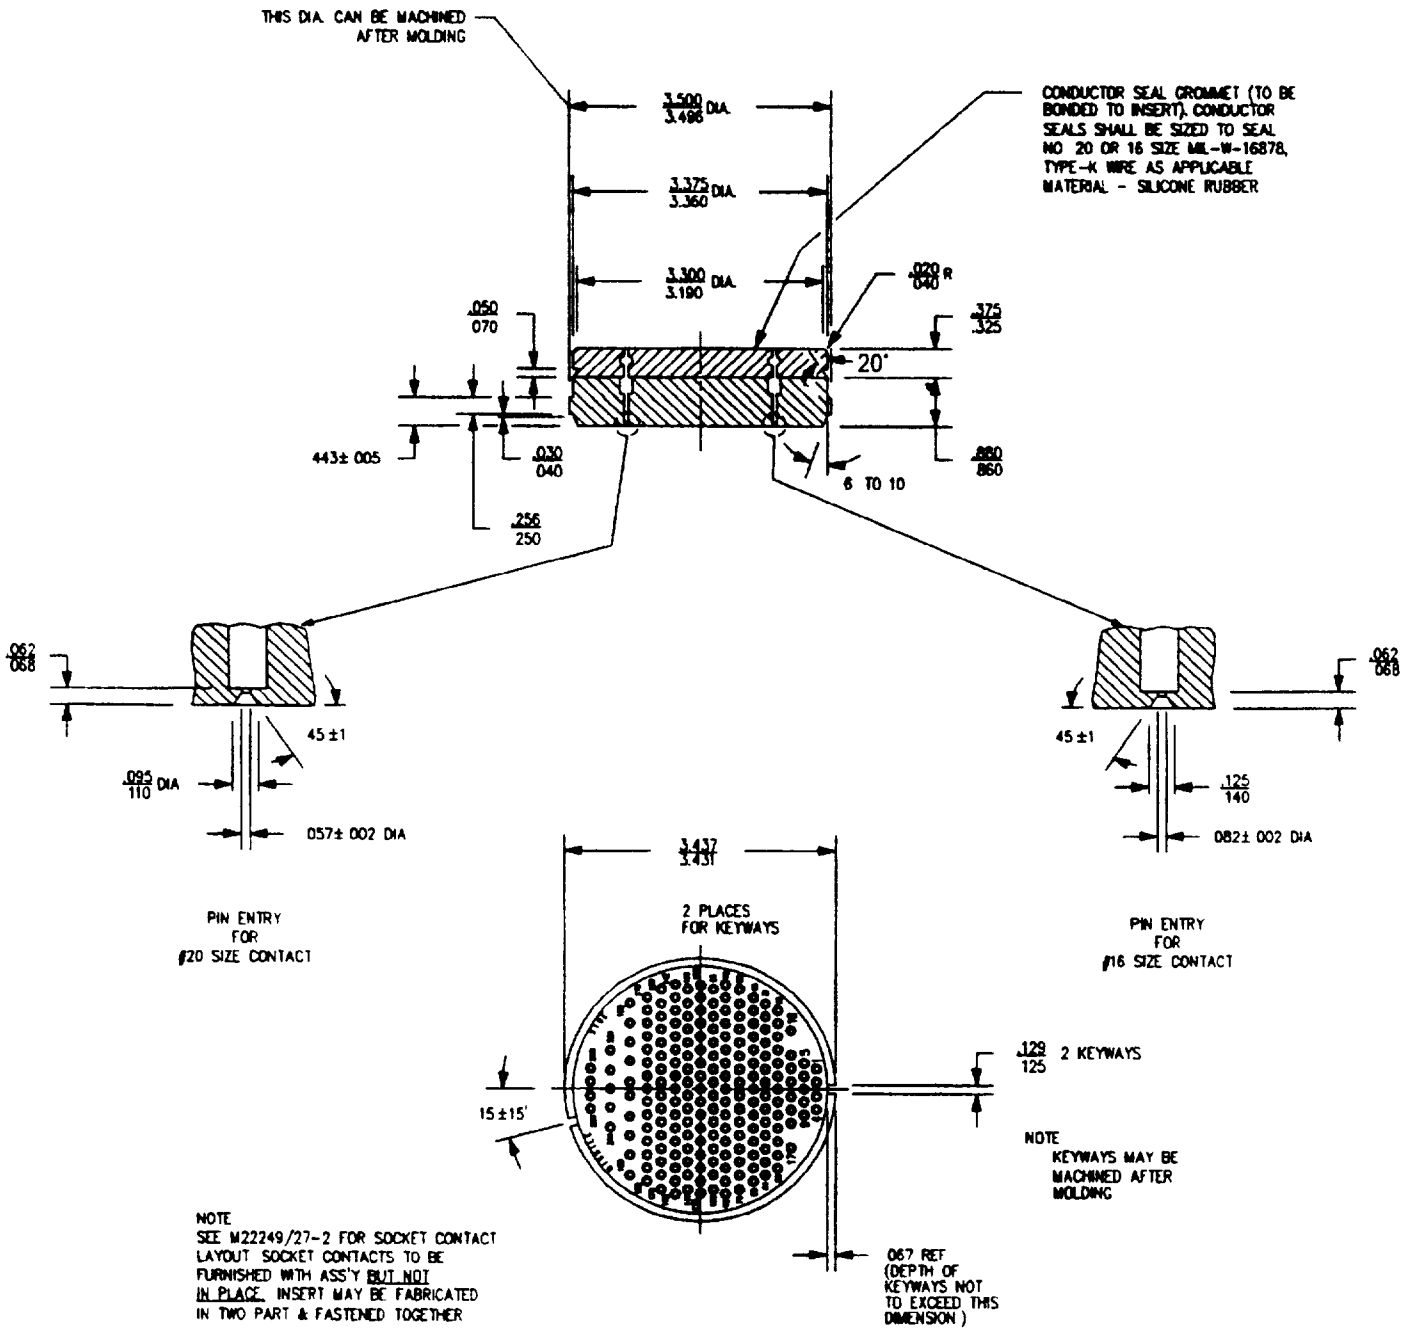


FIGURE 4 Insert assembly M22249/29-2. (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

TABLE I Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 208-pin, missile side (45° orientation)			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 2
03	Nut, coupling	1	M22249/26-3	
04	Washer, thrust	1	M22249/26-5	
05	Retaining ring, coupling nut	1	Spirolox RST-475 (or equal)	
06	Clip, locking	1	M22249/26-7	
07	Screw, locking clip	1	M22249/26-8	
08	Insert assembly	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 4
09	O-ring	1	MS28775-237	
10	Retaining ring, insert assembly	1	M22249/26-9	
11	Screw, .190-32NF-2Ax15/16	3	CRES/Class 302 to 305 QQ-S-763	82° flat head, for cable clamp mounting
12	Nut, .190-32NF-2B	3	Nylok E9CR1032-P (or equal)	Cable clamp mounting
13	Cover, protective	1	M22249/26-10	
14	Clamp body, cable support	1	Cast aluminum alloy 356, QQ-A-601	Figure 3
15	Clamp, cable	1	Alloy 356, QQ-A-601	Figure 3

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-29)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.