INCH-POUND
MIL-C-22249/31B(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/31A(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 3-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

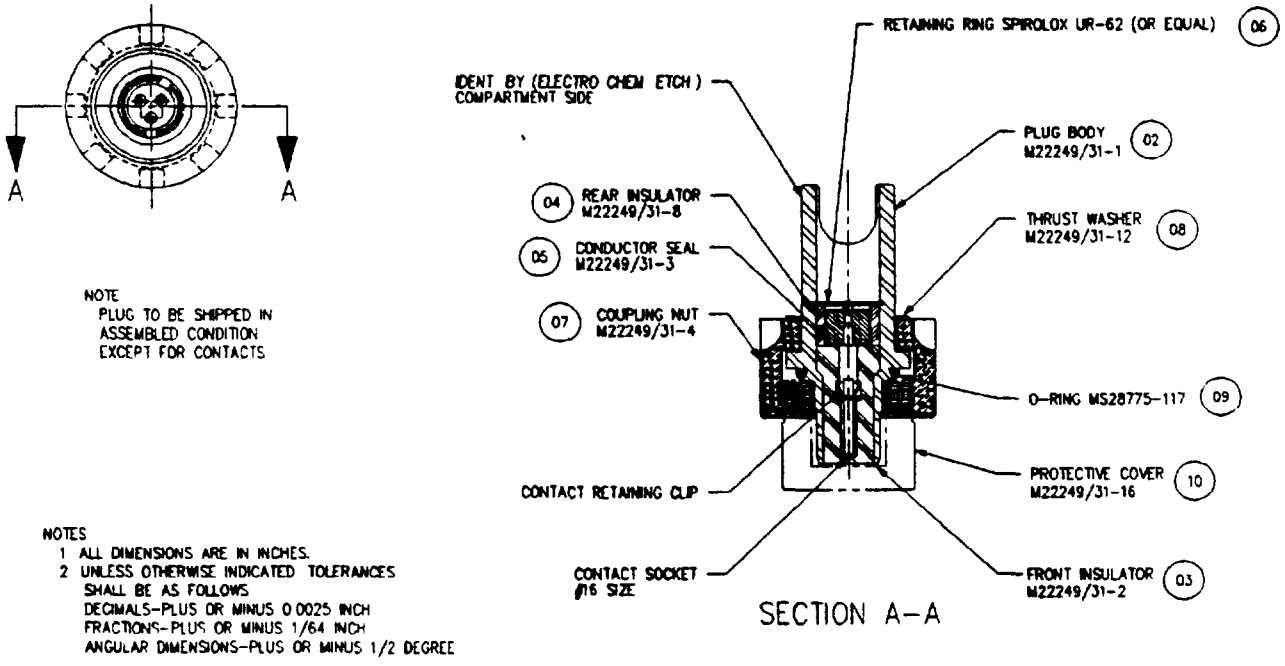


FIGURE 1 Plug assembly, 3-pin, compartment side. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

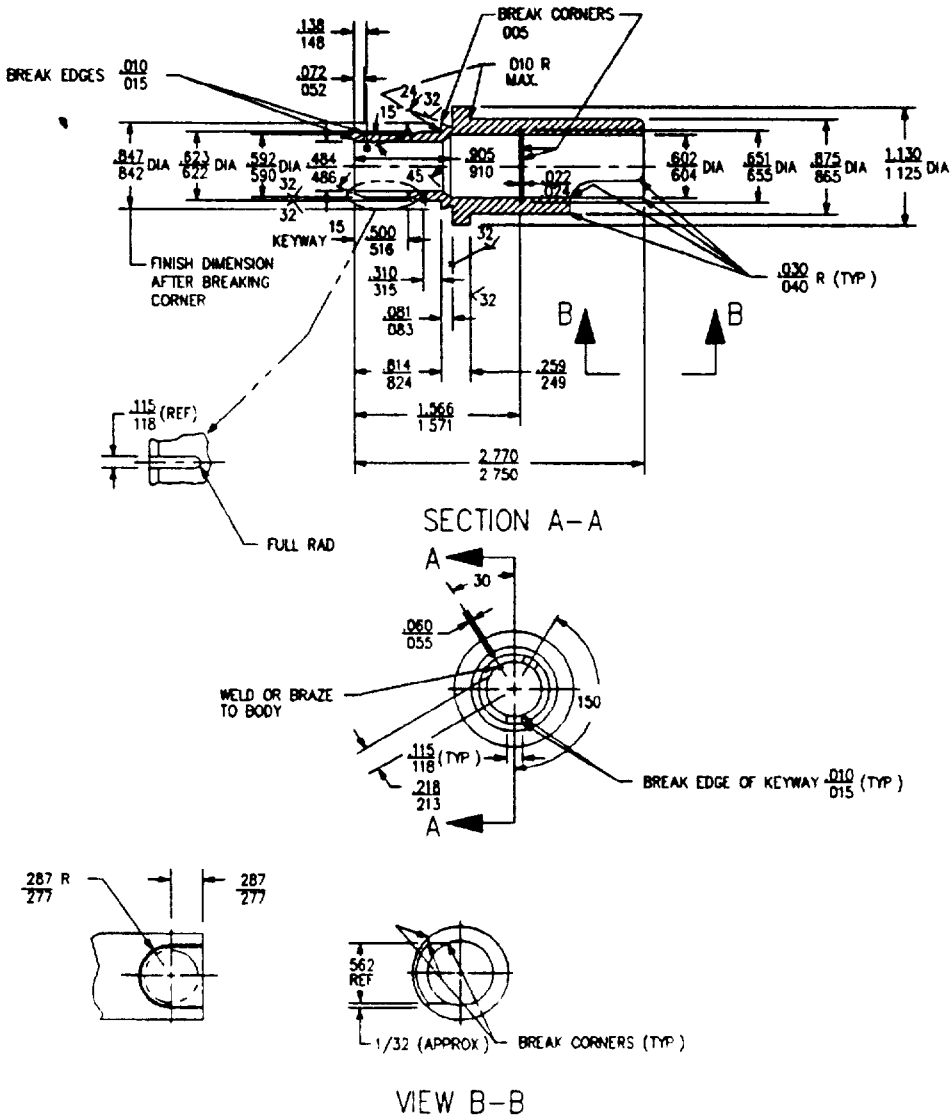


FIGURE 2. Plug body M22249/31-1 (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

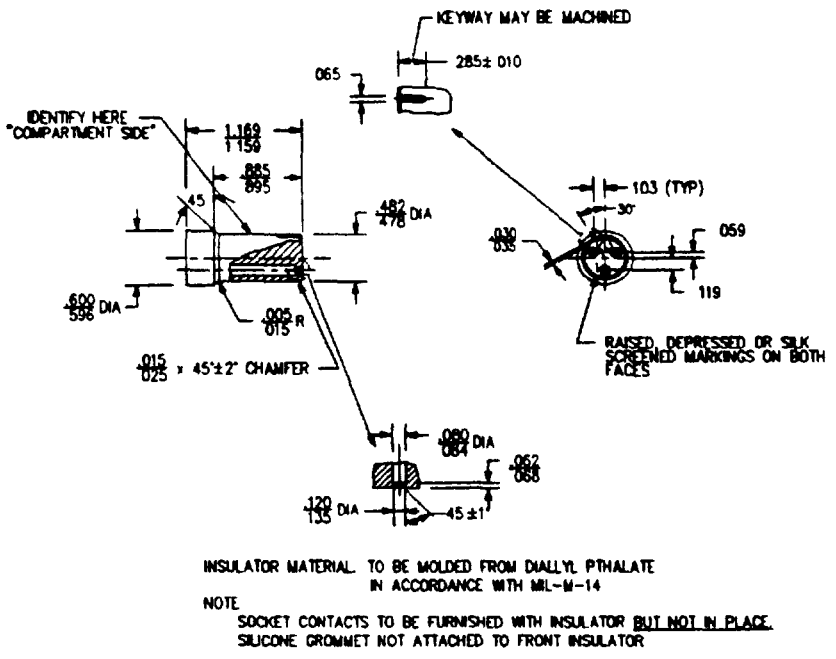


Figure 3. Front insulator M22249/31-2. (03)

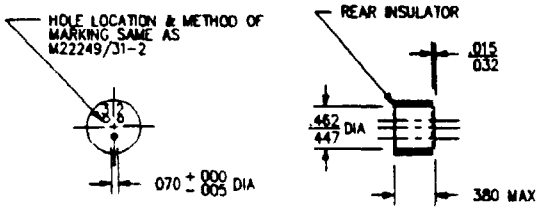


FIGURE 4. Conductor seal grommet M22249/31-3 (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

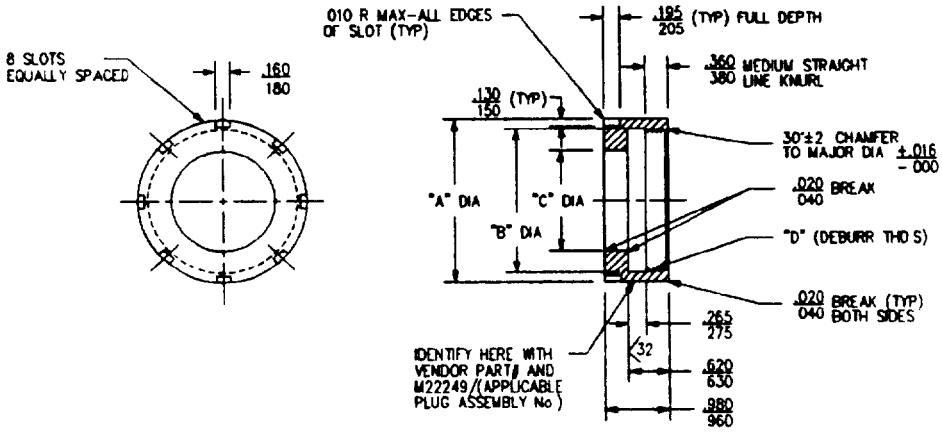


	TABLE OF DIMENSIONS					
	PART No	PIN SIZE & QUANTITY	DIA-A	DIA-B	DIA-C	THREAD-D
*	M22249/31-7	19-#16	2.695/2.675	2.385/2.395	1.657 ±.005/.000	2.375-12UN-2B
*	M22249/31-6	12-#16	2.385/2.365	2.185/2.195	1.517 ±.005/.000	2.125-12UN-2B
*	M22249/31-5	6-#16	2.010/1.990	1.790/1.800	1.203 ±.005/.000	1.750-12UN-2B
	M22249/31-4	3-#16	1.625/1.605	1.260/1.270	.890 ±.005/.000	1.250-12UN-2B

* NOTE NOT PART OF /31 ASSEMBLY

FIGURE 5. Coupling nut M2249/31-4,5,6,7 (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

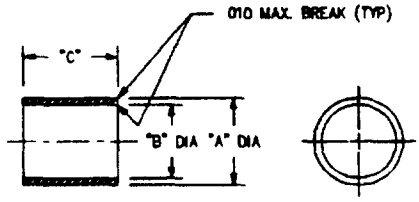


	TABLE OF DIMENSIONS				
	PART No	PIN SIZE & QUANTITY	DIA-"A"	DIA-"B"	DIA-"C"
*	M22249/31-11	19-#16	1.256/1.246	1.080/1.090	.663/.658
*	M22249/31-10	12-#16	1.132/1.122	.960/.970	.663/.658
*	M22249/31-9	6-#16	.868/.861	.742/.749	.663/.658
	M22249/31-8	3-#16	.600/.594	.437/.442	.369/.364

* NOTE NOT PART OF /31 ASSEMBLY

MATERIAL TO BE MOLDED FROM DIALLYL PHTHALATE IN ACCORDANCE WITH MIL-M-14

FIGURE 6. Rear insulator M22249/31-8,9,10,11. 04

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

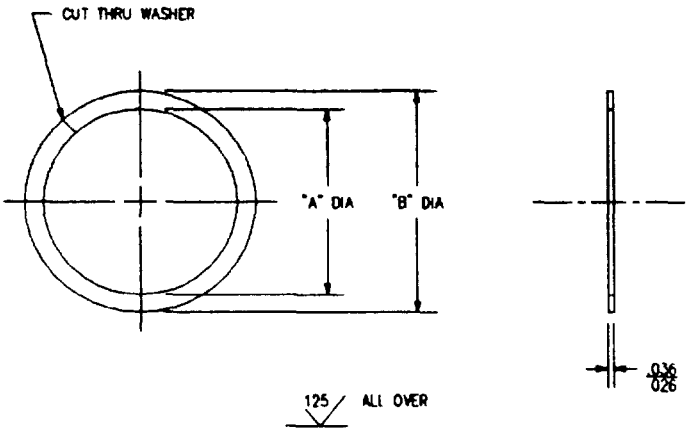



TABLE OF DIMENSIONS				
	PART No	PIN SIZE & QUANTITY	DIA-"A"	DIA-"B"
*	M22249/31-15	19-ø16	1.657 +.015 -.000	2.150/2.130
*	M22249/31-14	12-ø16	1.517 +.015 -.000	2.010/1.990
*	M22249/31-13	6-ø16	1.203 +.015 -.000	1.760/1.740
	M22249/31-12	3-ø16	.890 +.015 -.000	1.260/1.240

* NOTE. NOT PART OF /31 ASSEMBLY

MATERIAL. NYLON COMMERCIAL

FIGURE 7. Thrust washer M22249/31-12,13,14,15. 08

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

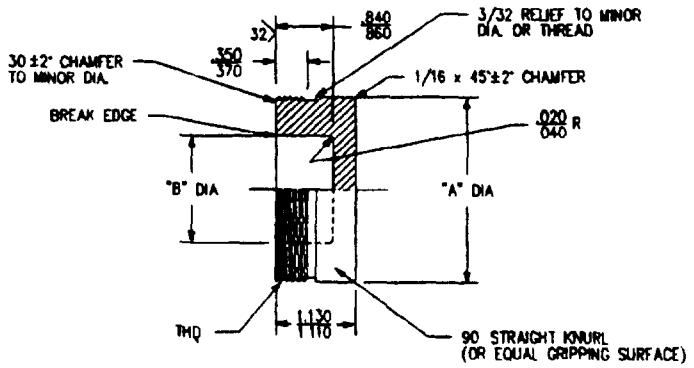

NOTE 125 MAX. FINISH EXCEPT AS NOTED

	TABLE OF DIMENSIONS				
	PART No.	PIN SIZE & QUANTITY	DIA-"A"	DIA-"B"	THD SIZE
*	M22249/31-19	19-#16	2.377/2.357	1.560/1.578	2.375-12UN-2A
*	M22249/31-18	12-#16	2.140/2.120	1.356/1.376	2.125-12UN-2A
*	M22249/31-17	6-#16	1.760/1.740	1.091/1.103	1.750-12UN-2A
	M22249/31-16	3-#16	1.260/1.240	.667/.687	1.250-12UNF-2A

* NOTE NOT PART OF /31 ASSEMBLY

MATERIAL STYRENE A.B.S. (CYCOLAC OR KRALASTIC) OR DELRIN IF MACHINED FROM BARSTOCK

ALTN MAT'L AL2024 T351 PER QQ-A-225/6 CLEAR ANODIZED PER MIL-A-8625

FIGURE 8. Protective cover M22249/31-16,17,18,19. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 3-pin, compartment side			Figure 1
02	Plug body		CRES/Class 316 QQ-S-763	Figure 2
03	Insulator, front	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 3
04	Insulator, rear		Type GDI-30, MIL-M-14	Figure 6
05	Seal, conductor	1	Silicone rubber, Class 2b, ZZ-R-765, Shore durometer hardness, 40±5	Figure 4
06	Ring, retaining	1	Spirolox UR-62 (or equal)	
07	Nut, coupling	1	Manganese bronze, Class A QQ-B-728	Figure 5
08	Washer, thrust	1	Nylok, COML	Figure 7
09	O-ring	1	MS28775-117	
10	Cover, protective	1	Figure 8	

[1]Item numbers are the same as shown on figures
[2]See applicable figure listed in remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity.
Navy - SH
(Project 5935-N278-31)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:39Z
Check the source to verify that this is the current version before use.