
MILITARY SPECIFICATION SHEET

CONNECTOR SETS, HEADER ASSEMBLY, 3-PIN

(A)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

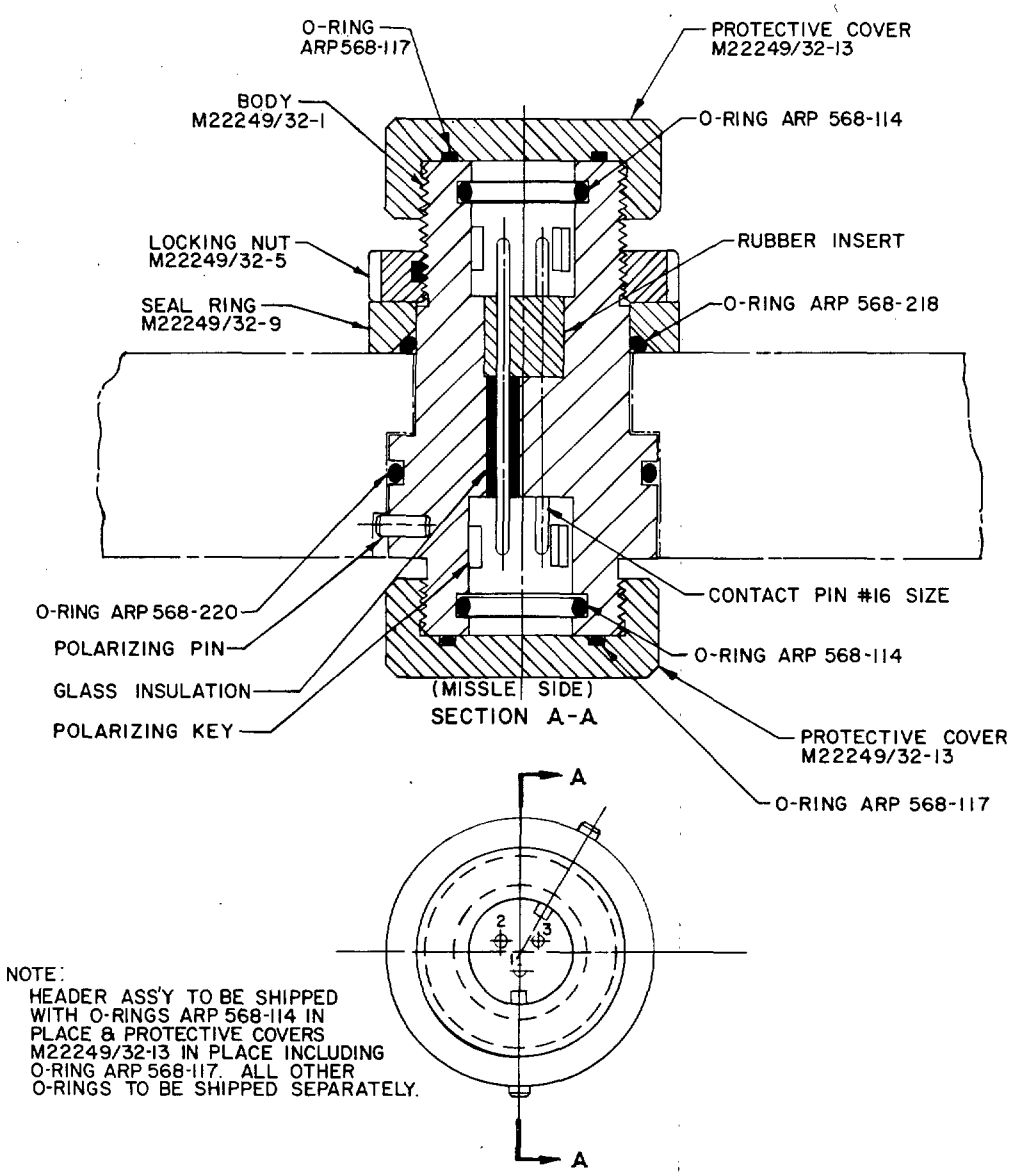


NOTE:
HEADER ASS'Y TO BE SHIPPED WITH O-RINGS ARP 568-114 IN PLACE & PROTECTIVE COVERS M22249/32-13 IN PLACE INCLUDING O-RING ARP 568-117. ALL OTHER O-RINGS TO BE SHIPPED SEPARATELY.

(A) DENOTES CHANGE

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

HEADER BODY

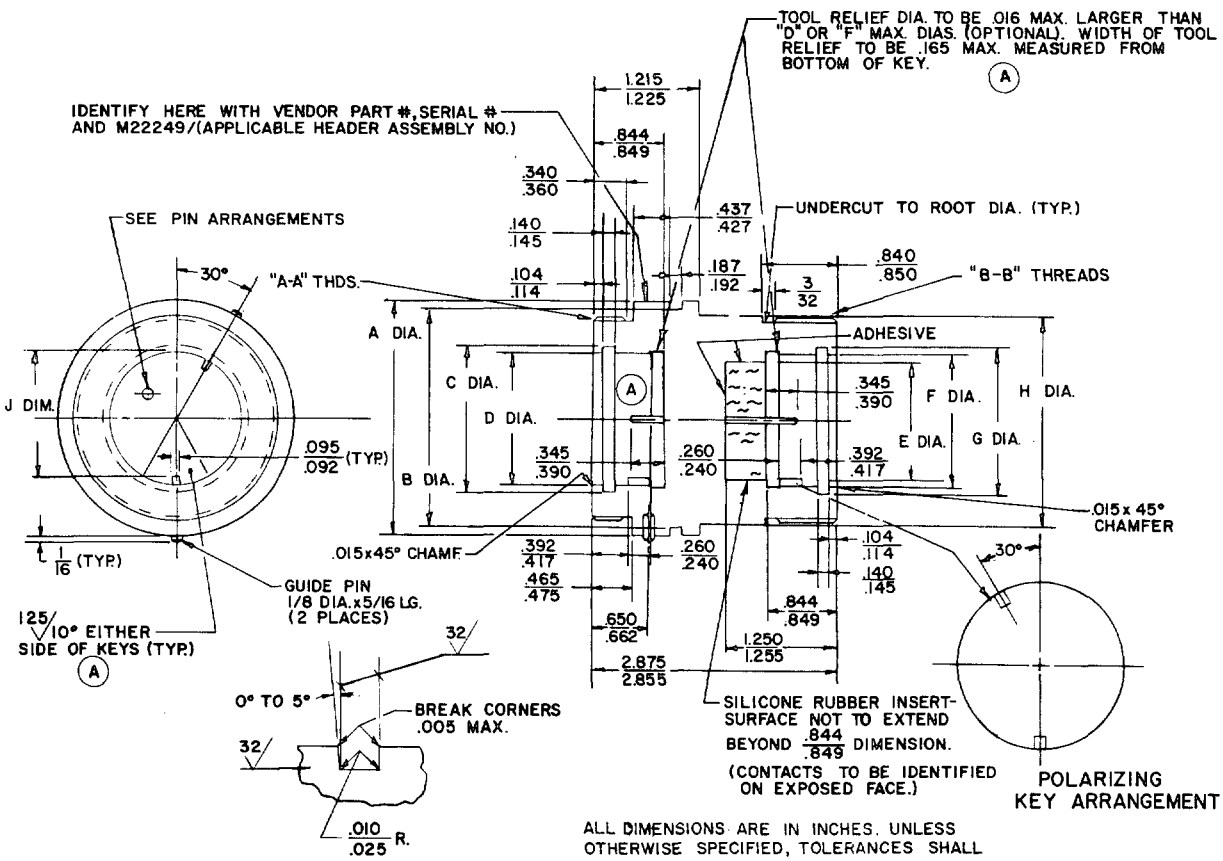

TYPICAL O-RING GROOVE

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

TABLE OF DIMENSIONS

	PART NO.	QUANTITY & PIN SIZE	DIA. A	DIA. B	DIA. C	DIA. D	DIA. E	DIA. F	DIA. G	DIA. H	DIM. J	THREADS "A-A"	THREADS "B-B"
*	M22249/32-4	19-#16	2.750/2.746	2.524/2.520	1.687/1.689	1.521/1.526	1.379±.005	1.521/1.526	1.687/1.689	2.390/2.386	1.441/1.451	2-3/8-12UN-2A	2-3/8-12UN-2A
*	M22249/32-3	12-#16	2.500/2.496	2.274/2.270	1.480/1.482	1.316/1.321	1.171±.005	1.316/1.321	1.480/1.482	2.140/2.136	1.233/1.243	2-1/8-12UN-2A	2-1/8-12UN-2A
*	M22249/32-2	6-#16	2.125/2.121	1.899/1.895	1.230/1.232	1.063/1.068	.918±.005	1.063/1.068	1.230/1.232	1.765/1.761	.980/.990	1-3/4-12UN-2A	1-3/4-12UN-2A
	M22249/32-1	3-#16	1.625/1.621	1.399/1.395	.795/.797	.628/.633	.483±.005	.628/.633	.795/.797	1.265/1.261	.560/.570	1-1/4-12UNF-2A	1-1/4-12UNF-2A


NOTE:

* NOT PART OF /32 ASSEMBLY.


SILICONE RUBBER INSERT CAN BE POURED IN PLACE, USING A CLEAR RTV SILICONE WITH CONTACT IDENTIFICATION DEPRESSED ON HEADER FACE. (A)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

PIN ARRANGEMENTS
(MISSLE SIDE)-HEADER




3-#16
M22249/32-1

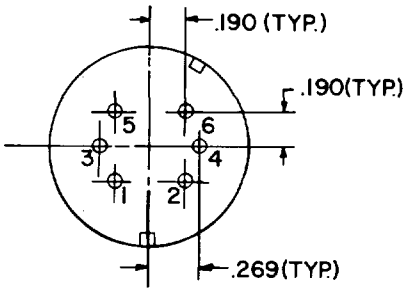


6-#16
M22249/32-2

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

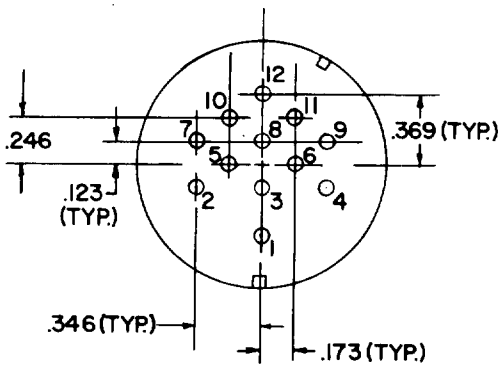


12-#16
M22249/32-3

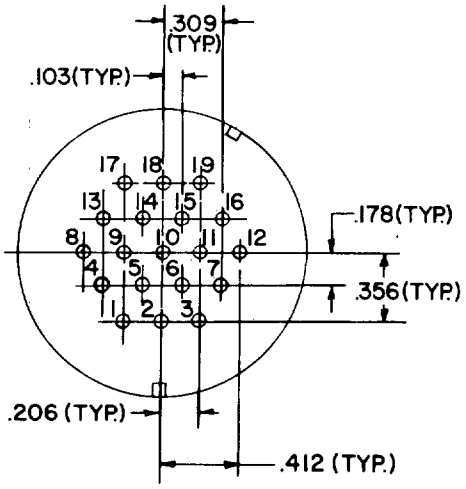

19-#16
M22249/32-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

LOCKING NUT

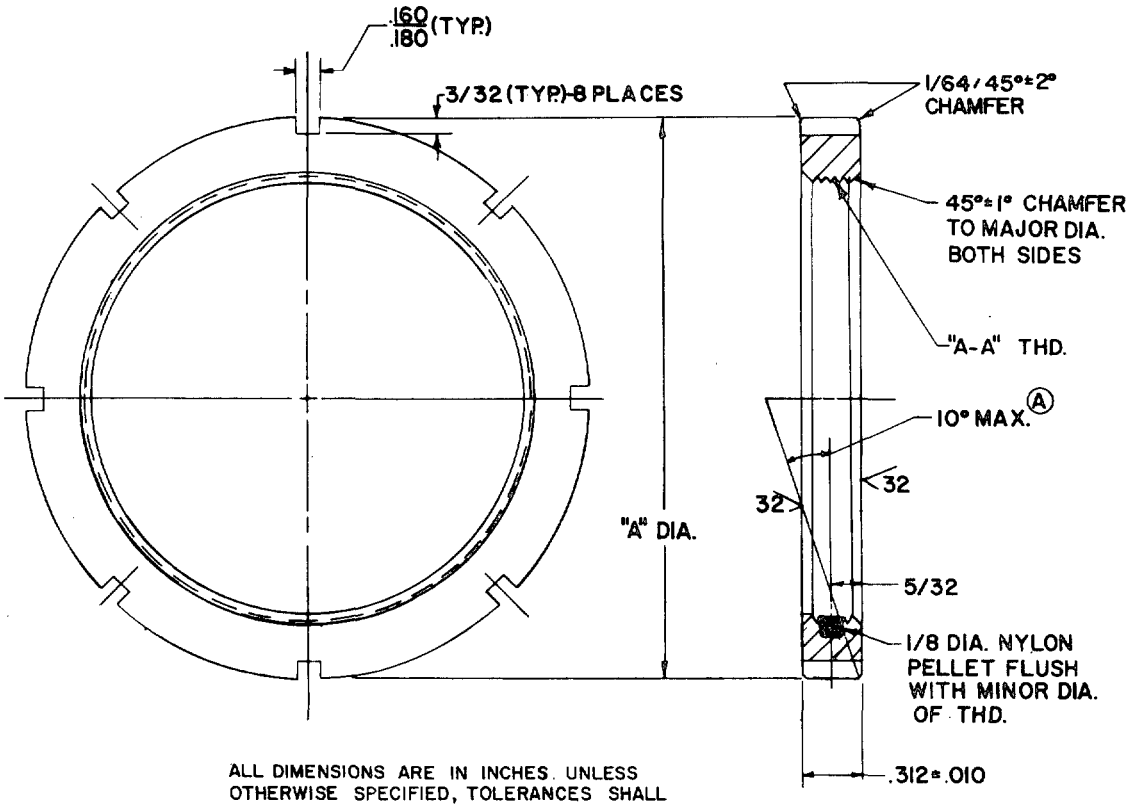

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ±1/64 INCH FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ±1/2 DEGREE.

TABLE OF DIMENSIONS


	PART Nº	PIN SIZE & QTY.	DIA. "A"	THDS. "A-A"
*	M22249/32-8	19-#16	3	2-3/8-12 UN-2B
*	M22249/32-7	12-#16	2-3/4	2-1/8-12 UN-2B
*	M22249/32-6	6-#16	2-3/8	1-3/4-12 UN-2B
	M22249/32-5	3-#16	1-7/8	1-1/4-12 UNF-2B


* NOTE:
NOT PART OF /32 ASSEMBLY

MATERIAL: MANGANESE BRONZE PER QQ-B-728

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

SEAL RING

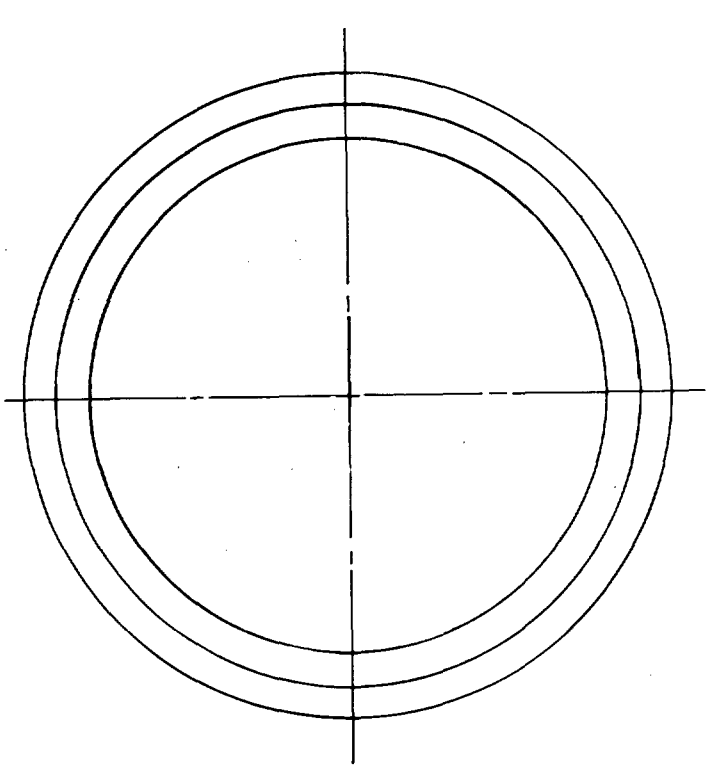

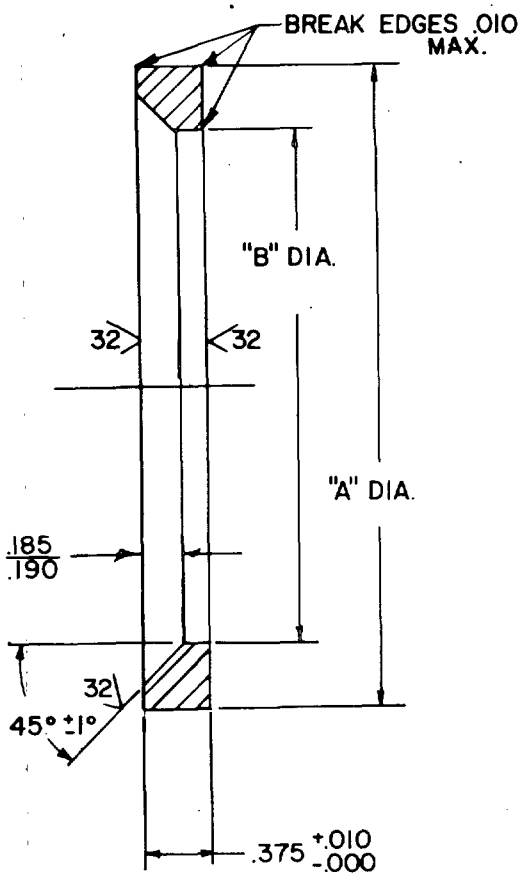

MATERIAL: CORROSION-RESISTING STEEL, TYPE 304 OF QQ-S-763.


TABLE OF DIMENSIONS				
	PART NO.	PIN SIZE & QTY.	DIA. "A"	DIA. "B"
*	M22249/32-12	19-#16	3	2.392/2.395
*	M22249/32-11	12-#16	2-3/4	2.142/2.145
*	M22249/32-10	6-#16	2-3/8	1.767/1.770
	M22249/32-9	3-#16	1-7/8	1.267/1.270

NOTE:
* NOT PART OF /32 ASSEMBLY.
TOLERANCE ON DIA "A" +.010 -.020 . (A)

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

PROTECTIVE COVER

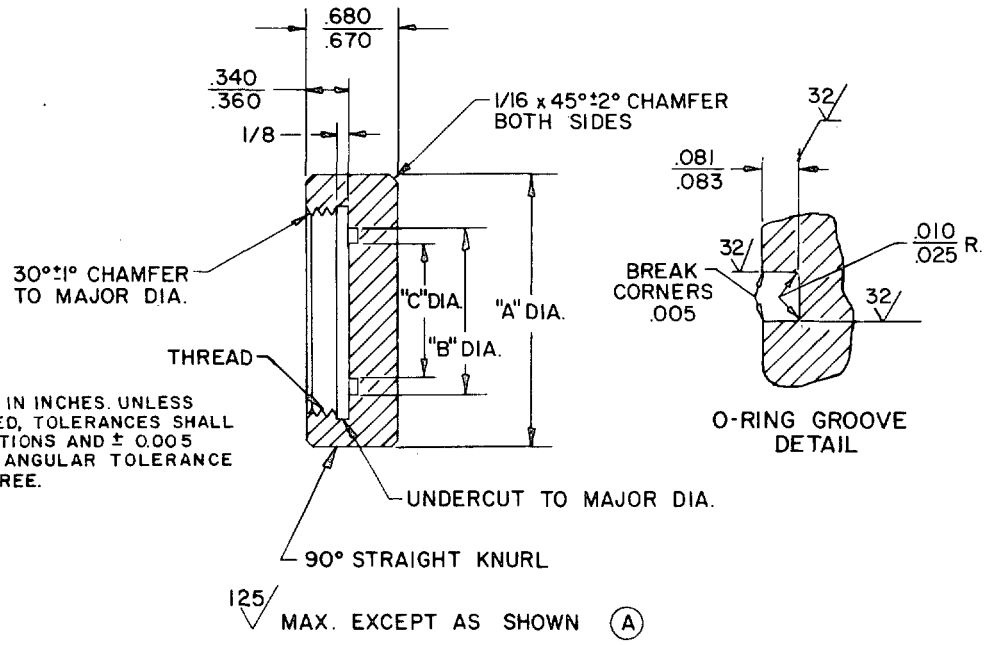

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

TABLE OF DIMENSIONS

	PART NO.	PIN SIZE & QUANTITY	DIA. "A"	DIA. "B"	DIA. "C"	THREAD
	M22249/32-13	3 #16	1.625 / 1.605	1-1/8	.813 $^{+.005}_{-.000}$	1-1/4-12UN-2B
*	M22249/32-14	6 #16	2.010 / 1.990	1-5/8	1.320 $^{+.005}_{-.000}$	1-3/4-12UN-2B
*	M22249/32-15	12 #16	2.385 / 2.365	1-7/8	1.570 $^{+.005}_{-.000}$	2-1/8-12UN-2B
*	M22249/32-16	19 #16	2.695 / 2.675	2-1/4	1.940 $^{+.005}_{-.000}$	2-3/8-12UNF-2B

* NOTE:
NOT PART OF /32 ASSEMBLY.

MATERIAL: STYRENE A.B.S. (CYCOLAC OR KRALASTIC) OR DELRIN IF MACHINED FROM BARSTOCK
ALTERNATE MAT'L: AL 2024,T 351 PER QQ-A-225/6 CLEAR ANODIZED PER MIL-A-8625.

Preparing activity:
Navy-SH
(Project 5935-N069-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.