INCH-POUND
MIL-C-22249/32B(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/32A(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, HEADER ASSEMBLY, 3-PIN

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

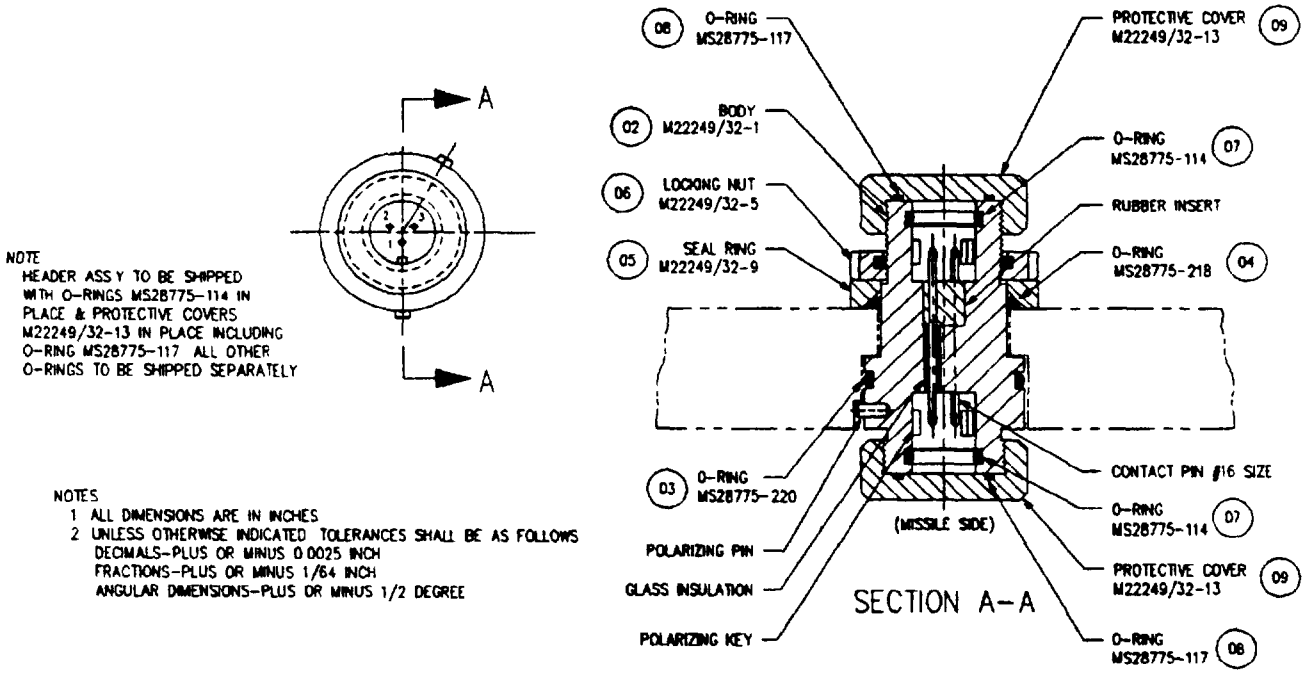


FIGURE 1. Header assembly, 3-pin. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

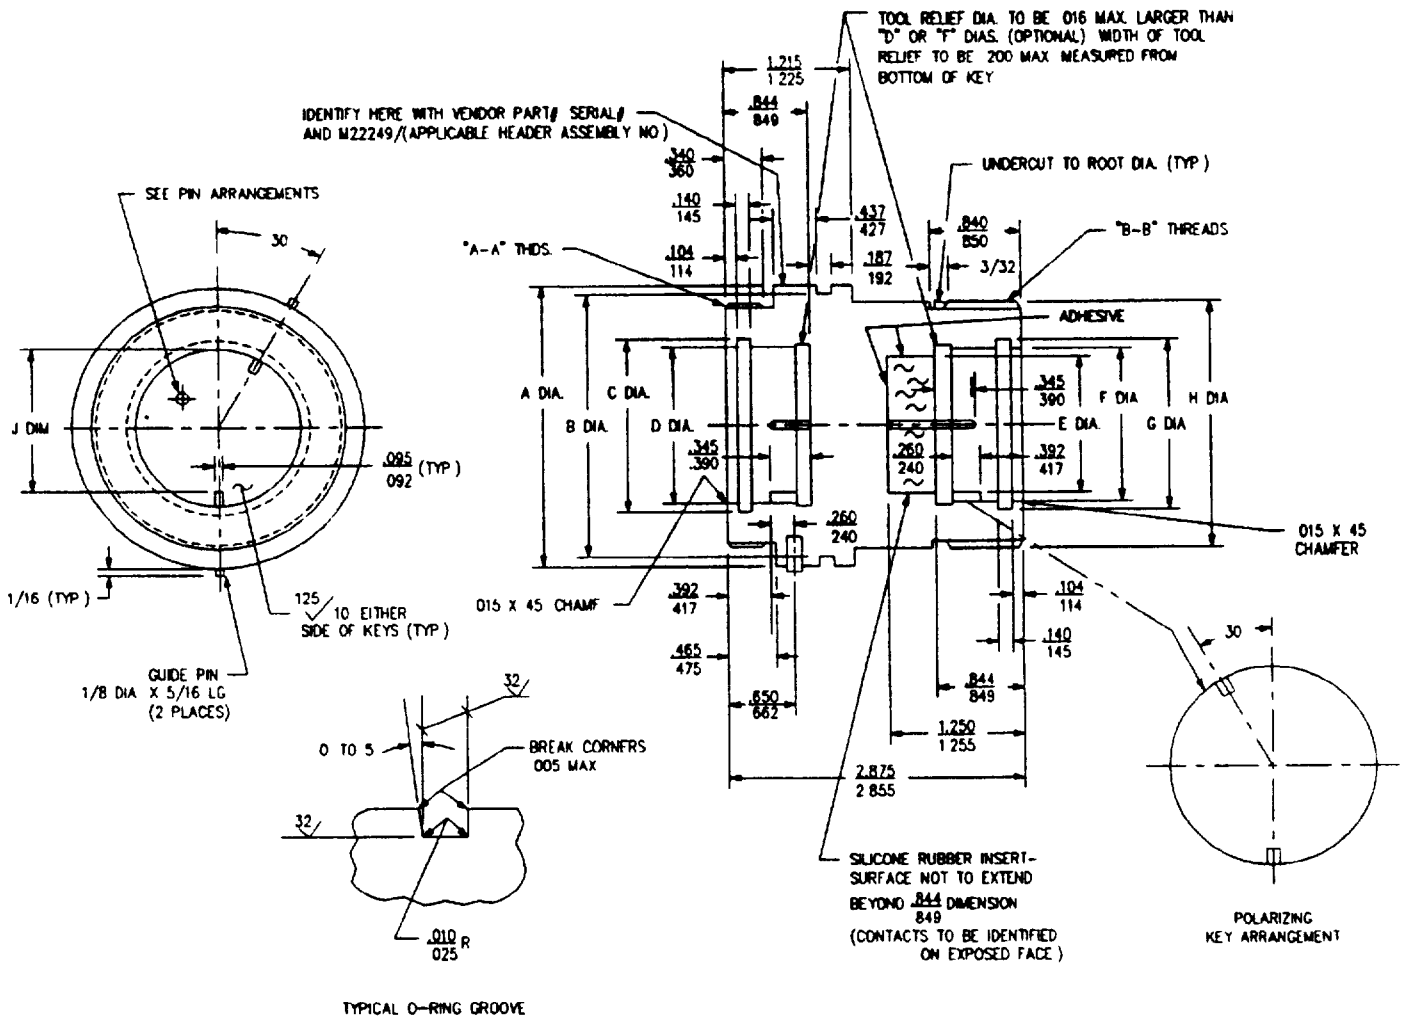



TABLE OF DIMENSIONS

	PART NO	QUANTITY & PIN SIZE	DIA A	DIA B	DIA C	DIA D	DIA E	DIA F	DIA G	DIA H	DIA J	THREADS "A-A"	THREADS "B-B"
*	M22249/32-4	19-#16	2.750 2.746	2.524 2.520	1.687 1.689	1.521 1.526	1.378± .005	1.521 1.526	1.687 1.689	2.380 2.386	1.441 1.451	2.375-12UN-2A	2.375-12UN-2A
*	M22249/32-3	12-#16	2.500 2.496	2.274 2.270	1.480 1.482	1.316 1.321	1.171± .005	1.316 1.321	1.480 1.482	2.140 2.136	1.233 1.243	2.125-12UN-2A	2.125-12UN-2A
*	M22249/32-2	6-#16	2.125 2.121	1.899 1.895	1.230 1.232	1.063 1.068	.918± .005	1.063 1.068	1.230 1.232	1.765 1.781	.980 .990	1.750-12UN-2A	1.750-12UN-2A
	M22249/32-1	3-#16	1.625 1.621	1.399 1.395	.795 .797	.628 .633	.483± .005	.628 .633	.795 .797	1.265 1.261	.560 .570	1.250-12UNF-2A	1.250-12UNF-2A


NOTE
* NOT PART OF /32 ASSEMBLY
SILICONE RUBBER INSERT CAN BE POURED IN PLACE USING A CLEAR RTV SILICONE WITH CONTACT IDENTIFICATION DEPRESSED ON HEADER FACE

FIGURE 2 Header body M22249/32-1,2,3,4. 02


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.




3-#16
M22249/32-1

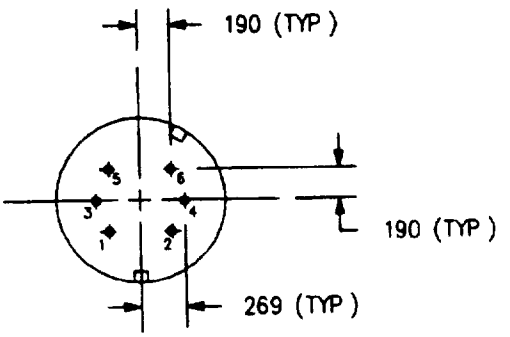

6-#16
M22249/32-2

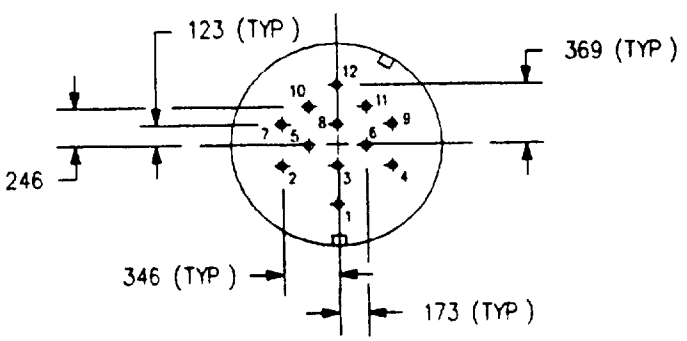

12-#16
M22249/32-3

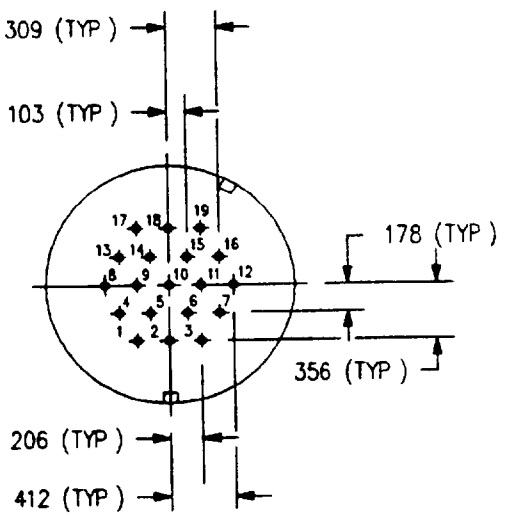

19-#16
M22249/32-4

FIGURE 3. Pin arrangement (missile side) header. 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

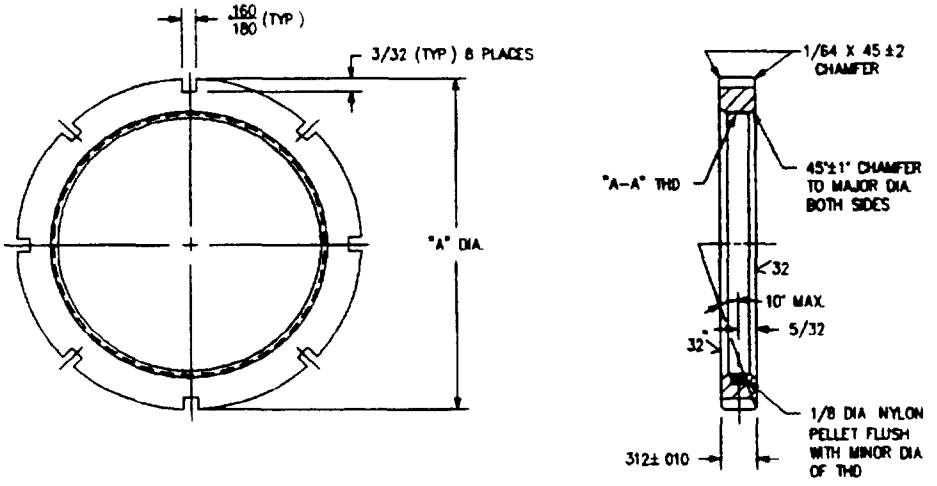



TABLE OF DIMENSIONS			
PART NO	PIN SIZE & QTY	DIA "A"	THDS "A-A"
* M22249/32-8	19-∅16	3	2 375 - 12UN - 2B
* M22249/32-7	12-∅16	2-3/4	2 125 - 12UN - 2B
* M22249/32-6	6-∅16	2-3/8	1 750 - 12UN - 2B
M22249/32-5	3-∅16	1-7/8	1 250 - 12UNF - 2B

* NOTE
NOT PART OF /32 ASSEMBLY

MATERIAL MANGANESE BRONZE PER QQ-B-728

FIGURE 4 Locking nut M22249/32-5,6,7,8. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

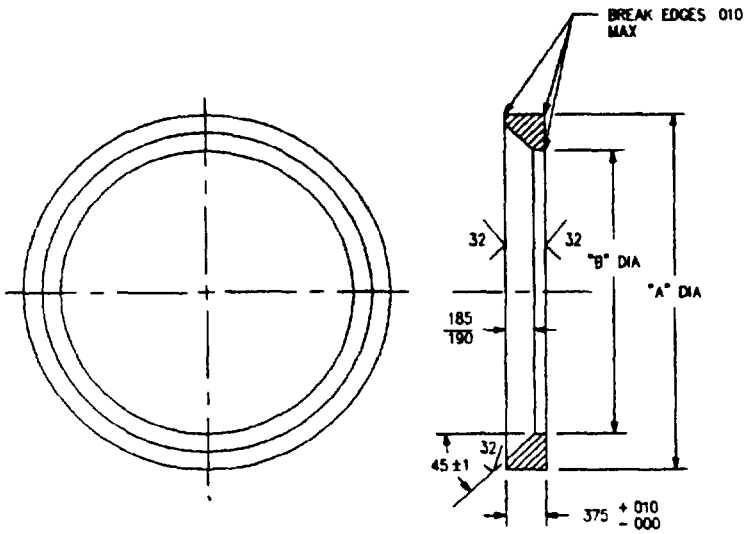


MATERIAL: CORROSION-RESISTING STEEL, TYPE 304 OF QQ-S-763

	TABLE OF DIMENSIONS			
	PART NO	PIN SIZE & QTY	DIA "A"	DIA "B"
*	M22249/32-12	19-#16	3	2.392/2.395
*	M22249/32-11	12-#16	2-3/4	2.142/2.145
*	M22249/32-10	6-#16	2-3/8	1.767/1.770
	M22249/32-9	3-#16	1-7/8	1.267/1.270

NOTE
* NOT PART OF /32 ASSEMBLY
TOLERANCE ON DIA "A" +.010 -.020

FIGURE 5 Seal ring M22249/32-9,10,11,12. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

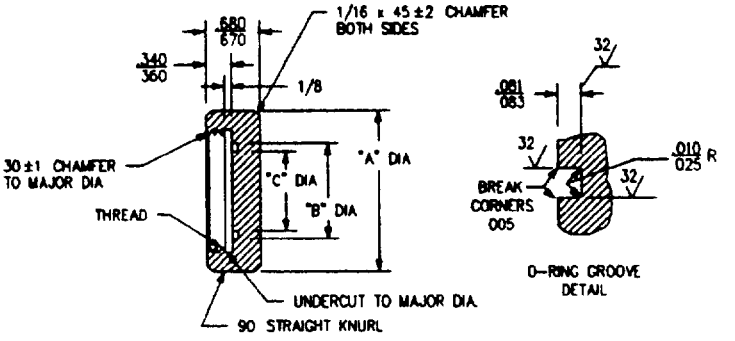

125 MAX. EXCEPT AS SHOWN

TABLE OF DIMENSIONS					
PART NO	PIN SIZE & QTY	DIA "A"	DIA "B"	DIA "C"	THREAD
M22249/32-13	3 #16	1.625 / 1.605	1-1/8	.813 +.005 -.001	1.250-12UN-2B
* M22249/32-14	6 #16	2.010 / 1.990	1-5/8	1.320 +.005 -.001	1.750-12UN-2B
* M22249/32-15	12 #16	2.385 / 2.365	1-7/8	1.570 +.005 -.001	2.125-12UN-2B
* M22249/32-16	19 #16	2.695 / 2.675	2-1/4	1.940 +.005 -.001	2.375-12UNF-2B

NOTE
* NOT PART OF /32 ASSEMBLY

MATERIAL STYRENE A.B.S. (CYCOLAC OR KRALASTIC)
OR DELRIN IF MACHINED FROM BARSTOCK
ALTERNATE MAT'L AL 2024 T 351 PER
QQ-A-225/6 CLEAR ANODIZED PER MIL-A-8625

FIGURE 6 Protective cover M22249/32-13,14,15,16 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Header assembly, 3-pin			Figure 1
02	Header, body	1	CRES/Class 316 QQ-S-763	Figure 2
03	O-ring	1	MS28775-220	
04	O-ring	1	MS28775-218	
05	Ring, seal	1	CRES/Type 304 QQ-S-763	Figure 5
06	Nut, locking	1	Manganese bronze, QQ-B-728	Figure 4
07	O-ring	2	MS28775-114	
08	O-ring	2	MS28775-117	
09	Cover, protective	2	M22249/32-16	Figure 6

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity
Navy - SH
(Project 5935-N278-32)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.