
INCH-POUND
MIL-C-22249/34C(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/34B(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 19-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

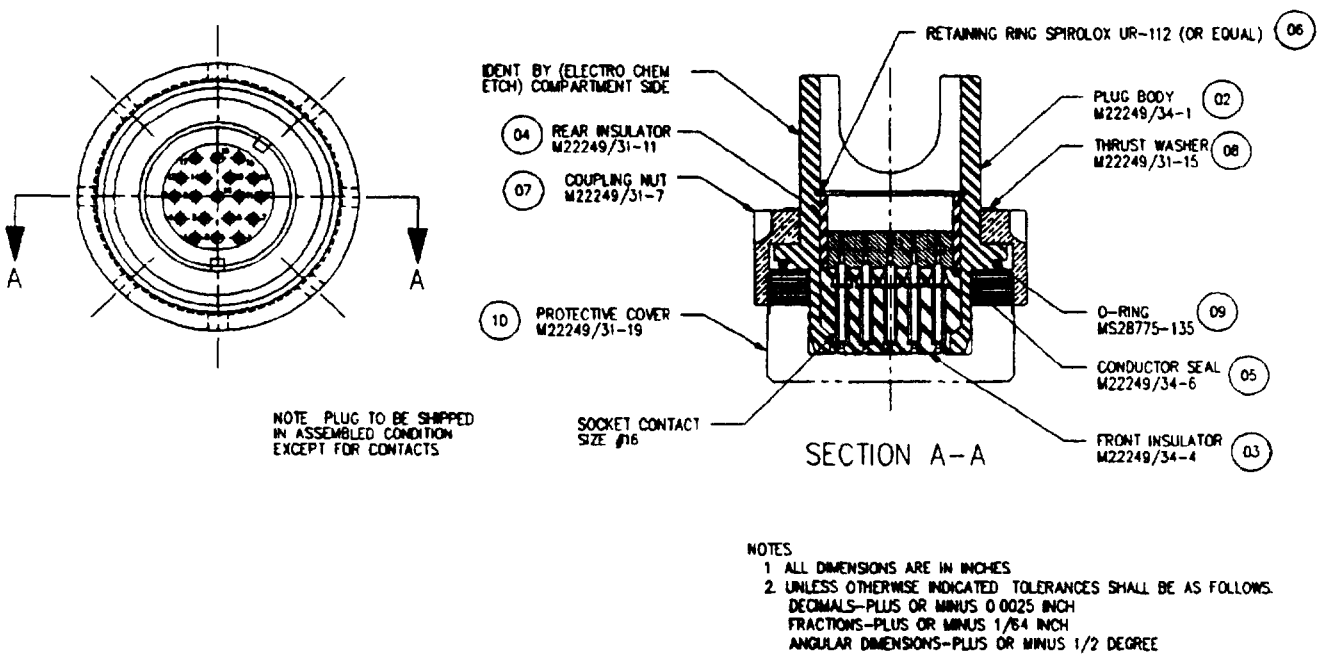

NOTES
1. ALL DIMENSIONS ARE IN INCHES
2. UNLESS OTHERWISE INDICATED TOLERANCES SHALL BE AS FOLLOWS.
   DECIMALS-PLUS OR MINUS 0.0025 INCH
   FRACTIONS-PLUS OR MINUS 1/64 INCH
   ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE

FIGURE 1 Plug assembly, 19-pin, compartment side. 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.


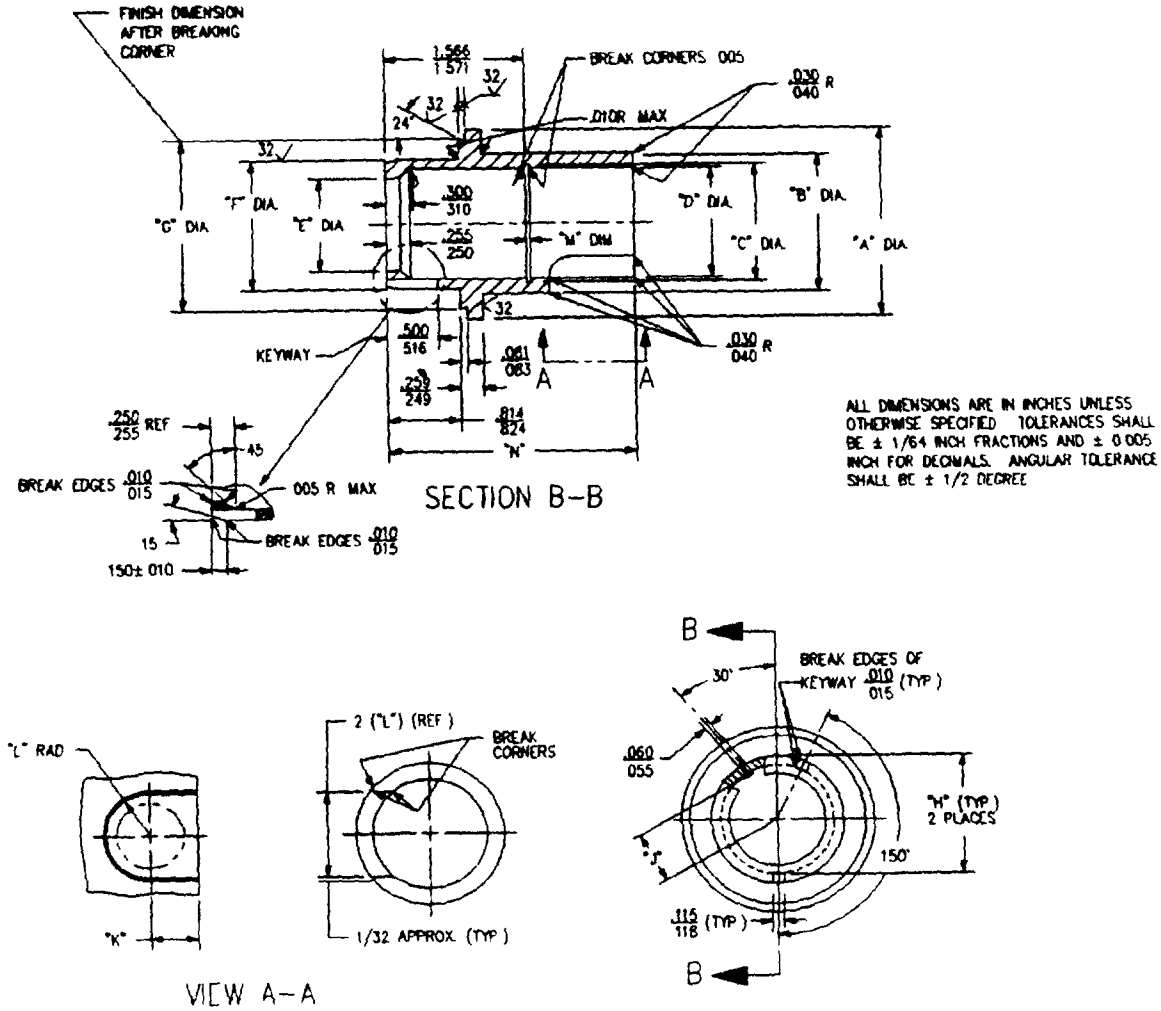


TABLE OF DIMENSIONS														
PART NO	PIN SIZE & QUANT.	DIM-A	DIM-B	DIM-C	DIM-D	DIM-E	DIM-F	DIM-G	DIM-H	DIM-J	DIM-K	RAD-L	DIM-M	DIM-N
M22249/34-1	19-#16	2.186 / 2.181	1.647 / 1.632	1.290 / 1.298	1.260 / 1.265	1.076 / 1.080	1.513 / 1.510	1.975 / 1.970	1.422 / 1.417	.604 / .609	.500 / .510	.500 / .505	.031 / .033	3.020 / 3.000
• M22249/34-2	12-#16	2.000 / 1.995	1.502 / 1.492	1.165 / 1.173	1.136 / 1.156	.954 / .958	1.308 / 1.307	1.770 / 1.773	1.219 / 1.212	.540 / .545	.437 / .447	.437 / .442	.031 / .033	2.770 / 2.750
• M22249/34-3	6-#16	1.627 / 1.622	1.187 / 1.177	.914 / .920	.874 / .876	.750 / .754	1.058 / 1.057	1.413 / 1.408	.963 / .960	.404 / .409	.375 / .385	.375 / .380	.026 / .028	2.770 / 2.750

• NOTE NOT PART OF /134 ASSEMBLY

FIGURE 2 Plug body M22249/34-1. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

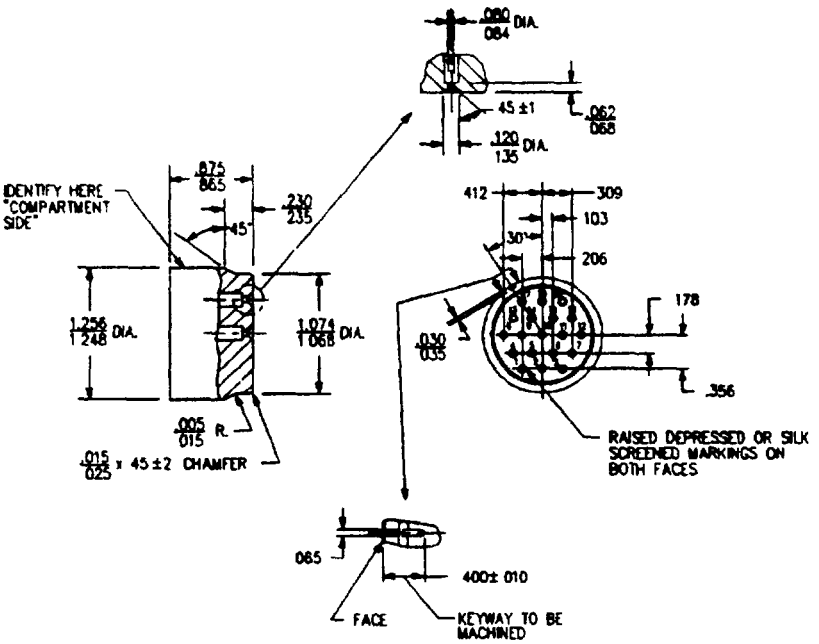

MATERIAL INSULATOR TO BE MOLDED FROM DYALLYL PHTHALATE IN ACCORDANCE WITH MIL-M-14

NOTE SOCKET CONTACTS TO BE FURNISHED WITH INSULATOR BUT NOT IN PLACE

FIGURE 3. Front insulator M22249/34-4. (03)

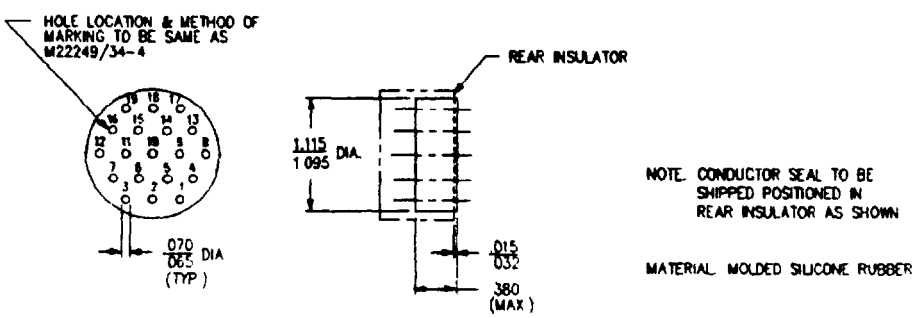


FIGURE 4. Conductor seal grommet M22249/34-6 (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 19-pin, compartment side			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 2
03	Insulator, front	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 3
04	Insulator, rear	1	M22249/31-11	
05	Seal, conductor	1	Silicone rubber, Class 2b, ZZ-R-765, Shore durometer hardness 40±5	Figure 4
06	Ring, retaining	1	Spirolox UR-125 (or equal)	
07	Nut, coupling	1	M22249/31-7	
08	Washer, thrust	1	M22249/31-15	
09	O-ring	1	MS28775-135	
10	Cover, protective	1	M22249/31-19	

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity:
Navy - SH
(Project 5935-N278-34)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.