
MIL-C-22249/36B(SH)
15 August 1977
SUPERSEDING
MIL-C-22249/36A(SH)
9 August 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY 19-PIN, MISSILE SIDE

(B) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

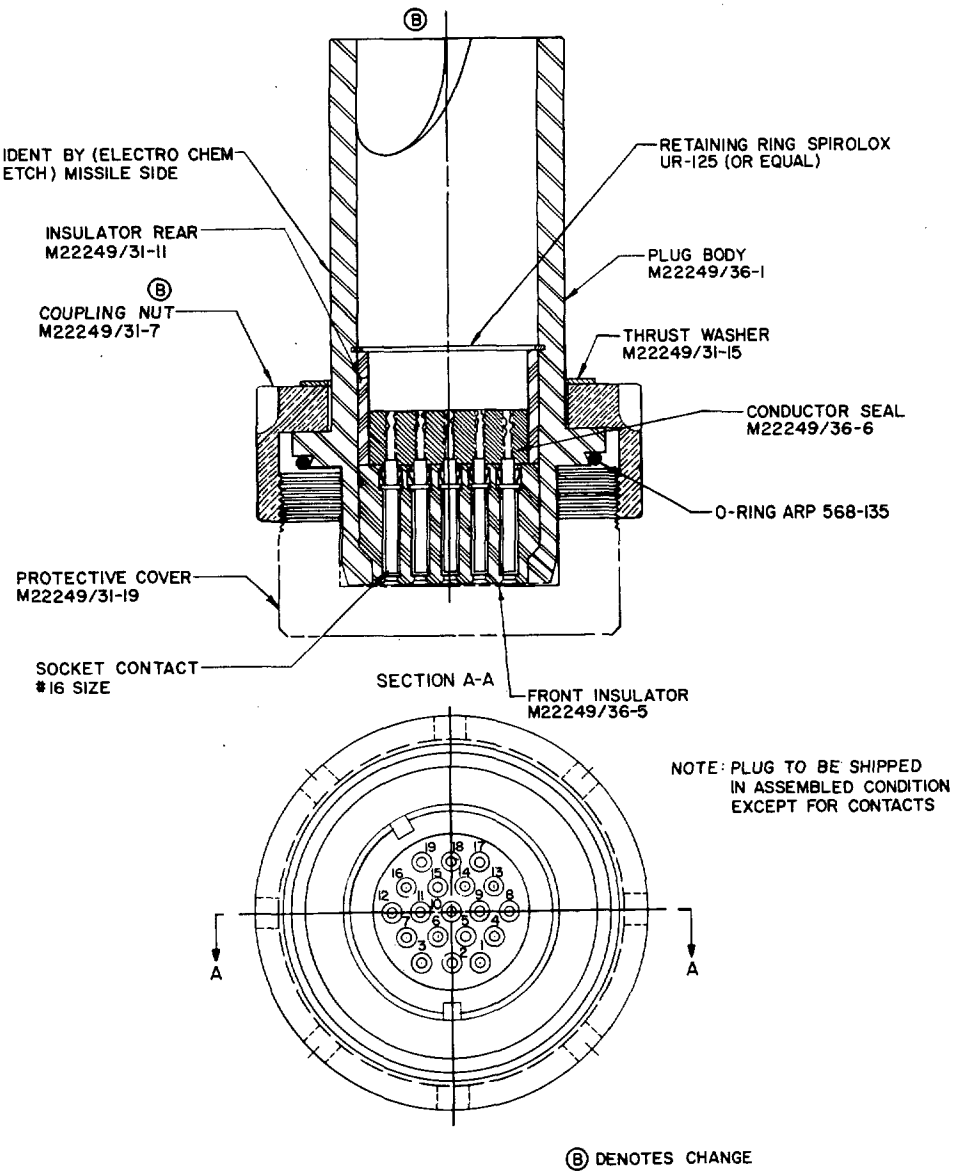


(B) DENOTES CHANGE

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

PLUG BODY
MISSILE SIDE

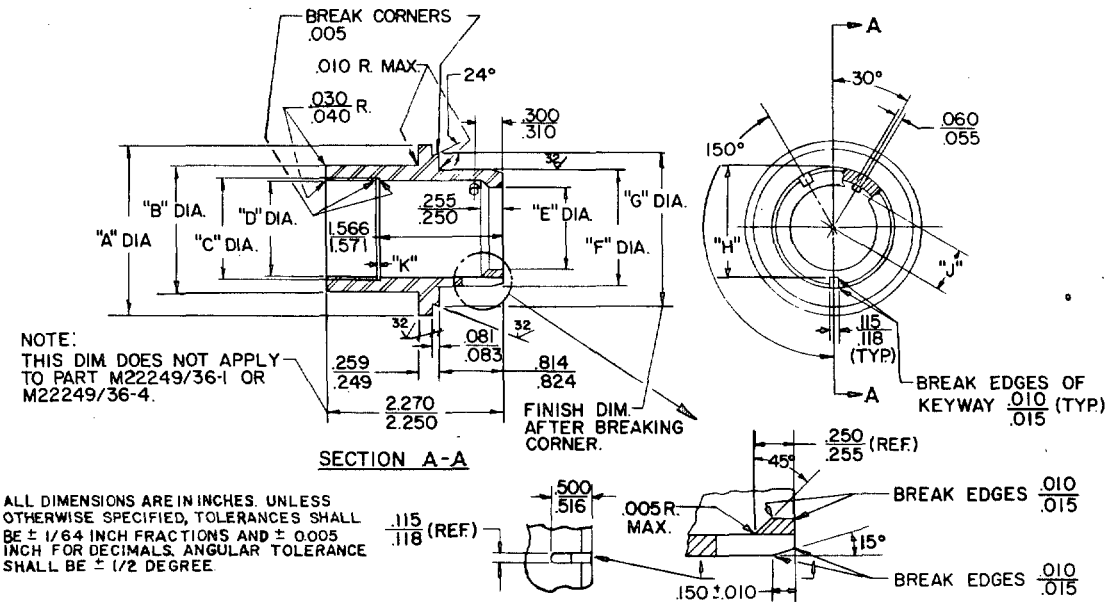

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.


TABLE OF DIMENSIONS

	PART NO.	PIN SIZE & QUANTITY	DIA. "A"	DIA. "B"	DIA. "C"	DIA. "D"	DIA. "E"	DIA. "F"	DIA. "G"	DIM. "H"	DIM. "J"	DIM. "K"
	M22249/36-1	19-#16	2.186/2.181	1.642/1.632	1.290/1.298	1.260/1.265	1.076/1.080	1.513/1.510	1.975/1.970	1.422/1.417	.604/.609	.031/.033
*	M22249/36-2	12-#16	2.000/1.995	1.502/1.492	1.165/1.173	1.136/1.138	.954/.958	1.308/1.307	1.778/1.773	1.219/1.212	.540/.545	.031/.033
*	M22249/36-3	6-#16	1.627/1.622	1.187/1.177	.914/.920	.874/.876	.750/.754	1.058/1.057	1.413/1.408	.963/.960	.404/.409	.026/.028
*	M22249/36-4	6-#16	1.627/1.622	1.187/1.177	.914/.920	.874/.876	.750/.754	1.058/1.057	1.413/1.408	.963/.960	.404/.409	.026/.028


* NOTE:
NOT PART OF /36 ASSEMBLY.

NOTE:
ALL ABOVE DETAILS APPLY EXCEPT AS NOTED BELOW.

PLUG BODY
M22249/36-4

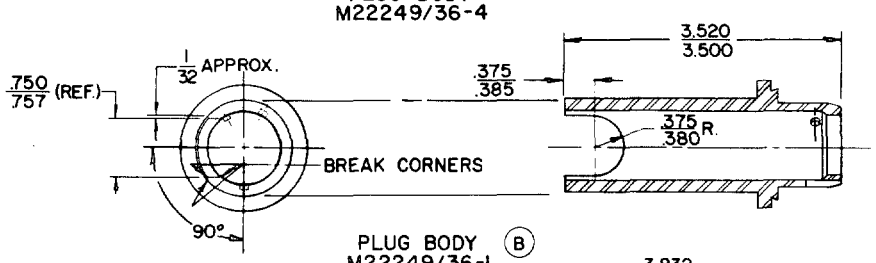


PLUG BODY (B)
M22249/36-1

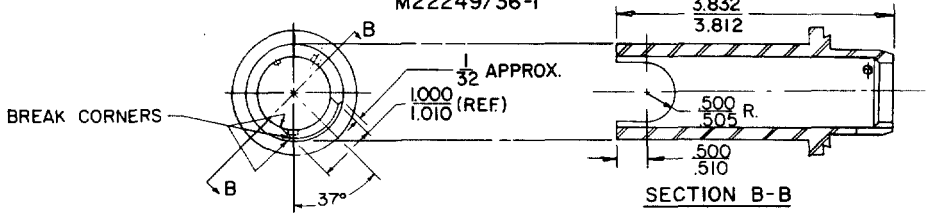

SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

FRONT INSULATOR
M22249/36-5

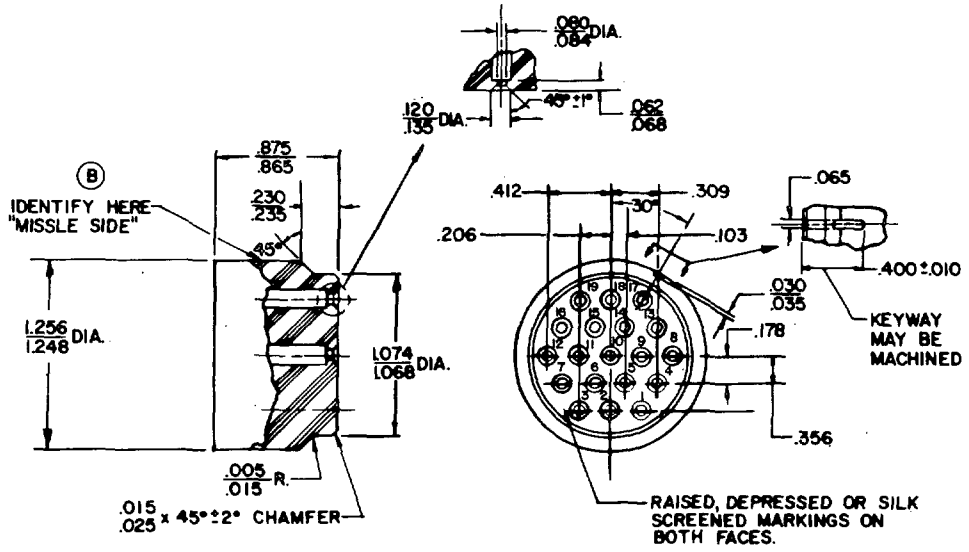


MATERIAL: INSULATOR TO BE MOLDED FROM DYALLYL PHTHALATE IN ACCORDANCE WITH MIL-C-22249

NOTE:
SOCKET CONTACTS TO BE FURNISHED WITH INSULATOR BUT NOT IN PLACE.

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ± 1/64 INCH FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ± 1/2 DEGREE.

CONDUCTOR SEAL GROMMET
M22249/36-6

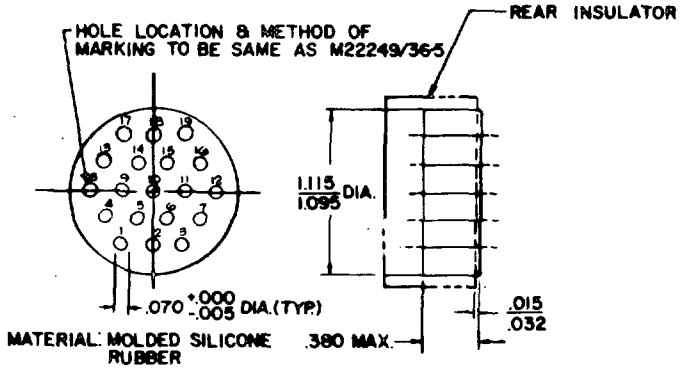

MATERIAL: MOLDED SILICONE RUBBER

NOTE:
CONDUCTOR SEAL TO BE SHIPPED POSITIONED IN REAR INSULATOR AS SHOWN.

Preparing activity:
Navy-SH
(Project 5935-N069-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.