INCH-POUND
MIL-C-22249/36C(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/36B(SH)
15 August 1977

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 19-PIN, MISSILE SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

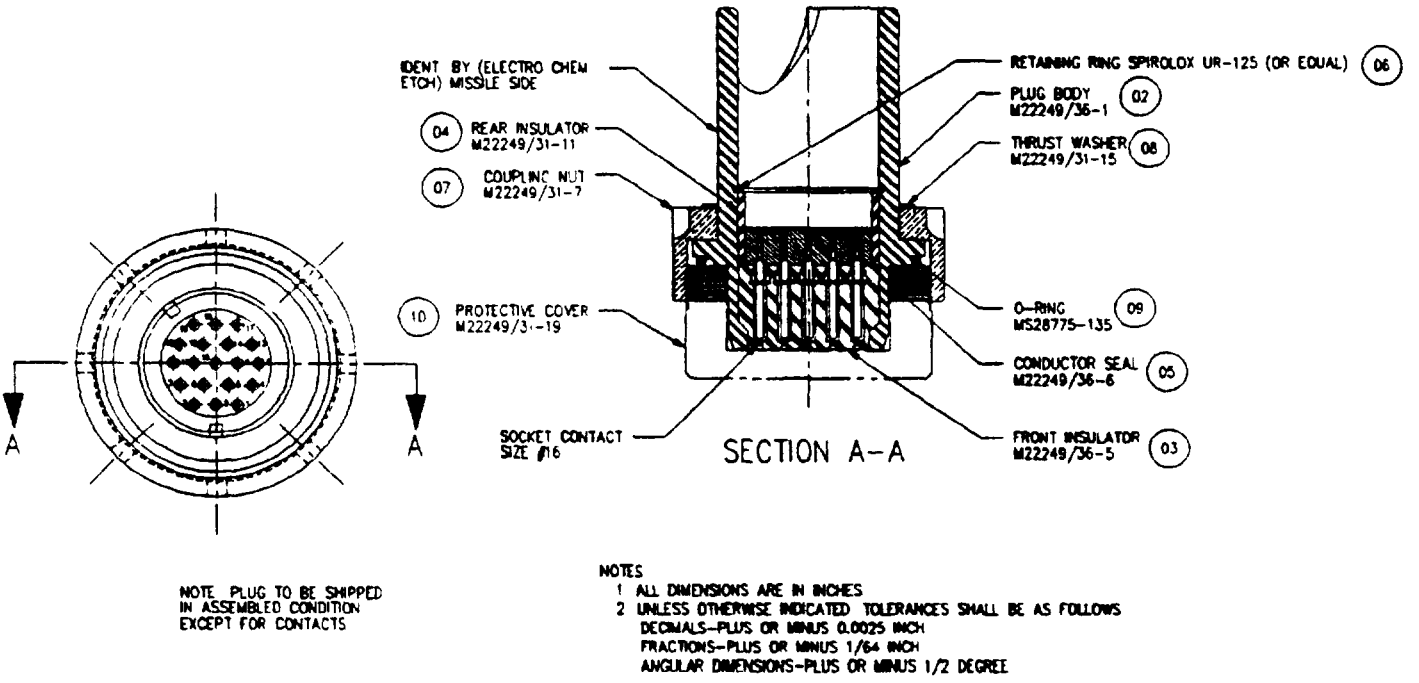


FIGURE 1 Plug assembly, 19-pin, missile side. 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.


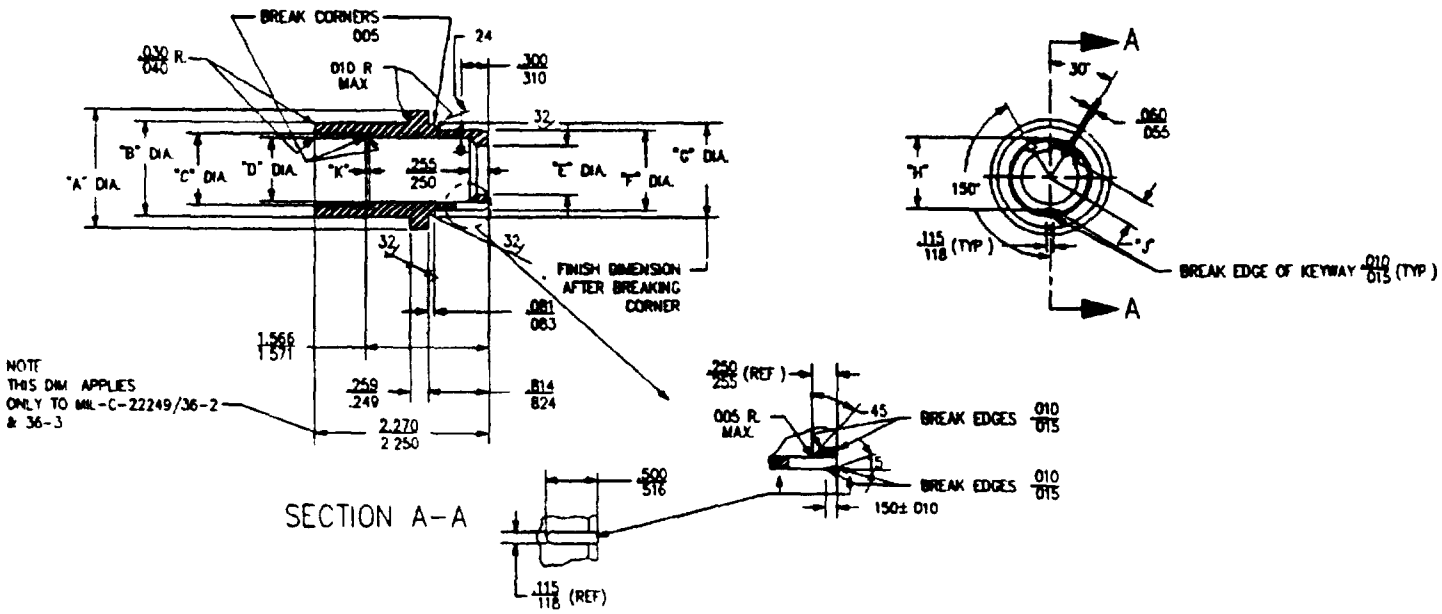


TABLE OF DIMENSIONS												
	PART NO	PIN SIZE & QUANT	DIA "A"	DIA "B"	DIA "C"	DIA "D"	DIA "E"	DIA "F"	DIA "G"	DIM "H"	DIM "J"	DIM "K"
	M22249/36-1	19-#16	2.186 2.181	1.642 1.632	1.290 1.298	1.260 1.265	1.076 1.080	1.513 1.510	1.975 1.970	1.422 1.417	.604 .609	.031 .033
*	M22249/36-2	12-#16	2.000 1.995	1.502 1.492	1.165 1.173	1.136 1.138	.954 .958	1.308 1.307	1.778 1.773	1.219 1.212	.540 .545	.031 .033
*	M22249/36-3	6-#16	1.627 1.622	1.187 1.177	.914 .920	.874 .876	.750 .754	1.058 1.057	1.413 1.408	.963 .960	.404 .409	.026 .028
*	M22249/36-4	6-#16	1.627 1.622	1.187 1.177	.914 .920	.874 .876	.750 .754	1.058 1.057	1.413 1.408	.963 .960	.404 .409	.026 .028
*	M22249/36-5	6-#16	1.627 1.622	1.187 1.177	.914 .920	.874 .876	.750 .754	1.058 1.057	1.413 1.408	.963 .960	.404 .409	.026 .028
*	M22249/36-6	12-#16	2.000 1.995	1.502 1.492	1.165 1.173	1.136 1.138	.954 .958	1.308 1.307	1.778 1.773	1.219 1.212	.540 .545	.031 .033

* NOTE
NOT PART OF /36 ASSEMBLY

FIGURE 2. Plug body (missile side). (02)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

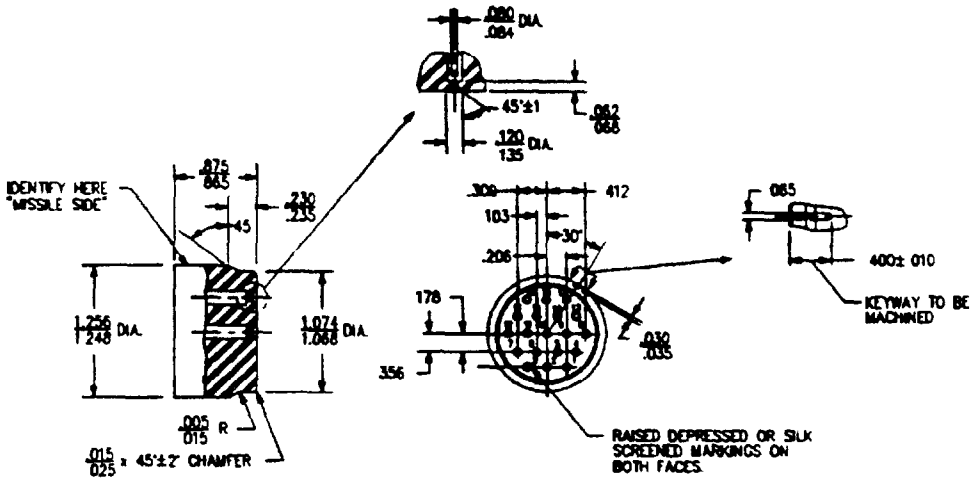

MATERIAL: INSULATOR TO BE MOLDED FROM DYALLYL PHTHALATE IN ACCORDANCE WITH MIL-M-14

NOTE: SOCKET CONTACTS TO BE FURNISHED WITH INSULATOR BUT NOT IN PLACE.

FIGURE 3 Front insulator M22249/36-5. (03)

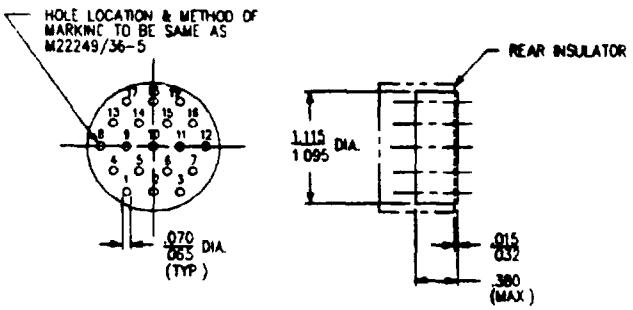

MATERIAL: MOLDED SILICONE RUBBER

NOTE: CONDUCTOR SEAL TO BE SHIPPED POSITIONED IN REAR INSULATOR AS SHOWN

FIGURE 4. Conductor seal grommet M22249/36-6. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

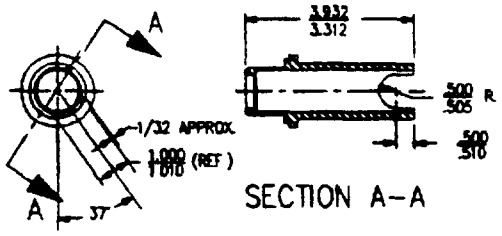


FIGURE 5. Plug body M22249/36-1. (02)

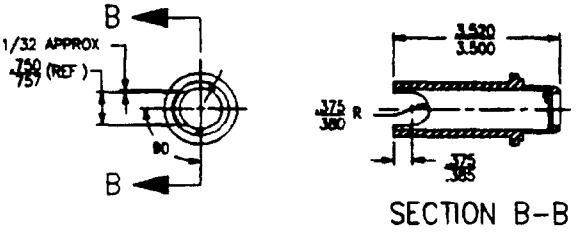


FIGURE 6. Plug body M22249/36-4. (02)

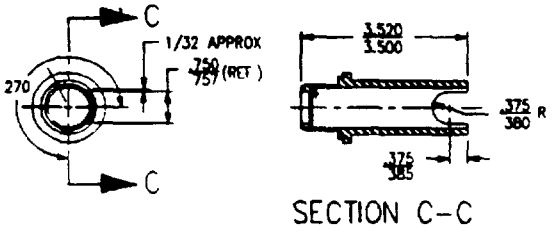


FIGURE 7. Plug body M22249/36-5. (03)

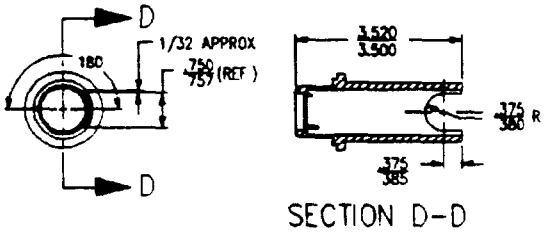


FIGURE 8. Plug body M22249/36-6. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 19-pin, missile side			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 2
03	Insulator, front	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 3
04	Insulator, rear	1	M22249/31-11	
05	Seal, conductor	1	Silicone rubber, Class 2b, ZZ-R-765, Shore durometer hardness 40±5	Figure 4
06	Ring, retaining	1	Spirolox UR-125 (or equal)	
07	Nut, coupling		M22249/31-7	
08	Washer, thrust	1	M22249/31-15	
09	O-ring	1	MS28775-135	
10	Cover, protective	1	M22249/31-19	

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-36)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:40Z
Check the source to verify that this is the current version before use.