MIL-C-22249/39A(SH)
15 August 1977


SUPERSEDING
MIL-C-22249/39(SH)
19 April 1968


MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 12-PIN, COMPARTMENT SIDE

(A) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector sets described herein shall consist of this document and the latest issue of MIL-C-22249(SH).

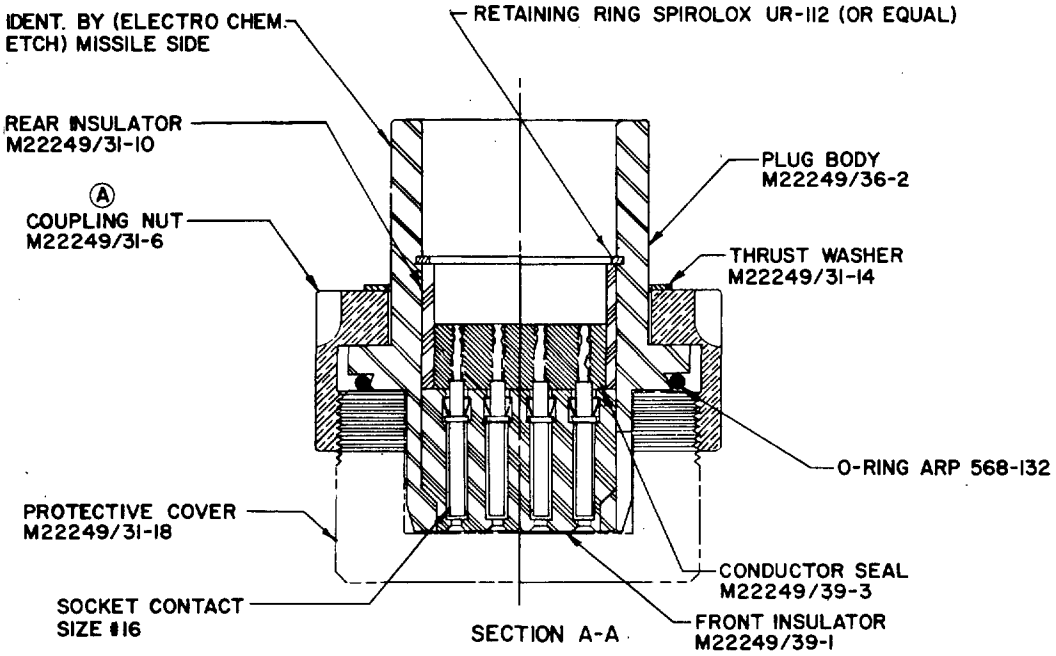

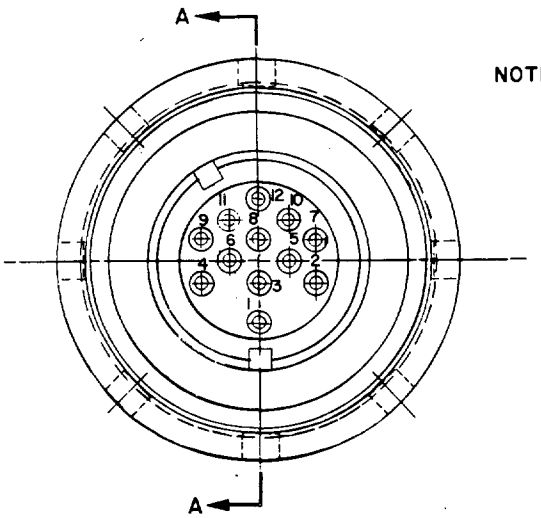


NOTE: PLUG TO BE SHIPPED IN ASSEMBLED CONDITION EXCEPT FOR CONTACTS

(A) DENOTES CHANGES

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:41Z
Check the source to verify that this is the current version before use.

FRONT INSULATOR
M22249/39-1

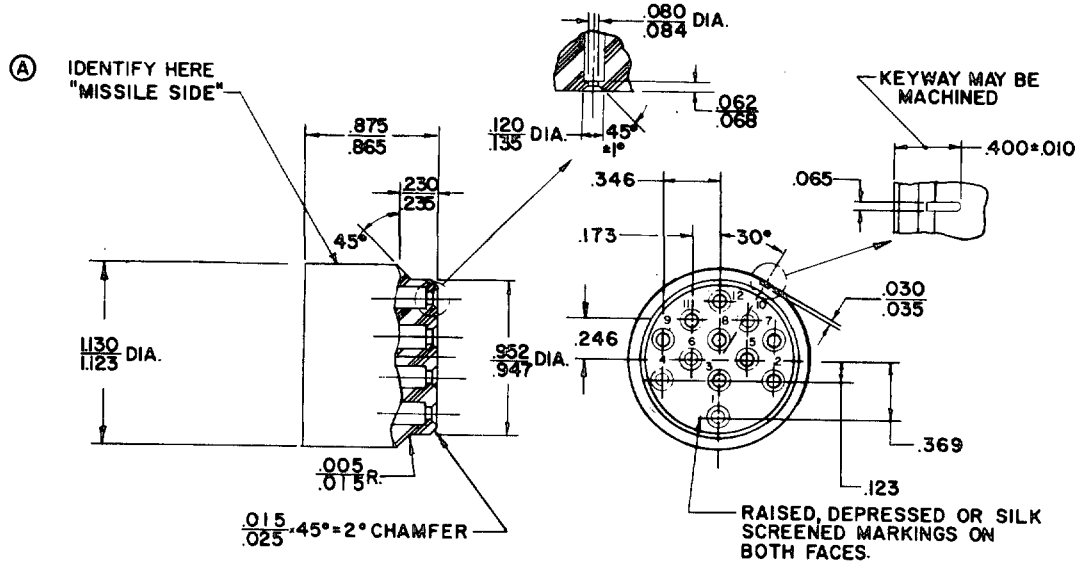


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE ±1/64 INCH FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE SHALL BE ±1/2 DEGREE.

NOTE: SOCKET CONTACTS TO BE FURNISHED WITH INSULATOR BUT NOT IN PLACE.

MATERIAL: INSULATOR TO BE MOLDED FROM DYALLYL PHTHALATE IN ACCORDANCE WITH MIL-C-22249.

CONDUCTOR SEAL GROMMET
M22249/39-3

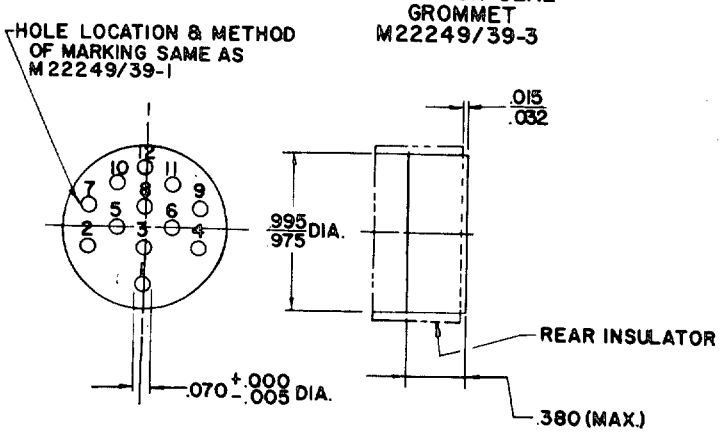

NOTE: CONDUCTOR SEAL TO BE SHIPPED POSITION IN REAR INSULATOR AS SHOWN.

Preparing activity:
Navy-SH
(Project 5935-N069-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:41Z
Check the source to verify that this is the current version before use.