MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 208-PIN, COMPARTMENT SIDE, THREE-CABLE TYPE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).


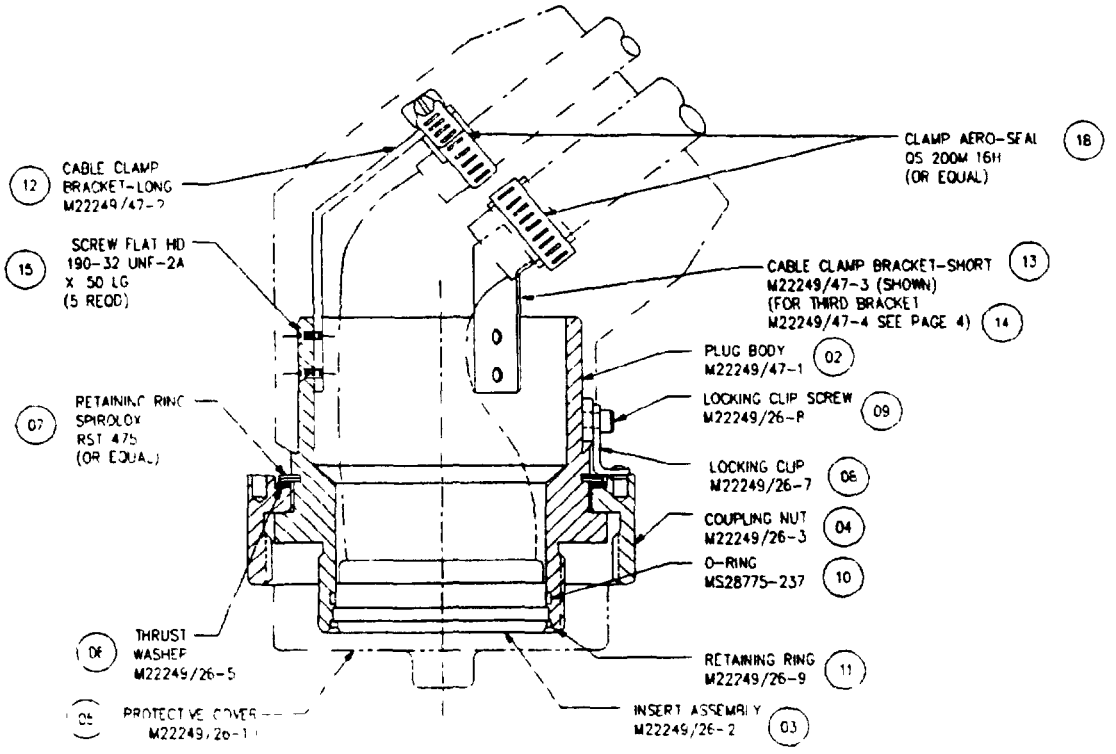


FIGURE 1. Plug assembly, compartment side, 208-pin, three-cable type (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

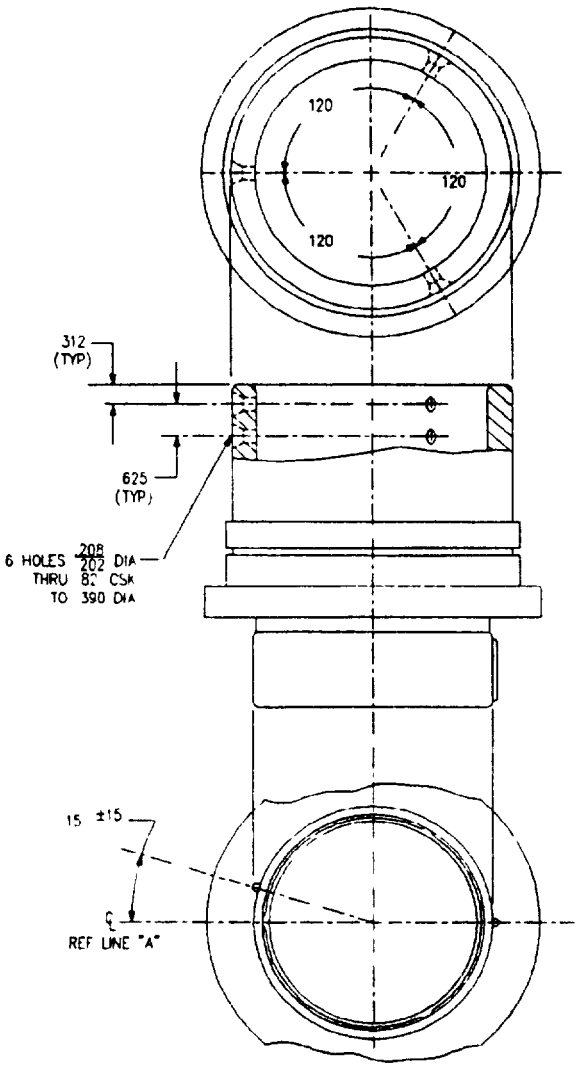


NOTE FOR ALL OTHER DIMENSIONS SEE M22249/26-1, EXCEPT "U" SHAPED CABLE CUTOUT IS DELETED FROM M22249/47-1

FIGURE 2 Plug body M22249/47-1 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

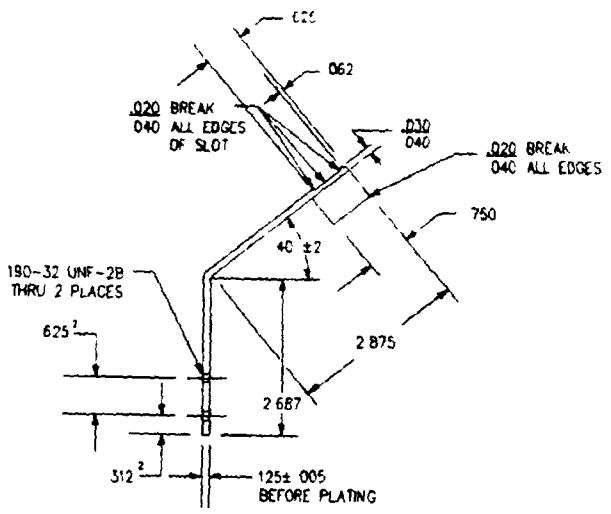

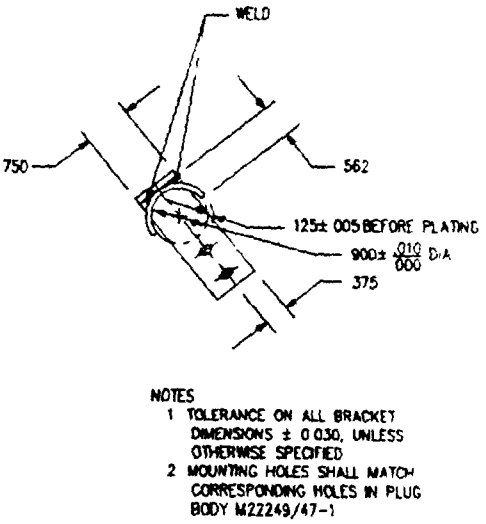

NOTES
1 TOLERANCE ON ALL BRACKET DIMENSIONS ± 0.030, UNLESS OTHERWISE SPECIFIED
2 MOUNTING HOLES SHALL MATCH CORRESPONDING HOLES IN PLUG BODY M22249/47-1

FIGURE 3. Cable clamp bracket (long) M22249/47-2. (12)

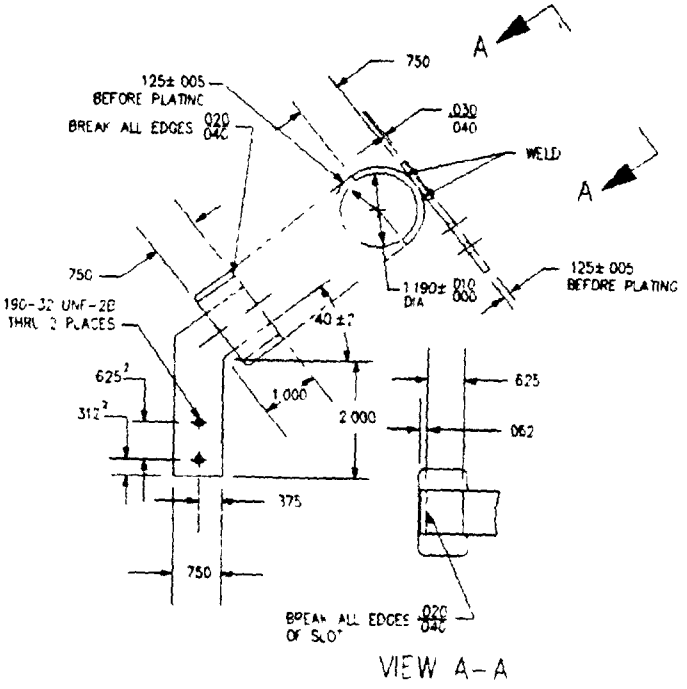


FIGURE 4 Cable clamp bracket (short) M22249/47-3. (13)

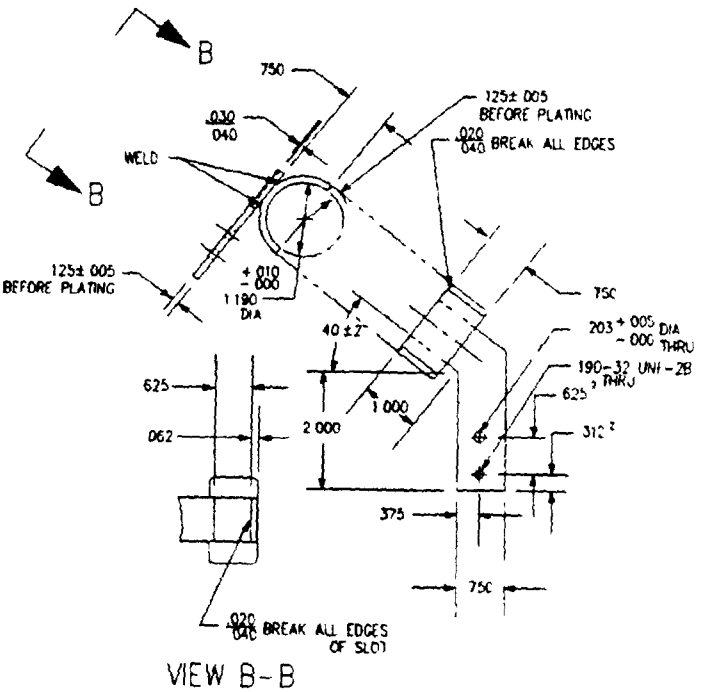


FIGURE 5. Cable clamp bracket (short) M22249/47-4 (14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

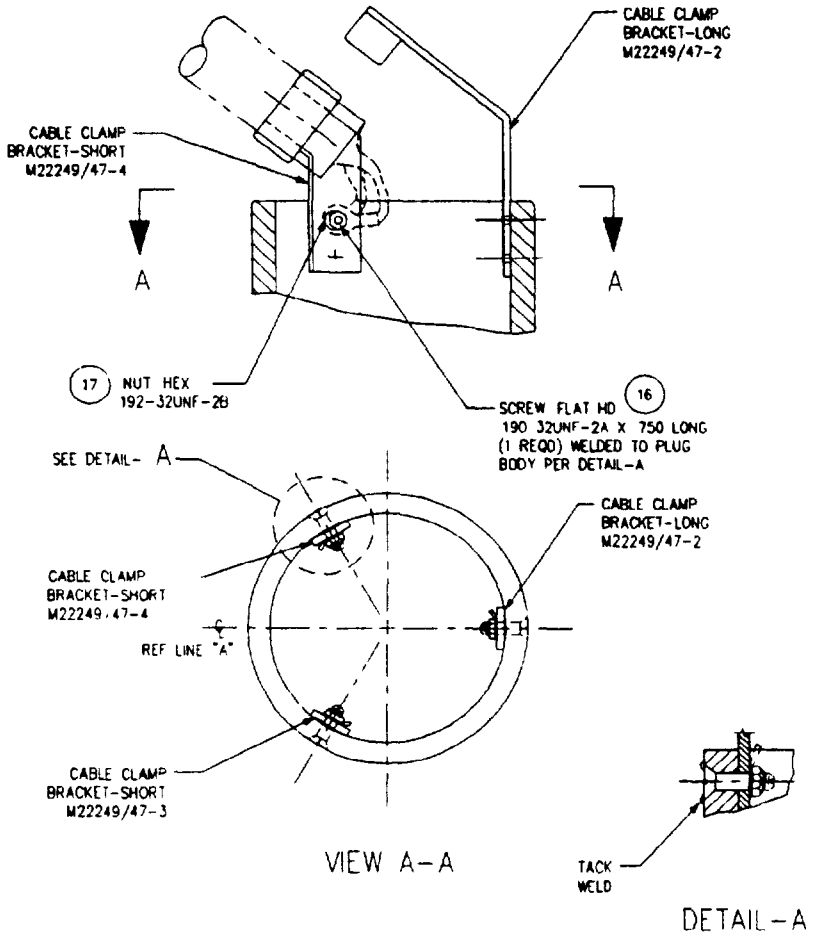


FIGURE 6. Partial assembly view showing cable shield terminal and cable clamp bracket locations

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

TABLE I Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, compart -ment side, 208-pin, three-cable type			Figure 1
02	Plug body	1	CRES/Class 316 of QQ-S-763	Figure 2
03	Insert assembly	1	M22249/26-2	
04	Nut, coupling	1	M22249/26-3	
05	Cover, protective	1	M22249/26-10	
06	Thrust, washer coupling nut	1	M22249/26-5	
07	Retaining ring, coupling nut	1	Spirolox RST-475	
08	Locking clip, coupling nut	1	M22249/26-7	
09	Screw, locking clip	1	M22249/26-8	
10	O-ring, insert	1	MS28775-237	
11	Retaining ring, insert assembly	1	M22249/26-9	
12	Clamp, cable bracket long	1	Steel, QQ-S-698 Cadmium plate of QQ-P-416	Figure 3
13	Clamp, cable bracket short	1	Steel, QQ-S-698 Cadmium plate of QQ-P-416	Figure 4
14	Clamp, cable bracket short	1	Steel, QQ-S-698 Cadmium plate of QQ-P-416	Figure 5
15	Screw, flathead 80° 0.190-32UNF-2A x 0 50 long	5	CRES/Class 302-to-305 QQ-S-763	Two each with items 12 and 13, one used with item 14
16	Screw, flathead 80° 0.190-UNF-2A x 0 750 long	1	CRES/Class 302 to 305 QQ-S-763	For terminal lug of cable shield
17	Nut, hex, self-locking, 0 19C-32UNF-2B	1	CRES/Class 302 to 305 QQ-S-763	Use with item 16, see MIL-C-22249/4
18	Clamp	3	Aero seal, QS 200M 16H (or equal)	Figure 1

See footnotes on next page

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.

[1]Item numbers are the same as shown on figures
[2]See applicable figures listed in Remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size.

Preparing activity:
Navy - SH
(Project 5935-N278-47)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:42Z
Check the source to verify that this is the current version before use.