MIL-L-22252B
9 December 1975
Superseding
MIL-L-22252A(ASG)
7 June 1963

MILITARY SPECIFICATION

LIGHT, MARKER, RUNWAY CIRCLING

This specification has been approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of steady-burning white light for installation outside standard runway-marker lights, designed to provide additional off-runway light to aid circling aircraft.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

| | |
|---|---|
| TT-S-1732 | Sealing Compound; Pipe Joint and Thread, Lead Free, General Purpose |
| PPP-B-601 | Boxes, Wood, Cleated - Plywood |
| PPP-B-636 | Box, Shipping, Fiber Board |

Military

| | |
|---|---|
| MIL-P-116 | Preservation, Methods of |
| MIL-D-1000 | Drawing, Engineering and Associated List |
| MIL-S-7742 | Screw Threads, Standard, Optimum Selected Series: General Specification for |

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MIL-C-7989 | Covers, Light-Transmitting, for Aeronautical Lights, General Specification for |
| MIL-C-25050 | Colors, Aeronautical Lights and Lighting Equipment, General Requirements for |

STANDARDS

Federal

| | |
|---|---|
| Fed. Std. No. 595 | Colors |

Military

| | |
|---|---|
| MIL-STD-129 | Marking for Shipping and Storage |
| MIL-STD-130 | Identification Marking of US Military Property |
| MIL-STD-143 | Specifications and Standards, Order of Precedence for the Selection of |
| MIL-STD-810 | Environmental Test Methods |
| MIL-STD-831 | Test Reports, Preparation of |
| MIL-STD-889 | Dissimilar Metals |
| MS17814 | Coupling, Frangible, Aviation Ground Lights |
| MS24321 | Lamp, Incandescent - T-20 Bulb, Medium Bipost Base |

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Federal Aviation Agency

| | |
|---|---|
| L-823 | Plug and Receptacle, Cable Connectors |

(Application for copies should be addressed to Federal Aviation Agency, Washington, DC 20591.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First Article Inspection.- The light furnished under this specification shall be a product which has been tested and has passed the first article inspection tests specified herein.

3.2 Materials.- Materials shall conform to applicable specifications and shall be as specified herein. Materials for which there are no applicable specifications, or which are not specifically described herein, shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.2.1 Metals.- Metals shall be of the corrosion-resistant type or shall be suitably protected to resist corrosion. The use of dissimilar metals shall be avoided whenever practicable or used in accordance with MIL-STD-889. The use of magnesium or any alloy thereof is prohibited.

3.2.2 Protective treatment.- Materials used in the construction of the marker light that are subject to corrosion in oxygen, salt air, or other atmospheric conditions likely to occur during service usage, shall be protected against such corrosion in a manner that will in no way prevent conformance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.

3.3 Selection of Government documents.- Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with Standard MIL-STD-143.

3.3.1 Use of commercial parts.- Bolts, nuts, washers, cottor pins, lock rings, and similar fastening devices used for assembly, may be selected from commercial sources, provided military or other standard parts are not specifically called out by this specification or associated standards. If such commercial parts are used, they shall possess suitable properties and shall be replaceable by military standard parts without alteration, and provided the corresponding military standard part numbers are referenced in the parts list, and, if practicable, on the contractor's drawings.

3.4 Design and construction.- The light shall be so designed and constructed that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service. The light shall be so constructed that adjustments and repairs can be



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

easily made by the personnel of operating units and overhaul bases with a minimum of training with tools normally available commercially. The light shall be designed in such manner that weight is held to the minimum, consistent with the necessary strength and rigidity. The design of the light shall be such that no ventilation is required, condensation upon the lens is minimized, and drainage is provided to prevent accumulation of condensation. The exact shape and design are optional provided the light conforms to all requirements specified herein.

3.4.1 Components.- The light shall consist of the following major components: lens, socket, lamp housing, cord, and shield if required.

3.4.2 Design conditions.- All lights shall be designed for continuous outdoor operation.

3.4.3 Focus.- The entire optical system shall be of the fixed prefocus type, requiring no focusing at installation or in service.

3.4.4 Lens.- The lens shall be of one-piece glass construction, and shall utilize both internal and external prisms. The lower portion of the lens shall be in accordance with figure 1, except that the three indexing slots need not run completely through the mounting flange as shown, but may extend up into the flange a minimum of 7/32 inch from the bottom. The lens shall be marked on the top surface with an arrow and the lettering RUNWAY SIDE, as indicated. The glass shall be aviation white, class B, heat-resistant in accordance with Specifications MIL-C-7989 and MIL-C-25050.

3.4.4.1 Shield.- If the design of the light requires shielding to limit the light emitted on the runway side, a shield shall be provided and so fastened to the housing that its adjusted position will not be disturbed during installation and operation of the light.

3.4.5 Lamp.- The light shall be designated to utilize a 500W, 20-amp, medium bipost lamp, Part No. MS24321-4. Unless otherwise specified, the lamp shall not be furnished with the light.

3.4.6 Socket.- A medium bipost socket, with a minimum rating of 500W, 20-amp, shall be securely mounted in the light. The socket shall hold the light center of the specified lamp at the specified focal point, with a maximum displacement of 1/16 inch, in any direction. All metal and nonmetal parts of the socket shall be suitable for continuous operation under the high temperatures that will exist, without any smoking, charring, scaling, loss of temper, binding of parts,



Source: https://assist.dla.mil -- Downloaded: 20260-19T11:43Z
Check the source to verify that this is the current version before use.

corrosion, or any other evidence of deterioration or failure. Metal parts shall be corrosion resistant. The socket shall be capable of accomodating all lamps manufactured within the specified lamp tolerances and capable of providing for normal expansion and contraction of lamp parts. Adequate and positive contacts shall be provided for the lamp pins, in order that no pitting or welding will occur.

3.4.6.1 The socket mounting bracket shall be cut away on at least two sides, in order that a screwdriver blade may be used to push slack cord down into the mounting tube during installation of the light.

3.4.7 Housing fixture.- The lens and socket shall be accurately positioned on a lightweight-aluminum fixture which shall consist of two separable sections. The upper portion shall hold the lens and shield (if used) and shall be readily separable from the lower portion for relamping by loosening one wing screw. Upper and lower portions of the housing shall be properly indexed to insure aiming within the required tolerances. The lens shall be secured to the upper portion of the fixture by four equally spaced spring clips conforming to figure 1. A 1/8-inch-thick silicone rubber gasket shall separate the lens and housing. Indexing devices shall be located on the fixture to engage the slots in the mounting flanges of the lens and shall be of sufficient size to limit the rotation of the lens to 1 degree, or less. The three devices which index the lens shall not extend up into the mounting flange slots more than 3/16 inch after the light is assembled.


3.4.7.1 Mounting.- The light shall be so designed that it may be mounted on a frangible coupling conforming to Standard MS17814. When mounted, the coupling shall extend 2-1/8 ±1/8 inch into the light. Screws with round points shall be used for clamping the fixture on the coupling.

3.4.7.2 Horizontal adjustment.- Horizontal adjustment of the light to any desired azimuth shall be obtainable by rotating the light on the mounting coupling.


3.4.7.3 Vertical adjustment.- The lower portion of the fixture shall be designed to provide leveling of the light from any position of the mounting coupling not exceeding 4 degrees from the vertical. The leveling device shall be of the pivot type, adjustable from the top by four screws. The screws shall be of the round or fillister-head type, size 10 or larger, and the threads shall be treated with sealing compound conforming to TT-S-1732. The screw points shall be rounded.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

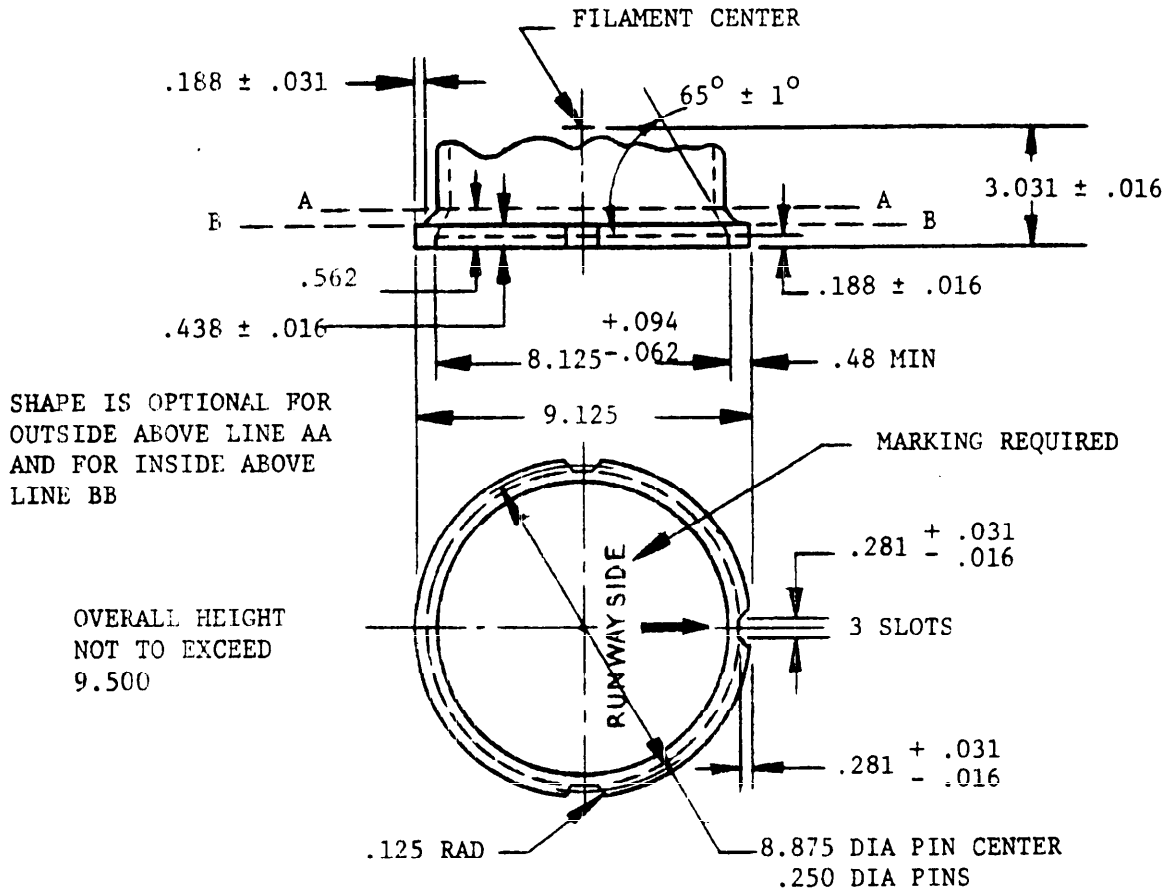


LENS PLAN VIEW

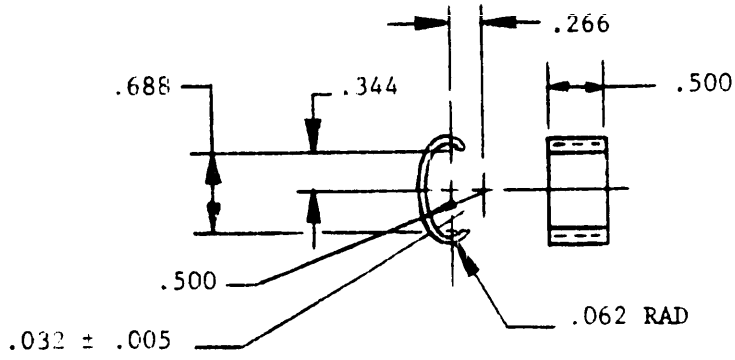


MATERIAL: AISI TYPE 414 OR 420

LENS MOUNTING CLIP

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS I.062

FIGURE 1. Lens and Lens Mounting Clip



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

3.4.7.4 Aiming.- The fixture shall provide a means for leveling and sighting, designed to insure aiming of the light with sufficient accuracy in order that the direction of the light beams will he in accordance with 3.5.1. The leveling device may be an accurately formed surface upon which a carpenter's level may be placed in two positions at right angles during installation. The sight may be any device or marks placed upon the light in such manner as to provide accurate aiming by sighting at the next lightin the row of circling guidance lights. Removal of the lens from the upper portion of the fixture shall not be required during the leveling and aiming procedure.

3.4.8 Cord.- The cord shall utilize two single leads each having a size 12 American wire gage (AWG) stranded, nickel-clad copper conductor and a suitable, high-temperature insulation. The temperature rating of the leads shall not be less than 343°C and the maximum outside diameter shall not exceed 3/16 inch. A two-pole, 600-volt plug, with pins and mating surfaces in accordance with the plug "(a.)" shown in the figure titled "Type 1. Plug and Receptacles. (Two Conductor, 20 Ampere, 600 Volts Between Contracts, 1500 Volts to Ground.)" of FAA Specification L-823 shall be molded on the lower end of the cord. The plug shall conform to the applicable construction, performance, and test requirements of FAA Specification L-823. Since contact losses, ambient temperatures, and lack of ventilation during normal service use may result in temperatures of approximately 149°C at the surface of the plug, the plug shall be molded from a suitable compound which will not deteriorate as such temperatures. The top ends of the leads shall be provided with high-temperature terminals, and shall be properly secured to the socket. The length shall be such that when the leads are hanging freely, the distance between the bottom of the assembly and the face of the plug will be 7±1/2 inches.

3.5 Performance.-

3.5.1 Photometric.- When tested as specified in 4.5.3, the light distribution shall be as follows: It shall be asymmetrical, with front and rear beams emitting approximately parallel to the runway. The light beams shall be visible from all points around and above the light. When the light has been properly aimed and leveled, and has operated at a rated lumen output so that all parts have reached normal operating temperatures, the elevation and toe-out angles of the beam axis shall be within 2° of the specified angles, and the light distribution shall be as specified herein. The 90° - 270° horizontal line shall be parallel to the runway centerline, and the 0° - 180° direction toward the runway side.

NOTE: The beam axis is defined here as the line midway between the angles at which the intensity is 6,000 candles.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

3.5.1.1 Optical design goals.- When tested as specified in 4.5.4, the optical design goal of the intensity distribution shall be as specified in table I.

3.5.1.1.1 The peak intensity of the main beam shall not exceed 20,000 candles.

3.5.1.1.2 The maximum intensity for the on-runway side shall not exceed the following candlepower values for the horizontal angles indicated at angles of 0 degree to 30 degrees above the horizontal:

| Horizontal angle (degrees) | Maximum candlepower |
|---|---|
| 300 to 60 | 100 |
| 280 to 300 and 60 to 80 | 200 |
| 270 to 280 and 80 to 90 | 500 |

3.5.1.1.3 The minimum intensity in all directions above the horizontal for which other minimums are not specified shall be 10 candlepower.

TABLE I. Intensity of light distribution

| Elevation angle (degrees) ±1 | Horizontal angle (degrees) ±1 | Minimum intensity (candles) |
|---|---|---|
| 2 to 8 | 95 to 100<br>260 to 265 | 2,000 |
| | 100 to 120<br>240 to 260 | 6,000 |
| | 120 to 240 | 4,000 |
| 0 to 2, and 8 to 12 | 95 to 100<br>260 to 265 | 1,000 |
| | 100 to 120<br>240 to 260 | 4,000 |
| | 120 to 240 | 2,000 |
| 12 to 20 | 95 to 265 | 400 |
| 20 to 60 | 95 to 265 | 100 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

3.5.1.2 Minimum acceptable requirements.- Minimum acceptable requirements for the light shall be as follows.

3.5.1.2.1 The runway-side maximums may be increased to the following candlepower values at the horizontal angle indicated:

| Horizontal angle (degrees) | Maximum candlepower |
|---|---|
| 300 to 60 | 200 |
| 280 to 300 and 60 to 80 | 400 |
| 270 to 280 and 80 to 90 | 1,000 |

3.5.1.2.2 Occasional dips below the minimum values specified in 3.5.1.1 will be permitted, provided the average value of any horizontal trace exceeds the applicable minimum value.

3.5.2 Operation.- When tested as specified in 4.5.2, the light shall operate satisfactorily and there shall be no evidence of blistering, smoking, or damage to any part of the light.

3.5.3 Environmental.-

3.5.3.1 High temperature.- When tested as specified in 4.5.5.1, there shall be no evidence of blistering, smoking, or heat damage to any part of the light.

3.5.3.2 Humidity.- When tested as specified in 4.5.5.2, there shall be no evidence of damage to the light.

3.5.3.3 Low temperature.- When tested as specified in 4.5.5.3, there shall be no evidence of damage to the light.

3.5.4 Rain.- When tested as specified in 4.5.5.4, there shall be no cracking of lens, breaking, or evidence of damage to the light.

3.5.5 Heat operation.- When tested as specified in 4.5.6, there shall be no blistering, smoking, charring, or other evidence of heat damage to any part of the light.

3.6 Interchangeability.- All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of MIL-D-1000 shall govern changes in the manufacturer's part numbers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

3.7 Threads.- Screw threads shall conform to class 2 of Specification MIL-S-7742.

3.8 Dimensions.- The overall height of the light shall be not more than 14 inches. The maximum horizontal dimension shall not exceed 10 inches.

3.9 Weight.- The weight of the light shall be not more than 14 pounds.

3.10 Finishes and protective coatings.- Unless fabricated from corrosion-resistant metal, all metal parts shall be suitably protected against corrosion. The outside of the housing shall be finished with aviation orange, color number 12197 of Federal Standard No. 595. All finishes used shall be suitable for the high-operating temperatures involved and shall not cause parts of the light to stick together.

3.11 Identification of product.- Equipment, assemblies, and parts shall be marked for identification in accordance with Standard MIL-STD-130, except that the serial number need not be utilized.

3.12 Workmanship.- The light, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, wiring, marking of parts and assemblies, welding and brazing, painting, riveting, machine-screw assemblies, and freedom of parts from burrs and sharp edges.

3.12.1 Cleaning.- The light shall be thoroughly cleaned, and loose, spattered or excess solder, metal chips, and other foreign material removed during and after final assembly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

Superseding

4.2 Classification of tests.- The inspection and testing of marker lights shall be classified as follows:

(a) First Article Inspection (4.3)
(b) Quality Conformance Inspection (4.4)

4.3 First Article Inspection

4.3.1 Sampling instructions.- Unless otherwise specified, as soon as practicable after award of contract or order and prior to submission of any complete units for final acceptance, the contractor shall furnish one marker light, for tests to determine conformance with this specification. The approval of the first article sample by the activity concerned shall not relieve the contractor of his obligation to supply equipment conforming to this specification. Any changes or deviations from the first article sample shall be approved by the contracting officer. The first article sample shall be accompanied by the contractor's drawings and shall be tested at a location specified by the procuring activity (see 6.2).

4.3.2 Manufacturer's drawings.- Manufacturer's drawings submitted with the preproduction test sample shall show a cutaway section showing all parts and their normal assembled position and shall specify part numbers of all parts and subassemblies. The drawings shall be in accordance with Specification MIL-D-1000.

4.3.3 Preproduction test report.- After the contractor completes the preproduction tests, he shall prepare a preproduction report in accordance with Specification MIL-T-9107 and furnish two complete copies to the procuring activity. The test report shall include the following:

(a) Report of all tests.
(b) Outline and description of tests and test conditions.

4.3.4 Tests.- First article inspection tests shall consist of all the tests specified under 4.5.

4.4 Acceptance tests.- Acceptance tests shall consist of individual tests and sampling tests (4.4.1 and 4.4.2, respectively).

4.4.1 Individual tests.- Each light shall be subjected to the following tests, as specified under 4.5:

| | | |
|---|---|---|
| (a) | Examination of product | (4.5.1) |
| (b) | Operation | (4.5.2) |
| (c) | Optical performance | (4.5.4) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling tests.- One light shall be selected at random from each lot of 100 or fraction thereof on the order and subjected to the test specified in 4.5.3.

4.4.2.1 Lot.- A lot shall consist of lights manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.4.3 Rejection.- When any item from a lot fails the specified tests, this shall be cause for rejection of the lot.

4.5 Test methods.-

4.5.1 Examination of product.- Each light shall be inspected to determine compliance with the requirements specified herein with respect to materials, finish, marking, and workmanship.

4.5.2 Operation.- Each light shall be completed assembled and operated. The light shall be inspected to determine proper operation and assembly and shall conform to the requirements specified in 3.5.2.

4.5.3 Photometric.- Photometric tests shall be conducted to determine compliance with light distribution requirements of 3.5.1. All parts shall reach operating temperatures before any readings are taken.

4.5.4 Optical performance.- The candlepower and direction of the main beams emitted by the light shall be determined by the method which has been approved by the procuring activity. Insufficient candlepower or deviation of over 2 degrees, either horizontally or vertically from the direction indicated by the aiming device, shall be cause for rejection (see 6.2).

4.5.5 Environmental.- The light shall be subjected to the following tests, conducted in accordance with the specified procedures of MIL-STD-810, to determine proper operation and lack of damage.

4.5.5.1 High temperature.- The light shall be subjected to high temperature test Procedure I, except with temperature of $55^{\circ} \pm 2^{\circ}$C and for a period of 7 hours with lamp operating at rated current. Evidence of heat damage to any part shall be cause for rejection.

4.5.5.2 Humidity.- The light shall be subjected to humidity test Procedure I, except with humidity ranging from saturation at tropical sea level at $40^{\circ} \pm 2^{\circ}$ C to saturation at 10,000 feet altitude followed immediately by examination and operation.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

4.5.5.3 Low temperature.- The light shall be subjected to low temperature test Procedure I for a 48-hour period, except that the low temperature shall be -54°C (-65°F). Follow immediately by operation and examination of the light. Any evidence of damage shall be cause for rejection.

4.5.5.4 Rain.- The light shall be subjected to rain test Procedure II, except that the light shall be operated at rated current for 2 hours before the rain is started. Operation at rated current with rain falling, shall be continued for 3 hours. Lens cracking or breaking or other evidence of damage to the light shall be cause for rejection.

4.5.6 Heat operation.- The light, with the specified lamp installed, shall be operated continuously for a period of 24 hours at rated current and room temperature. The light shall be mounted upon a frangible coupling simulating actual installation. Any blistering, smoking, charring, or other evidence of heat damage to parts shall be cause for rejection.

4.6 Packaging, packing, and marking.- Preparation for delivery shall be examined for conformance to section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.- Unless otherwise specified, lights shall be preserved and packaged method 1C of MIL-P-116, one each in a unit container conforming to PPP-B-636, weather resistant. Cushioning within the unit container shall be as required to prevent item damage.

5.1.2 Level Commercial.- Each light shall be individually packaged in a manner which affords adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity for immediate use, plus 30 days storage.

5.2 Packing.- Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A.- Unless otherwise stipulated, a quantity of lights packaged as specified in 5.1 shall be packed in containers conforming to PPP-B-601 or PPP-B-621, Class 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.- Unless otherwise stipulated, a quantity of lights packaged as specified in 5.1 shall be packed in a weather resistant fiberboard container conforming to PPP-B-636.

5.2.3 Level Commercial.- Lights shall be packed in a manner which affords adequate protection against damage during direct shipment from the supply source to the first receiving activity. This level shall conform to applicable carrier rules and regulations and may be the suppliers's commercial practice when such meets the requirements of this level.

5.3 Marking.- In addition to any special marking required by the contract or order, interior unit containers and exterior shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use.- The light covered by this specification is intended for use in runway-lighting installations.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Levels of preservation and packaging, and packing required (see 5.1).
(c) Engineering data describing optical performance tests (submitted for approval (see 4.5.5)).

6.3 Instruction sheet.- An instruction sheet should be furnished with each light. This sheet should contain complete instructions for installing, leveling, and aiming of the light and a description of the lamp to be used.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Navy - AS
Air Force - 82

Preparing activity:
Navy - AS

Proj. No. 6210-0498



Source: https://assist.dla.mil -- Downloaded: 202610-19T11:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-L-22252B LIGHT, MARKER, RUNWAY CIRCLING

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

U.S. MAIL

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:43Z
Check the source to verify that this is the current version before use.