[Metric]
A-A-3071
December 8, 1997

COMMERCIAL ITEM DESCRIPTION
FILE FOLDERS, DRAWER
(STRAIGHT CUT)

The General Services Administration has authorized the use of this commercial item description by all Federal Agencies which replaces Federal Specification UU-F-1206 that has been canceled.

1. Scope: This Commercial Item Description covers 2 types, 3 grades, 2 styles, and 3 sizes of straight cut drawer, file folders that expand 9.53 mm (3/4) which are used for filing of documents. These folders are supplied with or without fasteners as specified.

2. Classification:

Type:	I. - General Purpose	
	II. - Special Purpose	
Grade:	A. - Standard Duty	{11 Point}
	B. - Light Duty	{9.5 Point}
Class:	1. - With Fasteners	
	2. - Without Fasteners	
Size:	A. - Letter	{298.5 x 241.3 mm [11.750 x 9.5 inches]}
	B. - Legal	{374.7 x 241.3 mm [14.750 x 9.5 inches]}
	C. - Custom	As Specified

3. Salient Characteristics:

3.1 Material. The file folders as cited in this commercial item description shall be made from fibrous, cellulose materials and conform to the physical properties as specified Table I.

3.1.1 Paperboard. The paperboard used for each grade shall be as follows: Grade A - Standard Duty (Kraft or Manila); and Grade B - (Manila) as specified in Table I.

3.1.2 Grain. The grain of the paperboard shall be parallel to the short side of the folder when held in its closed position, when tested as specified in accordance with Table II.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration, Federal Supply Service, Engineering Branch, 26 Federal Plaza, New York, NY 10278.

FSC 7530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

Table I.
Physical Properties

Characteristics	Grade A Standard Duty	Grade B Light Duty
Basis Weight (24 x 36 x 500)	239.24 g/m2 (147 pounds)	216.45 g/m2 (133 pounds)
Tolerance	-5% + 8%	-5% + 8%
Thickness	.279 mm (.011 inch)	2.413 mm (.095 inch)
Tolerance	- .0025 mm + .00127 mm (- .001 inch + .0005 inch)	± . 00127 mm (± .0005 inch)
Stiffness (gurley / minimum)		
MD, gm	3,300	2,200
CD, gm	1,200	700
Smoothness (max.) Sheffield Felt / Wire	200	200
Tear, total of both directions (min. avg.)	500	475

Table II.
Testing of Components

Paperboard Characteristic	Specification Referenced
Sampling	Par. 5.1.1 - TAPPI T 400
Grain	Par. 3.1.2 - TAPPI T 409
Basis Weight	Table I - TAPPI T 410
Thickness	Table I - TAPPI T 411
Tearing Resistance, Total - Both Directions	Table I - TAPPI T 414
Stiffness	Table I - TAPPI T 543
Smoothness	Table I - TAPPI T 538

3.2 Construction.

3.2.1 Type I & II File Folders. Type I & II file folders shall be fabricated from the grade boards as specified in paragraph 3.1.1. The folders shall be formed by folding the board to form a front and back leaf. The dimensions on the front and back leaf shall be as specified for the applicable size in the contract or ordering document. The front leaf shall be scored 19.05 mm (3/4 inch) expansion at 9.53 mm (3/8) or 6.35 mm (1/4 inch) intervals across the bottom width of the folder. Unless otherwise specified, Type I folders with straight-cut tabs shall be scored on the tab using two single lines to show the position of 1/3 cut tabs. All top corners of the folders shall be rounded (Rounded corners may include "S" Curves).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.2.2 Grade A Folders. Grade A folders shall be fabricated from grade A paperboard in accordance with paragraph 3.1.1 and table I of this commercial item description. The folders shall be formed by folding the board to form a front and back leaf. The dimensions on the front and back leaf shall be as specified for the applicable size. The front leaf shall be scored 19.05 mm (3/4 inch) expansion at 9.53 mm (3/8 inch) or 6.35 mm (1/4 inch) interval across the bottom width of the folder. The front leaf shall be scored for 19.05 mm (3/4 inch) expansions, at 9.53 mm (3/8 inch) interval, across the bottom width of the folder. When specified, the folder shall be provided with fasteners and shall be in accordance with paragraph 3.5.

3.2.3 Grade B Folders. Grade B folders shall be fabricated from grade B paperboard in accordance with paragraph 3.1.1 and table I of this commercial item description. The folders shall be formed by folding the board to form a front and back leaf. The dimensions on the front and back leaf shall be as specified for the applicable size. The front leaf shall be scored 19.05 mm (3/4 inch) expansion at 9.53 mm (3/8 inch) or 6.35 mm (1/4 inch) interval across the bottom width of the folder. The front leaf shall be scored for 19.05 mm (3/4 inch) expansions, at 9.53 mm (3/8 inch) interval, across the bottom width of the folder. When specified, the folder shall be provided with fasteners and shall be in accordance with paragraph 3.5.

3.3 Dimensions.

3.3.1 Sizes A, B, & C. The height and width of both the front and back leaves shall be as specified in the contract or ordering document. A tolerance of ± 1.59 mm (1/16 inch) shall apply to all dimensions cited.

3.4 Tabs.

3.4.1 Double Top Tab (if required). The back leaf of the folder shall be reinforced along the top or side tab edge, as applicable. The reinforcing material shall be the same stock as the folder and shall be 28.58 mm (1 1/8 inches), 1.59 mm ± (1/16 inch) in total width, including the tab and measured from the edge of the tab; extending the full length of the folder edge. The reinforcement shall be securely glued to the inner portion of the folder back leaf.

3.5 Fasteners. Fasteners (when specified) shall be located on the back and front leaves centered. The fasteners shall be located 19.05 mm ± 1.59 mm (9/16 inch ± 1/16 inch) from the top folder edge of the folder measured from the center of the fastener. Fasteners must be able to bend to accommodate two - hole punched paper with 69.85 mm ± 0.794 mm (2 3/4 inch ± 1/32 inch) between the center of the holes.

3.5.1 Clinch Type Fasteners. A two-prong fastener, ribbed lengthwise for rigidity, with tapered or rounded ends shall be made of baked enamel finish steel, with a thickness of 0.355 mm ± 0.05 mm (0.014 ± 0.002 inch). The fastener shall be set in indentation on the outside of the back and front leaves and be flush with the surface of the folder. Fasteners shall be closely secured by no less than eight clinching ears or tabs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.5.2 Bonded Type Fasteners. A two-prong fastener with tapered or rounded ends, made of baked enamel finish steel, with a thickness of 0.003 cm ± 0.005 cm (0.014 ± 0.002 inch). The fastener shall be centered on and bonded to a non-woven fabric, which shall have a thickness of 0.030 cm to 0.005 cm (0.012 to 0.015 inch), and have an Elmendorf tear resistance of 550 grams minimum in each direction, and shall be 0.030 cm to 0.005 cm (0.012 inch to 0.015 inch) in thickness. The non-woven fabric with steel fastener shall be bonded to the inner side of the folder board, so that removal of the fastener results in paperboard failure or tearing of the bonding non-woven fabric overlay.

3.5.3 Fastener Positions: The fastener positions shall be identified as follows: A - Not Applicable; B - Position 1 Top Right Leaf; C - Position 2 Bottom Right Leaf; D - Position 3 Top Left Leaf; E - Position 4 Bottom Left Leaf; F - Position 5 At Fold Right Leaf; G - Position 6 At Fold Left Leaf; H - Position 7 Left Edge Left Leaf; I - Position 8 Right Edge Right Leaf; J -As Specified.

3.5.3.1 Right Panel, One Inch Capacity. Unless otherwise specified, fasteners shall be positioned 19.05 mm (3/4 inch) from at the top folder edge to the center line of the fastener base. The left prong shall be positioned 34.93 mm (1 3/8 inch) from the folded edge. A tolerance of ± 1.59 mm (1/16 inch) shall be allowed, for all positions (see figure 1).

3.5..3.2 Left Panel, One Inch Capacity. Unless otherwise specified, fasteners shall be positioned 19.05 mm (3/4 inch) from at the top folder edge to the center line of the fastener base. The right prong shall be positioned 34.93 mm (1 3/8 inch) from the folded edge. A tolerance of ± 1.59 mm (1/16 inch) shall be allowed, for all positions (see figure 1).

Note: For legal size folders add 38.1 mm (1 1/2 inch) to the distance from the prong edge. For 50.8 mm (2 inch) capacity fasteners subtract 25.4 mm (1 inch) from the prong to the edge, for all positions (see figure 1).

3.6 Corrosion Resistance. All metal parts (fasteners) shall be corrosion resistant in accordance with normal commercial practice. The contractor shall provide a manufacturer's chemical certification of corrosion resistance upon request by the Government.

3.7 Workmanship. Folders shall be clean and free from hard shives, dirt spots, holes, blisters, tears, or wrinkles and shall have a smooth uniform finish. Edges shall be cleanly cut, without nicks or ragged edges. Die cuts to make the rounded corners may remain as long as they can be easily removed with little or no effort. Folders shall be free from any other defects which may affect their serviceability or appearance.

4. Regulatory Requirements: The contractor shall certify that the minimum content standard shall be no less than 20% Postconsumer fiber as defined by the Paper Products Recovered Materials Advisory Notice (Paper RMAN) and the Executive Order 12995 dated March 25, 1996. The Paper RMAN is found in the Federal Register, Vol. 61, Part IV dated May 29, 1996.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

4.1 Labeling of Recycled Content. The recycled content shall be marked on the product or unit pack.

4.2 Bleaching: To obtain an acceptable brightness, in accordance with the performance standards of this commercial item description, a chemical bleaching process may be used. When specified in the ordering data, the bleaching process shall not include the use of chlorine, chlorine dioxide, or other chlorine compounds. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. Quality Assurance Provisions:

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.1.1 Testing. Testing shall be conducted in accordance with the referenced tests in this Commercial Item Description. (Note: See TAPPI T 400 for specific sampling instructions and acceptance criteria).

6. Packaging:

6.1 Packaging, packing, marking, and palletization shall be as specified in the contract or order.

7. Notes:

7.1 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID **A-A-3071**

A-A- 2 A 2 C — Example of reference part number for an file folder, drawer

Size:	A. Letter B. Legal C. Custom
Class:	1. - With Fasteners 2. - Without Fasteners
Grade:	A. - Standard Duty B. - Light Duty
Type:	1 - Type I - General Purpose 2 - Type II - Special Purpose

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7.2 **Source of Documents.** The following documents form a part of the Commercial Item Description to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply:

7.2.1 Copies of Executive Order 12995 may be obtained from: The White House Publications Office, New Executive Office Building, White House, Att: Publications, Washington, DC. 20500 (202) 395-7332.

7.2.2 The Final (Paper RMAN) is available from the Environmental Protection Agency's public access server on the Internet or from the RCRA Hotline. The Hotline can be reached toll-free at (800) 424-9346.

7.2.3 Technical Association of the Pulp and Paper Industry (TAPPI) test methods cited in this CID may be obtained from TAPPI, Technology Park, PO Box 105113, Atlanta, Georgia, 30348-5113.

7.2.4 Copies of the appropriate ASTM's may be obtained from the American Standards for Testing Materials at 100 Barr Harbor Dr., West Conshohocken, PA 19428-2959.

7.3 **Ordering Data:** Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

A - Title, number and date of this specification.
B - Type, Grade, Class, and Size required.
C - Width of leaves required.
D - Whether bleaching without use of chlorine, chlorine dioxide, or chlorine compound is required.

7.4 **National Stock Number Listing (NSN's).** The following is a list of nsn's assigned which correspond to this CID. The list may not be indicative of all possible nsn's associated with the CID.

7530-00-181-8399
7530-00-285-1732
7530-00-291-0098
7530-00-559-4512
7530-00-663-0031
7530-00-889-3555

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

Military Interests:

Military Custodians.
Army - GL
Navy - SA
Air Force - 99

Review Activities.
Air Force - 84

User Activity.
Army - AV

Civil Agency Coordinating Activities:

GSA - FSS
NASA - JFK

Preparing Activity:
GSA - FSS (2FYEE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

8. **Figure:**

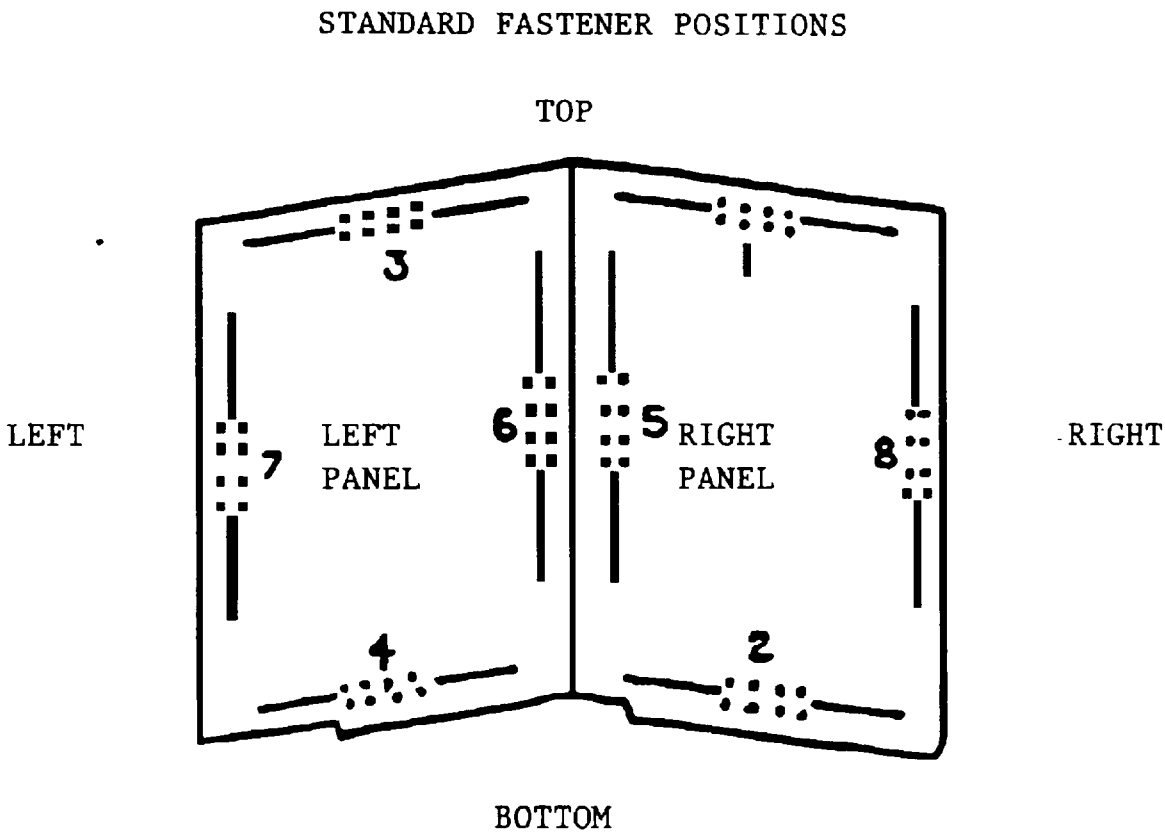


figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.