INCHPOUND

A-A-50528A
20 Nov. 1992

Superseding
A-A-50528
29 Sept. 1988

COMMERCIAL ITEM DESCRIPTION

COAT, SHOOTER'S GREEN

The General Service Administration has authorized the use of this Commercial Item Description.

Abstract. This description covers green cotton or polyester cotton shooting coats in an ambidextrous style for right or left hand shooters, intended for wear by male personnel of the US Marine Corps.

Salient characteristics The shooter's coat shall be a single breasted, unlined coat with a five button front closure; cardigan type neck; two-piece back with bellows at each side and a set-on half-belt; one piece sleeves with elbow pads; a button patch pocket on left side, hemmed on top edge and bartacked corners; a flap with a buttonhole; a shoulder/pulse pad on right and left front; double stitched shoulder, armhole, sleeve, side seams, and center back seam. The bottom of the coat shall have a 3/4 ± 1/8 inch hem.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:43Z
Check the source to verify that this is the current version before use.

Sizes. The coats shall be available in sizes small, medium, large and extra large.

Material. The basic fabric shall be cotton or polyester/cotton sateen cloth, weighing a minimum of seven ounces per square yard dyed to a dark olive green shade and shall be in accordance with the requirements in table I.

Cotton duck cloth. The cotton duck cloth which covers the pads shall be an olive green shade to approximate the basic material and shall be in accordance with the requirements in table II.

Table I

Requirements	Test method
Weight - 7 oz per sq/yd (min)	ASTM-D 3776 Option C
Breaking strength (lbs, minimum)	
Warp - 115	ASTM-D 5034 - 90
Filling - 100	ASTM-D 5034 - 90
Colorfastness to:	
Light - (good)	AATCC 16A-1988
Laundering (after 3 cycles) - (good)	AATCC 61-1986
Perspiration - (good)	AATCC 15-1985
Crocking - (good)	AATCC 8-1988
Shrinkage elongation (not more than 2.0% in warp or filling direction)	FED-STD-191/5550

Table II

Requirements	Test method
Weight - 8.25 oz per sq/yd (min)	ASTM-D 3776 Option C
Colorfastness to:	
Laundering (after 3 cycles) - (good)	AATCC 61-1986
Crocking - (good)	AATCC 8-1988
Shrinkage - 2.0 (in warp or filling direction)	FED-STD-191/5550
Breaking strength:	
Warp - not less than 90%	ASTM-D 5034-90
Filling - not less than 85%	ASTM-D 5034-90
Felt:	
Weight (original dry specimen)	FED-STD-191/2101
content (45% min)	FED-STD-191/2101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

Pads. The pads shall be constructed from 1/4 inch thick felt. The pads shall be cross stitched and edge stitched with a double row of stitching to provide stability. The area of measurement cited for all pads shall be the center of the length and the center of the width. The elbow pads shall be 8-3/4 inches wide and 17 inches long and shall be placed 1 inch from armhole. The shoulder/pulse pads shall measure approximately 11-1/2 inches wide and 9 inches long. The shoulder/pulse pad placement shall be 4 inches from front finished edge and 1 inch from shoulder/neckline seam. The pad shall have a slit opening 3 inches from the bottom to allow free arm movement (see figures 1 and 2).

Figure. The figure is furnished for information purposes only. If there are any inconsistencies between the written Commercial Item Description and the figure, the written Commercial Item Description shall govern.

Pocket and Flap. The pocket shall be placed 3/4 to 1 inch below the shoulder/pulse pad 3 inches over from finished front edge. The finished pocket shall measure 6-1/2 $\pm$ 1/4 inches long and 5-3/4 $\pm$ 1/8 inches wide. The pocket flap shall be placed 1/4 to 1/2 inch up from the top of the pocket and should measure 2-1/4 $\pm$ 1/2 inches long at the center point.

Thread. The thread shall be cotton or polyester/cotton and dyed an olive green shade.

Buttons. The buttons shall be plastic, 30 line, and an olive green shade.

Buttonholes. The buttonholes should be clean cut, eyelet end taper bar type or rectangular with bartacks at each end and properly positioned to fit the 30 line buttons.

Label. Each coat shall have a printed or stamped label at the back of the neck containing the size and national stock number (NSN). A printed or stamped label shall be placed inside the right facing near the bottom of the coat containing the contract number and contractor's name or a combination label may be used at the back of the neck.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

Finished measurements. The finished coat shall conform to the measurements below.

Coat measurements 1/

Size	Back length 2/ (inches)	Waist 3/ (inches)	Sleeve length 4/ (inches)
Small	28	19	23
Medium	28-1/2	21	23-1/2
Large	29	23	24
Ex-large	29-1/2	25	24-1/2

1/ Tolerance on all measurements: ± 1/2 inch.

2/ Back length measurement shall be taken along center back seam from top to bottom edge of coat.

3/ Waist measurement shall be taken along center of belt from folded edge to folded edge of coat with coat buttoned and lying flat.

4/ Sleeve length measurement shall be taken along the center of sleeve from the shoulder seam of armhole to lower finished end.

Workmanship. After completion, the coats shall be thoroughly cleaned and all loose threads, lint and foreign matter removed. The coats shall be uniform in quality and shall be free from irregularities or defects which adversely affect performance, reliability or durability.

Contractor certification. The contractor shall certify and maintain inspection records indicating that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Coat lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Dimensional Examination. The finished coat shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one coat; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Visual Examination. The coat shall be examined for the defects listed below. The lot size shall be expressed in units of coats. The sample unit is one coat. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:43Z
Check the source to verify that this is the current version before use.

VISUAL EXAMINATION

Examine	Defect
Basic fabric color	Hole, tear, slub, etc, that may develop a hole. Not dark olive green shade.
Pads	Not cross stitched or edge stitched with double row of stitching. Improperly positioned. Improper size of pads (too large or too small).
Pocket	Pocket or flap poorly shaped or set on crooked, affecting appearance. Too small or large by 1/2 inch or more.
Buttons	Cracked or broken. Not aligned with buttonholes in front or pocket flap causing fronts to twist, pucker or bulging between buttons. Wrong size and shade.
Seams and stitching	Seam twisted, puckered or pleated seriously affecting appearance. Tight or loose tension causing thread breaks or open seams. Thread breaks not secured by back tacking. Open seam over 1/4 inch. Raw edges over 1/2 inch.
Buttonholes	Not clean cut (loose threads). Not proper size.
Component parts	Missing, distorted, misplaced or not as specified.

Inspection for preparation and delivery. An inspection shall be made to determine whether the packaging, packing, and marking comply with the requirements of the contract or purchase order. Examination for defects shall be in accordance with Table II. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with ANSI/ASQC Z1.4. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

Preparation for delivery defects.

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing, damaged, or not conforming to applicable requirements stated herein.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, or distortion of container.
Contents	Quantity of container is more or less than required. Gross weight exceeds requirements of the box specifications.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

ASTM-D 3776 - Weight
ASTM-D 5034 - Breaking strength

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC 16 - Colorfastness to Light
AATCC 8 - Colorfastness to Crocking: AATCC Crockmeter Method
AATCC 61 - Colorfastness to Laundering, Home, and Commercial: Accelerated
AATCC 15 - Colorfastness to Perspiration

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Custodian:
Navy - MC


Civil Agency Coordinating Activities:
GSA-FSS


Preparing Activity:
DLA - CT

Project No. 8415-0882

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

FIGURE 1 COAT SHOOTERS: COTTON, SATEEN, GREEN

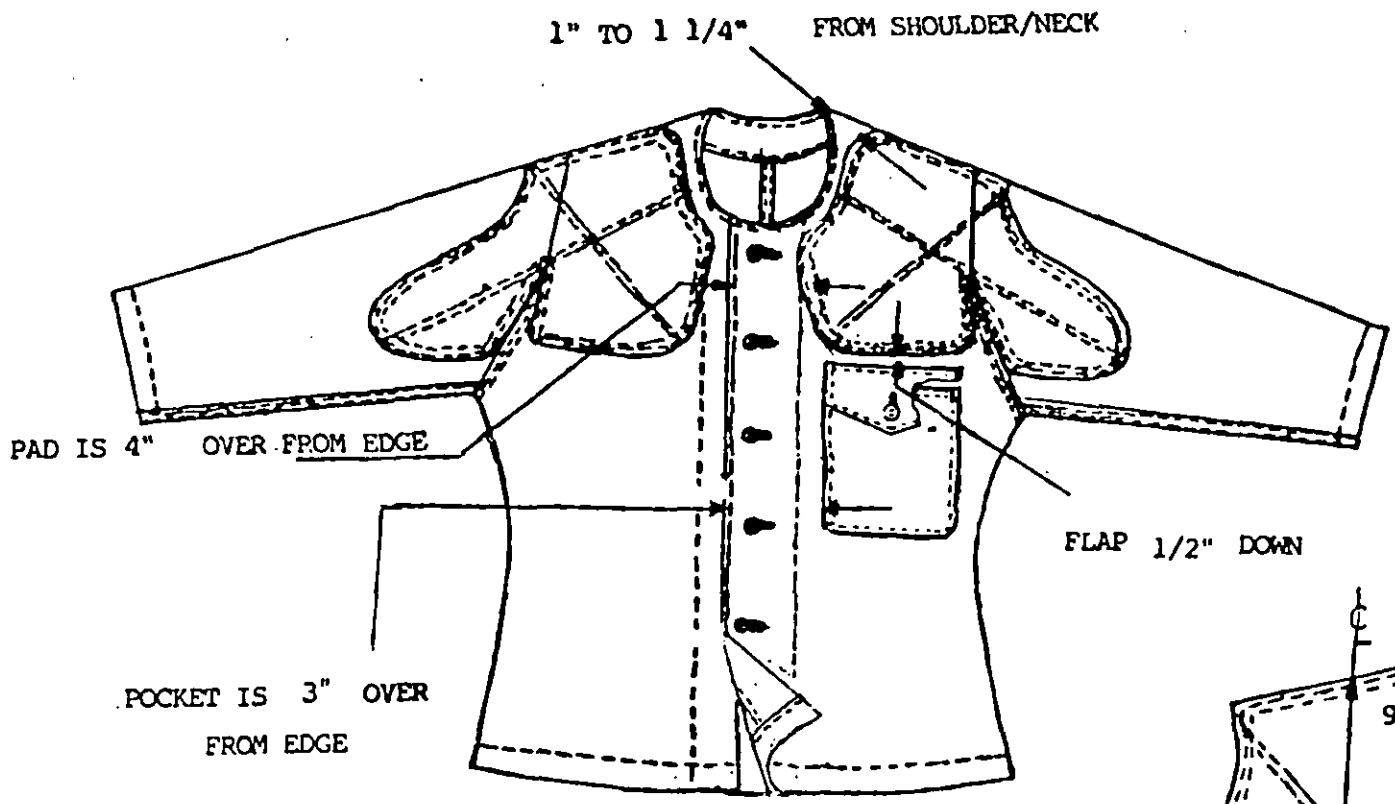

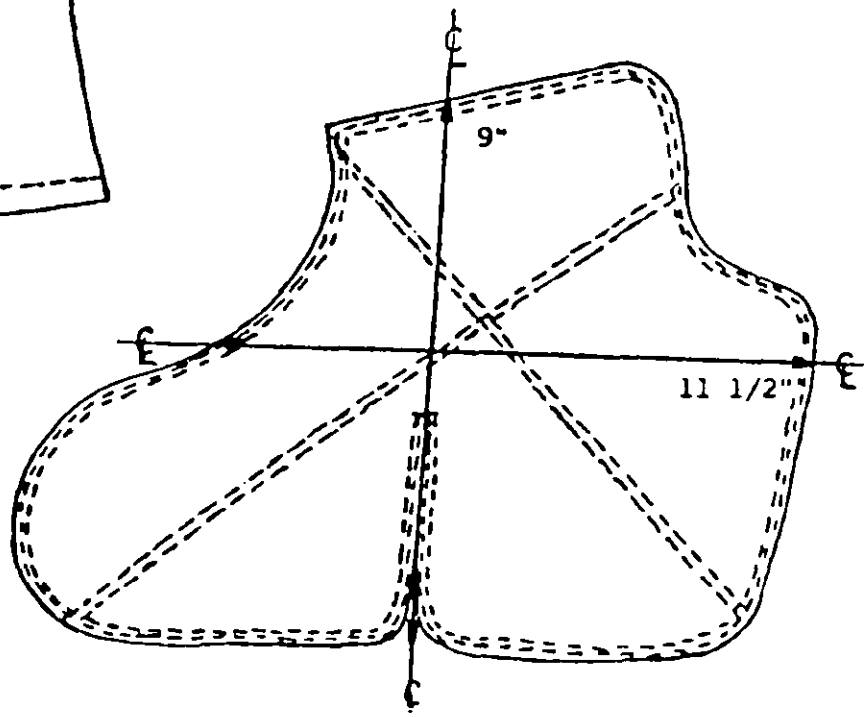


WIDTH "W" - SHOULDER/PULSE PAD

SMALL	11" ± 1/4"
MEDIUM	11 1/2" ± 1/4"
LARGE	12" ± 1/4"
EXTRA LARGE	12 1/2" ± 1/4"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

FIGURE 2, COAT SHOOTER'S: COTTON, SATEEN, GREEN

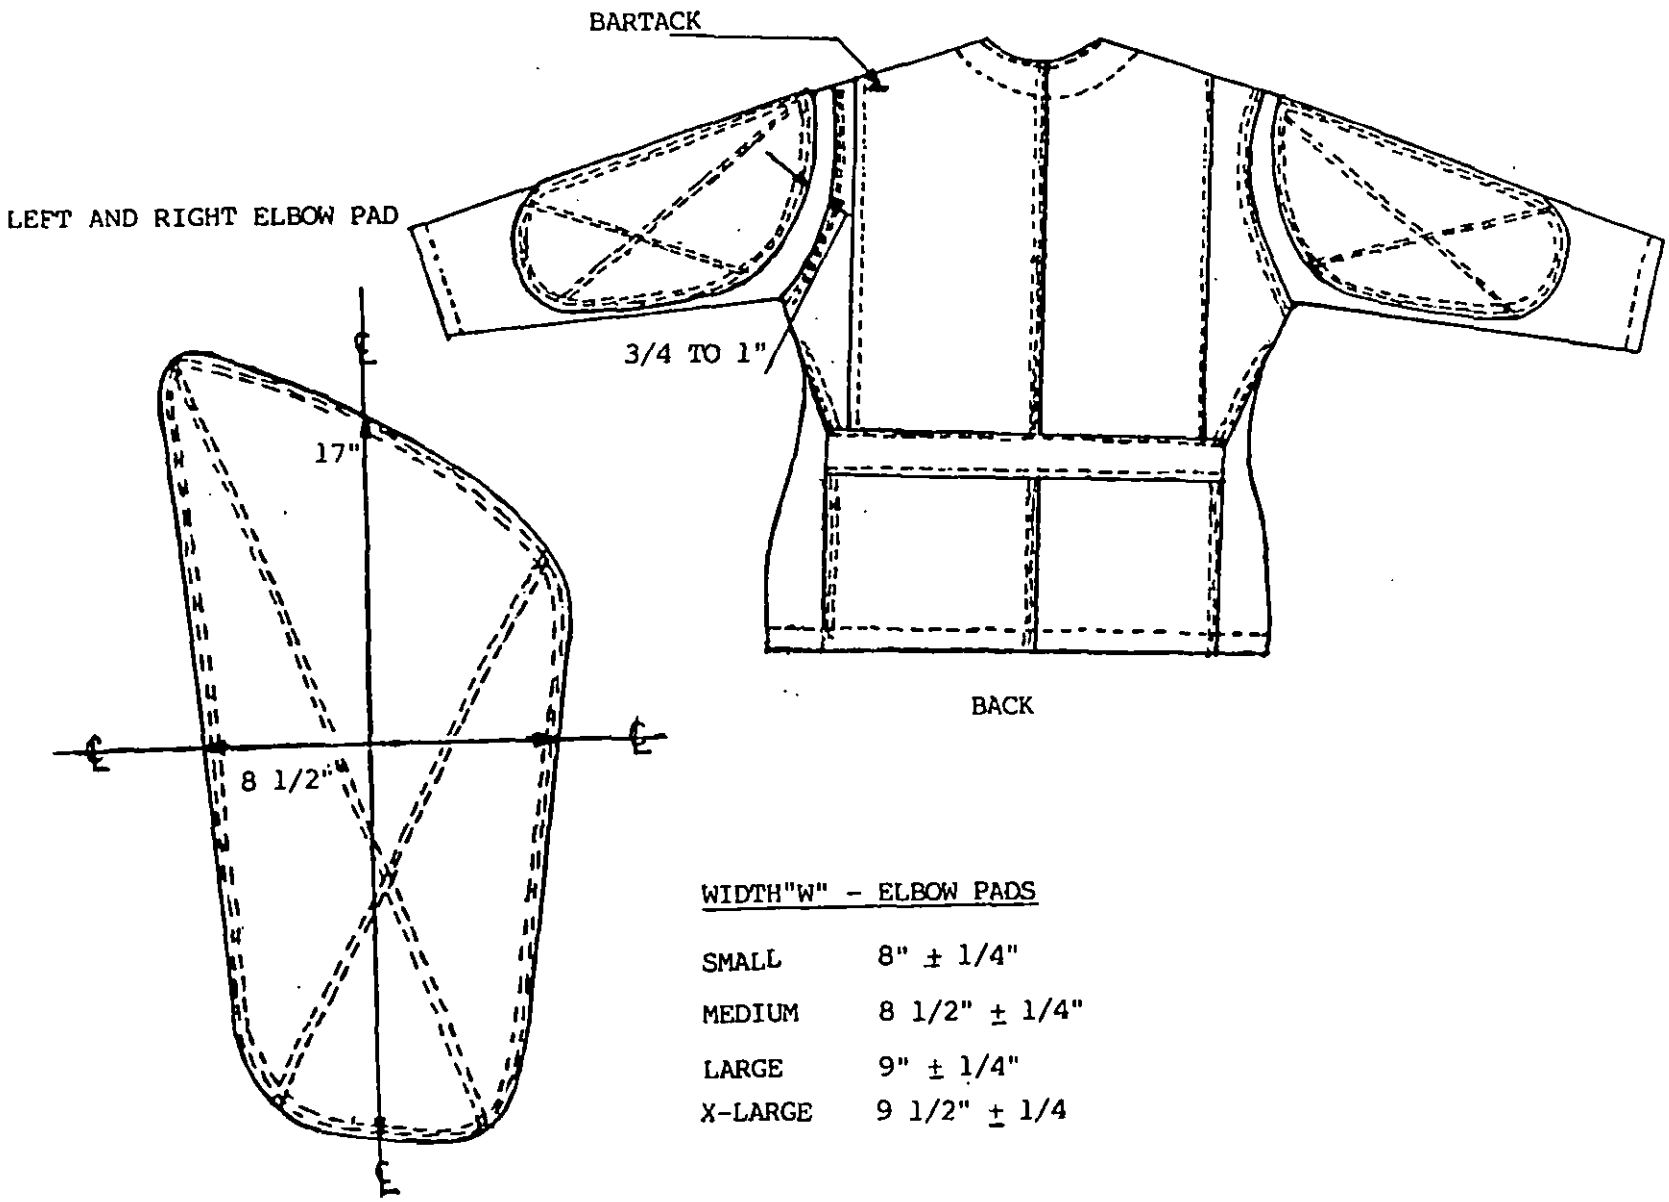

WIDTH"W" - ELBOW PADS

SMALL	8" ± 1/4"
MEDIUM	8 1/2" ± 1/4"
LARGE	9" ± 1/4"
X-LARGE	9 1/2" ± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-50528A	2. DOCUMENT DATE (YYMMDD) 921120

3. DOCUMENT TITLE
COAT, SHOOTER'S GREEN

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE *(Include Area Code)* (1) Commercial 215-737-8105 (2) AUTOVON 444-8105
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P.O. Box 8419 Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:43Z
Check the source to verify that this is the current version before use.