INCH-POUND


MIL-B-49436/6A(ER)
5 October 1990
SUPERSEDING
MIL-B-49436/6(ER)
3 August 1983

MILITARY SPECIFICATION SHEET


BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM, BB-516/U

This specification is approved for use by LABCOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49436

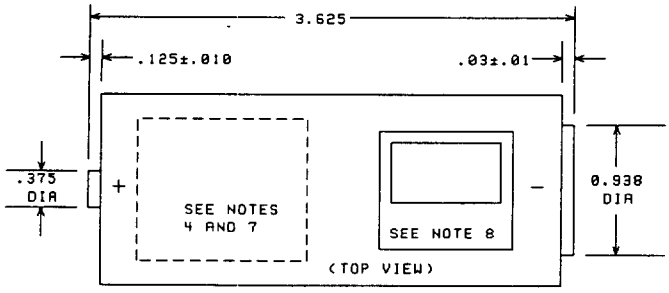

ID LABEL: BATTERY RECHARGEABLE BB-516/U
NICKEL-CADMIUM SEALED
24 VOLTS 0.2 AH AT 0.04 AMPS
(NSN)
(CONTRACT NO.)
(DATE CODE) (SERIAL NUMBER)
(MANUFACTURER)
(LOCATION)

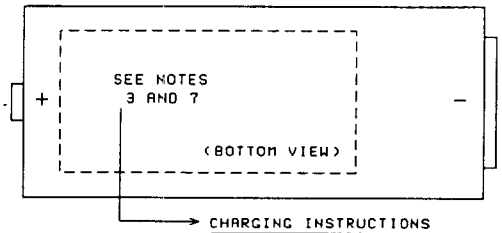

CHARGING INSTRUCTIONS

CHARGE AT A CONSTANT CURRENT OF 40 MA FOR 6-7 HOURS. BATTERY TEMPERATURE SHOULD BE BETWEEN 40°F (5°C) AND 100°F (38°C) DURING CHARGE. AFTER CHARGE ENTER DATE ON LABEL.

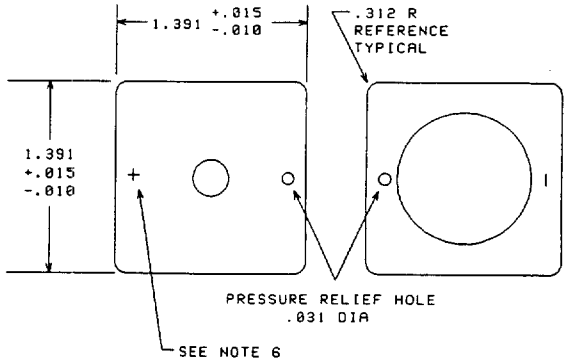


FIGURE 1. BATTERY DIMENSIONS AND LABELS.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Rated capacity (C/5): .20AH.
Voltage (nominal): 24 volts.
Weight (maximum): .27 kg (.59 lbs).
Terminals: 2 each MIL-N-46025 nickel, flat surface.
Number and type of cells: 20 sealed "1/3 A" size cells or equal in series.
Charge rate for testing and on battery (C/5 for 6-7 hrs): 0.04 amps.

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current(Amps)
C/5	-	20	.04
C_5	-	20	.20
$4C_5$	22	20	.80
$8C_5$	-	20	1.60

Test	Discharge Rate	Capacity Requirement (AH)
Full Capacity Discharge	C_5	.18
Cycle Life, 224 cycles	C_5	.144
Overcharge, 24 hours	C_5	.18
High Rate Discharge	$4C_5$	.13
Low Temperature Discharge at -30°C (-22°F)	C_5	.07
Retention of Charge 7 days at 51°C (124°F)	C_5	.09
Pulse Discharge 1.6 amps, 5 seconds on, 25 seconds off, continuously to 20 volts	$8C_5$	.13
Vibration	C/5	.20

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

DRAWING AND SPECIFICATION NOTES

1. Except as noted, all values are minimum.

12. All charges and discharges shall be performed on fully assembled batteries through the terminals.

3. Charging instructions shall be provided on a label which will be attached to side of the battery opposite ID label.

4. Identification label shall include complete label information required in specification. It shall be located as shown on drawing and surface shall be designated as top of battery. If necessary, adjacent side may contain continuation of label content.

5. Dimensions are in inches and unless otherwise specified decimal tolerances are ±0.031 in.

6. Symbol + on this surface; - on opposite end.

7. Labels may be an integral part of the container providing marking is permanent and clear or labels shall be separate, made of KOH resistant, non-metallic, material with permanent and clear marking.

8. Writeable charge history label.

REQUIREMENTS:

Mounting screws for connector. Not applicable.

Terminal markings. The positive terminal marking may be painted red. The negative terminal may be painted black.

Terminal. The two terminals shall be low resistance flat contacts of nickel per MIL-N-46025.

Electrical leakage. Not applicable.

Immersion. Not applicable.

Custodian:
Army - ER

Review Activities:
Army - CR, AV, GL

Preparing Activity:
Army - ER

(Project 6140-A720)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.