| INCH-POUND |


MIL-C-55302/56G
23 September 1992
SUPERSEDING
MIL-C-55302/56F
26 August 1988

MILITARY SPECIFICATION SHEET

Ⓖ CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for aquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302.

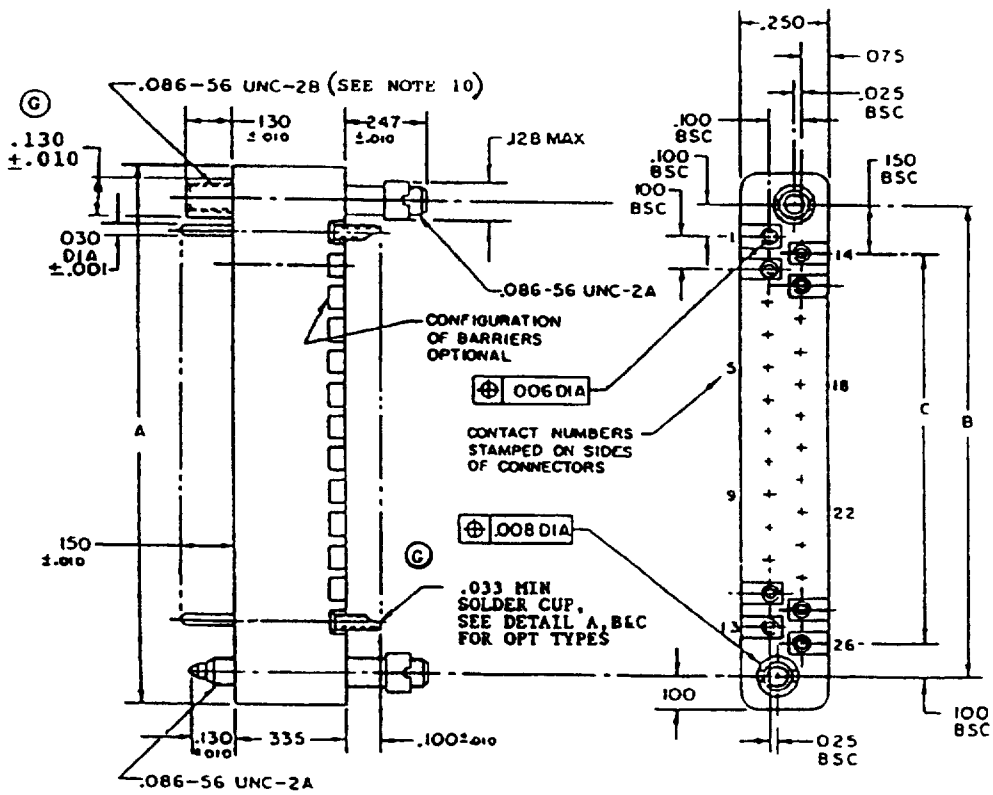


Ⓖ FIGURE 1. Connector, receptacle 100 (2.54 mm) spacing


Ⓖ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

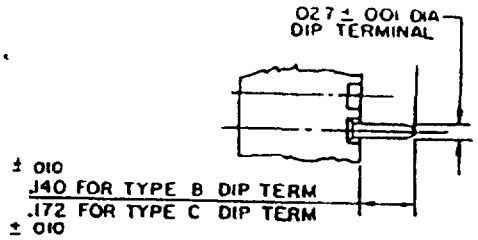

DETAIL A



WIRE WRAP TERM (TYPE D)
DETAIL B

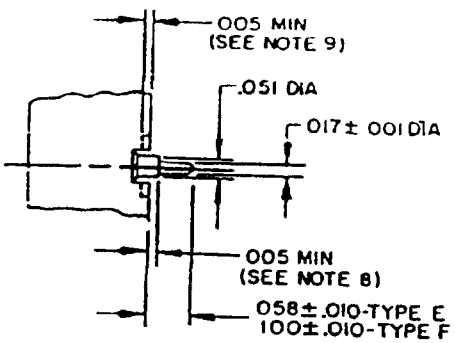

FLEXIBLE CIRCUIT TERMINAL

DETAIL C

Number of contacts	Dimensions		
	A ± 010	BSC B	REF C
10	.850 (21 59)	650 (16 51)	.400 (10 16)
14	1 050 (26 67)	850 (21 59)	600 (15 24)
20	1.350 (34 29)	1 150 (29 21)	900 (22.86)
24	1 550 (39.37)	1 350 (34 29)	1 100 (27.94)
26	1.650 (41.91)	1 450 (36 83)	1 200 (30.48)
30	1.850 (46 99)	1 650 (41 91)	1 400 (35.56)
36	2.150 (54 61)	1 950 (49 53)	1 700 (43 18)
40	2 350 (59 69)	2 150 (54 61)	1 900 (48 26)
44	2 550 (64 77)	2 350 (59.69)	2 100 (53 34)
50	2 850 (72.39)	2 650 (67 31)	2 400 (60 96)
54	3 050 (77.47)	2 850 (72 39)	2 600 (66 04)
56	3.150 (80 01)	2 950 (74 93)	2 700 (68 58)
60	3 350 (85 09)	3 150 (80 01)	2 900 (73 66)
66	3 650 (92 71)	3 450 (87 63)	3 200 (81 28)
70	3 850 (97.79)	3 650 (92 71)	3 400 (86 36)

Ⓖ FIGURE 1 Connector, receptacle 100 (2 54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
001	0.03	.075	1.91
.005	0.13	086	2.18
.006	0 15	100	2.54
008	0.20	128	3.25
010	0 25	130	3 30
017	0 43	140	3 56
025	0 64	150	3 81
027	0 69	172	4 37
.030	0.76	247	6 27
.035	0.89	.250	6 35
.051	1.30	.325	8.51
058	1.47	626	15 88

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4. These connectors mate with connectors specified in MIL-C-55302/55
5. Numbers indicating the first and last position in each row and every fourth contact position in between shall be marked on the side(s) of the connector. As an option to the above, numbers indicating every fourth cavity may be stamped on the side of the connector, with the exception that the number one contact shall be marked
6. Termination layout on .025 (0 64 mm) modular grid
7. Metric equivalents are in parentheses
8. Conformal coating clearances shall be 005 (0 13 mm) minimum (not required for optional design)
9. Optional design conformal coating clearance
10. (G) Hole depth to female guide hardware is 282 min (7 16 mm) Full thread depth to female threaded hardware is .240 min (6 1 mm)

(G) FIGURE 1 Connector, receptacle 100 (2 54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Material: Jackscrews and jacksockets shall be made of corrosion resisting stainless steel in accordance with ASTM-A581 or ASTM-A582 passivated in accordance with QQ-P-35 or shall be corrosion resistant copper nickel alloy (61 ±2% copper with 25 ±2% nickel, 2 5% maximum other, and the balance zinc) and shall have a brinell hardness of 145 to 175

Plating The contact plating shall be in accordance with MIL-C-55302 or gold in accordance with MIL-G-45204, type II, grade C, class 1, over nickel plating in accordance with QQ-N-290, class 2, 50 to 150 microinches in the engaging area and gold in accordance with MIL-G-45204, type II, grade C, class 00, or type III, grade A, class 00, over nickel plating in accordance with QQ-N-290, class 02, 50 to 150 microinches in the termination area

Contact identification See figure 1

Contact resistance: The average contact resistance of all contacts measured shall not exceed 0.010 ohm, and no individual contact pair shall have a resistance exceeding 0 020 ohm

Dielectric withstanding voltage

Sea level 1,000 volts rms
High altitude 300 volts rms

Current rating 5.0 amperes maximum in accordance with contact

Example of part number

M55302/56 — Basic number of specification sheet

A — Type of terminal (see figure 1)

A = solder cup
B = dip terminal .140 long
C = dip terminal .172 long
D = wire wrap
E = flexible circuit terminal .058
F = flexible circuit terminal .100

10 — Number of contacts (see figure 1)

Ⓖ Supersession data

New part number	Superseded part number
M55302/56**	M55302/56-***

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17
(G) NASA - NA

Review activities
Army - AR, MI
Navy - AS, TD
Air Force - 85, 99
DLA - ES

User activities
Army - AT, AV, ME
Navy - MC, OS
Air Force - 11, 19, 80

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3860-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.