
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PIN, RIGHT ANGLE PLUG, ELECTRICAL, POLARIZED FOR PRINTED WIRING BOARDS (.100 SPACING)

Ⓒ This specification inactive for new design after 1 October 1986

This specification is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-55302.

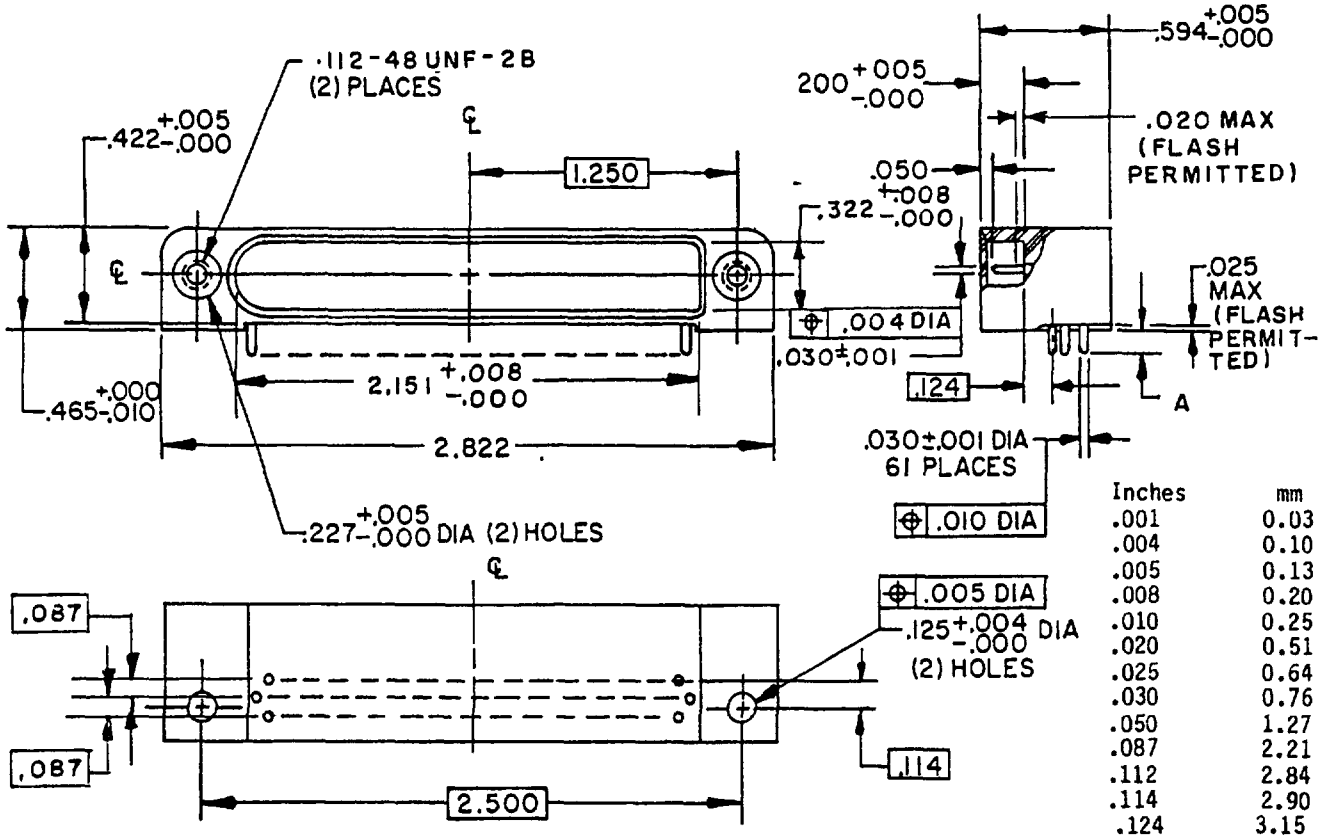


Inches	mm
.001	0.03
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.050	1.27
.087	2.21
.112	2.84
.114	2.90
.124	3.15
.125	3.18
.200	5.08
.227	5.77
.322	8.18
.422	10.72
.465	11.81
.594	15.09
1.250	31.75
2.151	54.64
2.500	63.50
2.822	71.68

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Nominal spacing between any two adjacent pin contacts shall be .090 ±.003 (2.29 ±.08 mm).
4. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
5. For dimensions A through E see table I.

FIGURE 1. Connector, plug, .100 (2.54 mm) contact spacing, pin terminal.

Ⓒ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

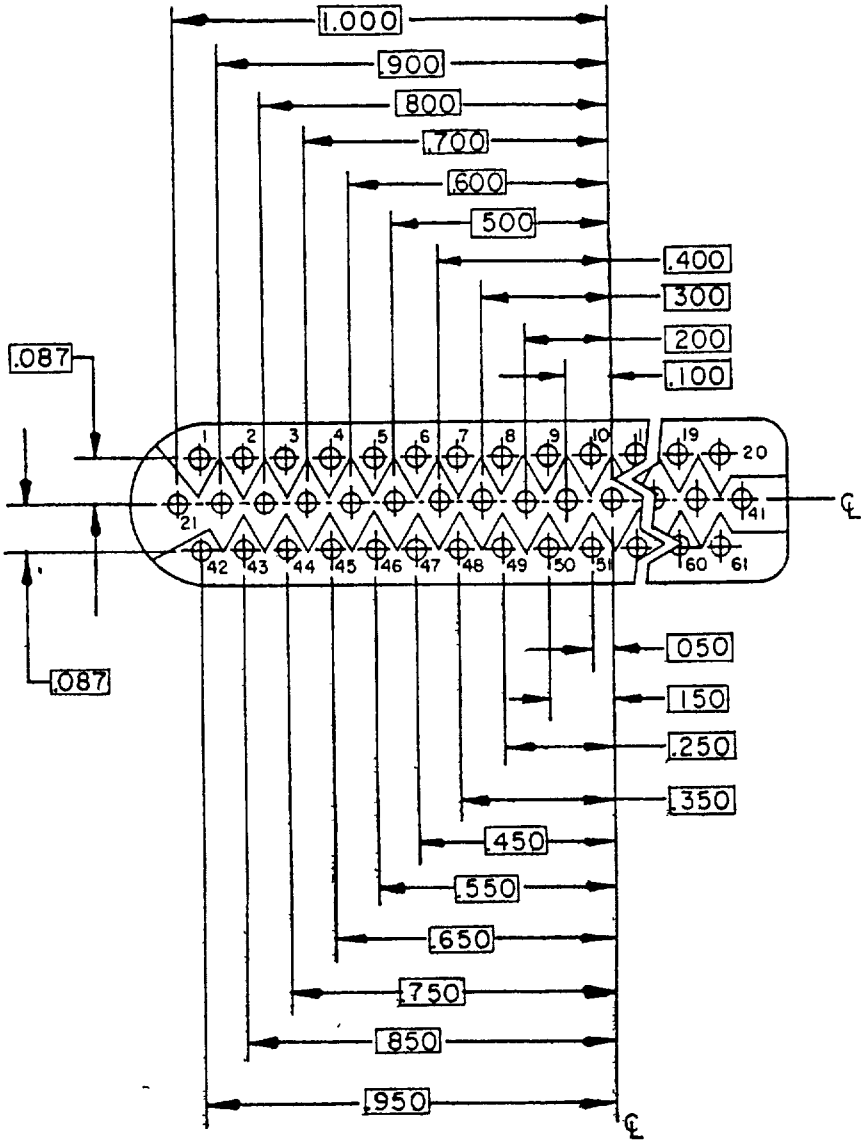

Inches	mm	Inches	mm
.050	1.27	.550	13.97
.087	2.21	.600	15.24
.100	2.54	.650	16.51
.150	3.81	.700	17.78
.200	5.08	.750	19.05
.250	6.35	.800	20.32
.300	7.62	.850	21.59
.350	8.89	.900	22.86
.400	10.16	.950	24.13
.450	11.43	1.000	25.40
.500	12.70		

NOTE: Contacts 1, 20 and 61 are identified on the front face of the connector per the insert arrangement.

FIGURE 2. Insert arrangement for .090 (2.29 mm) contact spacing connectors (Male engaging face).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: In accordance with MIL-C-55302, except:

Body - reinforced epoxy resin or equivalent.

Bushing - AMS 5640 stainless steel or MIL-S-7720, composition 303, condition A.

© Plating: The contact plating shall be gold in accordance with MIL-G-45204, type II, grade C, class 1 over copper in accordance with MIL-C-14550, class 4.

Contact identification: Contact locations are identified numerically as shown on figure 2.

Mating and unmating: The maximum mating force, in pounds, shall be 0.5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.08 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: With a test current of 3 A dc, the average resistance of all contact pairs measured shall not exceed 0.010 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.

Dielectric withstanding voltage:

Sea level: 1,300 V rms, 60 Hz, ac.

High altitude: 325 V rms, 60 Hz, ac.

Contact current rating: 3.0 amperes.

Insert arrangement: See figure 2.

Mating connectors: See MIL-C-55302/71.

Part number: M55302/70-(dash number from table I).

TABLE I. Dash number and dimensions.

Dash number	Dimensions 1/
01	.114 (2.90)
02	.180 +.015 - .000 (4.57 +.38)

1/ Metric equivalent are given for general information only. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 17, 85
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F294-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.