MILITARY SPECIFICATION

TELESCOPES, STRAIGHT: M120 AND XM134

1. SCOPE

1.1 This specification covers one basic type of telescope. The model designation identifies reticle design and application differences (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-O-13830	Optical Components for Fire Control Instruments; General Specification Governing the Manufacture, Assembly and Inspection of
MIL-F-13926	Fire Control Materiel; General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment, and Tools for Army Materiel, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions

DRAWINGS

U.S. Army, Frankford Arsenal

F10543470	Telescope, Straight: M120
F11728190	Telescope, Straight: XM134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEETS

10543470	Packaging of Telescope, Straight: M120
11728190	Packaging of Telescope, Straight: XM134

(Copies of specifications, standards, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article testing. - Requirements for the submission of first article samples by the contractor for testing shall be as specified in the contract.

3.2 Fabrication. - The telescope shall be manufactured in accordance with the applicable drawing listed in Section 2.

3.3 Temperature conditions. - Except as specified in 3.6.1, the following requirements shall be met at a temperature between 60° and 90° Fahrenheit (F).

3.4 General specification. - The requirements of MIL-F-13926 listed below shall be met wherever applicable.

a. Order of precedence.
b. Dimensions and tolerances.
c. Inorganic protective surface finishes.
d. Part identification and marking.

3.5 Workmanship. - The workmanship requirements of MIL-F-13926 shall be met. In addition, exterior protective surface finishes shall be free of defects which may affect their protective qualities or appearance. Optical surfaces shall be free of scratches and blemishes which may affect their optical qualities or appearance.

3.6 Environmental.

3.6.1 Storage temperature range. - There shall be no evidence of physical failure such as glass breakage or bonding failure due to storage at temperatures ranging from -80° to +160°F.

3.6.2 Shock. - The telescope shall show no evidence of physical failure and a line of sight shall not change more than 0.10 mil due to a series of eighteen shocks total, with three shocks applied in each direction along each of three mutually perpendicular axes. The axes shall be through the telescope optical axis, perpendicular to surface "A" (see Figure 1), and mutually perpendicular thereto respectively. The nominal value for acceleration shall be 40 gravity units (g). The nominal value for pulse duration shall be 10 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

3.6.3 Vibration.

3.6.3.1 Vibration "A". - The telescope shall be capable of meeting the requirements of 3.6,3.3 and 3.6.3.4 subsequent to being subjected to the following conditions:

a. Vibration in simple harmonic motion at the frequencies accelerations and amplitudes shown on Figure 2, and with Datum Surface "A" horizontal within 5.0° of arc.

b. The applied frequency changed from 5 to 400 to 5 cycles per second (cps) at a logarithmic rate over a period of 15 ± 1.0 minutes.

c. A 30-minute dwell at each, but not exceeding four along each axis, of the most significant resonant frequencies.

d. The vibrations applied for three hours, including time at resonance along each axis of the three mutually perpendicular axes defined in paragraph 3.6.2 (total nine hours).

3.6.3.2 Vibration "B". - The telescope shall be capable of meeting the requirements of 3.6.3.3 and 3.6.3.4, subsequent to being vibrated for 5 ± 1/4 minutes. The vibration shall be applied in a direction perpendicular to surface "A" (Figure 1) only, at a constant frequency of 30 cycles per second with an amplitude of 1/16 inch (1/8 inch total excursion).

3.6.3.3 Physical failure due to vibration. - There shall be no evidence of physical failure such as glass breakage, loosening of parts, and bonding or sealing failure due to subjecting the telescope to the vibrations speci~ fied in 3.6.3.1 and 3.6.3.2.

3.6.3.4 Collimation change due to vibration. - The line of sight shall not deviate more than 0.25 mil or 0.10 mil respectively from that originally established due to the vibrations specified in 3.6.3.1 and 3.6.3.2.

3.6.4 Sealing. - The telescope, with the objective lens cap removed, shall show no evidence of leakage while exposed to an external pressure of 5.0 pounds per square inch (psi) above and 5.0 psi below atmospheric pressure for a period of 2.5 minutes at each pressure. Optionally, the telescope shall sustain an internal pressure of 5.0 psi above atmospheric for a period of one hour without pressure drop in excess of 0.05 psi.

3.6.5 Purging. - The instrument shall be purged with dry nitrogen supplied at a pressure of 5 ± 1/4 psig until the dew point of the emergent gas is no higher than -25°F. is no higher than -25°F. Purging apertures shall be quickly and positively closed to minimize intermingling of external atmosphere upon disconnection of processing equipment.

3.7 Cleanliness.

3.7.1 Dirt. - This requirement shall be met with the obsevations for dirt and foreign particles (classed as dirt) made through the eye end of

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

the telescope. The size of any particle appearing on the reticle surfaces shall not exceed the width of a reticle line. There shall be not more than three particles within the field of view. Particles smaller than 1/4 reticle line width shall be ignored regardless of distribution.

3.7.2 Other defects. -There shall be no evidence of moisture, grease, fingerprints, condensates, fractures, or adhesive separations when viewing through the objective end and the eye end of the telescope.

3.8 Reticle illumination. - This requirement shall be met with a variable intensity light source not exceeding 0.25 candle-power positioned adjacent to the illumination window. The reticle markings shall be visible when observed in a darkened area.

3.9 Optical characteristics.

3.9.1 Collimation. - With the objective lens cap removed, the line of sight through the center of the reticle pattern (at the 800 meter line) shall be parallel to the intersection of datum surfaces "A" and "B" (see Figure 1) within 5.0 mils as measured in planes perpendicular and parallel to surface "A".

3.9.2 Parallelism of reticle and image. - The 800 meter range line of the reticle pattern shall be aligned within 2.0 degrees of arc to the image of a target line which for Telescope M120 shall be parallel to Datum Surface "A". For Telescope XM134 (Reticle pattern rotated 90° counterclockwise from that of Telescope M120) the target line shall be perpendicular to Datum Surface "A".

3.9.3 Reticle accuracy. - The angular elevation value between the boresight cross and the maximum range graduation of the reticle pattern shall be within 3.0% of the value shown on the reticle drawing.

3.9.4 Resolution. - Resolution shall be 6.0 seconds or less with objective lens cap removed. Resolution consists of detectable line structure and proper line count in all four meridians when using an observation scope of 3-4 power and at least 0.4 inch aperture. Focus shift between any two meridians shall not exceed 1/4 diopters measured at the instrument eyepiece.

3.9.5 Parallax. - With objective lens cap removed, parallax shall not exceed 0.10 mil when viewing a target located 1,000 meters ± 200 distant.

3.9.6 Eyepiece focus. - The eyepiece focus shall be fixed between the limits of minus 0.5 and minus 1.0 diopter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval. - The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 telescopes plus 3 each of all items covered by SQAP, The sample shall be manufactured in the same marine r, marinner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. - When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shalkl inspect the sample to insure that irt conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Bovernment reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. - Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "submission of product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. - All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (IEL), when provided with the technical data package (TDP). In the absence of SQAP'S the applicable Quality Assurance provisions of MIL-F-13926 shall apply. Examination and tests related to Section 3 herein, shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105. The sampling plans specified in Tables I, II, III and IV shall constitute the minimum inspection to

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:42Z
Check the source to verify that this is the current version before use.

be performed by the supplier after first article approval and prior to Government acceptance or rejction by item or lot.

TABLE I - CLASSIFICATION OF DEFECTS

CLASS CRITICAL: NONE MAJOR: AQL 1.0% Defective CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
101. Vibration "B" physical failure	3.6.3.3	4.6.3.2
102. Vibration "B" collimation change	3.6.3.3	4.6.3.2
103. Cleanliness	3.7	4.6.7
104. Reticle illumination	3.8	4.6.8
105. Collimation	3.9.1	4.7.1
106. Parallelism of reticle & image	3.9.2	4.7.2
107. Reticle accuracy	3.9.3	4.7.3
108. Resolution	3.9.4	4.7.4
109. Parallax	3.9.5	4.7.5
110. Eyepiece focus	3.9.6	4.7.6

MINOR: NONE

NOTE: The tests in Table I shall be conducted at a temperature between +60° and 90°F.

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General. - One telescope shall be selected at random as a special sampling from each 100 produced. The sample shall meet the requirements and tests in Table II.

TABLE II

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.2	Applicable drawings - visual
302. General specification	3.4	MIL-F-13926 - visual

4.4.2 Environmental. - Three telescopes shall be selected at random as samples form each 50 produced, or from each month's production, whichever occures first. Each sample shall meet the requirements and tests in Table III and shall then meet the requirements and tests in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

TABLE III

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
303.	Storage temperature (-80° and +160°F)	3.6.1	4.6.1
304.	Sealing	3.6.4	4.6.5
305.	Moisture condensation at low	3.5.5	4.6.6

4.4.2.1 Shock and vibration "A". - In addition to first article tests the requirements and tests in Table IV shall be performed on 3 telescopes randomly selected at the 25%, 50% and 75%. point of production.

TABLE IV

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
306.	Shock	3.6.2	4.6.2
307.	Vibration "A" physical failure	3.6.3.1, 3.6.3.3	4.6.3.1
308.	Vibration "A" collimation change	3.6.3.1, 3.6.3.4	4.6.3.1, 4.6.4

4.4.3 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment. - Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. - Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL) when provided with the technical data package (TDP).

4.5.2.2 Contractor design. - The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.6 Test methods and procedures.

4.7 Storage temperatures. - Testing equipment utilized in this test shall be in acordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.6.1. The telescope shall be exposed to each specified temperature extreme for a minimum of 5 hours. Subsequent to the temperature exposures the telescope shall be stabilized in an ambient temperature between +60° and +90°F and subjected to the audible, tactile, and visual examination of 4.6.3. The telescope shall conform to the requirements of 3.6.1. Caution must be exercised during this test to avoid subjecting the telescope to thermal shock.

4.6.2 Shock test. - Prior to the shock test the telscope shall be subjected to the test in 4.7.1 and the test results recorded. Perform the shock test in accordance with Procedure II of MIL-F-13926, except the acceleration (G's), directions and time duration shall be as specified in 3.6.2. The shock testing equipment shall provide an adapter capable of accepting and securing the telescope assembly as specified in 3.6.2. At the conclusion of the shock test the telescope shall be subjected to a visual and tactile examination for damage such as: damaged parts, broken glass chips, fractures, foreign matter or loose metal components. Any one of the above possible defects shall be cause to consider the telescope defective unless separate defects-per-hundred type sampling plans are established or approved by the Government as part of the suppliers inspection system. Telescopes which have passed the above examinations shall again be subjected to the test in 4.7.1. The telescope shall conform to the requirements of 3.6.2.

4.6.3 Vibration.

4.6.3.1 Vibration "A". - Prior to vibration the telescope shall be subjected to the test in 4.7.1, and the test results recorded. Standard vibrtating equipment capable of providing the amplitude and frequencies specified in 3.6.? la and b and the minimum dwell requirement of 3.6.3.1c shall be utilized for the vibration tests. Unless otherwise specified, the test equipment shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The vibrating equipment shall be equipped with a suitable adapter to permit mounting and securing the telescope in the normal position and at the various positions as specified in 3.6.3.ld and e for the time duration required by 3.6.3.1d. The motion shall be in a vertical plane for the period specified plus or minus one minute. Subsequent ot vibration the telescope shall be thoroughly examined for physical defects resulting from inferior materials or poor workmanship, to determine compliance with 3.6.3.3, prior to being subjected to the remaining tests specified herein. A visual and tactile examination shall be conducted to detect loose or broken parts. Telescopes which have passed the above examination shall be subjected to the test in 4.6.4 to determine mine overall compliance with 3.6.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:42Z
Check the source to verify that this is the currentversion before use.

4.6.3.2 Vibration "B". - Prior to vibration the telescope shall be subjetted to the test in 4.7.1 and the test results recorded. Standard vibrating equipment capable of providing the amplitude and frequency specified in 3.6.3.2 shall be utilized for this vibration test. Unless otherwise specified, the test equipment shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The vibrating equipment shall be equipped with a suitable adapter to permit mounting and securing the telescope with Datum Surface "A" horizontal within 5.0° of arc. The telescope shall then be vibrated in accordance with Procedure V of MIL-F-13926 and the conditions of 3.6.3.2. Subsequent to vibration the telescope shall be subjected to visual and tactile examination for evidence of physical failure. Telescopes which have passed the above examination shall be subjected to the test in 4.6.4 to determine overall compliance with 3.6.3.2.

4.6.4 Collimation change due to vibration. - Subsequent to vibration and prior to the examination for physical failure resulting from vibration, position the telescope in the collimation device used in 4.7.1. Observe through the auto-collimatior, any deviation from the auto-collimation setting established in 4.7.1 shall not exceed the tolerance specified in 3.6.3.4 as measured on the auto-collimator target reticle.

47.6.5 Sealing. - Special internal or external (optional) pressure test equipment shall be utilized for this test. The test equipment shall conform to Drawing F8565556, pressure tester - two station. For external pressure testing, an adapter to receive the telescope and equipment to zero or preset the adapter prior to testing the telescope, shall be provided for use in conjunction with the pressure tester. When internal pressure is applied, the telescope is attached to the pressure test euipmetnat the ports provided on the telescope. The pressure is then applied as specified in 3.6.4 for either method.

4.6.6 Purging. - The telescope shall be flushed with a dry nitrogen gas to conform to the requirement of 3.6.5. A dew point tester, (commercially available) standard equipment shall be attached to the telescope and the gas bled through the tester shall conform to the value specified in 3.6.5. The telescope shall then be quickly sealed, This test shall be conducted at +60°F to +90°F.

4.6.7 Cleanliness. - The optical surfaces of the telescope shall be inspected for cleanliness in accordance with MIL-O-13830. The telescope shall conform to the cleanliness requirements of 3.7.

4.6.8 Illumination. - With the reticle etchings illuminated as specified in 3.8, the etchings shall be clearly defined when visually examined against a darkened background. Should brightness of a reticle defect be greater than the brightness of a reticle line, the shall be cause for rejection.

4.7 Optical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

4.7.1 Collimation. - The equipment required for this test and subsequent tests shall consist of a device to receive the dovetail of the telescopes (see Figure 1) and position it in a horizontal or vertical position with the flat of the dovetail level within ten seconds; a V-block to accept an auxiliary collimating telescope; precision bench level; surface plate; plumb line and a wall target. The test equipment shall be set up on a cross leveled surface plate, essentially free from vibration, and in line with the wall target, that contains the acceptance tolerances. Provisions shall be made on the testing device to permit plumbing the collimating telescope's vertical line of the reticle to a plumb line suspended in front of the wall target that has been aligned to the seating surfaces of the dovetail of the testing device. It will be advantageous to establish two target points on the wall target. One point denoting the distance from the surface plate to the optical axis of the collimating telescope positioned on the device and the other denoting the distance from the surface plate to the center of the objective of the telescope under test when mounted in the test device. After coincidence between the intersecting point of the collimating telescope reticle and point on the wall target, remove the collimator and mount the telescope to be tested in the device. Sight through the eyepiece of the telescope and observe coincidence between the limit tolerance on the target and the telescope reticle point. Both points must coincide within the tolerance specified in 3.9.1.

4.7.2 Parallelism or plumb of reticle and image. - With the Telescope mounted as in 4.7.1, sight through the eyepiece of the telescope and obtain coincidence of a range line defined as in 3.9.2. This line shall be parallel to the image of a target line within the tolerance specified in 3.9.2.

4.7.3 Reticle accuracy. - The value between the boresight cross and the maximum range line shall be within the tolerance specified in 3.9.3. when viewed on a target. The range value shall correspond with the tabulations on the reticle drawing within the tolerance specified thereon.

4.7.4 Resolution. - The telescope shall be tested for resolution in accordance with the procedure and test outlined in MIL-O-13830 to determine compliance with the requirements of 3.9.4.

4.7.5 Parallax. - This test shall be performed by sighting through the telescope and observing a target set between, or at each specified distance. Parallax is any apparent movement of the target image in relation to the reticle line when the observers head is moved from side to side or up and down. Total parallax at the center of the field shall not exceed the tolerance specified in 3.9.5.

4.7.6 Eyepiece focus. - The eyepiece focus test shall be performed with the aid of calibrated dioptometer of at least 3 (X) power. Adjust the dioptometer to the individual user's eye accommodation and set the scale to zero. Position the dioptometer at the telescope eyepiece. The telescope shall be in best focus within the limits specified in 3.9.6 as measured on the diopter scale of the dioptometer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. - Packaging, packing, and marking shall be in accordance with the applicable packaging data sheet listed in Section 2. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. - Telescope:M120 provides direct fire sighting for a 20mm gun used on armored personnel carriers. Telescope: XM134 is used on the Vulcan Air Defense Systems:XM163 and XM167.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Selection of applicable levels of preservation, packaging, and packing.
c. Applicable stock number.
d. Applicable packaging data sheet (see 5.1).
e. Requirement for first article inspection.

Custodian:


Army - MU

Preparing activity:

Army-MU


Project No. 1240-A369

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

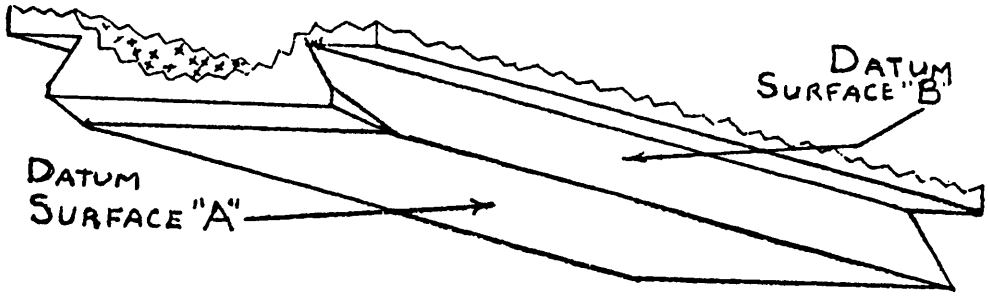

TELESCOPE DOVETAIL

Figure 1

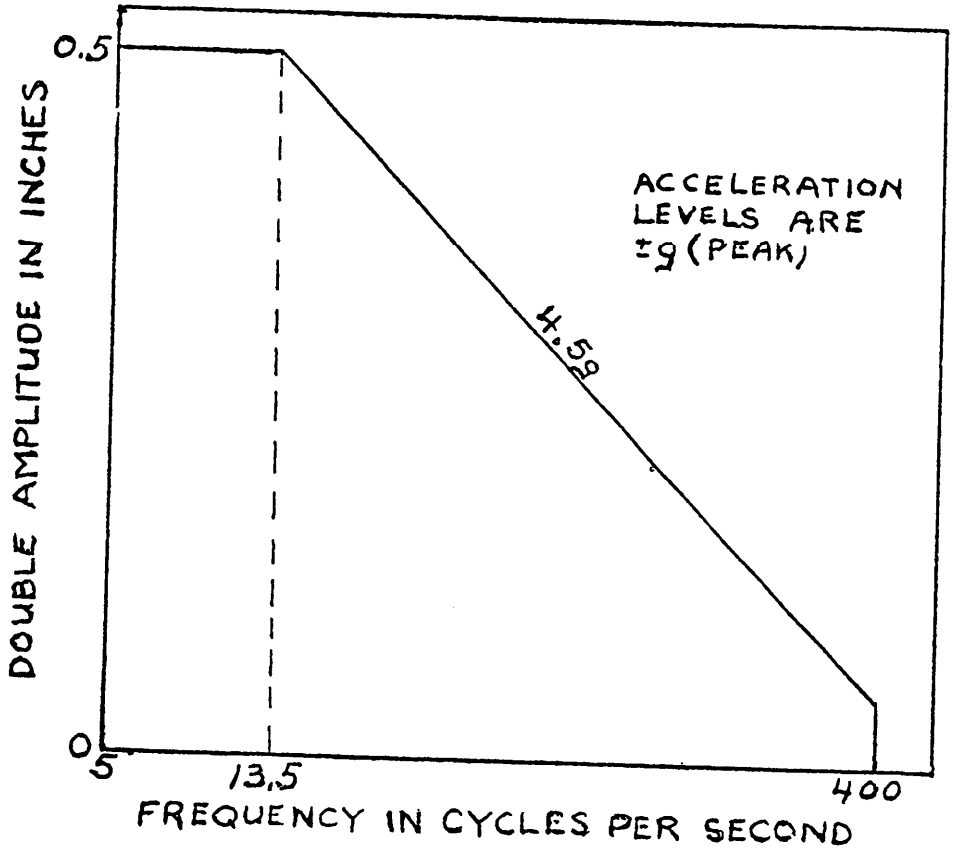

VIBRATION CURVE

Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Army

OFFICIAL BUSINESS

Commanding Officer
Frankford Arsenal
ATTN: SMUFA-J4000
Philadelphia, Pa. 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:42Z
Check the source to verify that this is the current version before use.