MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, CMOS, MULTIPLEXERS/DEMULTIPLEXERS MONOLITHIC SILICON, POSITIVE LOGIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic, silicon, CMOS logic microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Single 15-channel MUX/DEMUX
02	Differential 8-channel MUX/DEMUX
03	Quad 2-line-to-1-line data selector/MUX

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line package
F	F-5 (16-lead, 1/4" x 3/8"), flat package
J	D-3 (24-lead, 1/2" x 1-1/4"), dual-in-line package
K	F-6 (24-lead, 3/8" x 5/8"), flat package
Z	F-8 (24-lead, 1/4" x 3/8"), flat package
X	F-5 (16-lead, 1/4" x 3/8"), flat package, except A dimension = 0.1" (2.54 mm) max
Y	F-6 (24-lead, 3/8" x 5/8"), flat package, except A dimension = 0.1" (2.54 mm) max
U	F-8 (24-lead, 1/4" x 3/8"), flat package, except A dimension = 0.1" (2.54 mm) max

NOTES:
1. As an exception to nickel plate or undercoating paragraph of MIL-M-38510, for case outlines X, Y, and U only, the leads of bottom brazed ceramic packages (i.e., configuration 2 of case outlines F-5, F-6, and F-8) may have electroless nickel undercoating which shall be 50 to 200 microinches (1.27 to 5.08 µm) thick provided the lead finish is hot solder dip (i.e., finish letter A) and provided that, after any lead forming, an additional hot solder dip coating is applied which shall extend from the outer tip of the lead to no more than 0.015 inch (0.38 mm) from the package edge.
2. For bottom or side brazed packages, case outlines F, Y, and U only, the S_1 dimension may go to .000 inch (.00 mm) mimimum.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: George C, Marshall Space Flight Center, National Aeronautics and Space Administration, ATTN: EG02, Marshall Space Flight Center, AL 35812 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Supply voltage range (V_{DD}-V_{SS})	-0.5 V to +18 V
Input current (each input)	±10 mA
Input voltage range	(V_{SS} - 0.5) $\leq V_I \leq$ (V_{DD} +0.5)
Storage temperature range	-65°C to +175°C
Maximum power dissipation (P_D)	200 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case	(See MIL-M-38510, appendix C)
Junction temperature (T_J)	+175°C

1.4 Recommended operating conditions.

Supply voltage range (V_{DD}-V_{SS})	4.5 V to 15 V
Low level input voltage range (V_{IL})	0-1.5 V dc @ V_{DD} = 5 V dc, V_{OL} = 10% V_{DD}, V_{OH} = 90% V_{DD}, 0-4.0 V dc @ V_{DD} = 15 V dc, 0-2.0 V dc @ V_{DD} = 10 V dc
High level input voltage range (V_{IH})	3.5-5.0 V dc @ V_{DD} = 5 V dc, V_{OL} = 10% V_{DD}, V_{OH} = 90% V_{DD}, 11.0-15.0 V dc @ V_{DD} = 15 V dc, 8.0-10.0 V dc @ V_{DD} = 10 V dc
Ambient operating temperature range (T_A)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein. Although eutectic die bonding is preferred, epoxy die bonding may be performed. However, the resin used shall be Dupont 5504 Conductive Silver Paste, or equivalent, which is cured at 200°C ±10°C for a minimum of 2 hours. The use of equivalent epoxies or cure cycles shall be approved by the qualifying activity. Equivalency shall be demonstrated in data submitted to the qualifying activity for verification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Logic diagrams. The logic diagrams shall be as specified on figure 2.

3.2.3 Truth tables. The truth tables shall be as specified on figure 3.

3.2.4 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained and available upon request.

3.2.5 Case outline. The case outline shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 and 6.4 herein.

3.4 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.6.1. Total dose radiation hardness identifier. Total dose radiation hardness identifier shall be in accordance with MIL-M-38510 and 4.5.4 herein.

3.6.2 Serialization. All class S devices shall be serialized in accordance with MIL-M-38510.

3.6.3 Correctness of indexing and marking. All devices shall be subjected to the final electrical tests specified in table II after part number marking to verify that they are correctly indexed and identified by part number. Optionally, an approved electrical test may be devised especially for this requirement.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 39 (see MIL-M-38510, appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Delete the sequence specified in 3.1.9 through 3.1.13 of method 5004 and substitute lines 1 through 7 of table II herein.

b. Burn-in (method 1015 of MIL-STD-883).

(1) Static tests (test condition A) using circuit shown on figure 4, or equivalent. Ambient temperature shall be 125°C minimum. Test duration for each static test shall be 24 hours minimum for class S devices and in accordance with table I of method 1015 for class B devices.

(2) Dynamic test (test condition D) using circuit shown on figure 5, or equivalent. Ambient temperature shall be 125°C minimum. Test duration shall be in accordance with table I of method 1015.

c. Interim and final electrical parameters shall be as specified in table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

d. For class S devices, post dynamic burn-in, or class B devices, post static burn-in, electrical parameter measurements may, at the manufacturer's option, be performed separately or included in the final electrical parameter requirements.

4.2.1 Percent defective allowable (PDA).

a. The PDA for class S devices shall be 5 percent for static burn-in and 5 percent for dynamic burn-in, based on the exact number of devices submitted to each separate burn-in.

b. Static burn-in I and II the failures shall be cumulative for determining PDA.

c. The PDA for class B devices shall be in accordance with MIL-M-38510 for static burn-in. Dynamic burn-in is not required.

d. Those devices whose measured characteristics, after burn-in, exceed the specified delta (Δ) limits or electrical parameter limits specified in table III, subgroup 1, are defective and shall be removed from the lot. The verified failures divided by the total number of devices in the lot initially submitted to burn-in shall be used to determine the percent defective for the lot and the lot shall be accepted or rejected based on the specified PDA.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.5).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.5).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be performed in accordance with table II herein.

b. Subgroups 5, 6, 7, and 8 of table I of method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 4 (C_j measurement) shall be measured only for initial qualification and after process or design changes which may affect input capacitance. Capacitance shall be measured between the designated terminal and V_{SS} at a frequency of 1 MHz.

d. Subgroup 12 shall be added to the group A inspection requirements for class S devices using an LTPD of 15 and consist of the procedures, test conditions, and limits specified in table III.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. Class S steady state life (accelerated) test circuits shall be submitted to the qualifying activity for approval. When the alternate steady state life test is used, the circuit on figure 5, or equivalent, shall be used.

b. A special subgroup shall be added using an LTPD of 15 for classes S and B, and shall be measured only for initial qualification and after process or design changes. This subgroup shall consist of a high voltage test of the input protection circuits, V_{ZAP} (see 4.5.3).

c. End-point electrical parameters shall be as specified in table II herein and shall consist only of those subgroups specified in table IIa of test method 5005 of MIL-STD-883, and table II herein. Delta limits shall apply only to subgroup 5 of group B inspections and shall consist of tests specified in table IV herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions V_{SS} = 0 V $-55°C \leq T_A \leq 125°C$ Unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Positive clamping input to V_{DD}	$V_{IC(pos)}$	T_A = 25°C, V_{DD} = GND, V_{SS} = Open, Output = Open, I_{IN} = 1 mA	All	---	1.5	Vdc
Negative clamping input to V_{SS}	$V_{IC(neg)}$	T_A = 25°C, V_{DD} = Open, V_{SS} = GND, Output = Open, I_{IN} = -1 mA	All	---	-6.0	Vdc
Quiescent supply current	I_{SS} or I_{DD}	V_{DD} = 18.0 Vdc, V_{IN} = V_{SS} or V_{DD} All input combinations	All	---	-2.5	µA
High-level output voltage	V_{OH1}	V_{DD} = 15.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	14.95	---	Vdc
Low-level output voltage	V_{OL1}	V_{DD} = 15.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	---	0.05	Vdc
3-state output leakage current	I_{OC1}	V_{DD} = 18.0 Vdc Measure outputs sequentially $V_O = V_{DD}$	03	---	100	nA
	I_{OC2}	V_{DD} = 18.0 Vdc Measure outputs sequentially $V_O = V_{SS}$	03	---	-100	nA
Input high voltage	V_{IH1}	V_{DD} = 5.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	4.5	---	Vdc
	V_{IH2}	V_{DD} = 10.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	9.0	---	Vdc
	V_{IH3}	V_{DD} = 15.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	13.5	---	Vdc
Input low voltage	V_{IL1}	V_{DD} = 5.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	---	0.5	Vdc
	V_{IL2}	V_{DD} = 10.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	---	1.0	Vdc
	V_{IL3}	V_{DD} = 15.0 Vdc See table III $\|I_O\| \leq 1$ µA	All	---	1.5	Vdc

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Test	Symbol	Conditions V_{SS} = 0 V -55°C ≤ T_A ≤ 125°C Unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Output high (source) current	I_{OH1}	V_{DD} = 5.0 Vdc, V_{IN} = V_{DD}, V_{OH} = 4.6 Vdc	03	-0.36	---	mAdc
	I_{OH2}	V_{DD} = 15.0 Vdc, V_{IN} = V_{DD}, V_{OH} = 13.5 Vdc	03	-2.4	---	mAdc
Output low (sink) current	I_{OL1}	V_{DD} = 5.0 Vdc, V_{IN} = GND, V_{OL} = 0.4 Vdc	03	0.36	---	mAdc
	I_{OL2}	V_{DD} = 15.0 Vdc, V_{IN} = GND, V_{OL} = 1.5 Vdc	03	2.4	---	mAdc
Input leakage current 1/	I_{IH}	V_{DD} = 18.0 Vdc Measure inputs sequentially connect all unused inputs to V_{DD} or V_{SS}	All	---	45	nA
	I_{IL}	V_{DD} = 18.0 Vdc Measure inputs sequentially connect all unused inputs to V_{DD} or V_{SS}	All	---	-45	nA
Switch "on" resistance	R_{ON1}	V_{DD} = 2.5 V, V_{SS} = -2.5 V See table III	01,02	---	900	Ω
	R_{ON2}	V_{DD} = 5.0 V, V_{SS} = -5.0 V See table III	01,02	---	325	Ω
	R_{ON3}	V_{DD} = 7.5 V, V_{SS} = -7.5 V See table III	01,02	---	230	Ω
Input, control, output, feedthrough capacitance	C_C	V_{DD} = 0 Vdc, f = 1 MHz, T_A = 25°C (see table III)	All	---	7.5	pF
	C_{IS}		01,02	---	7.5	pF
	C_{IOS}		01,02	---	0.4	pF
	C_{OS}		01	---	75	pF
			02	---	50	pF
Switch leakage current	I_{DOFF1}	V_{DD} = 5.0 Vdc	01,02	---	±100	mA
	I_{DOFF2}	V_{DD} = 10.0 Vdc	01,02	---	±200	mA
	I_{DOFF3}	V_{DD} = 15.0 Vdc	01,02	---	±500	mA
Propagation delay times: O/I to I/O	t_{PLH1}, t_{PHL1}	V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 10 kΩ (see figures 10 and 11)	01,02	3	77	ns

1/ Input current of one input node.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Test	Symbol	Conditions V_{SS} = 0 V -55°C ≤ T_A ≤ 125°C Unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Propagation delay times: Data input to output	t_{PLH1}, t_{PHL1}	V_{DD} = 5.0 Vdc, C_L = 50 pF R_L = 200 kΩ (see figure 16)	03	15	420	ns
Propagation delay times: Control inputs to I/O		V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 10 kΩ (see figures 12 and 13)				
Low to high level	t_{PLH2}		01,02	30	830	ns
High to low level	t_{PHL2}		01,02	20	560	ns
Propagation delay times: Input select to output	t_{PLH2}, t_{PHL2}	V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 200 kΩ (see figure 17)	03	18	490	ns
Propagation delay times: Inhibit to I/O		V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 10 kΩ (see figures 14 and 15)				
Low to high level	t_{PLH3}		01,02	30	830	ns
High to low level	t_{PHL3}		01,02	20	560	ns
3-state delay times:		V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 1 kΩ (see figure 18)				
Output high to high impedance	t_{PHZ}		03	9	250	ns
High impedance to output high	t_{PZH}		03	9	250	ns
High impedance to output low	t_{PZL}		03	9	250	ns
Output low to high impedance	t_{PLZ}		03	9	250	ns
Transition times	t_{THL}, t_{TLH}	V_{DD} = 5.0 Vdc, C_L = 50 pF, R_L = 200 kΩ (see figure 16)	03	10	280	ns
Propagation delay times: O/I to I/O	t_{PLH1}, t_{PHL1}	V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 10 kΩ C_L = 50 pF (see figures 10 and 11)	01,02	1	25	ns
Propagation delay times: Data input to output	t_{PLH1} t_{PHL1}	V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 200 kΩ C_L = 50 pF (see figure 16)	03	7	140	ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Test	Symbol	Conditions V_{SS} = 0 V -55°C ≤ T_A ≤ 125°C Unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Propagation delay times: Control inputs to I/O		V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 10 kΩ, C_L = 50 pF (see figures 12 and 13)				
Low to high level	t_{PLH2}		01,02	13	250	ns
High to low level	t_{PHL2}		01,02	8	150	ns
Propagation delay times: Input select to output	t_{PLH2}, t_{PHL2}	V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 200 kΩ, C_L = 50 pF (see figure 17)	03	8	170	ns
Propagation delay times: Inhibit to I/O		V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 10 kΩ, C_L = 50 pF (see figures 14 and 15)				
Low to high level	t_{PLH3}		01,02	13	250	ns
High to low level	t_{PHL3}		01,02	8	150	ns
3-state delay times: Output high to high impedance	t_{PHZ}	V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 1 kΩ, C_L = 50 pF (see figure 18)	03	5	100	ns
High impedance to output high	t_{PZH}		03	5	100	ns
High impedance to low output	t_{PZL}		03	5	100	ns
Low output to high impedance	t_{PLZ}		03	5	100	ns
Transition times	t_{THL}, t_{TLH}	V_{DD} = 10.0 Vdc, T_A = 25°C, R_L = 200 kΩ, C_L = 50 pF (see figure 16)	03	5	100	ns
Input test voltage	V_{ZAP}	C_1 = 100 pF R_Z = 1.5 kΩ (see 4.5.3)	All	400	---	V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE II. Burn-in and electrical test requirements.

Line no.	Applicable tests and MIL-STD-883 test methods	Class S device 3/				Class B devices 3/			
		Ref. par.	Table 2/ III sub-groups	Table 1/ IV delta limits	Test circuit figure	Ref. par.	Table 2/ III sub-groups	Table 1/ IV delta limits	Test circuit figure
1	Interim electrical parameters (method 5004)		1				1		
2	Static burn-in I (method 1015)	4.2b. 4.5.2			9	4.2b. 4.5.2	4/		4
3	Same as line 1		1*	Δ		4.2d.	1*	Δ	
4	Dynamic burn-in (method 1015)	4.2b. 4.5.2			5				
5	Same as line 1	4.2.d.	1*	Δ					
6	Final electrical parameters (method 5004)		1*,2,3,9				1*,2,3,9		
7	Group A test requirements (method 5005)	4.4.1	1,2,3,4, 9,10,11, 12			4.4.1	1,2,3, 4,9		
8	Group B end-point parameters (method 5005)	4.4.2	1,2,3, 9,10,11	Δ					
9	Group C end point electrical parametrs (method 5005)					4.4.3	1,2,3	Δ	
10	Additional group C tests, (method 5005)					4.4.3c	10,11		
13	Group D end-point electrical parameters (method 5005)	4.4.4	1,2,3			4.4.4	1,2,3		

1/ (Δ) indicates delta limit shall be required only on table III subgroup 1 where specified, and delta values shall be computed with reference to the previous interim electrical parameters.

2/ (*) indicates PDA applied to subgroup 1 (see 4.2.1).


3/ Blank spaces indicate tests are not applicable.

4/ The device manufacturer may at his option either perform delta measurements orwithin 24 hours after burn-in (or removal of bias) perform the final electrical parameter measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.


Device type 01

Cases J, K, U, Y, and Z

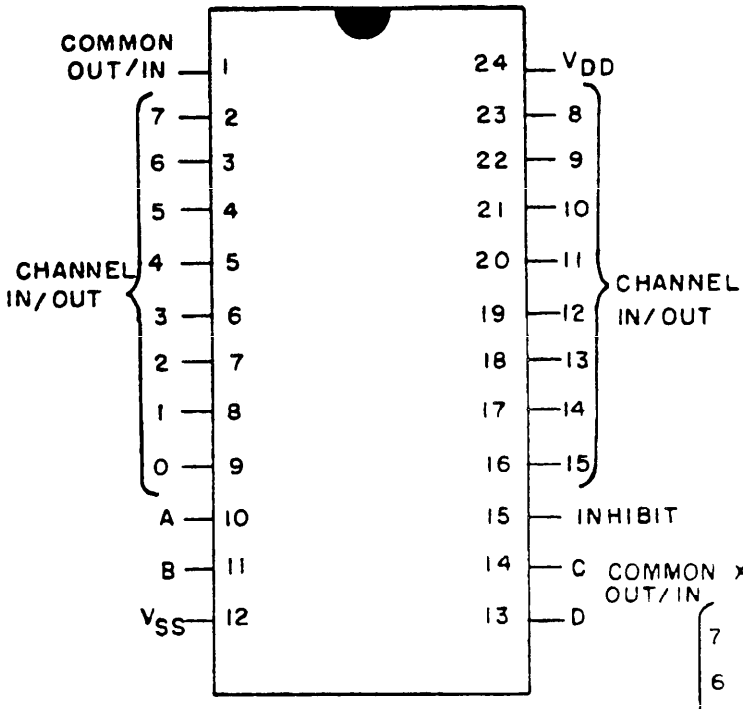

Device type 02

Cases J, K, U, Y, and Z

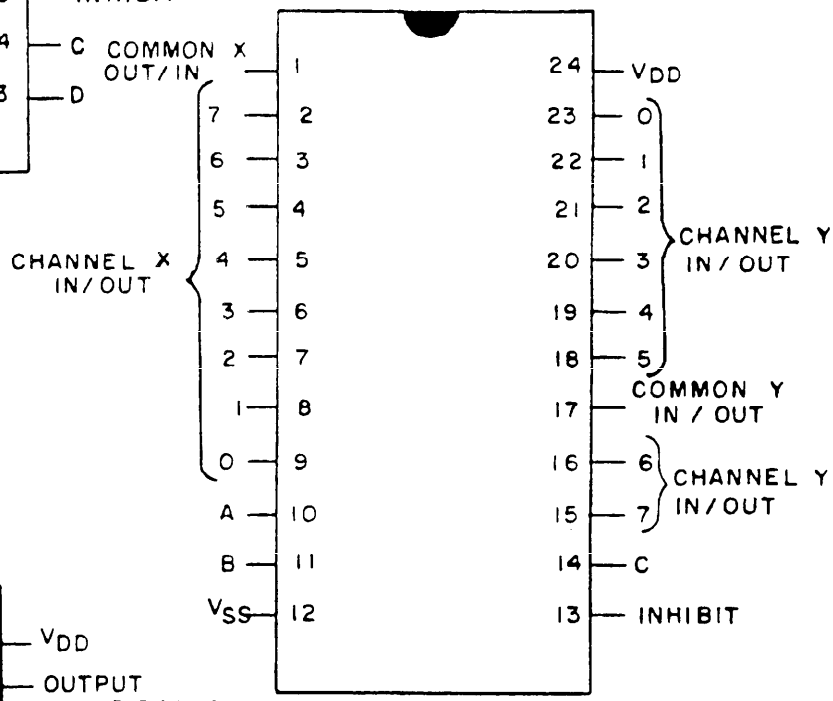

Device type 03

Cases E, F, and X

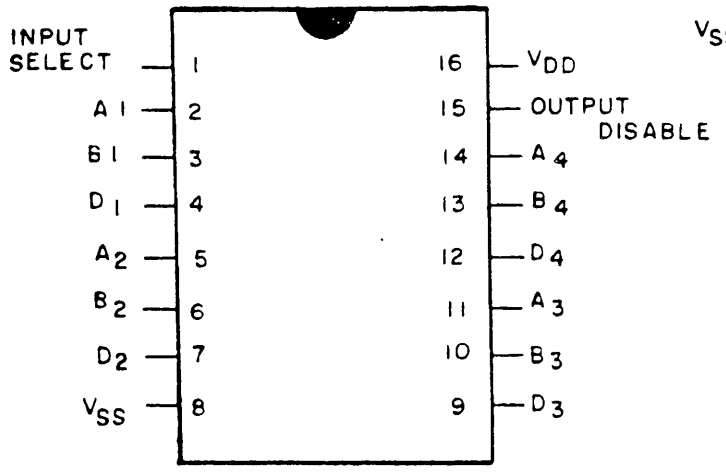


FIGURE 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

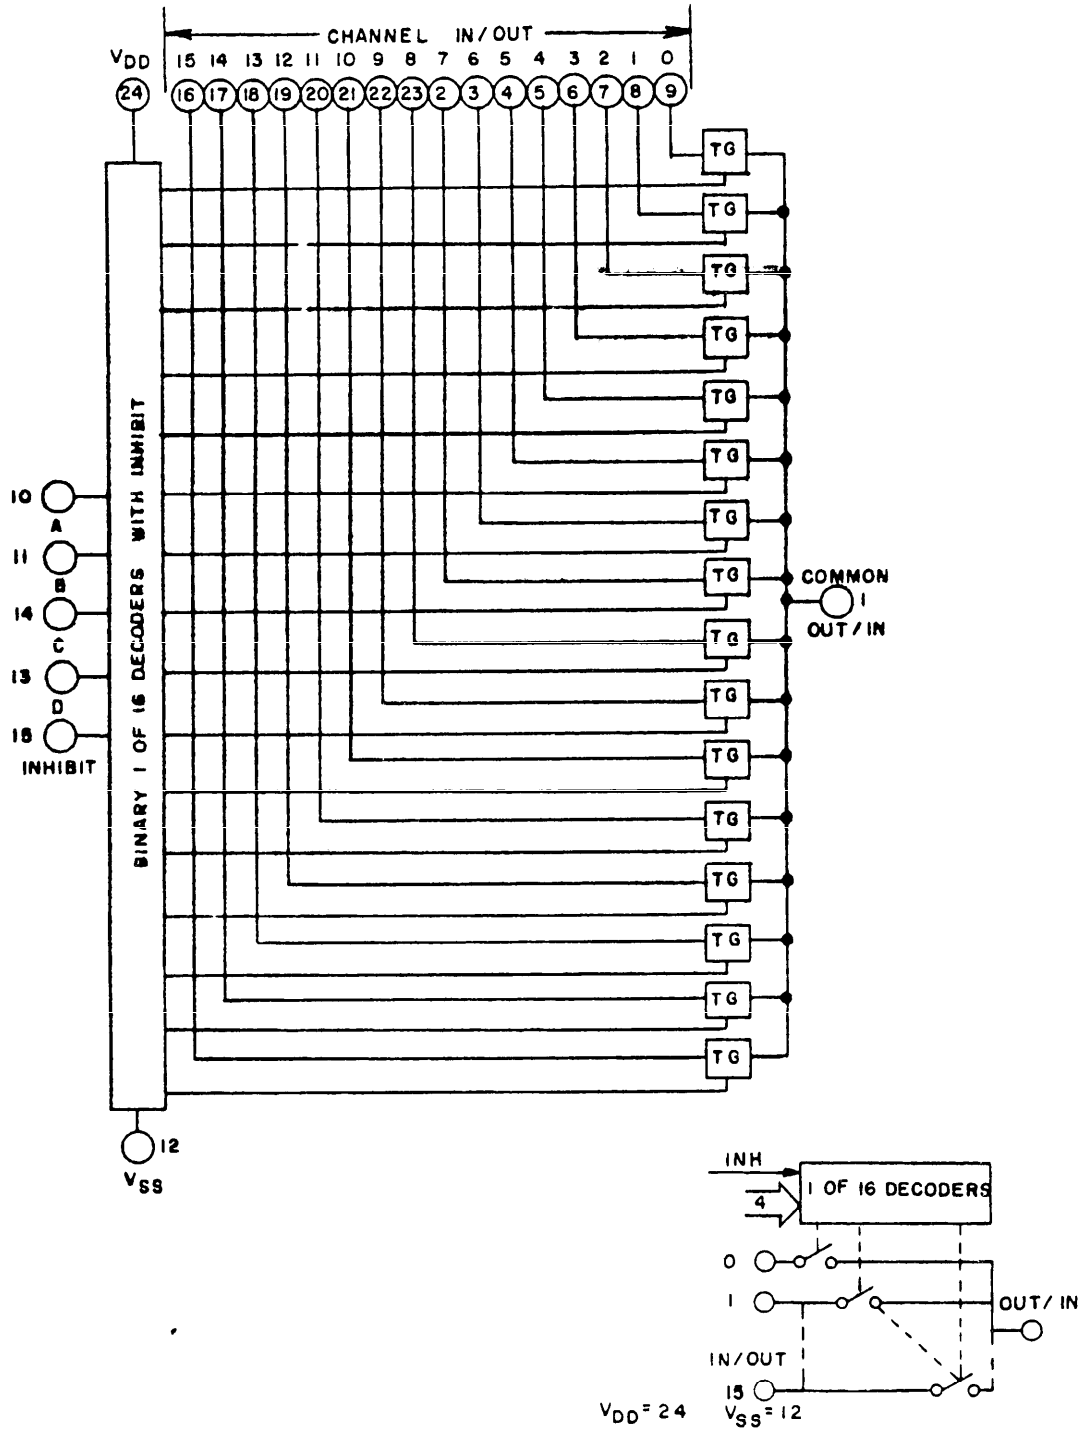
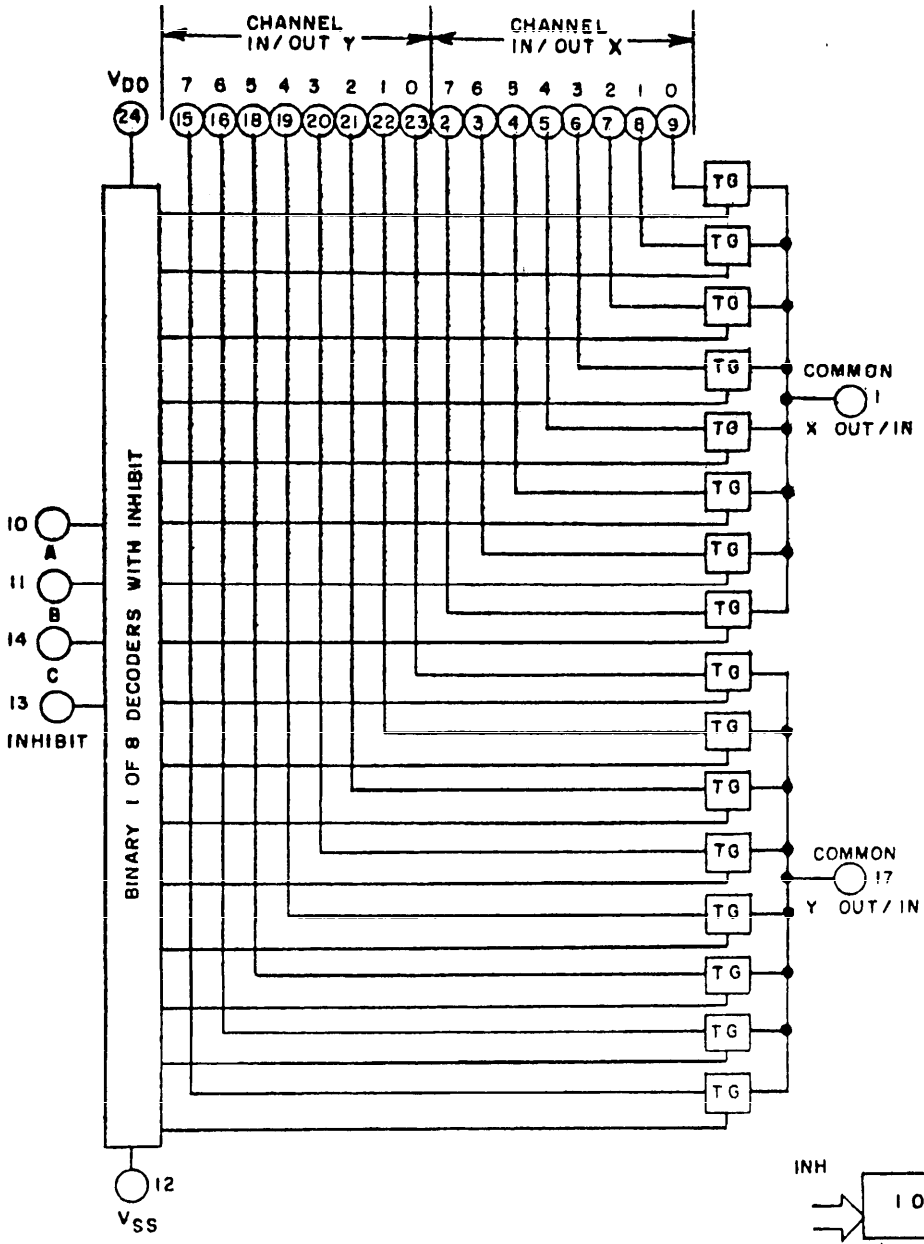


FIGURE 2. Logic diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 02



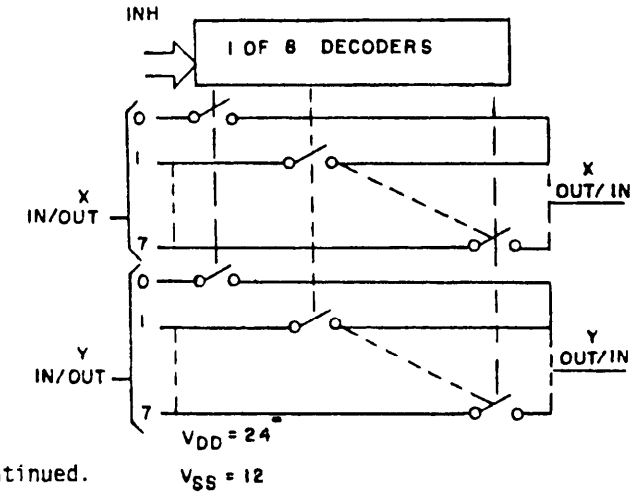


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 03

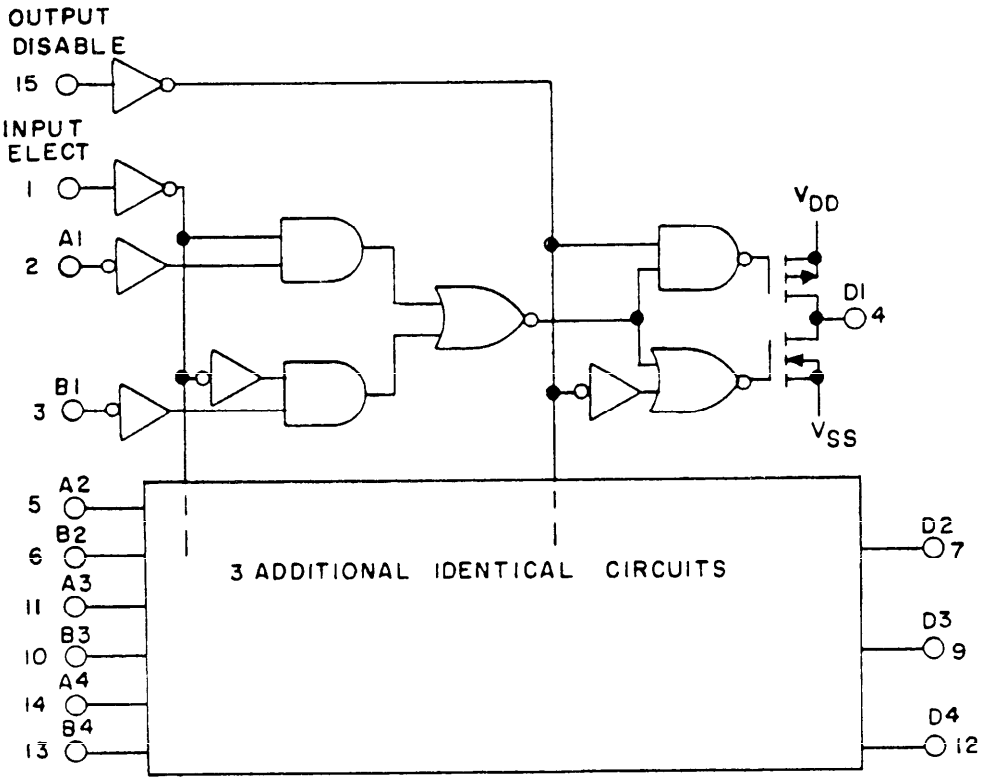


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

A	B	C	D	INH	SELECTED CHANNEL
X	X	X	X	1	None
0	0	0	0	0	0
1	0	0	0	0	1
0	1	0	0	0	2
1	1	0	0	0	3
0	0	1	0	0	4
1	0	1	0	0	5
0	1	1	0	0	6
1	1	1	0	0	7
0	0	0	1	0	8
1	0	0	1	0	9
0	1	0	1	0	10
1	1	0	1	0	11
0	0	1	1	0	12
1	0	1	1	0	13
0	1	1	1	0	14
1	1	1	1	0	15

Device type 02

A	B	C	INH	SELECTED CHANNEL
X	X	X	1	None
0	0	0	0	0X, 0Y
1	0	0	0	1X, 1Y
0	1	0	0	2X, 2Y
1	1	0	0	3X, 3Y
0	0	1	0	4X, 4Y
1	0	1	0	5X, 5Y
0	1	1	0	6X, 6Y
1	1	1	0	7X, 7Y

X = DON'T CARE LOGIC 1 = HIGH

LOGIC 0 = LOW Z = HIGH IMPEDANCE


Device type 03

INPUTS				OUTPUT
3 - STATE OUTPUT DISABLE	SELECT	A	B	D
1	X	X	X	Z
0	0	0	X	0
0	0	1	X	1
0	1	X	0	0
0	1	X	1	1

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

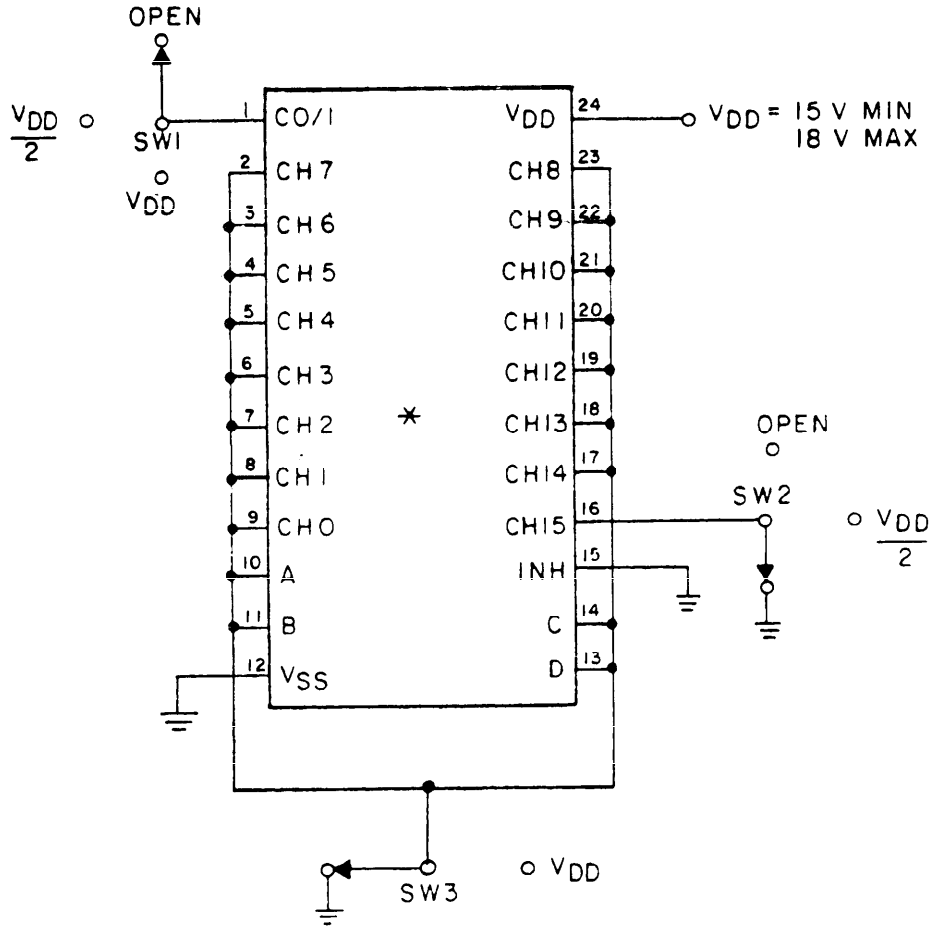


NOTES:
1. For static burn-in I, connect the switches as follows: Switch 1 = open or $V_{DD}/2$, switch 2 = GND, switch 3 = GND.
2. For static burn-in II, connect the switches as follows: Switch 1 = V_{DD}, switch 2 = open or $V_{DD}/2$, switch 3 = V_{DD}.
3. Except for V_{DD} and V_{SS}, each terminal shall be connected through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exceed ±20% of its branded value due to use, heat, or age.

FIGURE 4. Static burn-in tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 02

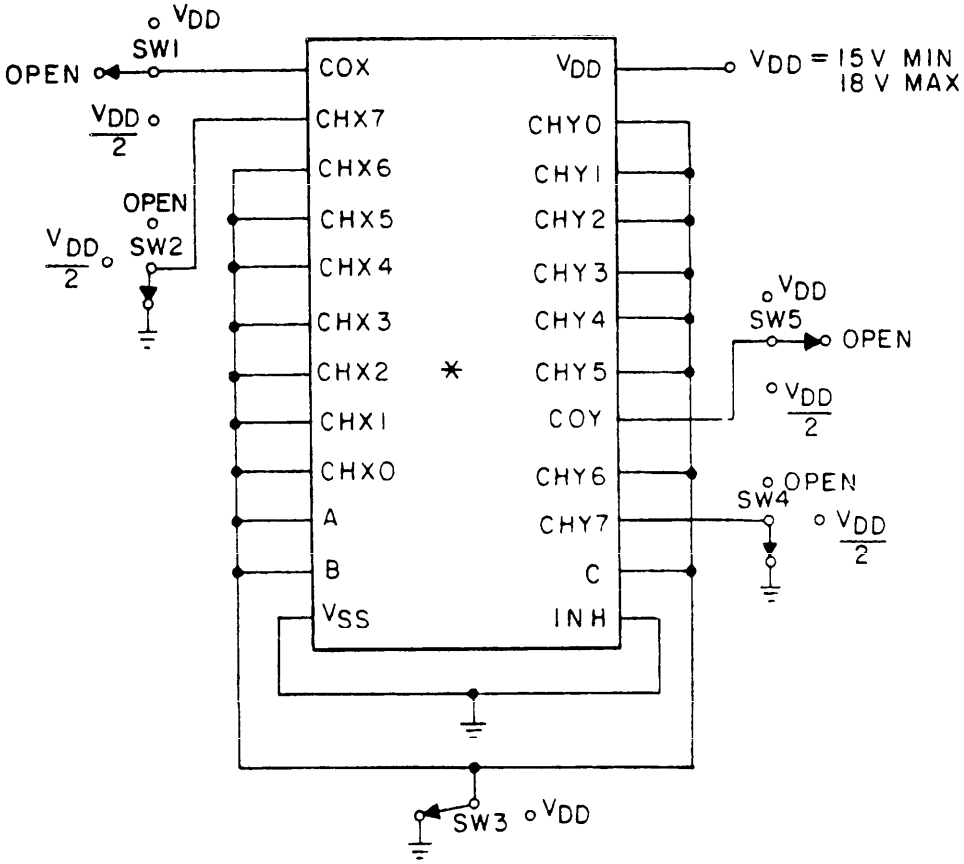


* SEE NOTE 3

NOTES:
1. For static burn-in I, connect the switches as follows: Switches 1 and 5 = open or $V_{DD}/2$, switches 2, 3 and 4 = GND.
2. For static burn-in II, connect the switches as follows: Switches 1, 3 and 5 = V_{DD}, switches 2 and 4 = open or $V_{DD}/2$.
3. Except for V_{DD} and V_{SS}, each terminal shall be connected directly to V_{DD} or V_{SS}, or through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exceed ±20% of its branded value due to use, heat, or age.

FIGURE 4. Static burn-in tests - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 03

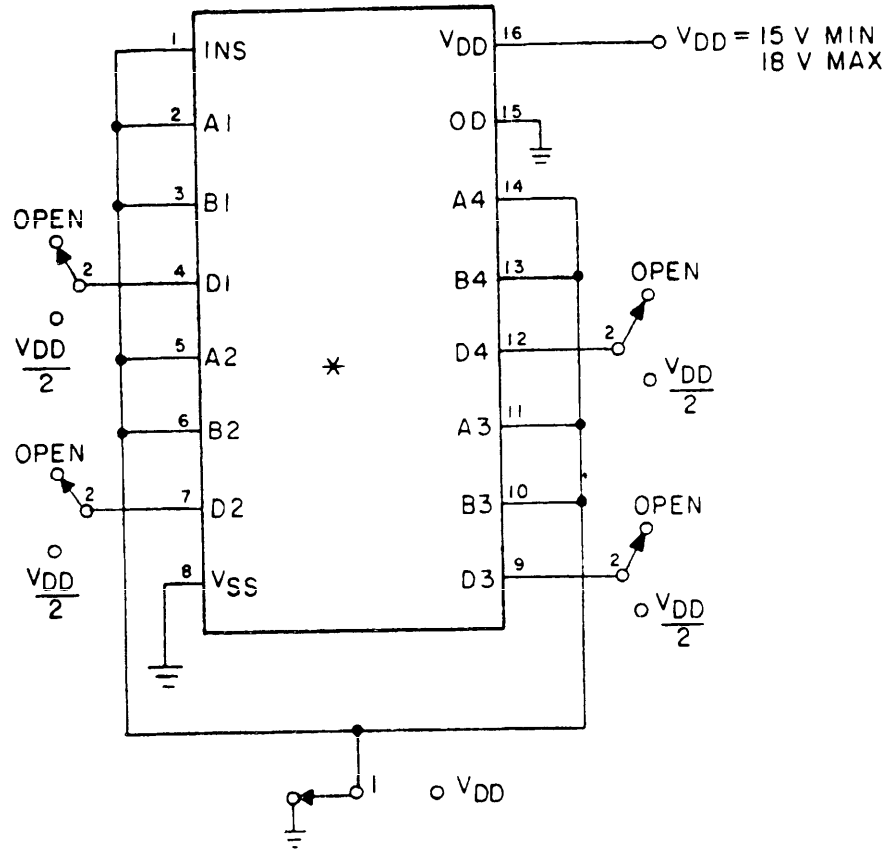


* SEE NOTE 3

NOTES:
1. For static burn-in I, all inputs are connected to 0 volts, switch position 1.
2. For static burn-in II, all inputs are connected to V_{DD}, switch position 2.
3. Except for V_{DD} and V_{SS}, each terminal shall be connected through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exeed ±20% of its branded value due to use, heat or age.
4. Output may be in switch position 1 or 2.
5. $V_{DD/2} = V_{DD/2} \pm 1.0$ V.

FIGURE 4. Static burn-in tests - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

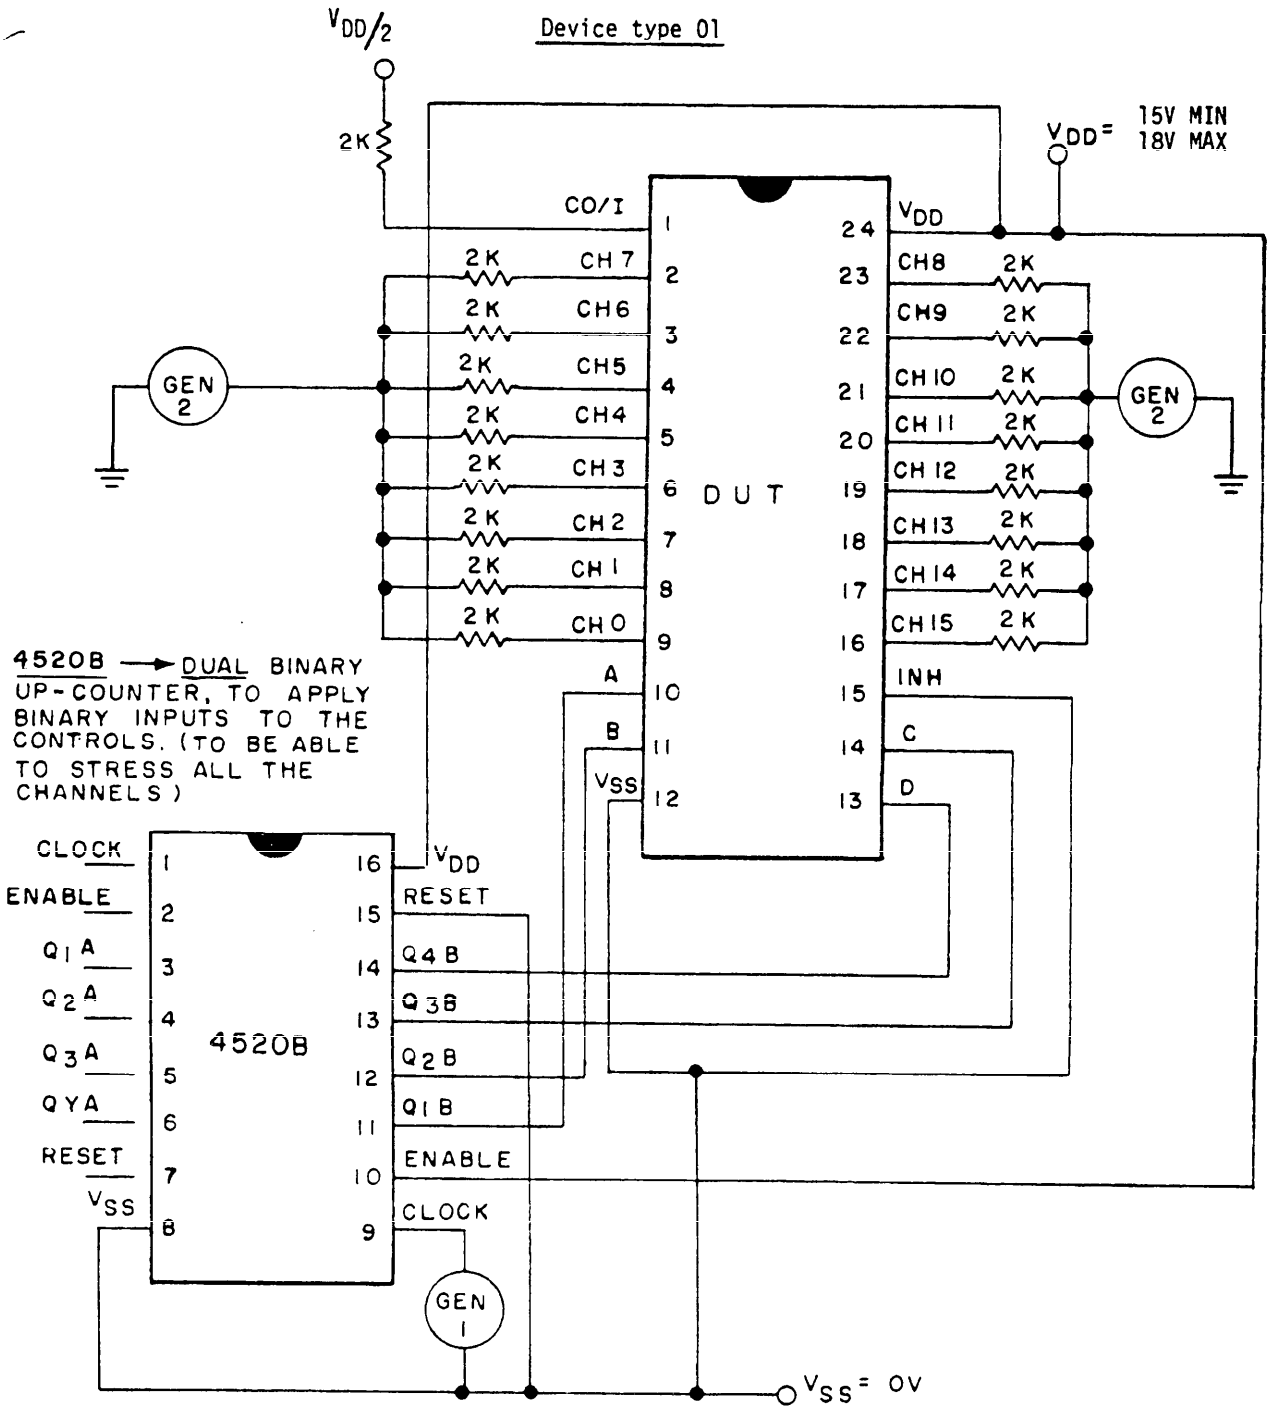


NOTES:
1. Except for V_{DD} and V_{SS}, each terminal shall be connected through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exceed ±20% of its branded value due to use, heat or age.
2. Input signal requirements:
   a. Square wave, 50% duty cycle.
   b. 25 kHz < PRR < 1 MHz.
   c. t_{TLH} and t_{THL} < 1 µs.
   d. Voltage level:
      Minimum = V_{SS} -0.5 V, +10% V_{DD}.
      Maximum = V_{DD} +0.5, -10% V_{DD}.

FIGURE 5. Dynamic burn-in and steady state life test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 02

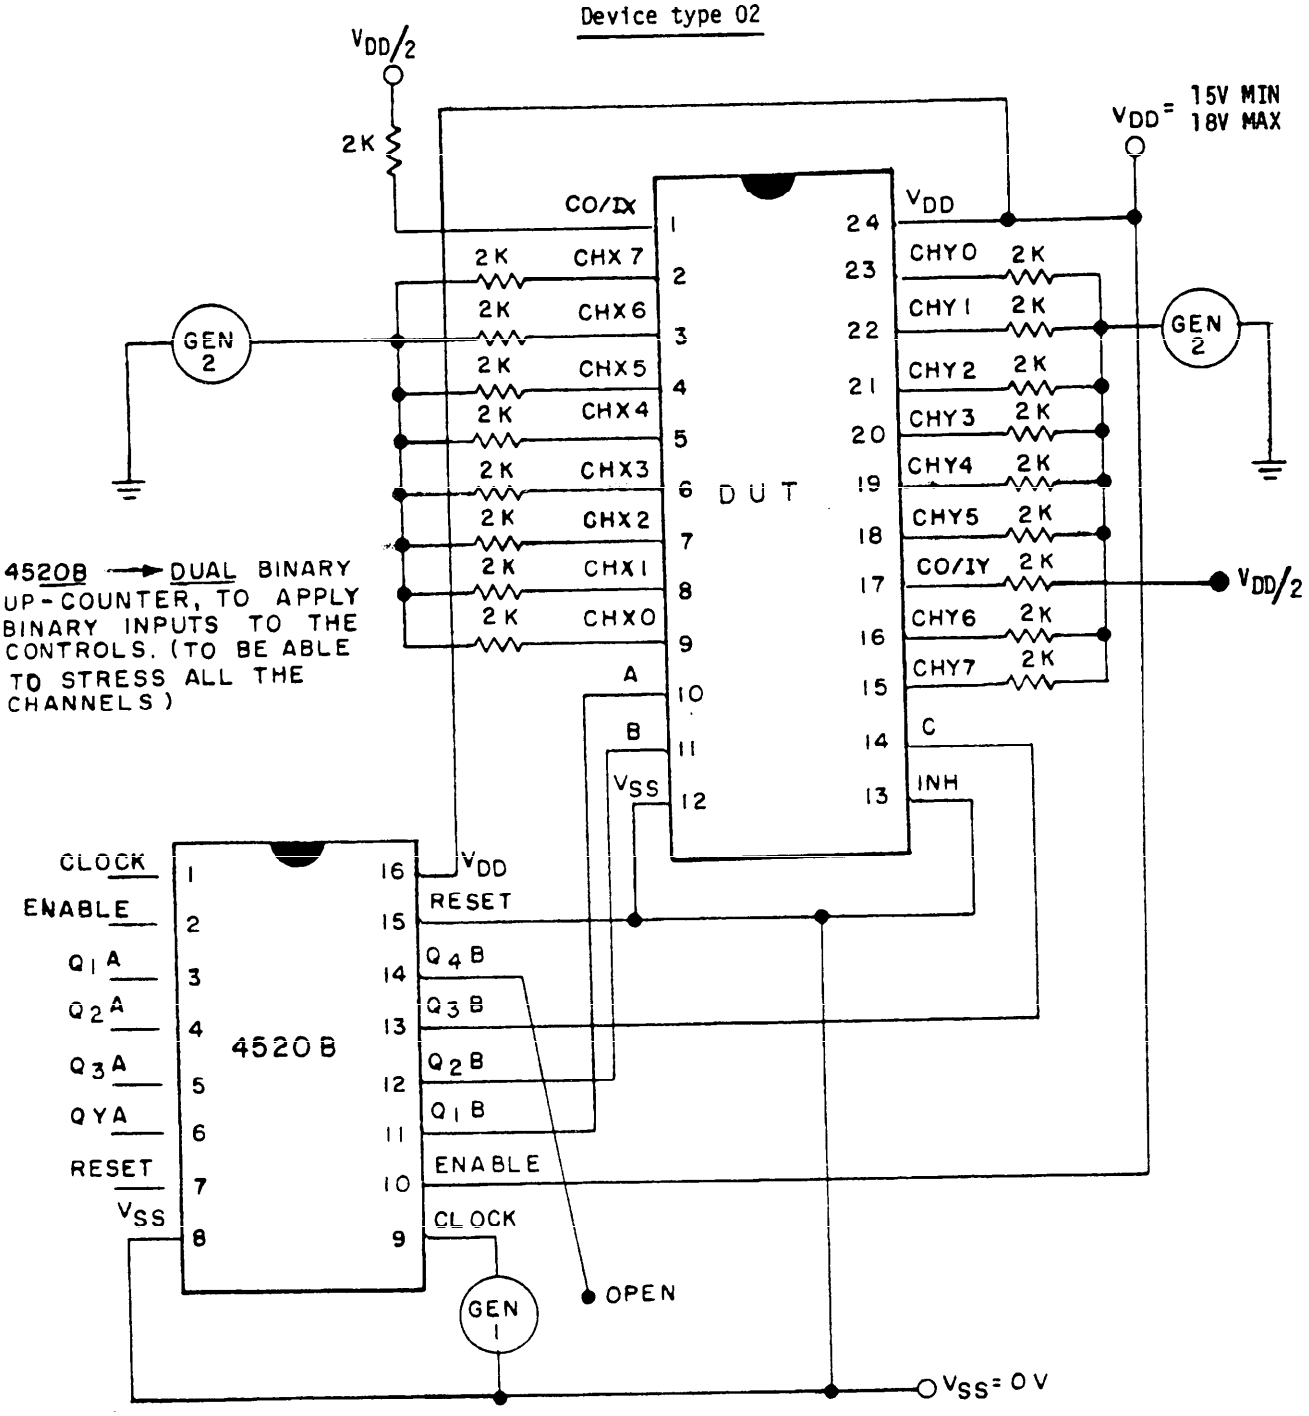


NOTES:
1. Except for V_{DD} and V_{SS}, each terminal shall be connected through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exceed ±20% of its branded value due to use, heat or age.
2. Input signal requirements:
   a. Square wave, 50% duty cycle.
   b. 25 kHz < PRR < 1 MHz.
   c. t_{TLH} and t_{THL} < 1 µs.
   d. Voltage level:
      Minimum = V_{SS} -0.5 V, +10% V_{DD}.
      Maximum = V_{DD} +0.5, -10% V_{DD}.

FIGURE 5. Dynamic burn-in and steady state life test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.


Device type 03

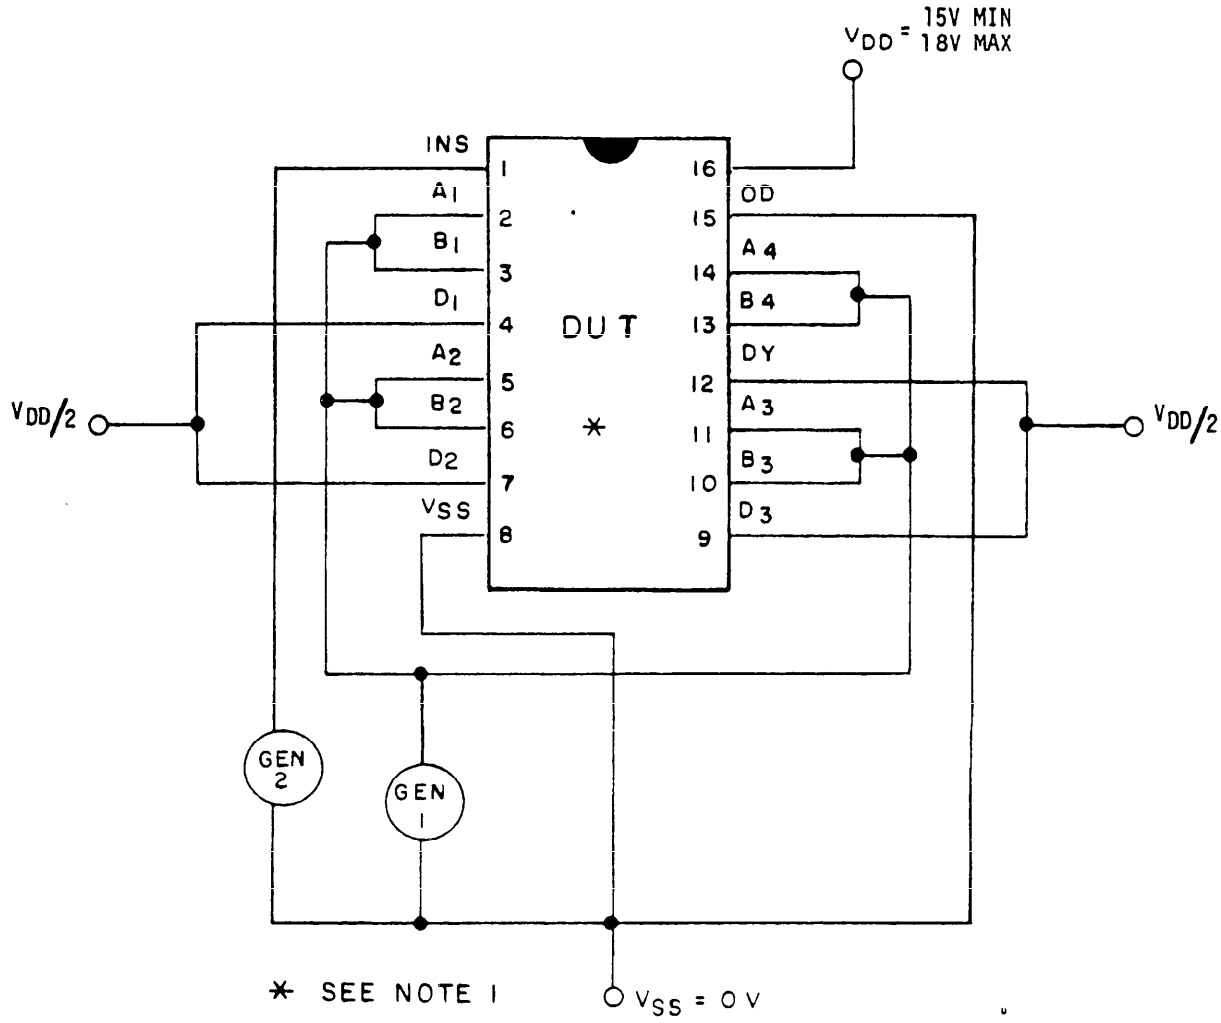

NOTES:
1. Except for V_{DD} and V_{SS}, each terminal shall be connected through a resistor whose value is 2 kΩ to 47 kΩ. The actual measured value of the resistor selected shall not exceed ±20% of its branded value due to use, heat or age.
2. Input signal requirements:
   a. Square wave, 50% duty cycle.
   b. 25 kHz < PRR < 1 MHz.
   c. t_{TLH} and t_{THL} < 1 µs.
   d. Voltage level:
      Minimum = V_{SS} -0.5 V, +10% V_{DD}.
      Maximum = V_{DD} +0.5, -10% V_{DD}.
3. Generators 1 and 2 should have frequencies which are dissonant and free-running with respect with each other.

FIGURE 5. Dynamic burn-in and steady state life test circuits. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

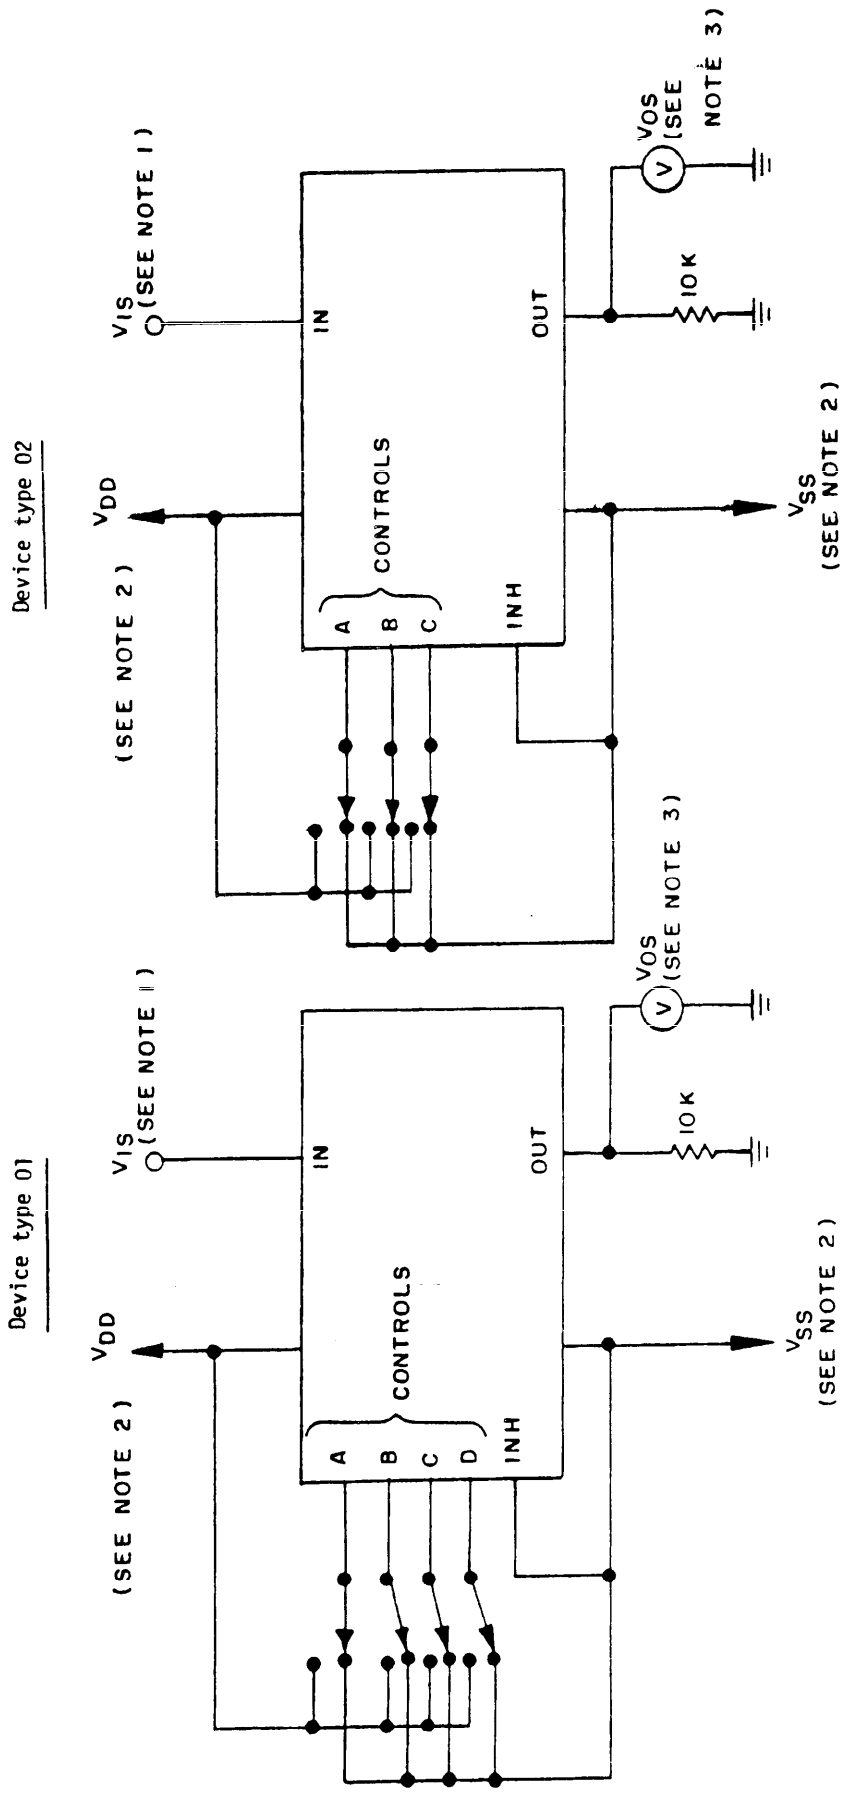


NOTES:

R_{ON1} number	R_{ON1} (1)	R_{ON1} (2)	R_{ON1} (3)	R_{ON1} (4)
V_{IS}	-2.0 V	-0.9 V	+1.0 V	+2.0 V

1. Conditions V_{DD} V_{SS}: V_{DD} = 2.5 V, V_{SS} =-2.5 V
2. Translation from V_{OS} to R_{ON}: $R_{ON} = \frac{VIS - VOS}{VOS/10\ k\Omega}$
3. See table III for complete terminal conditions.

FIGURE 6. ON resistance test.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

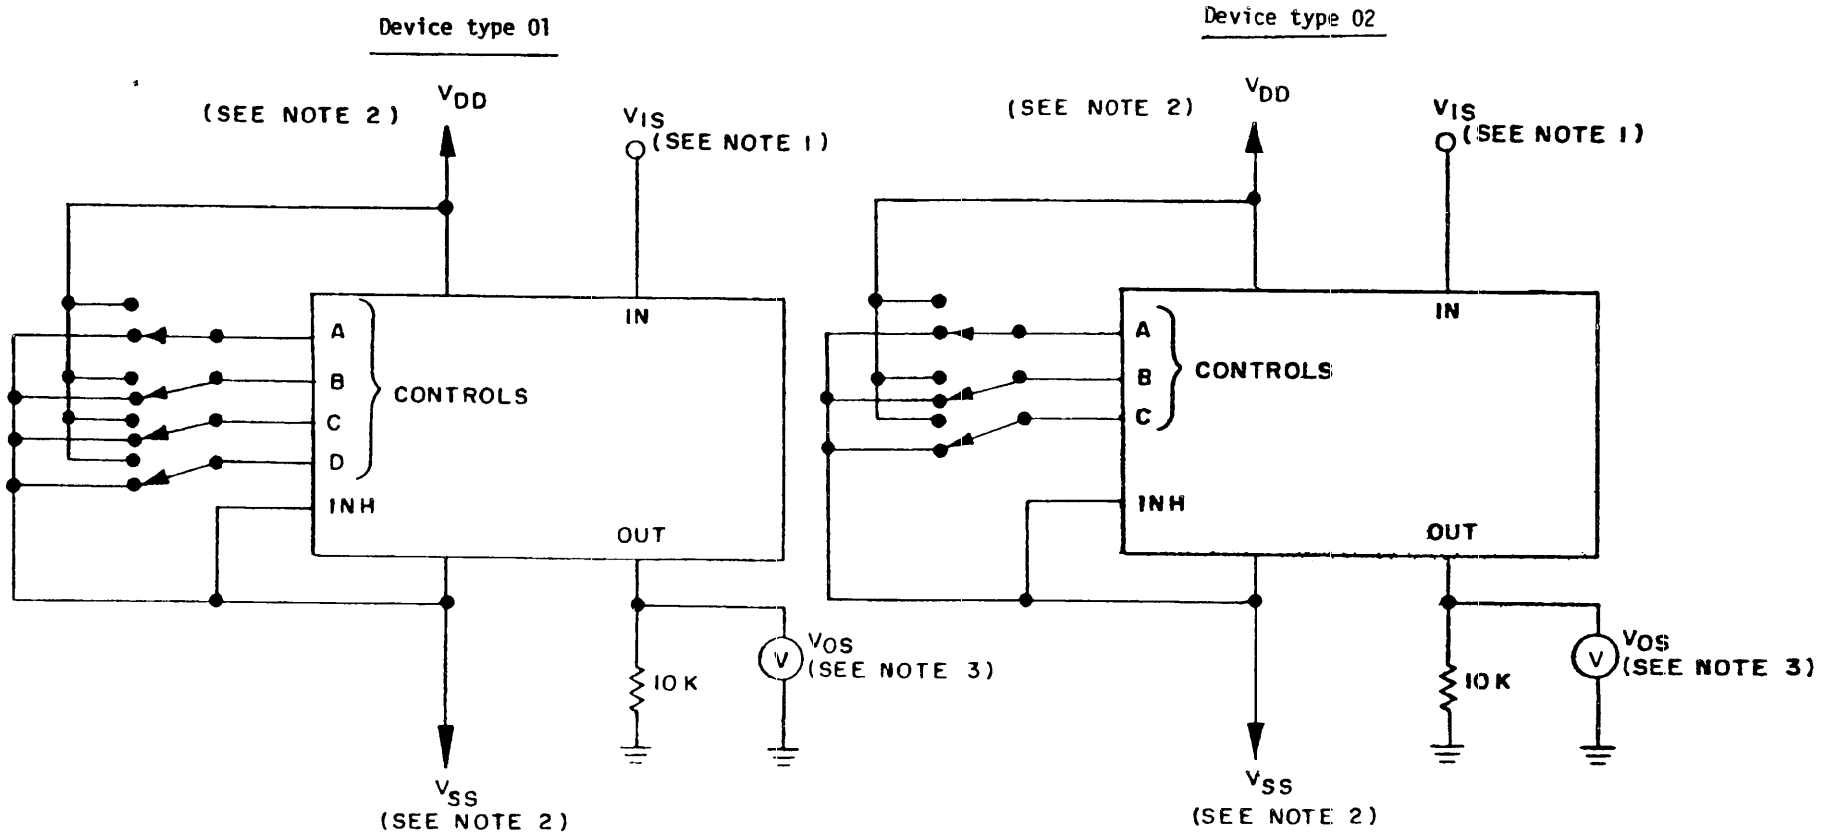

NOTES:

	R_{ON2} number	R_{ON2} (1)	R_{ON2} (2)	R_{ON2} (3)	R_{ON2} (4)
1.	V_{IS}	-5.0 V	-3.0 V	+3.5 V	+5.0 V

2. Conditions V_{DD} and V_{SS}: V_{DD} = 5 V, V_{SS} = -5V


3. Translation from V_{OS} to R_{ON}:

$$R_{ON} = \frac{VIS-VOS}{VOS/10\ k\Omega}$$

4. See table III for complete terminal conditions.

FIGURE 7. On resistance test.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

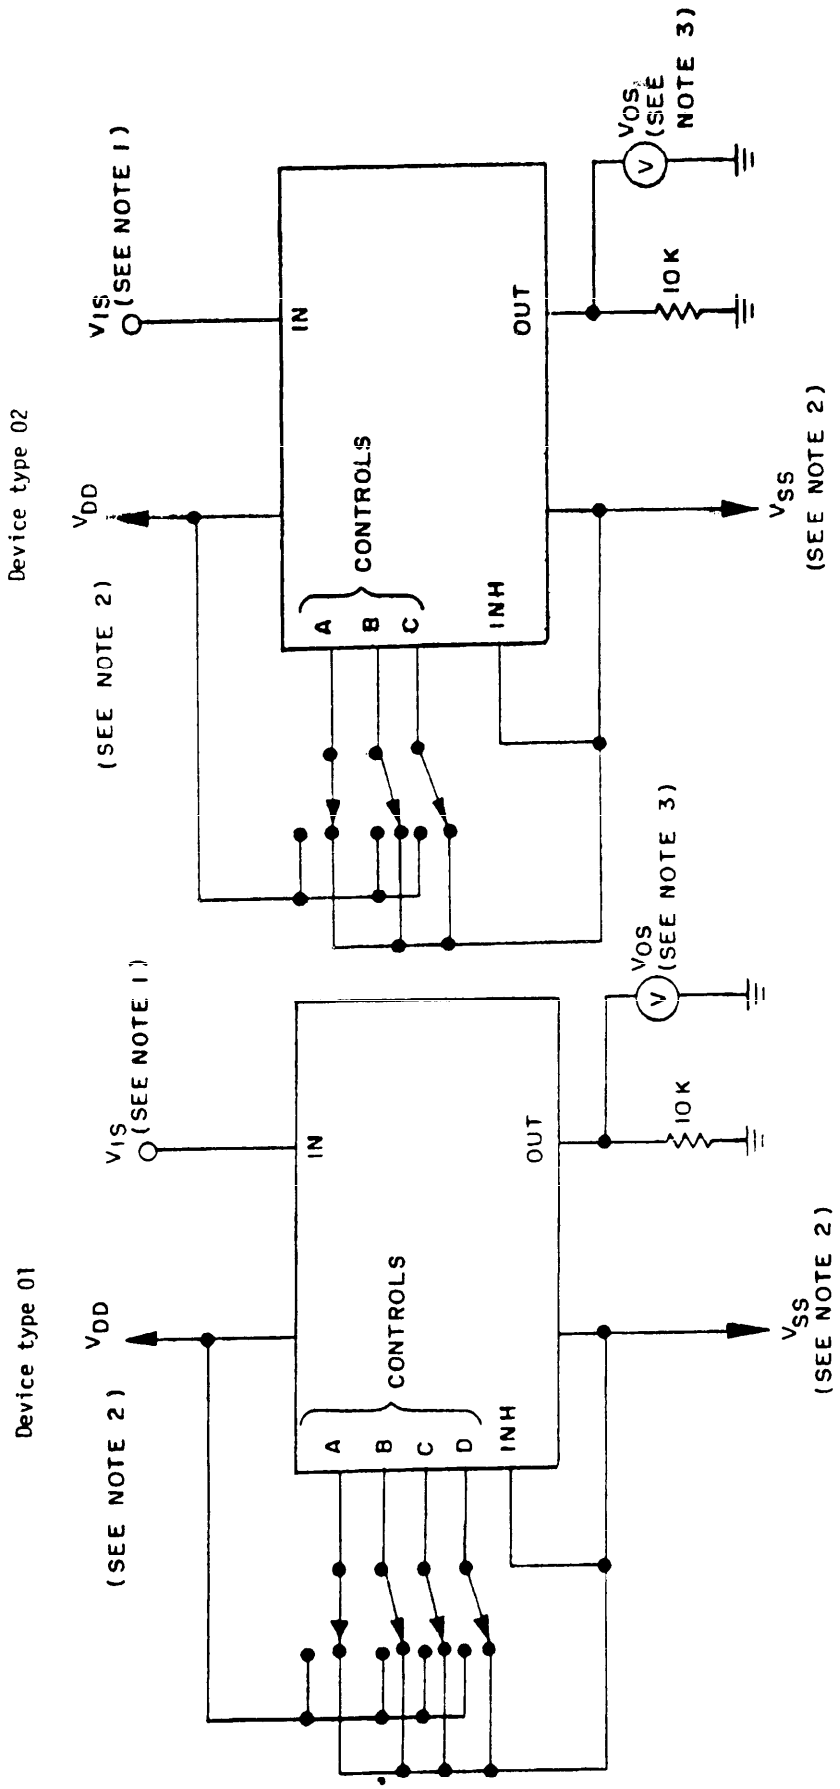

R_{ON3} number	R_{ON3} (1)	R_{ON3} (2)	R_{ON3} (3)	R_{ON3} (4)	R_{ON3} (5)
V_{IS}	-7.5 V	-5.0V	0V	+6.0 V	+7.5 V

NOTES:

1.
2. Conditions V_{DD} and V_{SS}: V_{DD} = 7.5 V, V_{SS} = -7.5 V
3. Translation from V_{OS} to R_{ON}: $R_{ON} = \frac{VIS - VOS}{VOS/10\ k\Omega}$
4. See table III for complete terminal conditions.

FIGURE 8. ON resistance test.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the currentversion before use.


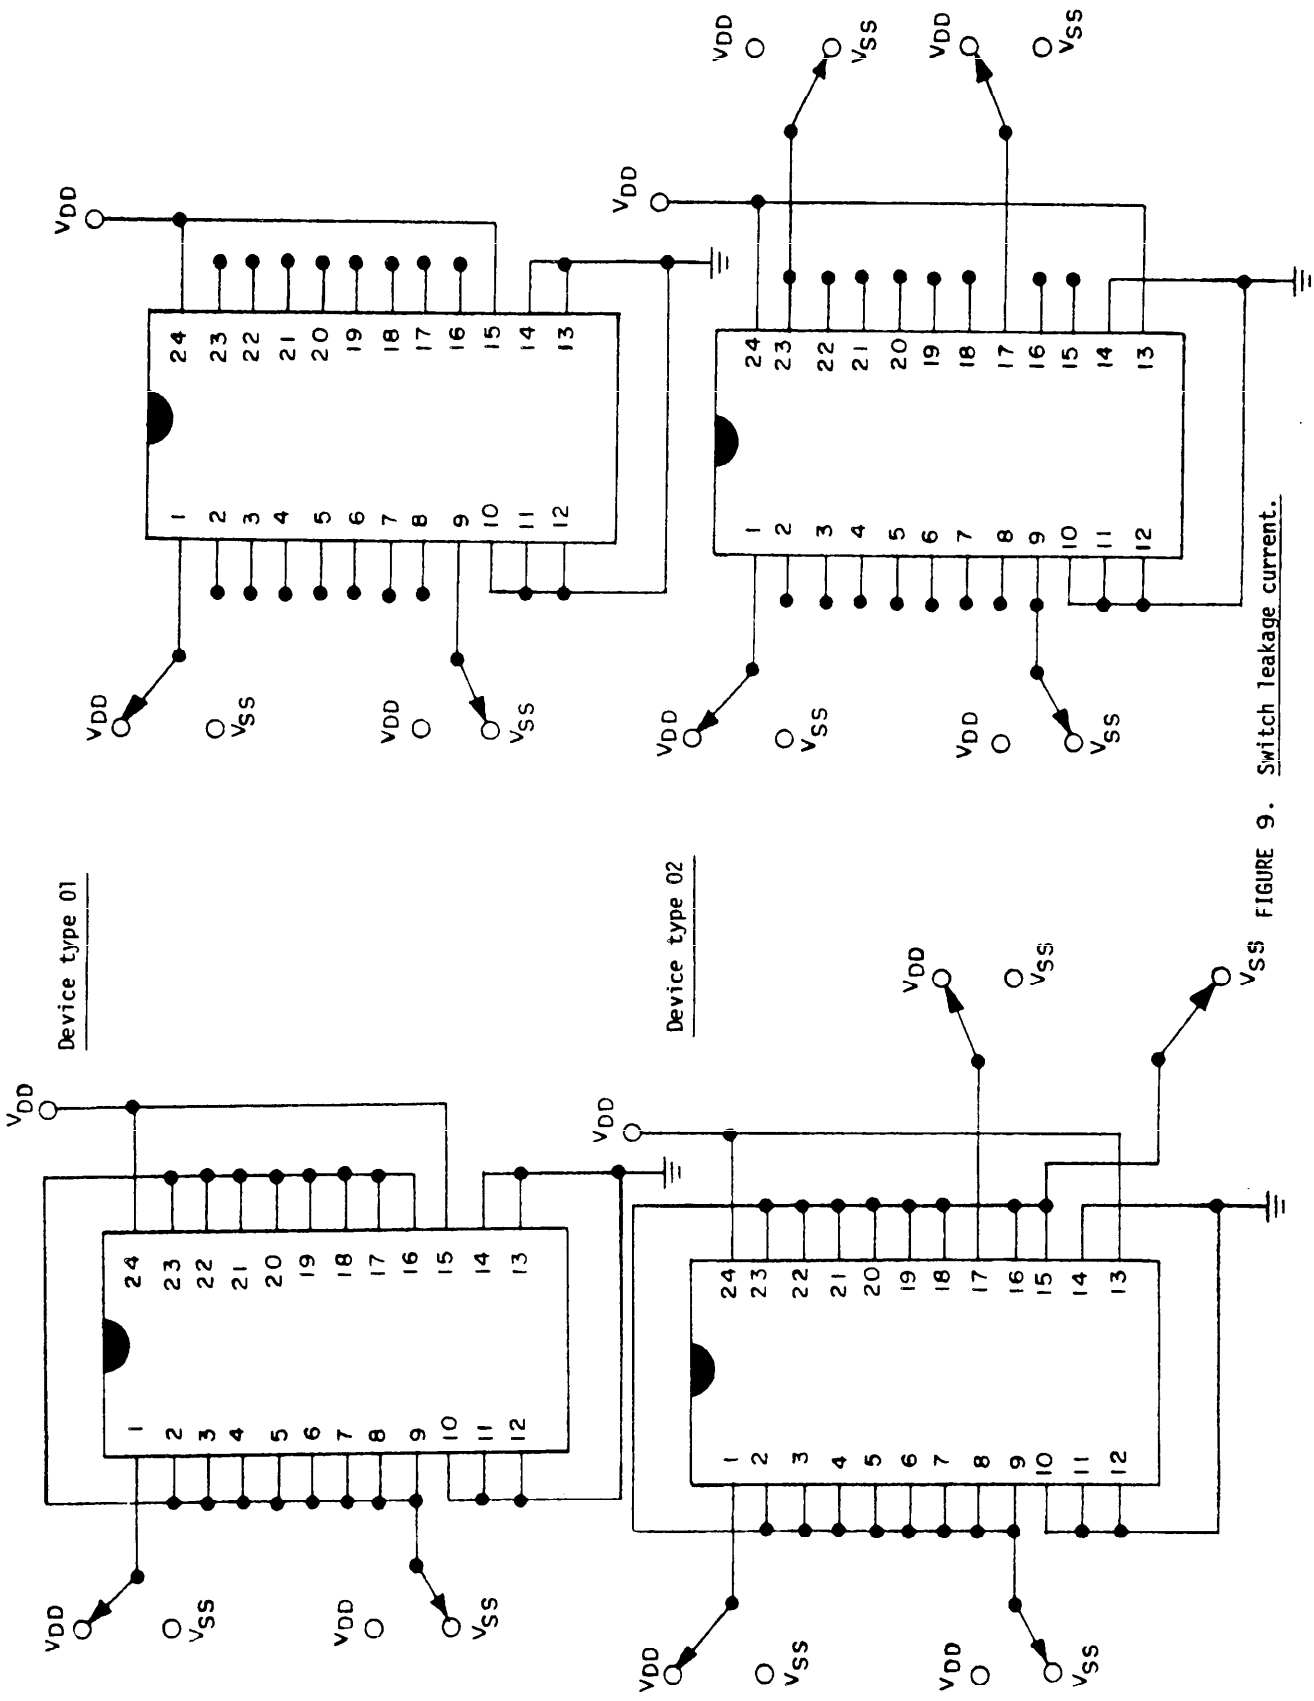



FIGURE 9. Switch leakage current.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

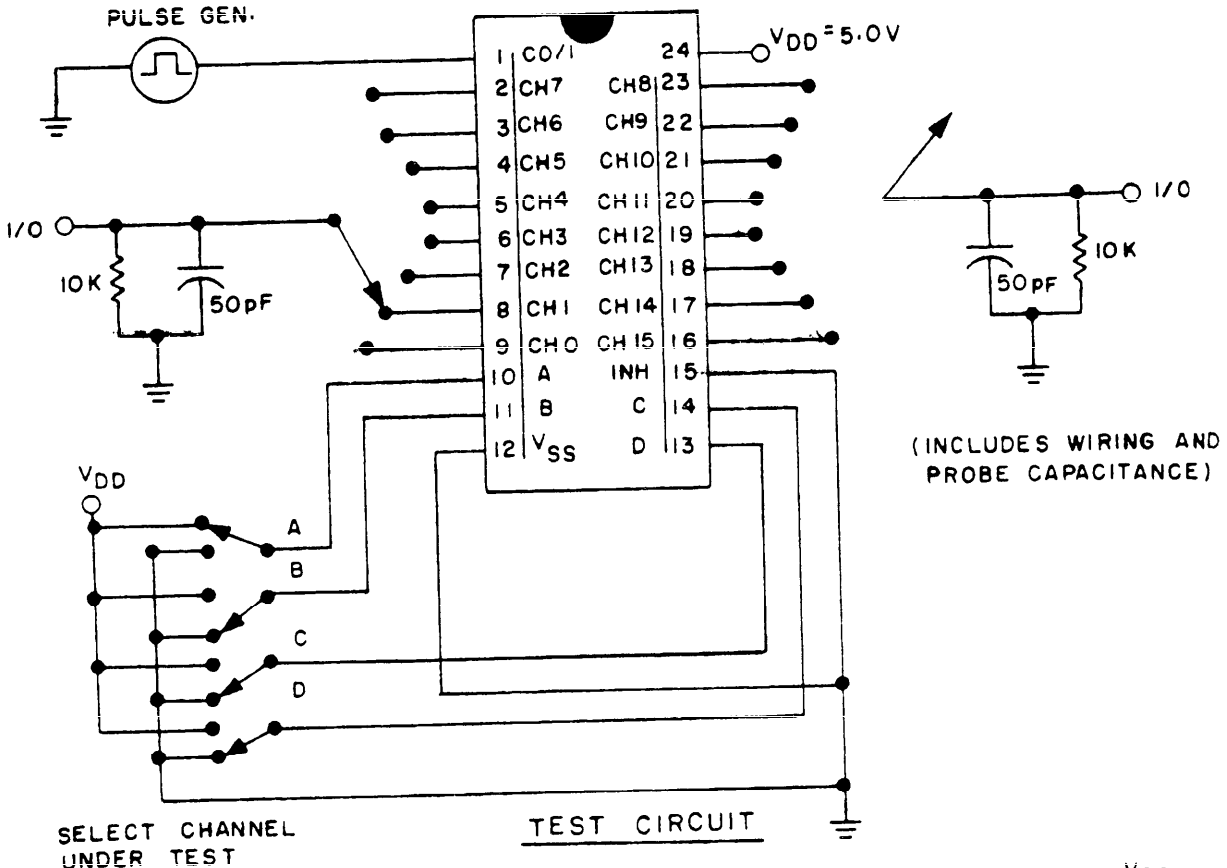

TEST CIRCUIT

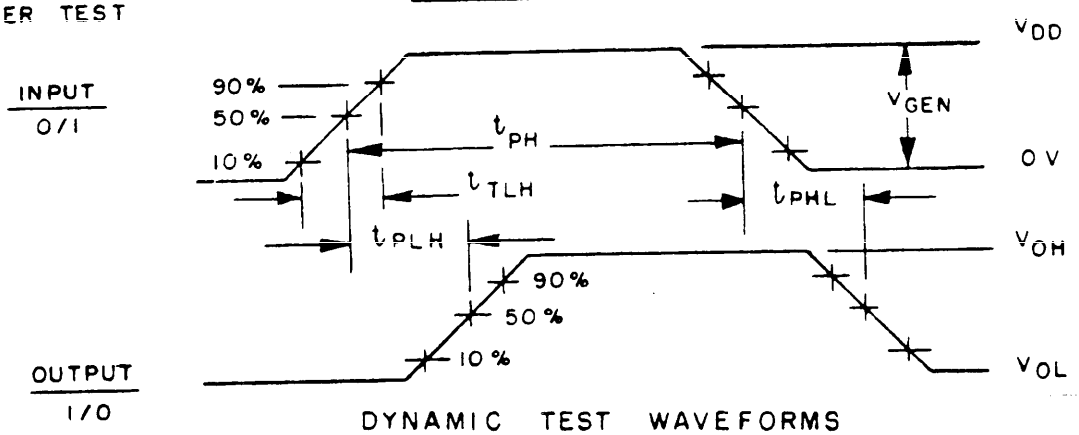


DYNAMIC TEST WAVEFORMS

Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL1} = t_{TLH1} = 20 \pm 2$ ns
PRR = 200 KHz


FIGURE 10. Switching times test circuit and waveforms. (O/I to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 02

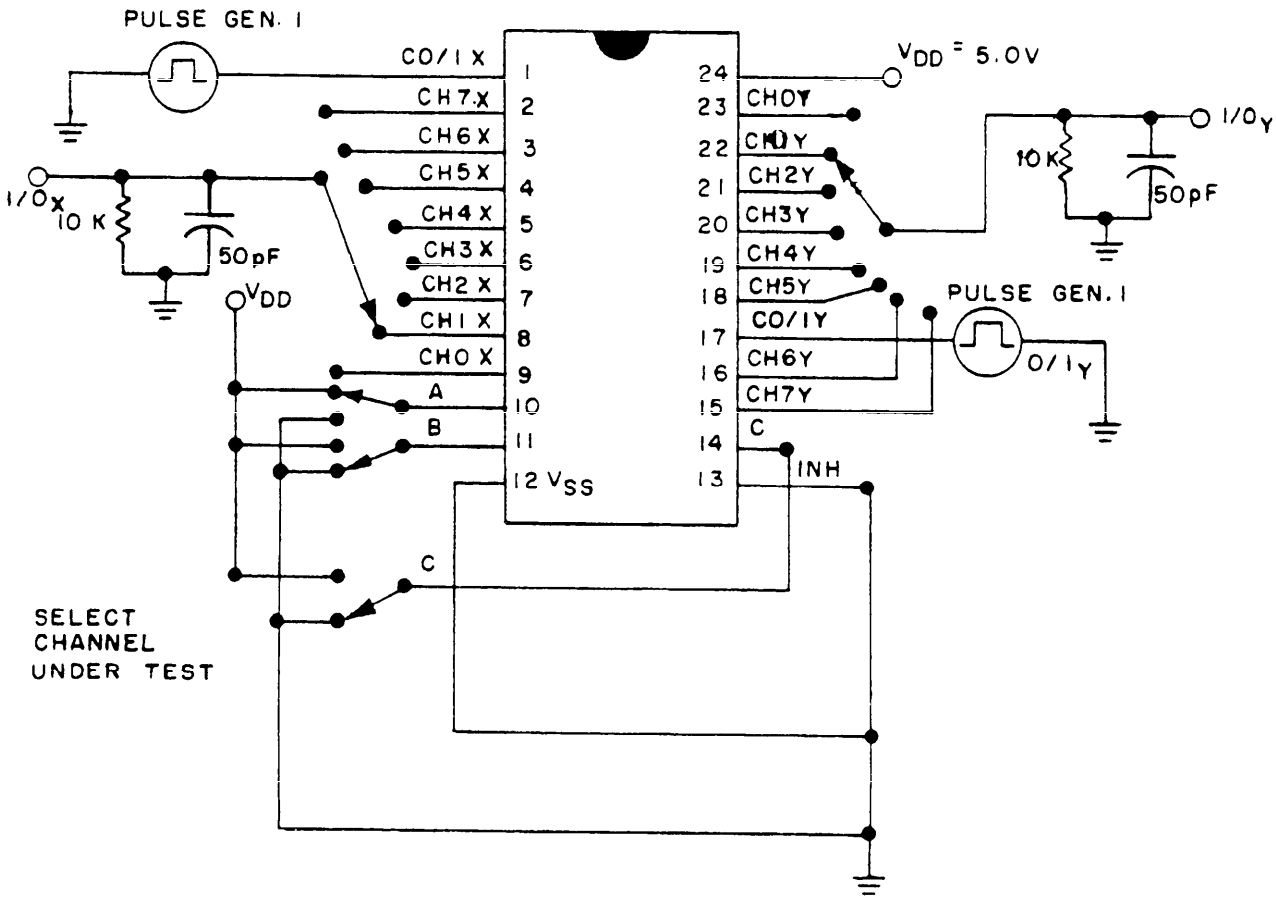

TEST CIRCUIT

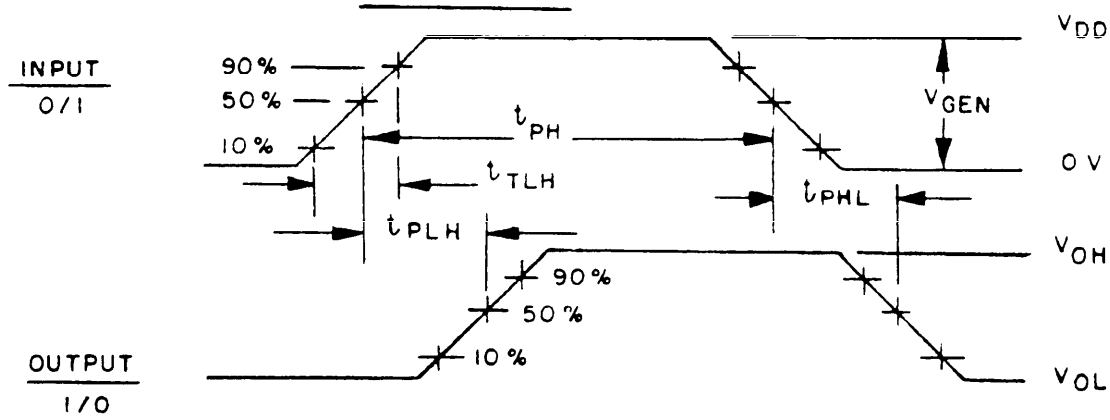


DYNAMIC TEST WAVEFORMS


Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$.
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL1} = t_{TLH1} = 20 \pm 2$ ns
PRR = 200 KHz

FIGURE 11. Switching times test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

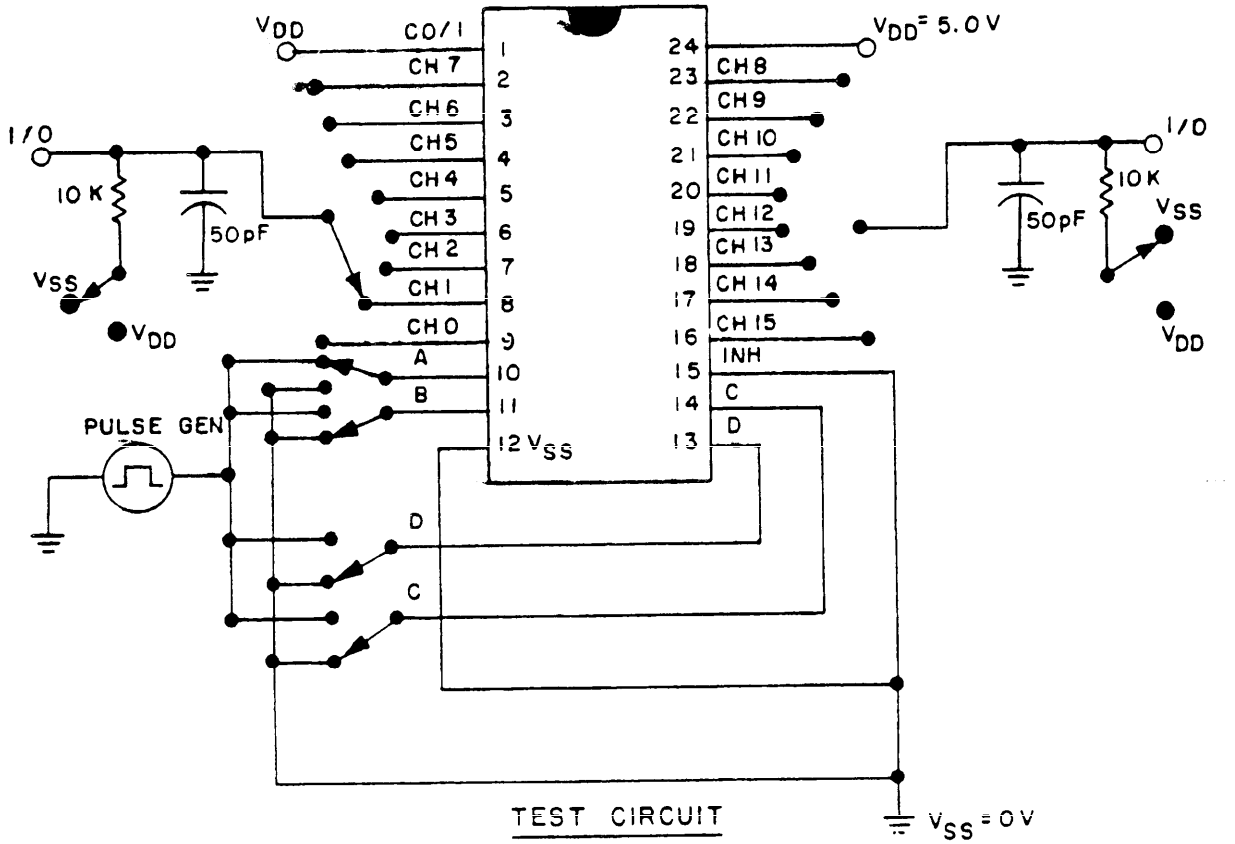

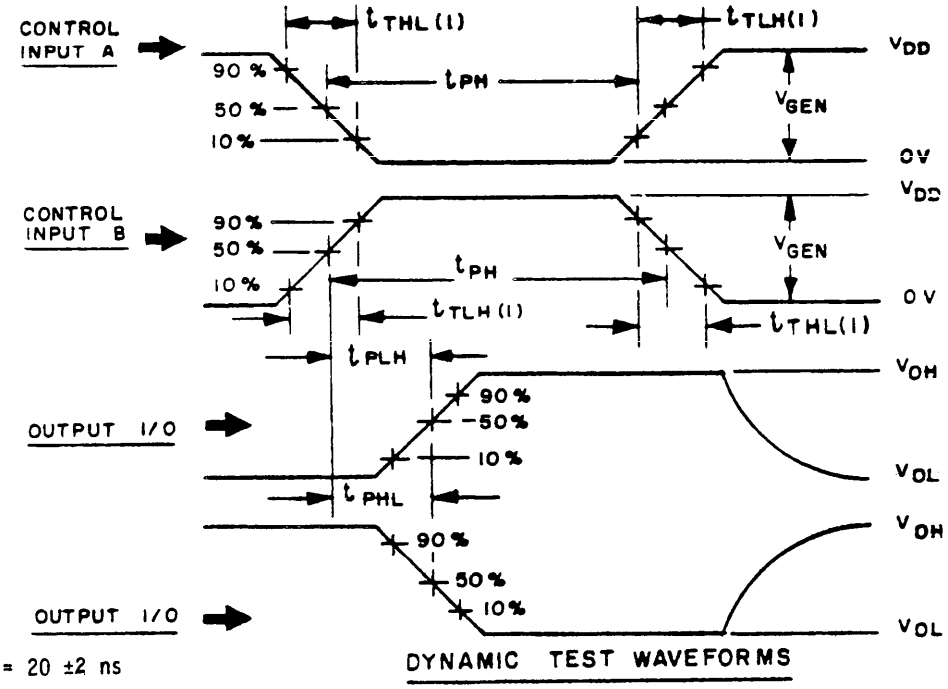


Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL\ (1)} = t_{TLH\ (1)} = 20 \pm 2$ ns
PRR = 200 KHz
Input A used for t_{PLH} test of CH0, and t_{PHL} test of CH1 through CH15.
Input B used for t_{PHL} test of CH0, and t_{PLH} test of CH1 through CH15.

NOTE; RL = 10 kΩ to V_{SS} for t_{PHL}
RL = 10 kΩ to V_{DD} for t_{PLH}

FIGURE 12. Switching times test circuit and waveforms.
(Control inputs to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 02

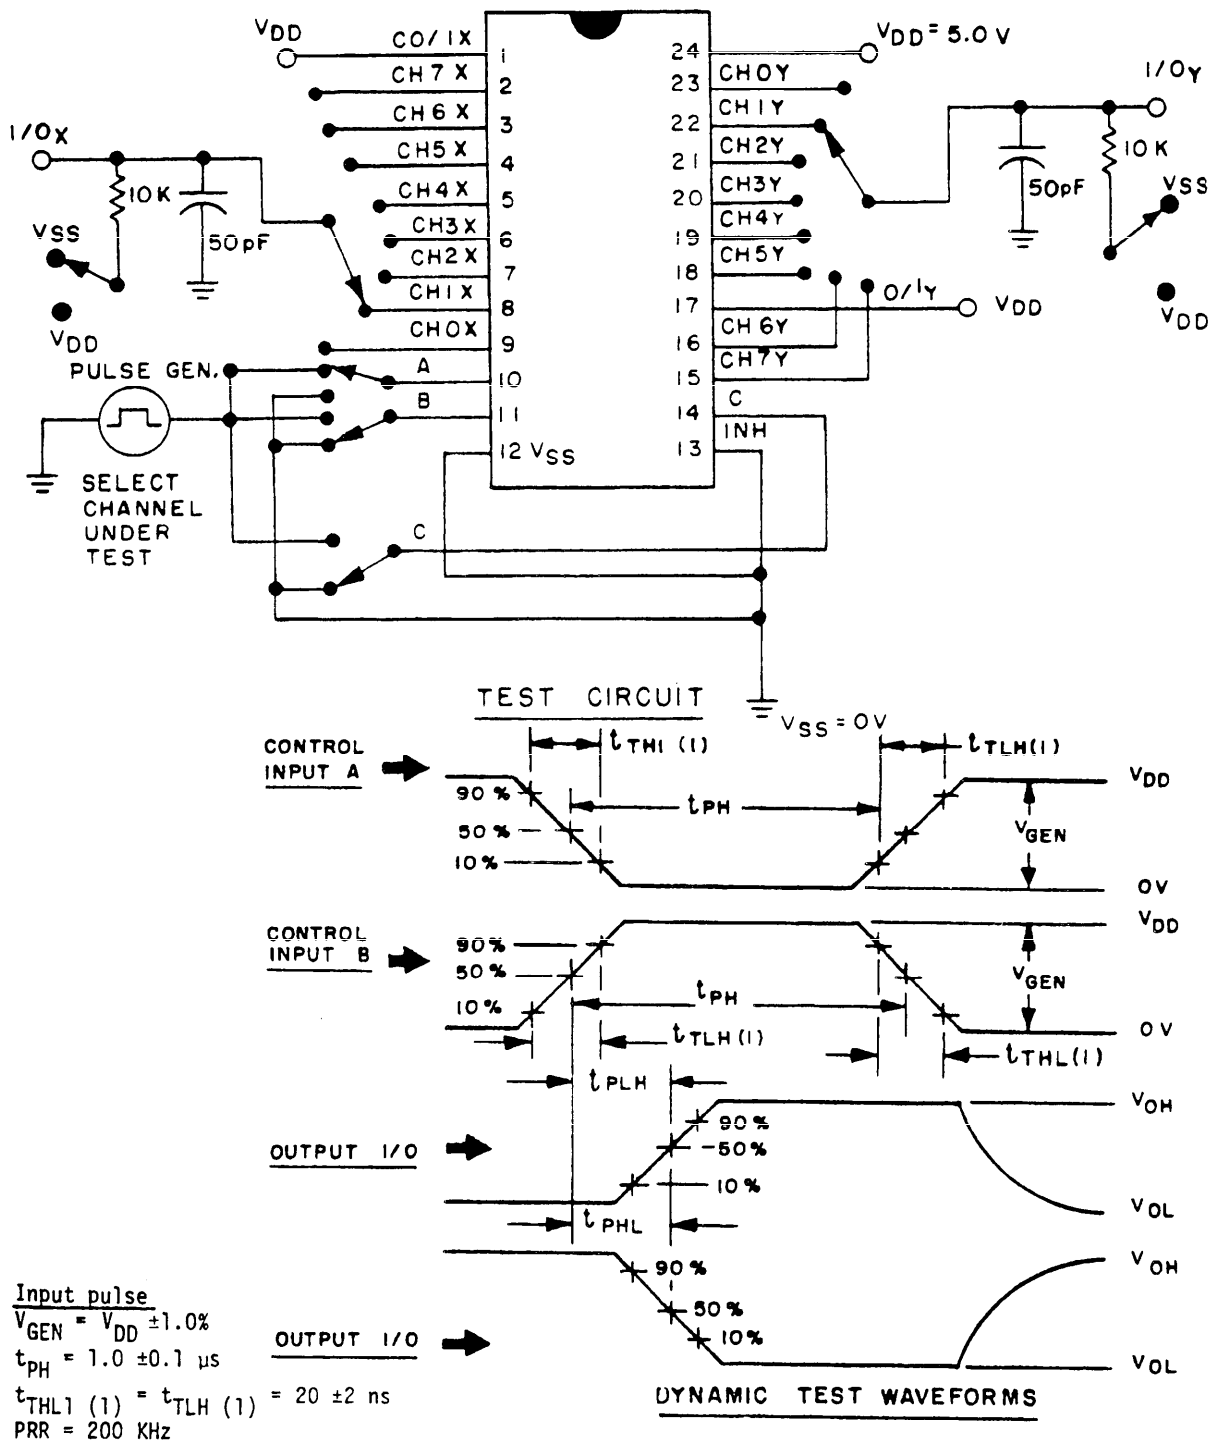


Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL1}(1) = t_{TLH}(1) = 20 \pm 2$ ns
PRR = 200 KHz
Input A used for t_{PLH} test of CHO and for t_{PHL} test of CH1 through CH7
Input B used for t_{PHL} test of CHO and for t_{PLH} test of CH1 through CH7

NOTE R_L = 10 kΩ to V_{SS} for t_{PLH}
R_L = 10 kΩ to V_{DD} for t_{PHL}

FIGURE 13. Switching times test circuit and waveforms.
(Control inputs to I/O

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 01

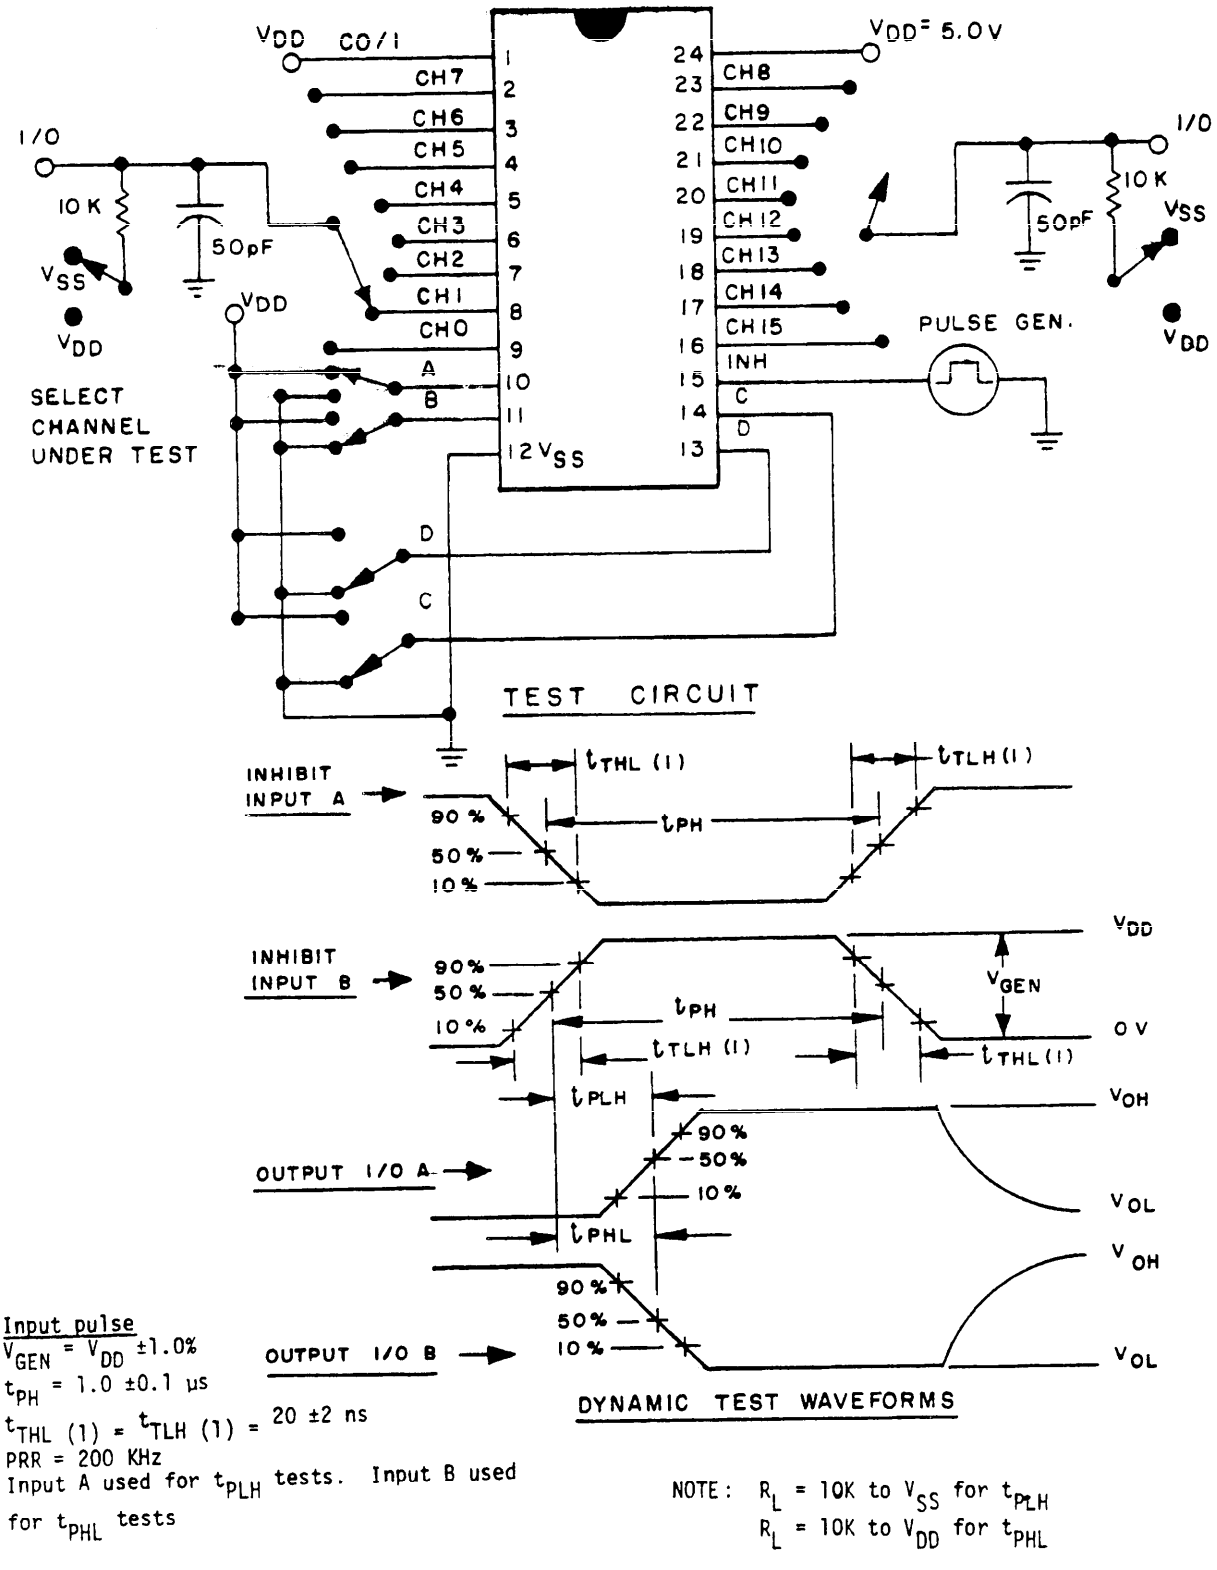


Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL}(1) = t_{TLH}(1) = 20 \pm 2$ ns
PRR = 200 KHz
Input A used for t_{PLH} tests. Input B used for t_{PHL} tests

NOTE: R_L = 10K to V_{SS} for t_{PLH}
R_L = 10K to V_{DD} for t_{PHL}

FIGURE 14. Swtiching times test circuit and waveforms.
(Inhibit to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the currentversion before use.

Device type 02

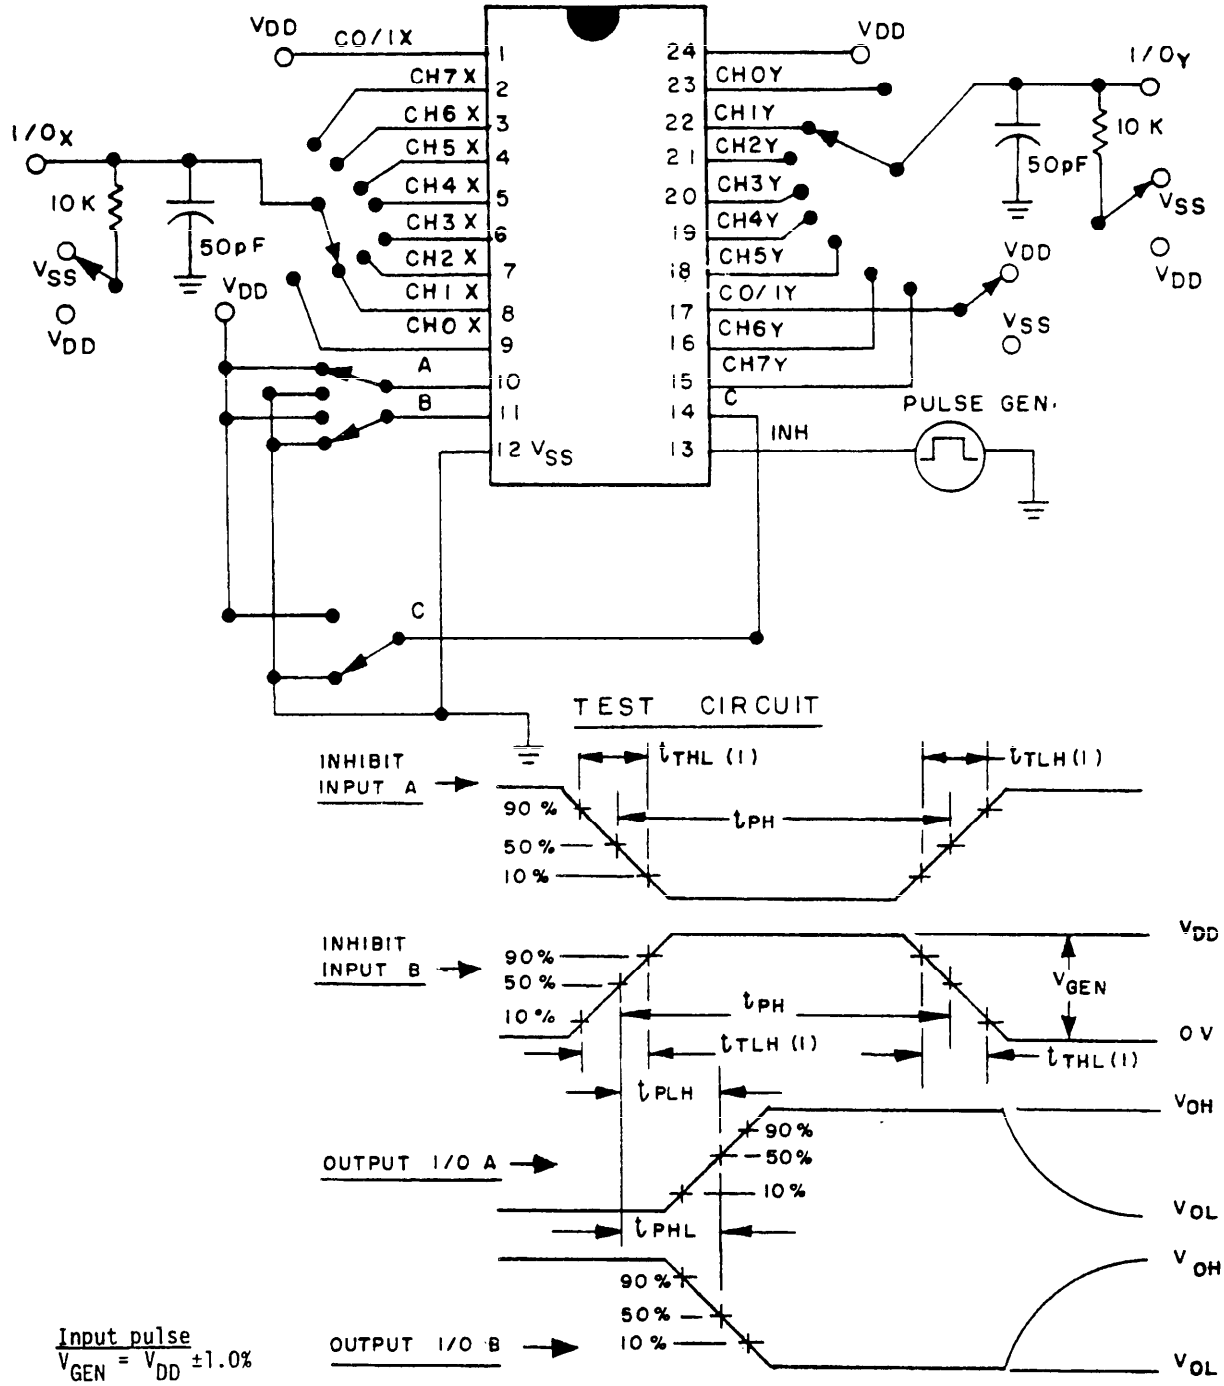

Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL}(1) = t_{TLH}(1) =$ 20 ±2 ns
PRR = 200 KHz


NOTE: R_L = 10K to V_{SS} for t_{PLH}
R_L = 10K to V_{DD} for t_{PHL}

DYNAMIC TEST WAVEFORMS


FIGURE 15. Switching times test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 03

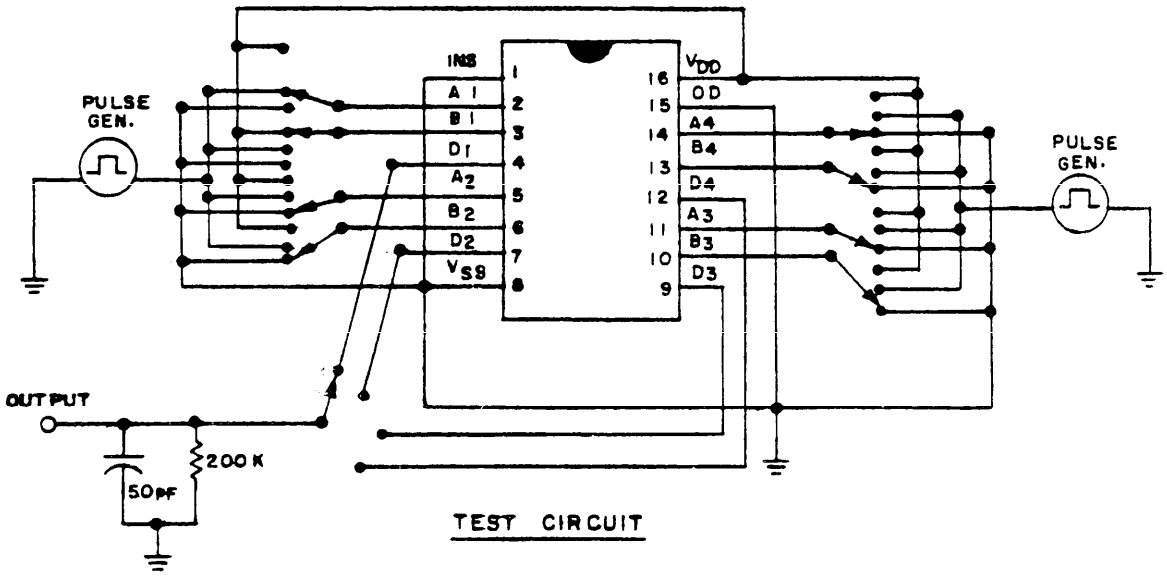

TEST CIRCUIT

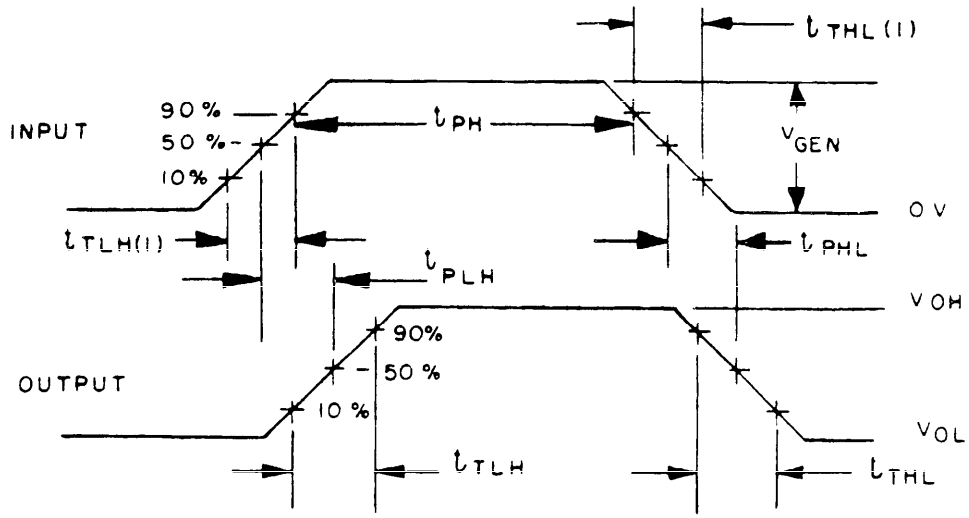


DYNAMIC TEST WAVEFORMS

Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL}(1) = t_{TLH}(1) = 20 \pm 2$ ns
PRR = 200 KHz


FIGURE 16. Switching times test circuit and waveforms.
(Data input to output)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

Device type 03

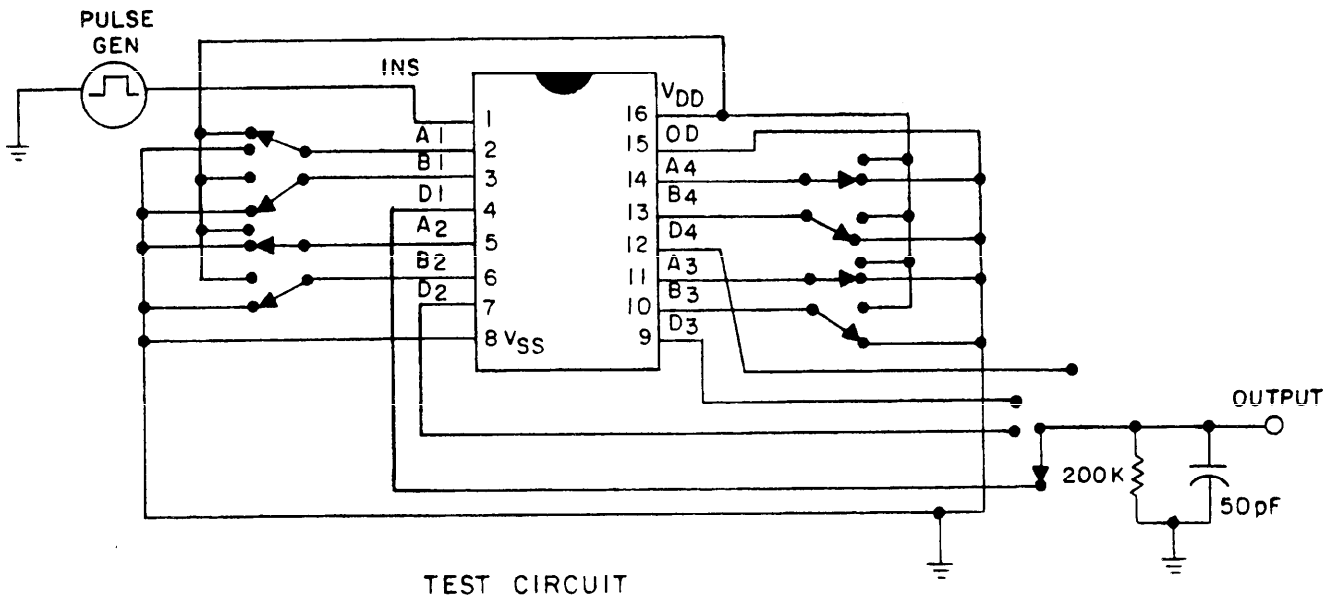

TEST CIRCUIT

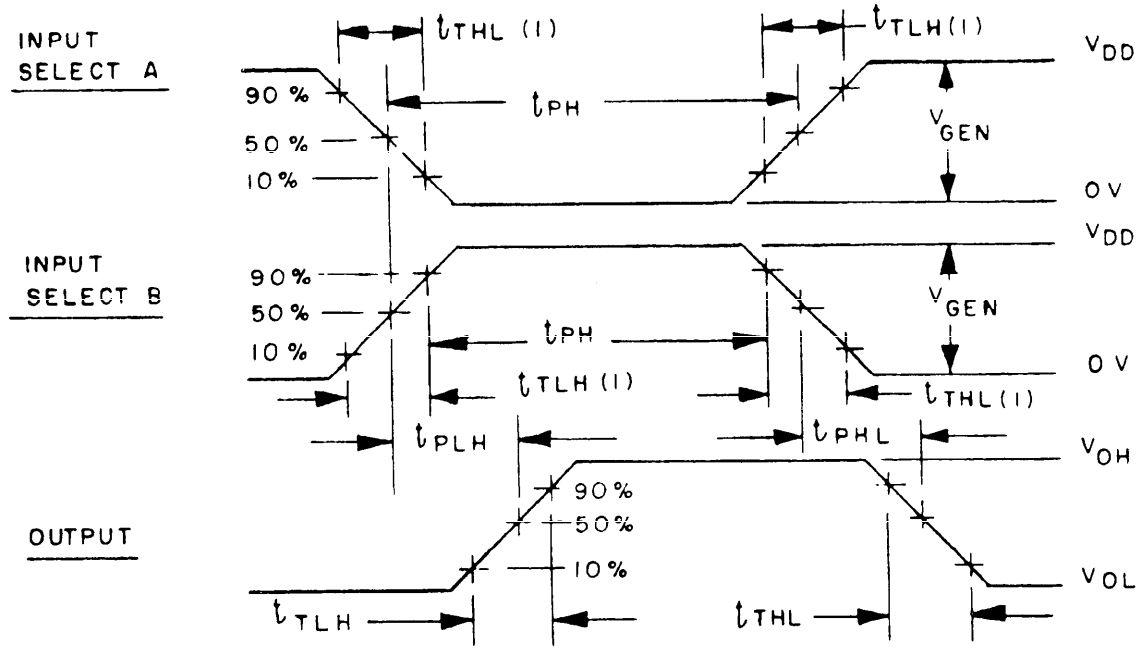


DYNAMIC TEST WAVEFORMS

Input pulse
$V_{GEN} = V_{DD} \pm 1.0\%$
$t_{PH} = 1.0 \pm 0.1$ µs
$t_{THL\ (1)} = t_{TLH\ (1)} = 20 \pm 2$ ns
PRR = 200 KHz
Input A used for tests 171, 173, 175, 177 where A = H, B = L
Input B used for tests 172, 174. 176, 178 where A = 1, B = H

FIGURE 17. Switching times test circuit and waveforms.
(Input select to output)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.


Device type 03

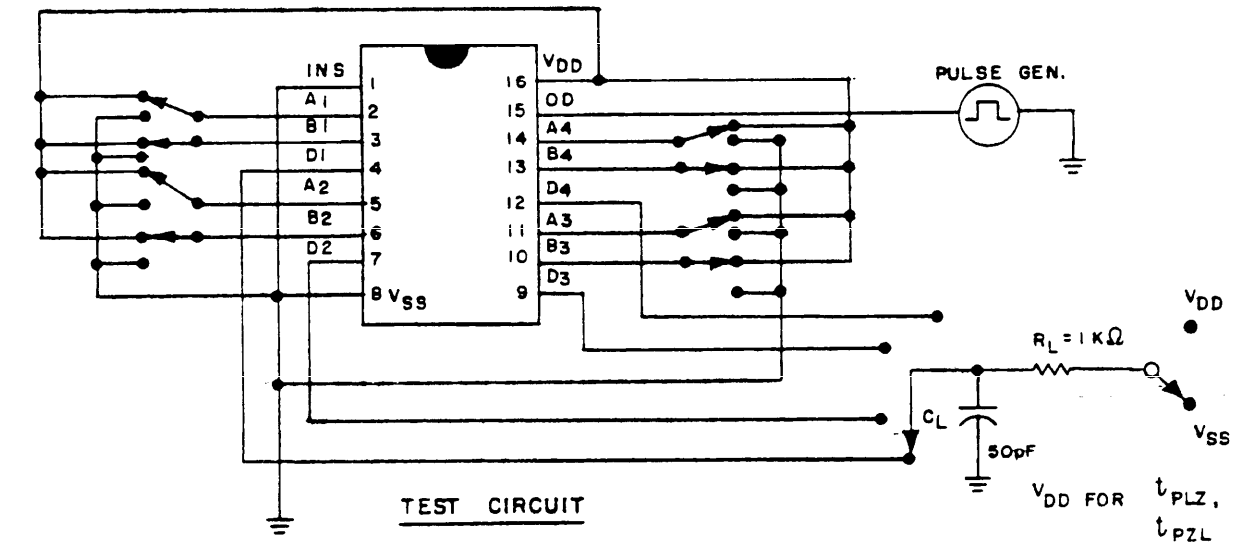

TEST CIRCUIT

V_{DD} FOR t_{PLZ}, t_{PZL}

V_{SS} FOR t_{PHZ}, t_{PZH}

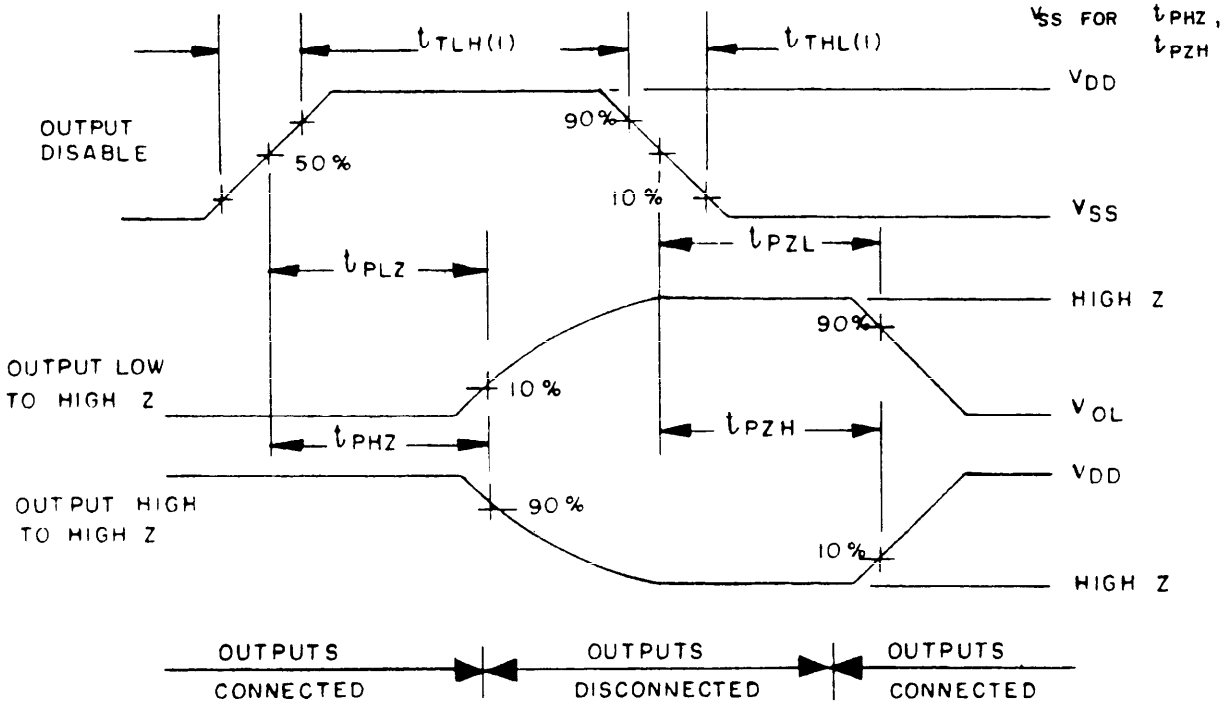

DYNAMIC TEST WAVEFORMS

Input pulse

$V_{GEN} = V_{DD} \pm 1.0\%$

$t_{PH} = 1.0 \pm 0.1$ µs

$t_{THL}(1) = t_{TLH}(1) = 20 \pm 2$ ns

PRR = 200 KHz

FIGURE 18. Switching times test circuit and waveforms.
(Output disable to output)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																	
$V_{IC(pos)}$		1		1 mA																						GND	CH_7		1.5					Vdc
		2			1 mA																						CH_6							
		3				1 mA																					CH_5							
		4					1 mA																				CH_4							
		5						1 mA																			CH_3							
		6							1 mA																		CH_2							
		7								1 mA																	CH_1							
		8									1 mA																CH_0							
		9										1 mA															A							
		10											1 mA														B							
		11													1 mA												D							
		12														1 mA											C							
		13															1 mA										INH							
		14																1 mA									CH_{15}							
		15																	1 mA								CH_{14}							
		16																		1 mA							CH_{13}							
		17																			1 mA						CH_{12}							
		18																				1 mA					CH_{11}							
		19																					1 mA				CH_{10}							
		20																						1 mA			CH_9							
		21																							1 mA		CH_8							
		22	1 mA																								$CO/_I$							
$V_{IC(neg)}$		23		-1 mA										GND													CH_7		-6.0					
		24			-1 mA																						CH_6							
		25				-1 mA																					CH_5							
		26					-1 mA																				CH_4							
		27						-1 mA																			CH_3							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, 7, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
$V_{IC(neg)}$		28							-1 mA					GND													CH_2		-6.0					Vdc
		29								-1 mA																	CH_1							
		30									-1 mA																CH_0							
		31										-1 mA															A							
		32											-1 mA														B							
		33													-1 mA												D							
		34														-1 mA											C							
		35															-1 mA										INH							
		36																-1 mA									CH_{15}							
		37																	-1 mA								CH_{14}							
		38																		-1 mA							CH_{13}							
		39																			-1 mA						CH_{12}							
		40																				-1 mA					CH_{11}							
		41																					-1 mA				CH_{10}							
		42																						-1 mA			CH_9							
		43																							-1 mA		CH_8							
		44	-1 mA																								$CO/_I$							
I_{OS} 2/	3005	45	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND		GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	V_{SS}		-0.25		-2.5			uA
		46										18.0 V	18.0 V		18.0 V	18.0 V																		
		47										18.0 V	18.0 V		GND	GND																		
		48										GND	GND		GND	GND																		
		49		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V									
		50		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		GND	18.0 V		GND																
		51	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND	GND		GND	GND		18.0 V																
		52	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND		GND	18.0 V		GND																
		53	18.0 V	18.0 V	GND	18.0 V	GND	18.0 V	GND	GND	GND	18.0 V	GND		18.0 V	GND		18.0 V	GND	GND	GND	GND	GND	GND	GND	GND								

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test Limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{OH1}	3006	54										15.0 V	15.0 V	GND	15.0 V	15.0 V	GND	15.0 V								15.0 V	$CO/_I$	14.95		14.95		14.95		Vdc
		55	15.0 V									GND	GND		GND	GND											CH_0							
		56										15.0 V	GND														CH_1							
		57										GND	15.0 V														CH_2							
		58										15.0 V	15.0 V														CH_3							
		59										GND	GND			15.0 V											CH_4							
		60										15.0 V	GND														CH_5							
		61										GND	15.0 V														CH_6							
		62										15.0 V	15.0 V														CH_7							
		63										GND	GND		15.0 V	GND											CH_8							
		64										15.0 V	GND														CH_9							
		65										GND	15.0 V														CH_{10}							
		66										15.0 V	15.0 V														CH_{11}							
		67										GND	GND			15.0 V											CH_{12}							
		68										15.0 V	GND			15											CH_{13}							
		69										GND	15.0 V														CH_{14}							
		70										15.0 V	15.0 V														CH_{15}							
V_{OL1}	3007	71									GND	GND	GND		GND	GND	GND										$CO/_I$		0.05		0.05		0.05	
		72	GND									GND	GND														CH_0							
		73										15.0 V	GND														CH_1							
		74										GND	15.0 V														CH_2							
		75										15.0 V	15.0 V														CH_3							
		76										GND	GND			15.0 V											CH_4							
		77										15.0 V	GND														CH_5							
		78										GND	15.0 V														CH_6							
		79										15.0 V	15.0 V														CH_7							
		80										GND	GND		15.0 V	GND											CH_8							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{OL1}	3007	81	GND									15.0 V	GND	GND	15.0 V	GND	GND									15.0 V	CH_9		0.05		0.05		0.05	Vdc
		82										GND	15.0 V														CH_{10}							
		83										15.0 V	15.0 V														CH_{11}							
		84										GND	GND			15.0 V											CH_{12}							
		85										15.0 V	GND														CH_{13}							
		86										GND	15.0 V														CH_{14}							
		87										15.0 V	15.0 V														CH_{15}							
I_{IH1} 3/	3010	88		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	All inputs		21					nA
I_{IH2} 3/		89	18.0 V									GND	GND		GND	GND	GND										$CO/_I$		1.0		45			
		90		GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	GND			GND		GND	GND	GND	GND	GND	GND	GND	GND		A							
		91										GND	18.0 V			GND											B							
		92											GND			18.0 V											C							
		93													18.0 V	GND											D							
		94													GND		18.0 V										INH							
		95									18.0 V						GND										CH_0							
		96								18.0 V	GND	18.0 V															CH_1							
		97							18.0 V	GND		GND	18.0 V														CH_2							
		98						18.0 V	GND			18.0 V	18.0 V														CH_3							
		99					18.0 V	GND				GND	GND			18.0 V											CH_4							
		100				18.0 V	GND					18.0 V	GND														CH_5							
		101			18.0 V	GND						GND	18.0 V														CH_6							
		102		18.0 V	GND							18.0 V	18.0 V														CH_7							
		103		GND								GND	GND		18.0 V	GND									18.0 V		CH_8							
		104										18.0 V	GND											18.0 V	GND		CH_9							
		105										GND	18.0 V										18.0 V	GND			CH_{10}							
		106										18.0 V	18.0 V									18.0 V	GND	GND			CH_{11}							
		107										GND	GND			18.0 V					18.0 V	GND	GND	GND			CH_{12}							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
I_{IH2} 3/	3010	108		GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	GND	GND	18.0 V	18.0 V	GND	GND	GND	18.0 V	GND	GND	GND	GND	GND	18.0 V	CH_{13}		1.0		45			nA
I_{IH2} 3/	3010	109										GND	18.0 V		18.0 V	18.0 V		GND	18.0 V	GND	GND						CH_{14}		1.0		45			
I_{IH2} 3/	3010	110										18.0 V	18.0 V		18.0 V	18.0 V		18.0 V	GND	GND	GND						CH_{15}		1.0		85			
I_{IL1}	3009	111										GND	GND		GND	GND		GND	GND	GND	GND						All inputs		-21					
I_{IL2} 3/		112	GND									18.0 V	18.0 V		18.0 V	18.0 V											$CO/_I$		-1.0		-45			
		113		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND	18.0 V			18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		A							
		114										18.0 V	GND			18.0 V											B							
		115											18.0 V			GND											C							
		116											18.0 V		GND	18.0 V											D							
		117											18.0 V		18.0 V	18.0 V											INH							
		118									GND	GND	GND		GND	GND											CH_0							
		119								GND	18.0 V	18.0 V	GND														CH_1							
		120							GND	18.0 V		GND	18.0 V														CH_2							
		121						GND	18.0 V			18.0 V	18.0 V														CH_3							
		122					GND	18.0 V				GND	GND			18.0 V											CH_4							
		123				GND	18.0 V					18.0 V	GND														CH_5							
		124			GND	18.0 V						GND	18.0 V														CH_6							
		125		GND	18.0 V							18.0 V	18.0 V														CH_7							
		126		18.0 V								GND	GND		18.0 V	GND											CH_8							
		127										18.0 V	GND											GND	GND		CH_9							
		128										GND	18.0 V										GND	18.0 V	18.0 V		CH_{10}							
		129										18.0 V	18.0 V									GND	18.0 V				CH_{11}							
		130										GND	GND			18.0 V					GND	18.0 V					CH_{12}							
		131										18.0 V	GND							GND	18.0 V						CH_{13}							
		132										GND	18.0 V						GND	18.0 V	18.0 V						CH_{14}							
		133										18.0 V	18.0 V					GND	18.0 V	18.0 V	18.0 V						CH_{15}							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON11}	Fig. 6	134	V_{IS} = -2.0 V								V_{OS}	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V									2.5 V	CH_0		500		700		350	Ω
		135								V_{OS}		2.5 V	-2.5 V														CH_1							
		136							V_{OS}			-2.5 V	2.5 V														CH_2							
		137						V_{OS}				2.5 V	2.5 V														CH_3							
		138					V_{OS}					-2.5 V	-2.5 V			2.5 V											CH_4							
		139				V_{OS}						2.5 V	-2.5 V														CH_5							
		140			V_{OS}							-2.5 V	2.5 V														CH_6							
		141		V_{OS}								2.5 V	2.5 V														CH_7							
		142										-2.5 V	-2.5 V		2.5 V	-2.5 V									V_{OS}		CH_8							
		143										2.5 V	-2.5 V											V_{OS}			CH_9							
		144										-2.5 V	2.5 V										V_{OS}				CH_{10}							
		145										2.5 V	2.5 V									V_{OS}					CH_{11}							
		146										-2.5 V	-2.5 V			2.5 V					V_{OS}						CH_{12}							
		147										2.5 V	-2.5 V							V_{OS}							CH_{13}							
		148										-2.5 V	2.5 V						V_{OS}								CH_{14}							
		149										2.5 V	2.5 V					V_{OS}									CH_{15}							
R_{ON12}		150-165	Same tests and terminal conditions as for tests 134-149, except V_{IS} = -0.9 V and limits are as shown.																										700		900		900		
R_{ON13}		166-181	Same tests and terminal conditions as for tests 134-149, except V_{IS} = 1.0 V and limits are as shown.																										600		800		400		
R_{ON14}		182-197	Same tests and terminal conditions as for tests 134-149, except V_{IS} = 2.0 V and limits are as shown.																										500		700		300		
R_{ON11}		198	V_{OS}								V_{IS} = -2.0 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V									2.5 V	$CO/_I$						350	
R_{ON11}		199	V_{OS}							V_{IS} = -2.0 V		2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V									2.5 V	$CO/_I$						350	
R_{ON11}		200	V_{OS}						V_{IS} = -2.0 V			-2.5 V	2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V									2.5 V	$CO/_I$						350	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K	Test No.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Units
				CO/I_1	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}									
R_{ON11}	Fig. 6		201	V_{OS}					V_{IS} = -2.0 V				2.5 V	2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V										2.5 V	CO/I_1		500		700		350	Ω
			202	↓				V_{IS} = -2.0 V					-2.5 V	-2.5 V			2.5 V																		
			203				V_{IS} = -2.0 V						2.5 V	-2.5 V																					
			204			V_{IS} = -2.0 V							-2.5 V	2.5 V																					
			205		V_{IS} = -2.0 V								2.5 V	2.5 V																					
			206										-2.5 V	-2.5 V		2.5 V	-2.5 V																	
			207										2.5 V	-2.5 V																					
			208										-2.5 V	2.5 V																					
			209										2.5 V	2.5 V																					
			210										-2.5 V	-2.5 V			2.5 V																		
			211										2.5 V	-2.5 V																					
			212										-2.5 V	2.5 V																					
			213										2.5 V	2.5 V																					
R_{ON12}			214-229	Same tests and terminal conditions as for tests 198-213, except V_{IS} = -0.9 V and limits are as shown.																										700		900		500		
R_{ON13}			230-245	Same tests and terminal conditions as for tests 198-213, except V_{IS} = -1.0 V and limits are as shown.																										600		800		400		
R_{ON14}			246-261	Same tests and terminal conditions as for tests 198-213, except V_{IS} = -2.0 V and limits are as shown.																										500		700		300		
R_{ON21}	Fig. 7		262	V_{IS} = -5.0 V								V_{OS}	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V									5.0 V	CH_0		200		280		140	Ω

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

inch above the sealant surface and itself contains no sealant, and such that

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
		Symbol	CO/ 1	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
R_{ON21}	Fig. 7	263	V_{IS} = -5.0 V							V_{OS}		5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V									5.0 V	CH_1		200		260		140	Ω
		264							V_{OS}			5.0 V	5.0 V			-5.0 V											CH_2							
		265						V_{OS}				5.0 V	5.0 V			-5.0 V											CH_3							
		266					V_{OS}					-5.0 V	-5.0 V			5.0 V											CH_4							
		267				V_{OS}						5.0 V	-5.0 V														CH_5							
		268			V_{OS}							-5.0 V	5.0 V														CH_6							
		269		V_{OS}								5.0 V	5.0 V														CH_7							
		270										-5.0 V	-5.0 V		5.0 V										V_{OS}		CH_8							
		271										5.0 V	-5.0 V											V_{OS}			CH_9							
		272										-5.0 V	5.0 V										V_{OS}				CH_{10}							
		273										5.0 V	5.0 V									V_{OS}					CH_{11}							
		274										-5.0 V	-5.0 V								V_{OS}						CH_{12}							
		275										5.0 V	-5.0 V							V_{OS}							CH_{13}							
		276										-5.0 V	5.0 V						V_{OS}								CH_{14}							
		277										5.0 V	5.0 V					V_{OS}									CH_{15}							
R_{ON22}		278-293	Same tests and terminal conditions as for tests 262-277, except V_{IS} = -3.0 V and limits are as shown.																										250		325		175		
R_{ON23}		294-309	Same tests and terminal conditions as for tests 262-277, except V_{IS} = 3.6 V and limits are as shown.																										250		325		175		
R_{ON24}		310-325	Same tests and terminal conditions as for tests 262-277, except V_{IS} = 5.0 V and limits are as shown.																										200		260		140		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test Limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	CO/I	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}			Min	Max	Min	Max	Min	Max	
		Test No.																																
R_{ON21}	Fig. 7	326	V_{OS}								V_{IS} = -5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V									5.0 V	CO/I		200		260		140	Ω
		327								V_{IS} = -5.0 V		5.0 V	-5.0 V																				
		328							V_{IS} = -5.0 V			-5.0 V	5.0 V																				
		329						V_{IS} = -5.0 V				5.0 V	5.0 V																				
		330					V_{IS} = -5.0 V					-5.0 V	-5.0 V			5.0 V																	
		331				V_{IS} = -5.0 V						5.0 V	-5.0 V																				
		332			V_{IS} = -5.0 V							-5.0 V	5.0 V																				
		333		V_{IS} = -5.0 V								5.0 V	5.0 V																				
		334										-5.0 V	-5.0 V		5.0 V	-5.0 V									V_{IS} = -5.0 V								
		335										5.0 V	-5.0 V											V_{IS} = -5.0 V									
		336										-5.0 V	5.0 V										V_{IS} = -5.0 V										
		337										5.0 V	5.0 V									V_{IS} = -5.0 V											
		338										-5.0 V	-5.0 V			5.0 V					V_{IS} = -5.0 V												
		339										5.0 V	-5.0 V							V_{IS} = -5.0 V													
		340										-5.0 V	5.0 V						V_{IS} = -5.0 V														
		341										5.0 V	5.0 V					V_{IS} = -5.0 V															

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																									Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24			Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
			CO/I	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}			Min	Max	Min	Max	Min	Max	
		Test No.																																	
R_{ON22}	Fig. 7	342-357	Same tests and terminal conditions as for tests 326-241, except V_{IS} = -3.0 V and limits are as shown.																											250		325		175	Ω
R_{ON23}	Fig. 7	358-373	Same tests and terminal conditions as for tests 326-341, except V_{IS} = 3.5 V and limits are as shown.																											250		325		175	
R_{ON24}	Fig. 7	374-389	Same tests and terminal conditions as for tests 326-341, except V_{IS} = 5.0 V and limits are as shown.																											200		260		140	
R_{ON31}	Fig. 8	390	V_{IS} = -7.5 V								V_{OS}	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V									7.5 V	CH_0		150		200		100	
		391	↓							V_{OS}		7.5 V	-7.5 V														CH_1							
		392							V_{OS}			-7.5 V	7.5 V														CH_2							
		393						V_{OS}				7.5 V	7.5 V														CH_3							
		394					V_{OS}					-7.5 V	-7.5 V			7.5 V											CH_4							
		395				V_{OS}						7.5 V	-7.5 V														CH_5							
		396			V_{OS}							-7.5 V	7.5 V														CH_6							
		397		V_{OS}								7.5 V	7.5 V														CH_7							
		398										-7.5 V	-7.5 V		7.5 V	-7.5 V									V_{OS}		CH_8							
		399										7.5 V	-7.5 V											V_{OS}			CH_9							
		400										-7.5 V	7.5 V										V_{OS}				CH_{10}							
		401										7.5 V	7.5 V									V_{OS}					CH_{11}							
		402										-7.5 V	-7.5 V			7.5 V					V_{OS}						CH_{12}							
		403										7.5 V	-7.5 V							V_{OS}							CH_{13}							
		404										-7.5 V	7.5 V						V_{OS}								CH_{14}							
		405										7.5 V	7.5 V					V_{OS}									CH_{15}							
R_{ON32}		406-421	Same tests and terminal conditions as for tests 390-405, except V_{IS} = -5.0 V and limits are as shown.																										170		230		120	
R_{ON33}		422-437	Same tests and terminal conditions as for tests 390-405, except V_{IS} = 0 V and limits are as shown.																										170		230		120	
R_{ON34}		438-453	Same tests and terminal conditions as for tests 390-405, except V_{IS} = 6.0 V and limits are as shown.																										170		230		120	
R_{ON35}	↓	454-469	Same tests and terminal conditions as for tests 390-405, except V_{IS} = 7.5 V and limits are as shown.																										150		200		100	↓

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
		Symbol	$CO/_1$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON31}	Fig. 8	470	V_{05}								V_{IS} = -7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V									7.5 V	$CO/_1$		150		200		100	Ω
		471								V_{IS} = -7.5 V		7.5 V	-7.5 V																					
		472							V_{IS} = -7.5 V			-7.5 V	7.5 V																					
		473						V_{IS} = -7.5 V				7.5 V	7.5 V																					
		474					V_{IS} = -7.5 V					-7.5 V	-7.5 V			7.5 V																		
		475				V_{IS} = -7.5 V						7.5 V	-7.5 V																					
		476			V_{IS} = -7.5 V							-7.5 V	7.5 V																					
		477		V_{IS} = -7.5 V								7.5 V	7.5 V																					
		478										-7.5 V	-7.5 V		7.5 V	-7.5 V									V_{IS} = -7.5 V								
		479										7.5 V	-7.5 V											V_{IS} = -7.5 V										
		480										-7.5 V	7.5 V										V_{IS} = -7.5 V											
		481										7.5 V	7.5 V									V_{IS} = -7.5 V												
		482										-7.5 V	-7.5 V			7.5 V					V_{IS} = -7.5 V													
		483										7.5 V	-7.5 V							V_{IS} = -7.5 V														
		484										-7.5 V	7.5 V						V_{IS} = -7.5 V															
		485										7.5 V	7.5 V					V_{IS} = -7.5 V																

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																															
R_{ON32}	Fig. 8	486-501	Same tests and terminal conditions as for tests 470-485, except V_{IS} = 5.0 V and limits are as shown.																										170		230		120	Ω
R_{ON33}		502-517	Same tests and terminal conditions as for tests 470-485, except V_{IS} = 0 V and limits are as shown.																										170		230		120	
R_{ON34}		518-533	Same tests and terminal conditions as for tests 470-485, except V_{IS} = 6.0 V and limits are as shown.																										170		230		120	
R_{ON35}		534-549	Same tests and terminal conditions as for tests 470-485, except V_{IS} = 7.5 V and limits are as shown.																										150		200		100	
V_{IH1}	7/	550	5.0 V									GND	GND	GND	GND	GND	GND									5.0 V	CH_0	4.5		4.5		4.5		Vdc
		551										3.5 V	GND														CH_1							
		552										GND	3.5 V														CH_2							
		553										3.5 V	3.5 V														CH_3							
		554										GND	GND			3.5 V											CH_4							
		555										3.5 V	GND														CH_5							
		556										GND	3.5 V														CH_6							
		557										3.5 V	3.5 V														CH_7							
		558										GND	GND		3.5 V	GND											CH_8							
		559										3.5 V	GND														CH_9							
		560										GND	3.5 V														CH_{10}							
		561										3.5 V	3.5 V														CH_{11}							
		562										GND	GND			3.5 V											CH_{12}							
		563										3.5 V	GND														CH_{13}							
		564										GND	3.5 V														CH_{14}							
		565										3.5 V	3.5 V														CH_{15}							
V_{IH2}		566	10.0 V									GND	GND		GND	GND										10.0 V	CH_0	9.0		9.0		9.0		
		567										7.0 V	GND														CH_1							
		568										GND	7.0 V														CH_2							
		569										7.0 V	7.0 V														CH_3							
		570										GND	GND			7.0 V											CH_4							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_1$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IH2}	2/	571	10.0 V									7.0 V	GND	GND	GND	7.0 V	GND									10.0 V	CH_5	9.0		9.0		9.0		Vdc
		572										GND	7.0 V		GND	7.0 V											CH_6							
		573										7.0 V	7.0 V		GND	7.0 V											CH_7							
		574										GND	GND		7.0 V	GND											CH_8							
		575										7.0 V	GND														CH_9							
		576										GND	7.0 V														CH_{10}							
		577										7.0 V	7.0 V														CH_{11}							
		578										GND	GND			7.0 V											CH_{12}							
		579										7.0 V	GND														CH_{13}							
		580										GND	7.0 V														CH_{14}							
		581										7.0 V	7.0 V														CH_{15}							
V_{IH3}		582	15.0 V									GND	GND		GND	GND										15.0 V	CH_0	13.5		13.5		13.5		
		583										11.0 V	GND														CH_1							
		584										GND	11.0 V														CH_2							
		585										11.0 V	11.0 V														CH_3							
		586										GND	GND			11.0 V											CH_4							
		587										11.0 V	GND														CH_5							
		588										GND	11.0 V														CH_6							
		589										11.0 V	11.0 V														CH_7							
		590										GND	GND		11.0 V	GND											CH_8							
		591										11.0 V	GND														CH_9							
		592										GND	11.0 V														CH_{10}							
		593										11.0 V	11.0 V														CH_{11}							
		594										GND	GND			11.0 V											CH_{12}							
		595										11.0 V	GND														CH_{13}							
		596										GND	11.0 V														CH_{14}							
		597										11.0 V	11.0 V														CH_{15}							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IL1}	2/	598	5.0 V									GND	GND	GND	GND	GND	5.0 V									5.0 V	CH_0		0.5		0.5		0.5	Vdc
		599										1.5 V	GND														CH_1							
		600										GND	1.5 V														CH_2							
		601										1.5 V	1.5 V														CH_3							
		602										GND	GND			1.5 V											CH_4							
		603										1.5 V	GND														CH_5							
		604										GND	1.5 V														CH_6							
		605										1.5 V	1.5 V														CH_7							
		606										GND	GND		1.5 V	GND											CH_8							
		607										1.5 V	GND														CH_9							
		608										GND	1.5 V														CH_{10}							
		609										1.5 V	1.5 V														CH_{11}							
		610										GND	GND			1.5 V											CH_{12}							
		611										1.5 V	GND														CH_{13}							
		612										GND	1.5 V														CH_{14}							
		613										1.5 V	1.5 V														CH_{15}							
V_{IL2}		614	10.0 V									GND	GND		GND	GND	10.0 V									10.0 V	CH_0		1.0		1.0		1.0	
		615										3.0 V	GND														CH_1							
		616										GND	3.0 V														CH_2							
		617										3.0 V	3.0 V														CH_3							
		618										GND	GND			3.0 V											CH_4							
		619										3.0 V	GND														CH_5							
		620										GND	3.0 V														CH_6							
		621										3.0 V	3.0 V														CH_7							
		622										GND	GND		3.0 V	GND											CH_8							
		623										3.0 V	GND		3.0 V	GND											CH_9							
		624										GND	3.0 V		3.0 V	GND											CH_{10}							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IL2}	7/	625	10.0 V									3.0 V	3.0 V	GND	3.0 V	GND	10.0 V									10.0 V	CH_{11}		1.0		1.0		1.0	Vdc
		626										GND	GND			3.0 V											CH_{12}							
		627										3.0 V	GND														CH_{13}							
		628										GND	3.0 V														CH_{14}							
		629										3.0 V	3.0 V														CH_{15}							
V_{IL3}		630	15.0 V									GND	GND		GND	GND	15.0 V									15.0 V	CH_0		1.5		1.5		1.5	
		631										4.0 V	GND														CH_1							
		632										GND	4.0 V														CH_2							
		633										4.0 V	4.0 V														CH_3							
		634										GND	GND			4.0 V											CH_4							
		635										4.0 V	GND														CH_5							
		636										GND	4.0 V														CH_6							
		637										4.0 V	4.0 V														CH_7							
		638										GND	GND		4.0 V	GND											CH_8							
		639										4.0 V	GND														CH_9							
		640										GND	4.0 V														CH_{10}							
		641										4.0 V	4.0 V														CH_{11}							
		642										GND	GND			4.0 V											CH_{12}							
		643										4.0 V	GND														CH_{13}							
		644										GND	4.0 V														CH_{14}							
		645										4.0 V	4.0 V														CH_{15}							
I_{DOFF}	Fig. 9	646	5.0 V	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND		GND	GND	5.0 V	GND	GND	GND	GND	GND	GND	GND	GND	5.0 V	$CO/_I$		±100		±100		±100	nA
		647									GND																CH_0							
		648								GND																	CH_1							
		649							GND																		CH_2							
		650						GND																			CH_3							
		651					GND																				CH_4							

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, 7, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}			Min	Max	Min	Max	Min	Max	
		Test No.																																
I_{DOFF}	Fig. 9	652	5.0 V			GND						GND	GND	GND	GND	GND	5.0 V								5.0 V	CH_5		+100		+100		±100	nA
		653			GND																						CH_6							
		654		GND																							CH_7							
		655																							GND		CH_8							
		656																						GND			CH_9							
		657																					GND				CH_{10}							
		658																				GND					CH_{11}							
		659																			GND						CH_{12}							
		660																		GND							CH_{13}							
		661																	GND								CH_{14}							
		662																GND									CH_{15}							
		663	GND	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V							5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V		$CO/_I$							
		664									5.0 V																CH_0							
		665								5.0 V																	CH_1							
		666							5.0 V																		CH_2							
		667						5.0 V																			CH_3							
		668					5.0 V																				CH_4							
		669				5.0 V																					CH_5							
		670			5.0 V																						CH_6							
		671		5.0 V																							CH_7							
		672																							5.0 V		CH_8							
		673																						5.0 V			CH_9							
		674																					5.0 V				CH_{10}							
		675																				5.0 V					CH_{11}							
		676																			5.0 V						CH_{12}							
		677																		5.0 V							CH_{13}							
		678																	5.0 V								CH_{14}							
		679																5.0 V									CH_{15}							

See footnotes at end of table.

MIL-M-38510/113BA

Source: https://assist.dla.mil -- Downloaded: 202640-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																															
I_{DOFF2}	Fig. 9	680-713	Same tests and terminal conditions as for tests 663 through 679, except V_{DD} = 10.0 V and limits are as shown.																										±200		±200		±200	nA
I_{DOFF3}	Fig. 9	714-747	Same tests and terminal conditions as for tests 663 through 679, except V_{DD} = 15.0 V and limits are as shown.																										±200		±200		±200	nA
																												Subgroup 4 T_A = 25°C						
																												Min	Max					
C_C	3012	748										4/	4/	GND	4/	4/	4/									GND	A		7.5					pF
C_{IS}		749																									B							
		750																									C							
		751																									D							
		752																									INH							
		753																									CH_0							
		754																									CH_1							
		755																									CH_2							
		756																									CH_3							
		757																									CH_4							
		758																									CH_5							
		759																									CH_6							
		760																									CH_7							
		761																									CH_8							
		762																									CH_9							
		763																									CH_{10}							
		764																									CH_{11}							
		765																									CH_{12}							
		766																									CH_{13}							
		767																									CH_{14}							
		768																									CH_{15}							
C_{OS}		769	5/	4/	4/	4/	4/	4/	4/	4/	4/	GND	GND	-5.0 V	GND	GND	GND	4/	4/	4/	4/	4/	4/	4/	4/	GND 5.0 V	$CO/_I$		75					

See footnotes at end of table.

MIL-M-38510/78A

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

The requirements shall be measured and designated as

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 4 T_A = 25°C					
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}								
		Test No.																										Min	Max	Min	Max	Min	Max	
C_{IOS}	3012	770	6/								6/	GND	GND	GND	GND	GND	GND									GND	$CH_0 \rightarrow CO/_I$		0.4					pF
		771								6/																		$CH_1 \rightarrow CO/_I$							
		772							6/																			$CH_2 \rightarrow CO/_I$							
		773						6/																				$CH_3 \rightarrow CO/_I$							
		774					6/																					$CH_4 \rightarrow CO/_I$							
		775				6/																						$CH_5 \rightarrow CO/_I$							
		776			6/																							$CH_6 \rightarrow CO/_I$							
		777		6/																								$CH_7 \rightarrow CO/_I$							
		778																							6/			$CH_8 \rightarrow CO/_I$							
		779																						6/				$CH_9 \rightarrow CO/_I$							
		780																					6/					$CH_{10} \rightarrow CO/_I$							
		781																				6/						$CH_{11} \rightarrow CO/_I$							
		782																			6/							$CH_{12} \rightarrow CO/_I$							
		783	*																	6/								$CH_{13} \rightarrow CO/_I$							
		784																	6/									$CH_{14} \rightarrow CO/_I$							
		785																6/										$CH_{15} \rightarrow CO/_I$							
																													Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																													Min	Max	Min	Max	Min	Max	
t_{PLH1} and t_{PHL1}	3003 Fig. 10	786	IN								OUT	GND	GND	GND	GND	GND	GND								5.0 V	$CO/_I \rightarrow CH_0$	3	55	4	11	3	55	ns
		787								OUT		5.0 V	GND														$CO/_I \rightarrow CH_1$							
		788							OUT			GND	5.0 V														$CO/_I \rightarrow CH_2$							
		789						OUT				5.0 V	5.0 V														$CO/_I \rightarrow CH_3$							
		790					OUT					GND	GND			5.0 V											$CO/_I \rightarrow CH_4$							
		791				OUT						5.0 V	GND			5.0 V											$CO/_I \rightarrow CH_5$							
		792			OUT							GND	5.0 V			5.0 V											$CO/_I \rightarrow CH_6$							
		793		OUT								5.0 V	5.0 V			5.0 V											$CO/_I \rightarrow CH_7$							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20240-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
t_{PLH1} and t_{PHL1}	3003 Fig. 10	794	IN									GND	GND	GND	5.0 V	GND	GND							OUT		5.0 V	$CO/_I \rightarrow CH_8$	3	55	4	77	3	55	ns
		795										5.0 V	GND										OUT				$CO/_I \rightarrow CH_9$							
		796										GND	5.0 V														$CO/_I \rightarrow CH_{10}$							
		797										5.0 V	5.0 V									OUT					$CO/_I \rightarrow CH_{11}$							
		798										GND	GND			5.0 V					OUT						$CO/_I \rightarrow CH_{12}$							
		799										5.0 V	GND							OUT							$CO/_I \rightarrow CH_{13}$							
		800										GND	5.0 V						OUT								$CO/_I \rightarrow CH_{14}$							
		801										5.0 V	5.0 V					OUT									$CO/_I \rightarrow CH_{15}$							
t_{PLH2}	3003 Fig. 12	802	5.0 V								OUT	IN	GND		GND	GND											A $\rightarrow CH_0$	30	600	41	830	30	600	
		803								OUT		IN	GND														A $\rightarrow CH_1$							
		804							OUT			GND	IN														B $\rightarrow CH_2$							
		805						OUT				IN	IN														B $\rightarrow CH_3$							
		806					OUT					GND	GND			IN											C $\rightarrow CH_4$							
		807				OUT						IN	GND														A $\rightarrow CH_5$							
		808			OUT							GND	IN														B $\rightarrow CH_6$							
		809		OUT								IN	IN														C $\rightarrow CH_7$							
		810										GND	GND		IN	GND									OUT		D $\rightarrow CH_8$							
		811										IN	GND											OUT			A $\rightarrow CH_9$							
		812										GND	IN										OUT				B $\rightarrow CH_{10}$							
		813										IN	IN									OUT					D $\rightarrow CH_{11}$							
		814										GND	GND			IN					OUT						C $\rightarrow CH_{12}$							
		815										IN	GND							OUT							A $\rightarrow CH_{13}$							
		816										GND	IN						OUT								B $\rightarrow CH_{14}$							
		817										IN	IN					OUT									D $\rightarrow CH_{15}$							
t_{PHL2}		818-833	Same tests and terminal conditions as for tests 802-817, except limits are as shown.																									20	400	28	560	20	400	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Symbol	$CO/_I$	CH_7	CH_6	CH_5	CH_4	CH_3	CH_2	CH_1	CH_0	A	B	V_{SS}	D	C	INH	CH_{15}	CH_{14}	CH_{13}	CH_{12}	CH_{11}	CH_{10}	CH_9	CH_8	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
t_{PLH3}	3003 Fig. 14	834	5.0 V								OUT	GND	GND	GND	GND	GND	IN									5.0 V	INH → CH_0	30	600	41	830	30	600	ns
		835								OUT		5.0 V	GND														INH → CH_1							
		836							OUT			GND	5.0 V														INH → CH_2							
		837						OUT				5.0 V	5.0 V														INH → CH_3							
		838					OUT					GND	GND			5.0 V											INH → CH_4							
		839				OUT						5.0 V	GND														INH → CH_5							
		840			OUT							GND	5.0 V														INH → CH_6							
		841		OUT								5.0 V	5.0 V														INH → CH_7							
		842										GND	GND		5.0 V	GND									OUT		INH → CH_8							
		843										5.0 V	GND											OUT			INH → CH_9							
		844										GND	5.0 V										OUT				INH → CH_{10}							
		845										5.0 V	5.0 V									OUT					INH → CH_{11}							
		846										GND	GND			5.0 V					OUT						INH → CH_{12}							
		847										5.0 V	GND							OUT							INH → CH_{13}							
		848										GND	5.0 V						OUT								INH → CH_{14}							
		849										5.0 V	5.0 V					OUT									INH → CH_{15}							
t_{PHL3}	3003 Fig. 14	850-865	Same tests and terminal conditions as for tests 834-849, except limits are as shown.																									20	400	28	550	20	400	

				Subgroup 12 T_A = 25°C	
				Min	Max
t_{PLH1} t_{PHL1}	3003 Fig. 10	866-881	Same tests and terminal conditions as for tests 786-801, except V_{DD} = 10.0 V and limits are as shown	1 1	25 25
t_{PLH2} t_{PHL2}	3003 Fig. 12	882-913	Same tests and terminal conditions as for tests 802-833, except $CO/_I$-V_{DD}=10.0 V and limits are as shown.	13 8	250 150
t_{PLH3} t_{PHL3}	3003 Fig. 14	914-945	Same tests and terminal conditions as for tests 834-865, except $CO/_I$-V_{DD}=10.0 V and limits are as shown.	13 8	250 150

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
$V_{IC(pos)}$		1		1 mA																						GND	CHX_7		1.5					Vdc
		2			1 mA																						CHX_6							
		3				1 mA																					CHX_5							
		4					1 mA																				CHX_4							
		5						1 mA																			CHX_3							
		6							1 mA																		CHX_2							
		7								1 mA																	CHX_1							
		8									1 mA																CHX_0							
		9										1 mA															A							
		10											1 mA														B							
		11													1 mA												INH							
		12														1 mA											C							
		13															1 mA										CHY_7							
		14																1 mA									CHY_6							
		15																		1 mA							CHY_5							
		16																			1 mA						CHY_4							
		17																				1 mA					CHY_3							
		18																					1 mA				CHY_2							
		19																						1 mA			CHY_1							
		20																							1 mA		CHY_0							
		21																	1 mA								COY							
		22	1 mA																								COX							
$V_{IC(neg)}$		23		-1 mA									GND														CHX_7		-6.0					
		24			-1 mA																						CHX_6							
		25				-1 mA																					CHX_5							
		26					-1 mA																				CHX_4							
		27						-1 mA																			CHX_3							

See footnotes at end of table.

MIL-M-38510/178A

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, 7, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
$V_{IC(neg)}$		28							-1 mA					GND													CHX_2		-6.0					Vdc
		29								-1 mA																	CHX_1							
		30									-1 mA																CHX_0							
		31										-1 mA															A							
		32											-1 mA														B							
		33													-1 mA												INH							
		34														-1 mA											C							
		35															-1 mA										CHY_7							
		36																-1 mA									CHY_6							
		37																		-1 mA							CHY_5							
		38																			-1 mA						CHY_4							
		39																				-1 mA					CHY_3							
		40																					-1 mA				CHY_2							
		41																						-1 mA			CHY_1							
		42																							-1 mA		CHY_0							
		43																	-1 mA								COY							
		44	-1 mA																								COX							
I_{SS} 2/	3005	45	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND		GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	V_{SS}		-0.25		-2.5			mA
		46		GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	18.0 V			18.0 V	GND	GND		GND	GND	GND	GND	GND	GND	GND								
		47		18.0 V	18.0 V	18.0 V	18.0 V	GND	18.0 V	18.0 V	18.0 V	18.0 V				GND	18.0 V	GND		18.0 V	18.0 V	GND	18.0 V	18.0 V	18.0 V								
		48		GND	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V				18.0 V	GND	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V								
		49		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND	18.0 V	18.0 V	GND				GND	18.0 V	18.0 V		18.0 V	GND	GND	GND	GND	GND	GND								
		50	18.0 V	18.0 V	GND	GND	GND	GND		GND	GND	18.0 V				18.0 V	GND	GND	18.0 V	GND	GND	GND	18.0 V	GND	GND								
		51		GND	GND	GND	GND	18.0 V		GND	GND	GND				GND	GND	GND		GND	GND	18.0 V	GND		GND	GND								
		52		GND	GND	GND	18.0 V	GND		GND	GND	GND	GND			18.0 V	GND	GND		GND	18.0 V	GND			GND	GND								
		53		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND			18.0 V	18.0 V	18.0 V			18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V								
		54		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND			GND	18.0 V	18.0 V			18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V								

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
V_{OH1}	3006	55		15.0 V								15.0 V	15.0 V	GND	GND	15.0 V										15.0 V	COX	14.95		14.95		14.95		Vdc
		56										15.0 V	15.0 V			15.0 V	15.0 V										COY							
		57	15.0 V									GND	GND			GND			GND								CHX_0							
		58										15.0 V	GND														CHX_1							
		59										GND	15.0 V														CHX_2							
		60										15.0 V	15.0 V														CHX_3							
		61										GND	GND			15.0 V											CHX_4							
		62										15.0 V	GND														CHX_5							
		63										GND	15.0 V														CHX_6							
		64										15.0 V	15.0 V														CHX_7							
		65	GND									GND	GND			GND			15.0 V								CHY_0							
		66										15.0 V	GND														CHY_1							
		67										GND	15.0 V														CHY_2							
		68										15.0 V	15.0 V														CHY_3							
		69										GND	GND			15.0 V											CHY_4							
		70										15.0 V	GND														CHY_5							
		71										GND	15.0 V														CHY_6							
		72										15.0 V	15.0 V														CHY_7							
V_{OL1}	3007	73									GND	GND	GND		15.0 V	GND											COX		0.05		0.05		0.05	
		74										GND													GND		COY							
		75	GND									GND							GND								CHX_0							
		76										15.0 V															CHX_1							
		77										GND	15.0 V														CHX_2							
		78										15.0 V	15.0 V														CHX_3							
		79										GND	GND			15.0 V											CHX_4							
		80										15.0 V	GND			15.0 V											CHX_5							
		81										GND	15.0 V			15.0 V											CHX_6							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																															
V_{OL1}	3007	82	GND									15.0 V	15.0 V	GND	15.0 V	15.0 V			GND							15.0 V	CHX_7		0.05		0.05		0.05	Vdc
		83										GND	GND			GND											CHY_0							
		84										15.0 V	GND														CHY_1							
		85										GND	15.0 V														CHY_2							
		86										15.0 V	15.0 V														CHY_3							
		87										GND	GND			15.0 V											CHY_4							
		88										15.0 V	GND														CHY_5							
		89										GND	15.0 V														CHY_6							
		90										15.0 V	15.0 V														CHY_7							
I_{IH1} 3/	3010	91		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	All inputs		20					nA
I_{IH2} 3/		92	18.0 V									GND	GND		GND	GND			18.0 V								COX		1.0		45			
		93										GND	GND														COY							
		94		GND	GND	GND	GND	GND	GND	GND	GND	18.0 V	GND				GND	GND		GND	GND	GND	GND	GND	GND		A							
		95										GND	18.0 V			18.0 V											B							
		96											GND			GND											C							
		97									18.0 V				18.0 V	GND											INH							
		98									GND				GND	GND											CHX_0							
		99								18.0 V		18.0 V															CHX_1							
		100							18.0 V	GND		GND	18.0 V															CHX_2							
		101						18.0 V	GND			18.0 V	18.0 V															CHX_3							
		102					18.0 V	GND				GND	GND			18.0 V												CHX_4							
		103				18.0 V	GND					18.0 V	GND															CHX_5							
		104			18.0 V	GND	GND					GND	18.0 V															CHX_6							
		105		18.0 V	GND	GND	GND					18.0 V	18.0 V															CHX_7							
		106										GND	GND			GND	GND	GND		GND	GND	GND	GND	GND	18.0 V		CHY_0							
		107										18.0 V	GND			GND	GND	GND		GND	GND	GND	GND	18.0 V	GND		CHY_1							
		108										GND	18.0 V			GND	GND	GND		GND	GND	GND	18.0 V	GND	GND		CHY_2							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
I_{IH2} 3/	3010	109										18.0 V	18.0 V	GND	GND	GND	GND	GND		GND	GND	18.0 V	GND	GND	GND	18.0 V	CHY_3		1.0		45			nA
		110										GND	GND			18.0 V		GND		GND	18.0 V	GND					CHY_4							
		111										18.0 V	GND					GND		18.0 V	GND						CHY_5							
		112										GND	18.0 V					18.0 V		GND							CHY_6							
		113										18.0 V	18.0 V				18.0 V	GND		GND							CHY_7							
I_{IL1} 3/	3009	114		GND	GND	GND	GND	GND	GND	GND	GND	GND	GND			GND	GND	GND		GND							All inputs		-20					
I_{IL2} 3/		115	GND									18.0 V	18.0 V			18.0 V											COX		-1.0		-45			
		116										18.0 V	18.0 V						GND								COY							
		117		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	A							
		118										18.0 V	GND														B							
		119										18.0 V	18.0 V			GND											C							
		120										18.0 V	18.0 V			18.0 V											INH							
		121									GND	GND	GND			GND											CHX_0							
		122								GND	18.0 V	18.0 V	GND														CHX_1							
		123							GND	18.0 V		GND	18.0 V														CHX_2							
		124						GND	18.0 V			18.0 V	18.0 V														CHX_3							
		125					GND	18.0 V				GND	GND			18.0 V											CHX_4							
		126				GND	18.0 V					18.0 V	GND														CHX_5							
		127			GND	18.0 V	18.0 V					GND	18.0 V														CHX_6							
		128		GND	18.0 V	18.0 V	18.0 V					18.0 V	18.0 V														CHX_7							
		129										GND	GND			GND	18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	GND		CHY_0							
		130										18.0 V	GND									18.0 V	18.0 V	GND	18.0 V		CHY_1							
		131										GND	18.0 V									18.0 V	GND	18.0 V			CHY_2							
		132										18.0 V	18.0 V									GND	18.0 V				CHY_3							
		133										GND	GND			18.0 V					GND	18.0 V					CHY_4							
		134										18.0 V	GND							GND	18.0 V						CHY_5							
		135										GND	18.0 V					GND		18.0 V	18.0 V						CHY_6							
		136										18.0 V	18.0 V				GND	18.0 V		18.0 V	18.0 V						CHY_7							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}								
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON11}	Fig. 6	137	V_{IS} = -2.0 V								V_{OS}	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V										2.5 V	CHX_0		500		700		350	u
		138								V_{OS}		2.5 V	-2.5 V														CHX_1							
		139							V_{OS}			-2.5 V	2.5 V														CHX_2							
		140						V_{OS}				2.5 V	2.5 V														CHX_3							
		141					V_{OS}					-2.5 V	-2.5 V			2.5 V											CHX_4							
		142				V_{OS}						2.5 V	-2.5 V														CHX_5							
		143			V_{OS}							-2.5 V	2.5 V														CHX_6							
		144		V_{OS}								2.5 V	2.5 V														CHX_7							
		145										-2.5 V	-2.5 V			-2.5 V			V_{IS} = -2.0 V						V_{OS}		CHY_0							
		146										2.5 V	-2.5 V											V_{OS}			CHY_1							
		147										-2.5 V	2.5 V										V_{OS}				CHY_2							
		148										2.5 V	2.5 V									V_{OS}					CHY_3							
		149										-2.5 V	-2.5 V			2.5 V					V_{OS}						CHY_4							
		150										2.5 V	-2.5 V							V_{OS}							CHY_5							
		151										-2.5 V	2.5 V					V_{OS}									CHY_6							
		152										2.5 V	2.5 V				V_{OS}										CHY_7							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}								
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON12}	Fig. 6	153-168	Same tests and terminal conditions as for tests 137-152, except V_{IS} = -0.9 V and limits are as shown.																										700		900		500.	Ω
R_{ON13}		169-184	Same tests and terminal conditions as for tests 137-152, except V_{IS} = 1.0 V and limits are as shown.																										600		800		400	
R_{ON14}		185-200	Same tests and terminal conditions as for tests 137-152, except V_{IS} = 2.0 V and limits are as shown.																										500		700		300	
R_{ON11}		201	V_{OS}								V_{IS} = -2.0 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V	-2.5 V										2.5 V	COI		500		700		350	
		202								V_{IS} = -2.0 V		2.5 V	-2.5 V																					
		203							V_{IS} = -2.0 V			-2.5 V	2.5 V																					
		204						V_{IS} = -2.0 V				2.5 V	2.5 V																					
		205					V_{IS} = -2.0 V					-2.5 V	-2.5 V			2.5 V																		
		206				V_{IS} = -2.0 V						2.5 V	-2.5 V																					
		207			V_{IS} = -2.0 V							-2.5 V	2.5 V																					
		208		V_{IS} = -2.0 V								2.5 V	2.5 V																					
		209										-2.5 V	-2.5 V			-2.5 V			V_{OS}						V_{IS} = -2.0 V		COY						
		210										2.5 V	-2.5 V											V_{IS} = -2.0 V										
		211										-2.5 V	2.5 V										V_{IS} = -2.0 V										
		212										2.5 V	2.5 V									V_{IS} = -2.0 V											
		213										-2.5 V	-2.5 V			2.5 V					V_{IS} = -2.0 V												

See footnotes at end of table.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
R_{ON11}	Fig. 6	214										2.5 V	-2.5 V	-2.5 V	-2.5 V	2.5 V			V_{OS}	V_{IS} = -2.0 V					2.5 V	COY		500		700		350	Ω
		215										-2.5 V	2.5 V					V_{IS} = -2.0 V															
		216										2.5 V	2.5 V				V_{IS} = -2.0 V																	
R_{ON12}		217-232	Same tests and terminal conditions as for tests 201-216, except V_{IS} = -0.9 V and limits are as shown																										700		900		500	
R_{ON13}		233-248	Same tests and terminal conditions as for tests 201-216, except V_{IS} = 1.0 V and limits are as shown.																										600		800		400	
R_{ON14}		249-264	Same tests and terminal conditions as for tests 201-216, except V_{IS} = 2.0 V and limits are as shown.																										500		700		300	
R_{ON21}	Fig. 7	265	V_{IS} = -5.0 V								V_{DS}	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V										5.0 V	CHX_0		200		260		140	
		266								V_{DS}		5.0 V	-5.0 V														CHX_1							
		267							V_{DS}			-5.0 V	5.0 V														CHX_2							
		268						V_{DS}				5.0 V	5.0 V														CHX_3							
		269					V_{DS}					-5.0 V	-5.0 V			5.0 V											CHX_4							
		270				V_{DS}						5.0 V	-5.0 V														CHX_5							
		271			V_{DS}							-5.0 V	5.0 V														CHX_6							
		272		V_{DS}								5.0 V	5.0 V														CHX_7							
		273										-5.0 V	-5.0 V			-5.0 V			V_{IS} = -5.0 V						V_{DS}		CHY_0							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COI	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																															
R_{ON21}	Fig. 7	274										5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V			V_{IS} = -5.0 V					V_{OS}		5.0 V	CHY_1		200		260		140	Ω
		275										-5.0 V	5.0 V										V_{OS}				CHY_2							
		276										5.0 V	5.0 V									V_{OS}					CHY_3							
		277										-5.0 V	-5.0 V			5.0 V					V_{OS}						CHY_4							
		278										5.0 V	-5.0 V							V_{OS}							CHY_5							
		279										-5.0 V	5.0 V					V_{OS}									CHY_6							
		280										5.0 V	5.0 V				V_{OS}										CHY_7							
R_{ON22}		281-296	Same tests and terminal conditions as for tests 265-280, except V_{IS} = -3.0 V and limits are as shown.																										250		325		175	
R_{ON23}		297-312	Same tests and terminal conditions as for tests 265-280, except V_{IS} = 3.5 V and limits are as shown.																										250		325		175	
R_{ON24}		313-328	Same tests and terminal conditions as for tests 265-280, except V_{IS} = 5.0 V and limits are as shown.																										200		260		140	
R_{ON21}		329	V_{OS}								V_{IS} = -5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V	-5.0 V										5.0 V	COX							
		330								V_{IS} = -5.0 V		5.0 V	-5.0 V																						
		331							V_{IS} = -5.0 V			-5.0 V	5.0 V																						
		332						V_{IS} = -5.0 V				5.0 V	5.0 V																						
		333					V_{IS} = -5.0 V					-5.0 V	-5.0 V			5.0 V																			
		334				V_{IS} = -5.0 V						5.0 V	-5.0 V			5.0 V																			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
R_{ON21}	Fig. 7	335	V_{OS}		V_{IS} = -5.0 V							-5.0 V	5.0 V	-5.0 V	-5.0 V	5.0 V										5.0 V	COX		200		260		140	Ω
		336	V_{OS}	V_{IS} = -5.0 V								5.0 V	5.0 V			5.0 V											COX							
		337										-5.0 V	-5.0 V			-5.0 V			V_{OS}						V_{IS} = -5.0 V		COY							
		338										5.0 V	-5.0 V											V_{IS} = -5.0 V										
		339										-5.0 V	5.0 V										V_{IS} = -5.0 V											
		340										5.0 V	5.0 V									V_{IS} = -5.0 V												
		341										-5.0 V	-5.0 V			5.0 V					V_{IS} = -5.0 V													
		342										5.0 V	-5.0 V							V_{IS} = -5.0 V														
		343										-5.0 V	5.0 V					V_{IS} = -5.0 V																
		344										5.0 V	5.0 V				V_{IS} = -5.0 V																	
R_{ON22}		345-360	Same tests and terminal conditions as for tests 329-344, except V_{IS} = -3.0 V and limits are as shown.																										250		325		175	
R_{ON23}		361-376	Same tests and terminal conditions as for tests 329-344, except V_{IS} = 3.5 V and limits are as shown.																										250		325		175	
R_{ON24}		377-392	Same tests and terminal conditions as for tests 329-344, except V_{IS} = 5.0 V and limits are as shown.																										200		260		140	
R_{ON31}	Fig. 8	393	V_{IS} = -7.5 V								V_{OS}	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V										7.5 V	CHX_0		150		200		100	
R_{ON31}	Fig. 8	394	V_{IS} = -7.5 V							V_{OS}		7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V										7.5 V	CHX_1		150		200		100	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON31}	Fig. 8	395	V_{IS} = -7.5 V						V_{OS}			-7.5 V	7.5 V	-7.5 V	-7.5 V	-7.5 V										7.5 V	CHX_2		150		200		100	Ω
		396						V_{OS}				7.5 V	7.5 V			-7.5 V											CHX_3							
		397					V_{OS}					-7.5 V	-7.5 V			7.5 V											CHX_4							
		398				V_{OS}						7.5 V	-7.5 V														CHX_5							
		399			V_{OS}							-7.5 V	7.5 V														CHX_6							
		400		V_{OS}								7.5 V	7.5 V														CHX_7							
		401										-7.5 V	-7.5 V			-7.5 V			V_{IS} = -7.5 V						V_{OS}		CHY_0							
		402										7.5 V	-7.5 V											V_{OS}			CHY_1							
		403										-7.5 V	7.5 V										V_{OS}				CHY_2							
		404										7.5 V	7.5 V									V_{OS}					CHY_3							
		405										-7.5 V	-7.5 V			7.5 V					V_{OS}						CHY_4							
		406										7.5 V	-7.5 V							V_{OS}							CHY_5							
		407										-7.5 V	7.5 V					V_{OS}									CHY_6							
		408										7.5 V	7.5 V				V_{OS}										CHY_7							
R_{ON32}		409-424	Same tests and terminal conditions as for tests 393-408, except V_{IS} = -5.0 V and limits are as shown.																										170		230		120		
R_{ON33}		425-440	Same tests and terminal conditions as for tests 393-408, except V_{IS} = 0 V and limits are as shown.																										170		230		120		
R_{ON34}		441-456	Same tests and terminal conditions as for tests 393-408, except V_{IS} = 6.0 V and limits are as shown.																										170		230		120		
R_{ON35}		457-472	Same tests and terminal conditions as for tests 393-408, except V_{IS} = 7.5 V and limits are as shown.																										150		200		100		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
R_{ON31}	Fig. 8	473	V_{OS}								V_{IS} = -7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V	-7.5 V										7.5 V	COX		150		200		100	Ω
		474								V_{IS} = -7.5 V		7.5 V	-7.5 V																				
		475							V_{IS} = -7.5 V			-7.5 V	7.5 V																				
		476						V_{IS} = -7.5 V				7.5 V	7.5 V																				
		477					V_{IS} = -7.5 V					7.5 V	-7.5 V			7.5 V																	
		478				V_{IS} = -7.5 V						7.5 V	-7.5 V																				
		479			V_{IS} = -7.5 V							-7.5 V	7.5 V																				
		480		V_{IS} = -7.5 V								7.5 V	7.5 V																				
		481										-7.5 V	-7.5 V			-7.5 V			V_{OS}						V_{IS} = -7.5 V		COY						
		482										7.5 V	-7.5 V											V_{IS} = -7.5 V									
		483										-7.5 V	7.5 V										V_{IS} = -7.5 V									
		484										7.5 V	7.5 V									V_{IS} = -7.5 V										
		485										-7.5 V	-7.5 V			7.5 V					V_{IS} = -7.5 V											
		486										7.5 V	-7.5 V							V_{IS} = -7.5 V												
		487										-7.5 V	7.5 V					V_{IS} = -7.5 V														
		488										7.5 V	7.5 V				V_{IS} = -7.5 V															

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																								Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
R_{ON32}	Fig. 8	489-504	Same tests and terminal conditions as for tests 473-488, except V_{IS} = -5.0 V and limits are as shown.																										170		230		120	Ω
R_{ON33}		505-520	Same tests and terminal conditions as for tests 473-488, except V_{IS} = 0 V and limits are as shown.																										170		230		120	
R_{ON34}		521-536	Same tests and terminal conditions as for tests 473-488, except V_{IS} = 6.0 V and limits are as shown.																										170		230		120	
R_{ON35}		537-552	Same tests and terminal conditions as for tests 473-488, except V_{IS} = 7.5 V and limits are as shown.																										150		200		100	
V_{IH1}	7/	553	5.0 V									GND	GND	GND	GND	GND			GND							5.0 V	CHX_7	4.5		4.5		4.5		Vdc
		554										3.5 V	GND														CHX_6							
		555										GND	3.5 V														CHX_5							
		556										3.5 V	3.5 V														CHX_4							
		557										GND	GND			3.5 V											CHX_3							
		558										3.5 V	GND														CHX_2							
		559										GND	3.5 V														CHX_1							
		560										3.5 V	3.5 V														CHX_0							
		561	GND									GND	GND			GND			5.0 V								CHY_7							
		562										3.5 V	GND														CHY_6							
		563										GND	3.5 V														CHY_5							
		564										3.5 V	3.5 V														CHY_4							
		565										GND	GND			3.5 V											CHY_3							
		566										3.5 V	GND														CHY_2							
		567										GND	3.5 V														CHY_1							
		568										3.5 V	3.5 V														CHY_0							
V_{IH2}		569	10.0 V									GND	GND			GND			GND							10.0 V	CHX_7	9.0		9.0		9.0		
		570										7.0 V	GND														CHX_6							
		571										GND	7.0 V														CHX_5							
		572										7.0 V	7.0 V														CHX_4							
		573										GND	GND			7.0 V											CHX_3							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IH2}	2/	574	10.0 V									7.0 V	GND	GND	GND	7.0 V			GND							10.0 V	CHX_2	9.0		9.0		9.0		Vdc
		575										GND	7.0 V			7.0 V			GND								CHX_1							
		576										7.0 V	7.0 V			7.0 V			GND								CHX_0							
		577	GND									GND	GND			GND			10.0 V								CHY_7							
		578										7.0 V	GND														CHY_6							
		579										GND	7.0 V														CHY_5							
		580										7.0 V	7.0 V														CHY_4							
		581										GND	GND			7.0 V											CHY_3							
		582										7.0 V	GND														CHY_2							
		583										GND	7.0 V														CHY_1							
		584										7.0 V	7.0 V														CHY_0							
V_{IH3}		585	15.0 V									GND	GND			GND			GND							15.0 V	CHX_7	13.5		13.5		13.5		
		586										11.0 V	GND														CHX_6							
		587										GND	11.0 V														CHX_5							
		588										11.0 V	11.0 V														CHX_4							
		589										GND	GND			11.0 V											CHX_3							
		590										11.0 V	GND														CHX_2							
		591										GND	11.0 V														CHX_1							
		592										11.0 V	11.0 V														CHX_0							
		593	GND									GND	GND			GND			15.0 V								CHY_7							
		594										11.0 V	GND														CHY_6							
		595										GND	11.0 V														CHY_5							
		596										11.0 V	11.0 V														CHY_4							
		597										GND	GND			11.0 V											CHY_3							
		598										11.0 V	GND														CHY_2							
		599										GND	11.0 V														CHY_1							
		600										11.0 V	11.0 V														CHY_0							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IL1}	1/	601	5.0 V									GND	GND	GND	5.0 V	GND			GND							5.0 V	CHX_7		0.5		0.5		0.5	Vdc
		602										1.5 V	GND														CHX_6							
		603										GND	1.5 V														CHX_5							
		604										1.5 V	1.5 V														CHX_4							
		605										GND	GND			1.5 V											CHX_3							
		606										1.5 V	GND														CHX_2							
		607										GND	1.5 V														CHX_1							
		608										1.5 V	1.5 V														CHX_0							
		609	GND									GND	GND			GND			5.0 V								CHY_7							
		610										1.5 V	GND														CHY_6							
		611										GND	1.5 V														CHY_5							
		612										1.5 V	1.5 V														CHY_4							
		613										GND	GND			1.5 V											CHY_3							
		614										1.5 V	GND														CHY_2							
		615										GND	1.5 V														CHY_1							
		616										1.5 V	1.5 V														CHY_0							
V_{IL2}		617	10.0 V									GND	GND		10.0 V	GND			GND							10.0 V	CHX_7		1.0		1.0		1.0	
		618										3.0 V	GND														CHX_6							
		619										GND	3.0 V														CHX_5							
		620										3.0 V	3.0 V														CHX_4							
		621										GND	GND			3.0 V											CHX_3							
		622										3.0 V	GND														CHX_2							
		623										GND	3.0 V														CHX_1							
		624										3.0 V	3.0 V														CHX_0							
		625	GND									GND	GND			GND			10.0 V								CHY_7							
		626	GND									3.0 V	GND			GND			10.0 V								CHY_6							
		627	GND									GND	3.0 V			GND			10.0 V								CHY_5							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
V_{IL2}	1/	628	GND									3.0 V	3.0 V	GND	18.0 V	GND			10.0 V							10.0 V	CHY_4		1.0		1.0		1.0	Vdc
		629										GND	GND			3.0 V											CHY_3							
		630										3.0 V	GND														CHY_2							
		631										GND	3.0 V														CHY_1							
		632										3.0 V	3.0 V														CHY_0							
V_{IL3}		633	15.0 V									GND	GND		15.0 V	GND			GND							15.0 V	CHX_7		1.5		1.5		1.5	
		634										4.0 V	GND														CHX_6							
		635										GND	4.0 V														CHX_5							
		636										4.0 V	4.0 V														CHX_4							
		637										GND	GND			4.0 V											CHX_3							
		638										4.0 V	GND														CHX_2							
		639										GND	4.0 V														CHX_1							
		640										4.0 V	4.0 V														CHX_0							
		641	GND									GND	GND			GND			15.0 V								CHY_7							
		642										4.0 V	GND														CHY_6							
		643										GND	4.0 V														CHY_5							
		644										4.0 V	4.0 V														CHY_4							
		645										GND	GND			4.0 V											CHY_3							
		646										4.0 V	GND														CHY_2							
		647										GND	4.0 V														CHY_1							
		648										4.0 V	4.0 V														CHY_0							
I_{DOFF1}	Fig. 9	649	5.0 V	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND		5.0 V	GND										5.0 V	COX		±100		±100		±100	nA
		650															GND	GND	5.0 V	GND	GND	GND	GND	GND	GND	COY							
		651	5.0 V								GND																CHX_0							
		652								GND																	CHX_1							
		653							GND																		CHX_2							
		654						GND																			CHX_3							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Y, Z, U	Terminal conditions 1/																							Measured terminal	Test Limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_j = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}									
		Test No.																										Min	Max	Min	Max	Min	Max	
I_{OOFF1}	Fig. 9	655	5.0 V				GND					GND	GND	GND	5.0 V	GND										5.0 V	CHX_4		±100		±100		±100	nA
		656				GND																					CHX_5							
		657			GND																						CHX_6							
		658	↓	GND																							CHX_7							
		659																	5.0 V						GND		CHY_0							
		660																						GND			CHY_1							
		661																					GND				CHY_2							
		662																				GND					CHY_3							
		663																			GND						CHY_4							
		664																		GND							CHY_5							
		665																GND									CHY_6							
		666															GND										CHY_7							
		667	GND	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V								↓								COX							
		668															5.0 V	5.0 V	GND	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V	5.0 V		COY							
		669	GND								5.0 V																CHX_0							
		670								5.0 V																	CHX_1							
		671							5.0 V																		CHX_2							
		672						5.0 V																			CHX_3							
		673					5.0 V																				CHX_4							
		674				5.0 V																					CHX_5							
		675			5.0 V																						CHX_6							
		676	↓	5.0 V																							CHX_7							
		677																	GND						5.0 V		CHY_0							
		678																						5.0 V			CHY_1							
		679																					5.0 V				CHY_2							
		680																				5.0 V					CHY_3							
		681														↓			↓		5.0 V						CHY_4							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHY_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
I_{DOFF1}	Fig. 9	682										GND	GND	GND	5.0 V	GND			GND	5.0 V						5.0 V	CHY_5		±100		±100		±100	nA
I_{DOFF1}		683										GND	GND	GND	5.0 V	GND		5.0 V	GND							5.0 V	CHY_6		±100		±100		±100	
I_{DOFF1}		684										GND	GND	GND	5.0 V	GND	5.0 V		GND							5.0 V	CHY_7		±100		±100		±100	
I_{DOFF2}		685-721	Same tests and terminal conditions as for tests 667-684, except V_{DD} = 10.0 V																										±200		±200		±200	
I_{DOFF3}		722-758	Same tests and terminal conditions as for tests 667-684, except V_{DD} = 15.0 V																										±200		±500		±500	
																												Subgroup 4 T_A = 25°C						
																												Min	Max					
C_C	3012	759										4/	4/	GND	4/	4/										GND	A		7.5					pF
		760																									B							
		761																									C							
		762													4/												INH							
C_{IS}		763									4/	GND	GND		GND	GND											CHX_0							
		764								4/																	CHX_1							
		765							4/																		CHX_2							
		766						4/																			CHX_3							
		767					4/																				CHX_4							
		768				4/																					CHX_5							
		769			4/																						CHX_6							
		770		4/																							CHX_7							
		771																								4/	CHY_0							
		772																							4/		CHY_1							
		773																						4/			CHY_2							
		774																					4/				CHY_3							
		775																				4/					CHY_4							
		776																			4/						CHY_5							
		777																	4/								CHY_6							
		778															4/										CHY_7							

See footnotes at end of table.

MIL-M-38510/178A

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, L, Z, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 4 T_A = 25°C					
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																															
C_{DS}	3012	779	5/									GND	GND	GND	GND	GND										GND	COX		50					pF
C_{DS}		780																	5/								COY		50					
C_{IOS}		781	6/								6/																CHX_0→COX		0.4					
		782								6/																	CHX_1→COX							
		783							6/																		CHX_2→COX							
		784						6/																			CHX_3→COX							
		785					6/																				CHX_4→COX							
		786				6/																					CHX_5→COX							
		787			6/																						CHX_6→COX							
		788		6/																							CHX_7→COX							
		789																							6/		CHY_0→COY							
		790																						6/			CHY_1→COY							
		791																					6/				CHY_2→COY							
		792																				6/					CHY_3→COY							
		793																			6/						CHY_4→COY							
		794																		6/							CHY_5→COY							
		795																6/									CHY_6→COY							
		796															6/										CHY_7→COY							
																												Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																												Min	Max	Min	Max	Min	Max	
t_{PLH1} and t_{PHL1}	3003 Fig. 11	797	IN								OUT	GND	GND	GND	GND	GND										5.0 V	COX→CHX_0	3	55	4	77	3	55	ns
		798								OUT		5.0 V	GND														COX→CHX_1							
		799							DUT			GND	5.0 V														COX→CHX_2							
		800						OUT				5.0 V	5.0 V														COX→CHX_3							
		801					OUT					GND	GND			5.0 V											COX→CHX_4							
		802				OUT						5.0 V	GND			5.0 V											COX→CHX_5							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K, Z, Y, U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}								
		Test No.																										Min	Max	Min	Max	Min	Max	
t_{PLH1} and t_{PHL1}	3003 Fig. 11	803	IN		OUT							GND	5.0 V	GND	GND	5.0 V										5.0 V	COX→CHX_6	3	55	4	77	3	55	ns
		804	IN	OUT								5.0 V	5.0 V			5.0 V											COX→CHX_7							
		805										GND	GND			GND			IN						OUT		COY→CHY_0							
		806										5.0 V	GND											OUT			COY→CHY_1							
		807										GND	5.0 V										OUT				COY→CHY_2							
		808										5.0 V	5.0 V									OUT					COY→CHY_3							
		809										GND	GND			5.0 V					OUT						COY→CHY_4							
		810										5.0 V	GND							OUT							COY→CHY_5							
		811										GND	5.0 V					OUT									COY→CHY_6							
		812										5.0 V	5.0 V				OUT										COY→CHY_7							
t_{PLH2}	3003 Fig. 13	813	5.0 V								OUT	IN	GND			GND											A→CHX_0	30	600	41	830	30	600	
		814								OUT		IN	GND														A→CHX_1							
		815							OUT			GND	IN														B→CHX_2							
		816						OUT				IN	IN														B→CHX_3							
		817					OUT					GND	GND			IN											C→CHX_4							
		818				OUT						IN	GND														A→CHX_5							
		819			OUT							GND	IN														B→CHX_6							
		820		OUT								IN	IN														C→CHX_7							
		821										IN	GND			GND			5.0 V						OUT		A→CHY_0							
		822										IN	GND											OUT			A→CHY_1							
		823										GND	IN										OUT				B→CHY_2							
		824										IN	IN									OUT					B→CHY_3							
		825										GND	GND			IN					OUT						C→CHY_6							
		826										IN	GND							OUT							A→CHY_5							
		827										GND	IN					OUT									B→CHY_6							
		828										IN	IN				OUT										C→CHY_7							
t_{PHL2}	3003 Fig. 13	829-844	Same tests and terminal conditions as for tests 814-829, except limits are as shown.																									20	400	28	560	20	400	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Cases J, K,Z,Y,U	Terminal conditions 1/																							Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Symbol	COX	CHX_7	CHX_6	CHX_5	CHX_4	CHX_3	CHX_2	CHX_1	CHX_0	A	B	V_{SS}	INH	C	CHY_7	CHY_6	COY	CHY_5	CHY_4	CHY_3	CHY_2	CHY_1	CHY_0	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																																
t_{PLH3}	3003 Fig. 15	845	5.0 V								DUT	GND	GND	GND	IN	GND										5.0 V	INH→CHX_0	30	600	41	830	30	600	ns
		846								OUT		5.0 V	GND														INH→CHX_1							
		847							OUT			GND	5.0 V														INH→CHX_2							
		848						OUT				5.0 V	5.0 V														INH→CHX_3							
		849					OUT					GND	GND			5.0 V											INH→CHX_4							
		850				OUT						5.0 V	GND														INH→CHX_5							
		851			OUT							GND	5.0 V														INH→CHX_6							
		852		OUT								5.0 V	5.0 V														INH→CHX_7							
		853										GND	GND			GND			5.0 V						OUT		INH→CHY_0							
		854										5.0 V	GND											OUT			INH→CHY_1							
		855										GND	5.0 V										OUT				INH→CHY_2							
		856										5.0 V	5.0 V									OUT					INH→CHY_3							
		857										GND	GND			5.0 V					OUT						INH→CHY_4							
		858										5.0 V	GND							OUT							INH→CHY_5							
		859										GND	5.0 V					OUT									INH→CHY_6							
		860										5.0 V	5.0 V				OUT										INH→CHY_7							
t_{PHL3}		861-876	Same tests and terminal conditions as for tests 846-861, except limits are as shown.																									20	400	≥8	560	20	400	
																												Subgroup 12 T_A = 25°C						
																												Min.	Max					
t_{PLH1} t_{PHL1}	3003 Fig. 11	877-892	Same tests and terminal conditions as for tests 797-812, except V_{DD} = 10.0 V and limits are as shown.																									1 1	25 25					ns
t_{PLH2} t_{PHL2}	3003 Fig. 13	893-924	Same tests and terminal conditions as for tests 813-844, except COX and COY = 10.0 V (where applicable) and V_{DD} = 10.0 V and limits are as shown.																									13 8	250 150					
t_{PLH3} t_{PHL3}	3003 Fig. 15	925-956	Same tests and terminal conditions as for tests 845-876, except COX and COY = 10.0 V (where applicable) and V_{DD} = 10.0 V and limits are as shown.																									13 8	250 150					

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
																				Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16								
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
$V_{IC(pos)}$		1	1 mA															GND	IN_S		1.5					Vdc
		2		1 mA															A_1							
		3			1 mA														B_1							
		4					1 mA												A_2							
		5						1 mA											B_2							
		6										1 mA							B_3							
		7											1 mA						A_3							
		8													1 mA				B_4							
		9														1 mA			A_4							
		10															1 mA		O_D							
$V_{IC(neg)}$		11	-1 mA							GND									IN_S		-6.0					
		12		-1 mA															A_1							
		13			-1 mA														B_1							
		14					-1 mA												A_2							
		15						-1 mA											B_2							
		16										-1 mA							B_3							
		17											-1 mA						A_3							
		18													-1 mA				B_4							
		19														-1 mA			A_4							
		20															-1 mA		O_D							
I_{SS} 2/	3005	21	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V	GND	18.0 V	V_{SS}		-0.25		-2.5			µA
		22	18.0 V	GND	GND		GND	GND				GND	GND		GND	GND										
		23	GND	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V										
		24	GND	GND	GND		GND	GND				GND	GND		GND	GND										

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
V_{OH1}	3006	25	15.0 V	15.0 V	15.0 V		GND	GND		GND		GND	GND		GND	GND	GND	15.0 V	D_1	14.95		14.95		14.95		Vdc
		26		GND	GND		15.0 V	15.0 V				GND	GND		GND	GND			D_2							
		27		GND	GND		GND	GND				15.0 V	15.0 V		GND	GND			D_3							
		28		GND	GND		GND	GND				GND	GND		15.0 V	15.0 V			D_4							
		29	GND	15.0 V	15.0 V		GND	GND				GND	GND		GND	GND			D_1							
		30		GND	GND		15.0 V	15.0 V				GND	GND		GND	GND			D_2							
		31					GND	GND				15.0 V	15.0 V		GND	GND			D_3							
		32										GND	GND		15.0 V	15.0 V			D_4							
V_{OL1}	3007	33	15.0 V												GND	GND	15.0 V		D_1		0.05		0.05		0.05	
		34																	D_2							
		35																	D_3							
		36																	D_4							
		37	GND																D_1							
		38																	D_2							
		39																	D_3							
		40																	D_4							
V_{IH1}		41	1.5 V	3.5 V	1.5 V												GND	5.0 V	D_1	4.5		4.5		4.5		
		42		GND	GND		3.5 V	1.5 V											D_2							
		43		GND	GND		GND	GND				1.5 V	3.5 V						D_3							
		44		GND	GND		GND	GND				GND	GND		1.5 V	3.5 V			D_4							
		45	5.0 V	1.5 V	3.5 V		GND	GND				GND	GND		GND	GND			D_1							
		46		GND	GND		1.5 V	3.5 V				GND	GND		GND	GND			D_2							
		47		GND	GND		GND	GND				3.5 V	1.5 V		GND	GND			D_3							
		48		GND	GND		GND	GND				GND	GND		3.5 V	1.5 V			D_4							
V_{IH2}		49	3.0 V	7.0 V	3.0 V		GND	GND				GND	GND		GND	GND		10.0 V	D_1	9.0		9.0		9.0		
V_{IH2}		50	3.0 V	GND	GND		7.0 V	3.0 V				GND	GND		GND	GND		10.0 V	D_2	9.0		9.0		9.0		
V_{IH2}		51	3.0 V	GND	GND		GND	GND				3.0 V	7.0 V		GND	GND		10.0 V	D_3	9.0		9.0		9.0		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
V_{IH2}		52	3.0 V	GND	GND		GND	GND		GND		GND	GND		3.0 V	7.0 V	GND	10.0 V	D_4	9.0		9.0		9.0		Vdc
		53	10.0 V	3.0 V	7.0 V		GND	GND				GND	GND		GND	GND			D_1							
		54		GND	GND		1.5 V	7.0 V				GND	GND		GND	GND			D_2							
		55		GND	GND		GND	GND				7.0 V	3.0 V		GND	GND			D_3							
		56		GND	GND		GND	GND				GND	GND		7.0 V	3.0 V			D_4							
V_{IH3}		57	4.0 V	11.0 V	4.0 V		GND	GND				GND	GND		GND	GND		15.0 V	D_1	13.5		13.5		13.5		
		58		GND	GND		11.0 V	4.0 V				GND	GND		GND	GND			D_2							
		59		GND	GND		GND	GND				4.0 V	11.0 V		GND	GND			D_3							
		60		GND	GND		GND	GND				GND	GND		4.0 V	11.0 V			D_4							
		61	15.0 V	4.0 V	11.0 V		GND	GND				GND	GND		GND	GND			D_1							
		62		GND	GND		4.0 V	11.0 V				GND	GND		GND	GND			D_2							
		63		GND	GND		GND	GND				11.0 V	4.0 V		GND	GND			D_3							
		64		GND	GND		GND	GND				GND	GND		11.0 V	4.0 V			D_4							
V_{IL1}		65	1.5 V	1.5 V	1.5 V		GND	GND				GND	GND		GND	GND	5.0 V	5.0 V	D_1		0.5		0.5		0.5	
		66		GND	GND		1.5 V	1.5 V				GND	GND		GND	GND			D_2							
		67		GND	GND		GND	GND				1.5 V	1.5 V		GND	GND			D_3							
		68		GND	GND		GND	GND				GND	GND		1.5 V	1.5 V			D_4							
		69	5.0 V	1.5 V	1.5 V		GND	GND				GND	GND		GND	GND			D_1							
		70		GND	GND		1.5 V	1.5 V				GND	GND		GND	GND			D_2							
		71		GND	GND		GND	GND				1.5 V	1.5 V		GND	GND			D_3							
		72		GND	GND		GND	GND				GND	GND		1.5 V	1.5 V			D_4							
V_{IL2}		73	3.0 V	3.0 V	3.0 V		GND	GND				GND	GND		GND	GND	10.0 V	10.0 V	D_1		1.0		1.0		1.0	
		74		GND	GND		3.0 V	3.0 V				GND	GND		GND	GND			D_2							
		75		GND	GND		GND	GND				3.0 V	3.0 V		GND	GND			D_3							
		76		GND	GND		GND	GND				GND	GND		3.0 V	3.0 V			D_4							
		77	10.0 V	3.0 V	3.0 V		GND	GND				GND	GND		GND	GND			D_1							
		78		GND	GND		3.0 V	3.0 V				GND	GND		GND	GND			D_2							
		79		GND	GND		GND	GND				3.0 V	3.0 V		GND	GND			D_3							
		80		GND	GND		GND	GND				GND	GND		3.0 V	3.0 V			D_4							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																								
V_{IL3}		81	4.0 V	4.0 V	4.0 V		GND	GND		GND		GND	GND		GND	GND	15.0 V	15.0 V	D_1		1.5		1.5		1.5	Vdc
		82		GND	GND		4.0 V	4.0 V				GND	GND		GND	GND			D_2							
		83		GND	GND		GND	GND				4.0 V	4.0 V		GND	GND			D_3							
		84		GND	GND		GND	GND				GND	GND		4.0 V	4.0 V			D_4							
		85	15.0 V	4.0 V	4.0 V		GND	GND				GND	GND		GND	GND			D_1							
		86		GND	GND		4.0 V	4.0 V				GND	GND		GND	GND			D_2							
		87		GND	GND		GND	GND				4.0 V	4.0 V		GND	GND			D_3							
		88		GND	GND		GND	GND				GND	GND		4.0 V	4.0 V			D_4							
I_{IH1} 3/	3010	89	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	All inputs		10					nA
I_{IH2} 3/		90	18.0 V	GND	GND		GND	GND				GND	GND		GND	GND	GND		IN_S		1.0		45			
		91	GND	18.0 V	GND		GND												A_1							
		92		GND	18.0 V		GND												B_1							
		93			GND		18.0 V												A_2							
		94					GND	18.0 V											B_2							
		95						GND				18.0 V							B_3							
		96										GND	18.0 V						A_3							
		97											GND		18.0 V				B_4							
		98													GND	18.0 V			A_4							
		99													GND	GND	18.0 V		O_D							
I_{IL1} 3/	3009	100													GND	GND	GND		All inputs		-10					
I_{IL2} 3/		101	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V			IN_S		-1.0		-45			
		102		GND	18.0 V		18.0 V												A_1							
		103		18.0 V	GND		18.0 V												B_1							
		104			18.0 V		GND												A_2							
		105					18.0 V	GND											B_2							
		106					18.0 V	18.0 V				GND							B_3							
		107					18.0 V	18.0 V				18.0 V	GND						A_3							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}		Min	Max	Min	Max	Min	Max	
		Test No.																								
I_{IL2} 3/	3009	108	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V		GND		18.0 V	18.0 V		GND	18.0 V	GND	18.0 V	B_4		-1.0		-45			nA
I_{IL2} 3/	3009	109	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	GND		18.0 V	A_4		-1.0		-45			nA
I_{IL2} 3/	3009	110	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V				18.0 V	18.0 V		18.0 V	18.0 V		18.0 V	O_D		-1.0		-45			nA
I_{OL1}		111	GND	GND	GND	0.4 V	GND	GND	0.4 V		0.4 V	GND	GND	0.4 V	GND	GND		5.0 V	D_1	0.51		0.36		0.64		mA
		112																	D_2							
		113																	D_3							
		114																	D_4							
		115	5.0 V			0.4 V													D_1							
		116							0.4 V										D_2							
		117									0.4 V								D_3							
		118												0.4 V					D_4							
I_{OH1}		119		5.0 V	5.0 V	4.6 V	5.0 V	5.0 V	4.6 V		4.6 V	5.0 V	5.0 V	4.6 V	5.0 V	5.0 V			D_1	-0.51		-0.36		-0.64		
		120																	D_2							
		121																	D_3							
		122																	D_4							
		123	GND			4.6 V													D_1							
		124							4.6 V										D_2							
		125									4.6 V								D_3							
		126												4.6 V					D_4							
I_{OL2}		127		GND	GND	1.5 V	GND	GND	1.5 V		1.5 V	GND	GND	1.5 V	GND	GND		15.0 V	D_1	3.4		2.4		4.2		
		128																	D_2							
		129																	D_3							
		130																	D_4							
		131	15.0 V			1.5 V													D_1							
		132							1.5 V										D_2							
		133									1.5 V								D_3							
		134												1.5 V					D_4							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
I_{OH2}		135	15.0 V	15.0 V	15.0 V	13.5 V	15.0 V	15.0 V		GND		15.0 V	15.0 V		15.0 V	15.0 V	GND	15.0 V	D_1	-3.4		-2.4		-4.2		mA
		136							13.5 V										D_2							
		137									13.5 V								D_3							
		138												13.5 V					D_4							
		139	GND			13.5 V													D_1							
		140							13.5 V										D_2							
		141									13.5 V								D_3							
		142												13.5 V					D_4							
I_{OC11}		143	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V		18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	18.0 V	All outputs		100					nA
I_{OC12}		144				18.0 V													D_1		25		90			
		145							18.0 V										D_2							
		146									18.0 V								D_3							
		147												18.0 V					D_4							
I_{OC21}		148				GND			GND		GND			GND					All outputs		-100					
I_{OC22}		149				GND													D_1		-25		-90			
		150							GND										D_2							
		151									GND								D_3							
		152												GND					D_4							
																				Subgroup 4 T_A = 25°C						
																				Min	Max					
C_{IS}	3012	153	4/							GND								GND	IN_S		7.5					pF
		154		4/															A_1							
		155			4/														B_1							
		156					4/												A_2							
		157						4/											B_2							
		158										4/							B_3							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 4 T_A = 25°C						
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
C_{IS}	3012	159								GND			4/		4/			GND	A_3		7.5					pF
		160														4/			B_4							
		161																	A_4							
		162															4/		O_D							
																				Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																				Min	Max	Min	Max	Min	Max	
t_{PHL1} and t_{PLH1}	3003 Fig. 16	163	GND	IN	5.0 V	OUT	GND	GND		GND		GND	GND		GND	GND	GND	5.0 V	$A_1 \rightarrow D_1$	15	300	21	420	15	300	ns
		164	5.0 V	5.0 V	IN	OUT	GND	GND											$B_1 \rightarrow D_1$							
		165	GND	GND	GND		IN	5.0 V	OUT										$A_2 \rightarrow D_2$							
		166	5.0 V				5.0 V	IN	OUT										$B_2 \rightarrow D_2$							
		167	GND				GND	GND			OUT	5.0 V	IN						$A_3 \rightarrow D_3$							
		168	5.0 V								OUT	IN	5.0 V						$B_3 \rightarrow D_3$							
		169	GND									GND	GND	OUT	5.0 V	IN			$A_4 \rightarrow D_4$							
		170	5.0 V											OUT	IN	5.0 V			$B_4 \rightarrow D_4$							
t_{PHL2} and t_{PLH2}	3003 Fig. 17	171	IN	5.0 V		OUT									GND	GND			$IN_S \rightarrow D_1$	18	350	25	490	18	350	
		172		GND	5.0 V	OUT													$IN_S \rightarrow D_1$							
		173			GND		5.0 V		OUT										$IN_S \rightarrow D_2$							
		174					GND	5.0 V	OUT										$IN_S \rightarrow D_2$							
		175						GND			OUT		5.0 V						$IN_S \rightarrow D_3$							
		176									OUT	5.0 V	GND						$IN_S \rightarrow D_3$							
		177										GND	GND	OUT		5.0 V			$IN_S \rightarrow D_4$							
		178										GND	GND	OUT	5.0 V	GND			$IN_S \rightarrow D_4$							
t_{PZH}	Fig. 18	179	GND	5.0 V	5.0 V	OUT	5.0 V	5.0 V				5.0 V	5.0 V			5.0 V	IN		$O_D \rightarrow D_1$	9	180	13	250	9	180	
		180							OUT										$O_D \rightarrow D_2$							
		181									OUT								$O_D \rightarrow D_3$							
		182												OUT					$O_D \rightarrow D_4$							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
t_{PHZ}	Fig. 18	183	GND	5.0 V	5.0 V	OUT	5.0 V	5.0 V		GND		5.0 V	5.0 V		5.0 V	5.0 V	IN	5.0 V	$O_D \rightarrow D_1$	9	180	13	250	9	180	ns
		184							OUT										$O_D \rightarrow D_2$							
		185									OUT								$O_D \rightarrow D_3$							
		186												OUT					$O_D \rightarrow D_4$							
t_{PZL}		187		GND	GND	OUT	GND	GND				GND	GND		GND	GND			$O_D \rightarrow D_1$							
		188							OUT										$O_D \rightarrow D_2$							
		189									OUT								$O_D \rightarrow D_3$							
		190												OUT					$O_D \rightarrow D_4$							
t_{PLZ}		191				OUT													$O_D \rightarrow D_1$							
		192							OUT										$O_D \rightarrow D_2$							
		193									OUT								$O_D \rightarrow D_3$							
		194												OUT					$O_D \rightarrow D_4$							
t_{THL} and t_{TLH}	3004	195		IN	5.0 V	OUT											GND		D_1	10	200	14	280	10	200	
		196		5.0 V	IN	OUT													D_1							
		197			GND		IN	5.0 V	OUT										D_2							
		198					5.0 V	IN	OUT										D_2							
		199					GND	GND			OUT	5.0 V	IN						D_3							
		200									OUT	IN	5.0 V						D_3							
		201										GND	GND	OUT	5.0 V	IN			D_4							
		202										GND	GND	OUT	IN	5.0 V			D_4							
																				Subgroup 12 T_A = 25°C						
																				Min	Max					
t_{PHL1} and t_{PLH1}	3003 Fig. 16	203	GND	IN	10.0 V	OUT	GND	GND		GND		GND	GND		GND	GND	GND	10.0 V	$A_1 \rightarrow D_1$	7	140					ns
		204		10.0 V	IN	OUT	GND	GND											$B_1 \rightarrow D_1$							
		205		GND	GND		IN	10.0 V	OUT										$A_2 \rightarrow D_2$							
		206		GND	GND		10.0 V	IN	OUT										$B_2 \rightarrow D_2$							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 12 T_A = 25°C						
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
t_{PHL1} and t_{PLH1}	3003 Fig. 16	207	GND	GND	GND		GND	GND		GND	OUT	10.0 V	IN		GND	GND	GND	10.0 V	$A_3 \rightarrow D_3$	7	140					ns
		208									OUT	IN	10.0 V		GND	GND			$B_3 \rightarrow D_3$							
		209										GND	GND	OUT	10.0 V	IN			$A_4 \rightarrow D_4$							
		210												OUT	IN	10.0 V			$B_4 \rightarrow D_4$							
t_{PHL2} and t_{PLH2}	3003 Fig. 17	211	IN	10.0 V		OUT									GND	GND			$IN_S \rightarrow D_1$	8	170					
		212		GND	10.0 V	OUT													$IN_S \rightarrow D_1$							
		213			GND		10.0 V		OUT										$IN_S \rightarrow D_2$							
		214					GND	10.0 V	OUT										$IN_S \rightarrow D_2$							
		215						GND			OUT		10.0 V						$IN_S \rightarrow D_3$							
		216									OUT	10.0 V	GND						$IN_S \rightarrow D_3$							
		217										GND	GND	OUT		10.0 V			$IN_S \rightarrow D_4$							
		218										GND	GND	OUT	10.0 V	GND			$IN_S \rightarrow D_4$							
t_{PZH}	Fig. 18	219	GND	10.0 V	10.0 V	OUT	10.0 V	10.0 V				10.0 V	10.0 V			10.0 V	IN		$D_D \rightarrow D_1$	5	100					
		220							OUT										$D_D \rightarrow D_2$							
		221									OUT								$D_D \rightarrow D_3$							
		222												OUT					$D_D \rightarrow D_4$							
t_{PHZ}		223				OUT													$D_D \rightarrow D_1$							
		224							OUT										$D_D \rightarrow D_2$							
		225									OUT								$D_D \rightarrow D_3$							
		226												OUT					$D_D \rightarrow D_4$							
t_{PZL}		227		GND	GND	OUT	GND	GND				GND	GND		GND	GND			$D_D \rightarrow D_1$							
		228							OUT										$D_D \rightarrow D_2$							
		229									OUT								$D_D \rightarrow D_3$							
		230												OUT					$D_D \rightarrow D_4$							
		231				OUT													$D_D \rightarrow D_1$							
		232							OUT										$D_D \rightarrow D_2$							
		233									OUT								$D_D \rightarrow D_3$							
		234												OUT					$D_D \rightarrow D_4$							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Cases E,F,X	Terminal conditions 1/																Measured terminal	Test limits						Units
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 12 T_A = 25°C						
		Symbol	IN_S	A_1	B_1	D_1	A_2	B_2	D_2	V_{SS}	D_3	B_3	A_3	D_4	B_4	A_4	O_D	V_{DD}								
		Test No.																		Min	Max	Min	Max	Min	Max	
t_{THL} and t_{TLH}	3004	235	GND	IN	10.0 V	OUT	GND	GND		GND		GND	GND		GND	GND	GND	10.0 V	D_1	5	100					ns
		236		10.0 V	IN	OUT	GND	GND											D_1							
		237		GND	GND		IN	10.0 V	OUT										D_2							
		238					10.0 V	IN	OUT										D_2							
		239					GND	GND			OUT	10.0 V	IN						D_3							
		240									OUT	IN	10.0 V						D_3							
		241										GND	GND	OUT	10.0 V	IN			D_4							
		242										GND	GND	OUT	IN	10.0 V			D_4							

1/ Pins not designated may be "high" level logic, "low" level logic or open. Exceptions are as follows: $V_{IC(pos)}$ tests, the V_{SS} terminal shall be open; $V_{IC(neg)}$ tests, the V_{DD} terminal shall be open; I_{SS} tests, the output terminals shall be open.

2/ The I_{SS} measurements shall be performed in sequence.

3/ The device manufacturer may, at his option, measure I_{IL} and I_{IH} at 25°C for each individual input or measure all inputs together.

4/ C_C and C_{IS} - Connect capacitance bridge between measured input terminal and V_{SS}, frequency = 1 MHz, see 4.4.1.c.

5/ C_{OS} - Connect capacitance bridge between measured output terminal and V_{SS}, frequency = 1 MHz, see 4.4.1.c.

6/ C_{IOS} - Connect capacitance bridge between measured input and output terminals, frequency = 1 MHz, see 4.4.1.c.

7/ For V_{IH}: Measured terminal shall be connected to ground (GND) through a 3.1 Kohm resistor. All channels shall be connected to GND through a 3.1 Kohm resistor.

For V_{IL}: Measured terminals shall be connected to GND through a 470 Kohm resistor and all other channels shall be connected to GND through a 3.1 Kohm resistor. The current through the resistor shall not be greater than 1.05 µA.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:45Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein. Delta limits shall apply only to subgroup 1 of group C inspection and shall consist of tests specified in table IV herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D and as specified in 4.5.2 herein and as shown on figure 5, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration, 1,000 hours, except as permitted by appendix B of MIL-M-38510 and method 1005 of MIL-STD-883.

c. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices, and shall consist of the tests, conditions, and limits as specified for subgroups 10 and 11 of group A.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.4.5 Group E inspection. Group E inspection is required only for device types intended to be marked as radiation hardened (see 3.6.1). When group E testing is performed it shall be in accordance with table V of method 5005 of MIL-STD-883 and 4.5.5 herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. Unless otherwise specified, all voltages given are referenced to the microcircuit V_{SS} terminal. Currents given are conventional current and positive when flowing into the referenced terminal.

4.5.2 Burn-in and life test cool down procedures. When the burn-in and life tests are completed and prior to removal of bias voltages, the devices under test (DUT) shall be cooled to a temperature of 25°C ±3°C; then, electrical parameter end-point measurements shall be performed.

TABLE IV. Delta limits at 25°C.


Parameter 1/	Device types		
I_{SS}	±10 nA	±10 nA	±10 nA
I_{OL1}	---	---	±15%
I_{OH1}	---	---	±15%
R_{ON1}	50 ohms	50 ohms	---
R_{ON2}	20 ohms	20 ohms	---
R_{ON3}	15 ohms	15 ohms	---

1/ Each of the above parameters shall be recorded before and after the required burn-in and life tests to determine deltas (Δ).

4.5.3 High voltage (V_{ZAP}) test or input protection circuits. All input terminals (up to a maximum of 4) of the DUT shall be subjected to a voltage pulse from a 100 pF source charged to 400 V. This destructive test shall be conducted as follows using the test circuit on figure 19.

a. Measure I_{IL} and I_{IH} at the inputs selected, as stated above, at 25°C. The test limit for each input tested shall be ±10 nA at the specified V_{DD}. Measure I_{SS} on the DUT at 25°C. The test limit for this measurement shall be increased a maximum of 20 percent of the specified I_{SS} table III limit at the specified V_{DD}.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

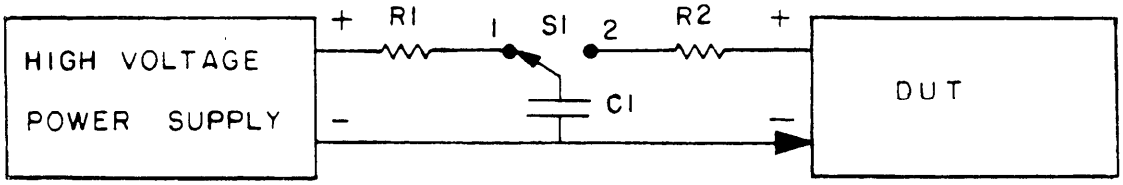

V_{ZAP} = 400 V charge on C1.
1 MΩ ≤ R1 ≤ 50 MΩ
R2 = 1.5 kΩ
C1 = 100 pF
S1 = Hg-wetted "bounceless" relay

FIGURE 19. High Voltage (V_{ZAP}) test circuit.

b. V_{ZAP} is applied to DUT in the following four modes (see table V) by changing C1 to V_{ZAP} with S1 in position 1 and then switching to position 2.

TABLE V. Modes for high voltage test.

Mode	+ Terminal	- Terminal
1	V_{DD}	Input
2	Input	V_{SS}
3	Input	Associated Output

c. Within 24 hours repeat the I_{SS}, I_{IL}, and I_{IH} measurements on the same terminals as performed above. If a DUT exhibits leakage currents in excess of the specified limits after the V_{ZAP} test, it shall be classified as a failure.

4.5.4 Quiescent supply current (I_{SS} test). When performing quiescent supply current measurements (I_{SS}), the meter shall be placed so that all currents flow through the meter.

4.5.5 Radiation hardness assurance (RHA) testing. The RHA testing shall be performed in accordance with test procedures and sampling specified in table V of method 5005 of MIL-STD-883 and herein:

a. Before irradiation, selected samples shall be assembled in qualified packages and pass the governing electrical parameters (group A subgroup 1 at 25°C) and also be subjected to the threshold-voltage test in table VIII in order to calculate the delta threshold (ΔV_T) after irradiation.

b. The devices shall be subjected to a total radiation dose as specified in MIL-M-38510 for the radiation hardness assurance (RHA) level being tested, and meet the end point electrical parameters as defined in table VI at 25°C, after exposure. The start and completion of the end point electrical parameter measurements shall not exceed 2 hours following irradiation.

c. Threshold-voltage test circuit conditions shall be as specified in table VIII and figure 20. In situ and remote testing, the tests shall be performed with the devices biased in accordance with table VII and bias may be interrupted for up to 1 minute to remove devices to the remote bias fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

d. After irradiation, the devices shall pass the truth table test as specified in subgroup 7 in table III or if subgroup 7 is not required, then an equivalent truth table test shall be performed.

TABLE VI. Radiation hardening end-point electrical parameters at 25°C.

Parameter	All device types	V_{DD}
V_{TN}	0.3 V min	10 V
V_{TP}	2.8 V max	10 V
ΔV_T	1.4 V	10 V
I_{SS}	100 x max limit	18 V
t_{PLH}	1.35 x max limit	5 V
t_{PHL}	1.35 x max limit	5 V

TABLE VII. Bias during exposure to radiation.

Device type	Pin connections		
	V_{DD} = 10 V dc (through a 30- to 60-kΩ resistor)	V_{SS} = GND	V_{DD} = 10 V dc
01	2,3,4,5,6,7,8,9,10,11,13,14,15,16, 17,18,19,20,21,22,23	12	24
02	2,3,4,5,6,7,8,9,10,11,13,14,15,16, 19,20,21,22,23	12	24
03	1,2,3,5,6,10,11,13,14,15	8	16

Pins not designated are open or connected to 10 V dc through a 30- to 60-kilohm resistor.

4.6 Data reporting. When specified in the purchase order or contract, a copy of the following data, as applicable, shall be supplied.

a. Attributes data for all screening tests (see 4.2) and variables data for all static burn-in, dynamic burn-in, and steady state life tests.

b. A copy of each radiograph.

c. The quality conformance inspection data (see 4.4).

d. Parameter distribution data on parameters evaluated during burn-in (see 3.6).

e. Final electrical parameters data (see 4.2c).

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design application and logisitic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T13:45Z
Check the source to verify that this is the current version before use.

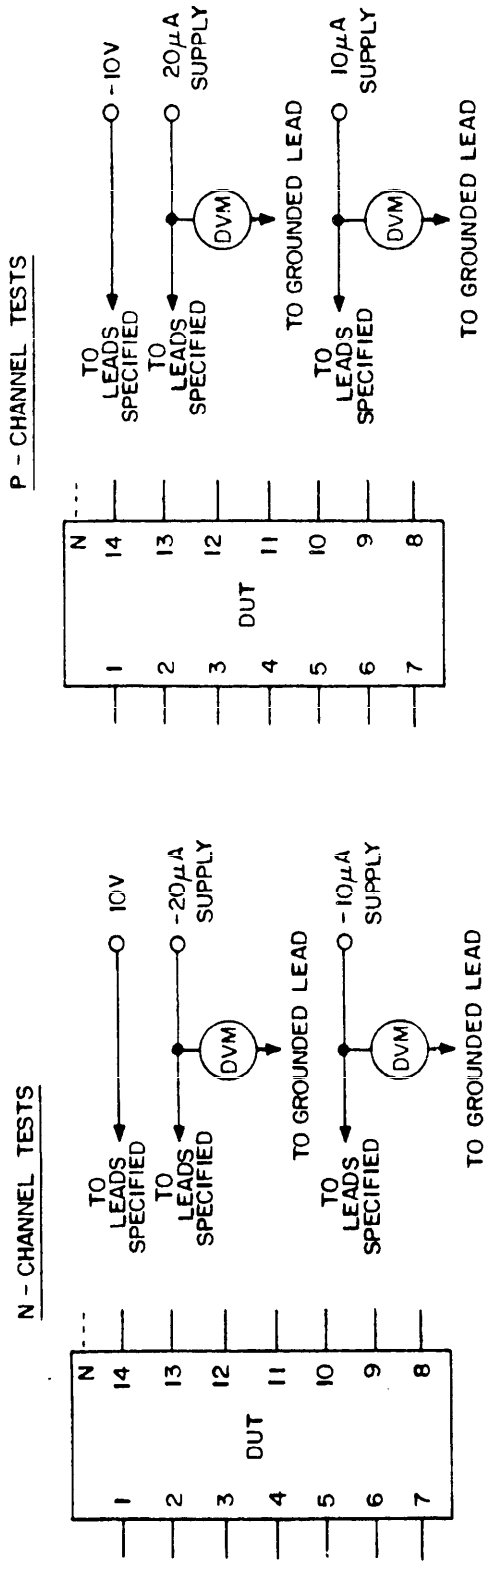


FIGURE 20. Threshold-voltage test circuit.

TABLE VIII. Threshold - voltage test circuit conditions.

Device type	GND	10V	V_{TN} measured at		GND	-10V	V_{TP} measured at	
			-20 μA supply	-10 μA supply			20 μA supply	10 μA supply
01	15	10,11,13,14,24		12	15	10,11,12,13,14		24
02	13	10,11,14,24		12	13	10,11,12,14		24
03	15	1,2,3,5,6,10, 11,13,14,16		8	15	8		1,2,3,5,6,10, 11,13,14,16

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by, or direct shipment to the Government.

h. Requirements for "JAN" marking.

i. Requirements for total dose radiation testing (see 3.6.1 and 4.5.5), if applicable.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

C_i	Input terminal-to-V_{SS} capacitance.
GND	Ground zero voltage potential.
I_{SS}	Quiescent supply current.
T_A	Free air temperature.
t_f	Fall time. Time duration during which the amplitude of the trailing edge of the input forcing condition or waveform is decreasing from 90 to 10 percent of the maximum amplitude.
t_r	Rise time. Time duration during which the amplitude of the leading edge of the input forcing condition or waveform is increasing from 10 to 90 percent of the maximum amplitude.
V_{DD}	Positive supply voltage.
V_{IC}	Input clamp voltage.
V_{SS}	Negative supply voltage.
V_{ZAP}	Input test voltage.

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class S for National Aeronautics and Space Administration or class B for Department of Defense (see 1.2.2), lead finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Military device type	Generic-industry type
01	4067B
02	4097B
03	40257B

6.6 Handling. MOS devices must be handled with certain precautions to avoid damage due to accumulation of static charge. Input protective devices have been designed in the chip to minimize the effect of this static build up. However, the following handling practices are recommended:

a. Devices should be handled on benches with conductive and grounded surface.

b. Ground test equipment and tools.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent, if practical.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - MI
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - AR, SM
Navy - AS, CG, MC, OS, SH

Agent:
DLA - ES

Preparing activity:
NASA - NA

(Project 5962-0639-9)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1984-705-040:A3757

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

National Aeronautics and
Space Administration

Washington, D.C
20546

Official Business
Penalty for Private Use $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12028 WASHINGTON, D.C

POSTAGE WILL BE PAID BY NASA

George C. Marshall Space Flight Center
National Aeronautics and Space Administration
Attn: EG02
Marshall Space Flight Center, AL 35812

NASA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/178A	MICROCIRCUITS, DIGITAL, CMOS MULTIPLEXERS/ MONOLITHIC SILICON, POSITIVE LOGIC

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:45Z
Check the source to verify that this is the current version before use.

Cable, Radio Frequency, Triaxial, Hermetic