MILITARY SPECIFICATION

MICROCIRCUITS, LINEAR, CMOS/ANALOG MULTIPLEXERS/DEMULTIPLEXERS WITH OVERVOLTAGE PROTECTION, MONOLITHIC SILICON, POSITIVE LOGIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, CMOS/Analog logic microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Single 16-channel MUX/DEMUX
02	Single 16-channel MUX/DEMUX with overvoltage protection
03	Differential 8-channel MUX/DEMUX
04	Differential 8-channel MUX/DEMUX with overvoltage protection
05	Single 8-channel MUX/DEMUX with overvoltage protection
06	Differential 4-channel MUX/DEMUX with overvoltage protection
07	Single 8-channel MUX/DEMUX
08	Differential 4-channel MUX/DEMUX

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line package
X	See figure 4 (28-lead, 9/16" x 1-7/16"), dual-in-line package

1.3 Absolute maximum ratings:

Supply voltage between V+ and V-:
- Device types 02, 04, 05, and 06 - - - - - +40 V
- Device types 01, 03, 07, and 08 - - - - - +32 V

V+ to ground:
- Device types 02, 04, 05, and 06 - - - - - +20 V
- Device types 01, 03, 07, and 08 - - - - - +16 V

Digital input voltage:
- Device types 02, 04, 05, and 06 - - - - - $((V-)-4\ V) \leq V_D \leq ((V+)+4\ V)$
- Device types 01, 03, 07, and 08 - - - - - $-0.3\ V \leq V_D \leq (V+)$

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: NASA Part Project Office, Code 311.A NASA/Goddard Space Flight Center, Greenbelt, MD 20771, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Analog input:	
Device types 02, 04, 05, and 06	$((V-)-20\ V \leq V_A \leq ((V+)+20\ V)$
Device types 01, 03, 07, and 08	$(V-) \leq V_A \leq (V+)$
Storage temperature	-65°C to +150°C
Lead temperature (soldering 10 seconds)	300°C
Junction temperature (T_J)	175°C

1.4 Recommended operating conditions:

$V+$	+15 V
$V-$	-15 V
V_{REF}	Open
V_{IL} (max)	0.8 V
V_{IH} (min)	
Device types 01, 03, 07, and 08	2.4 V
Device types 02, 04, 05, and 06	4.0 V
V_{EN}	
Device types 02, 04, 05, and 06	4.0 V
Device types 01, 03, 07, and 08	4.5 V
Ambient operating temperature range (T_A)	-55°C to +125°C

1.5 Power and thermal characteristics.

Package	Case outline	Maximum allowable power dissipation 1/	Maximum θ_{JC} 2/	Maximum θ_{JA}
16-lead DIP	E	400 mW @ T_A = 125°C	50°C/W	125°C/W
28-lead DIP	X	400 mW @ T_A = 125°C	51°C/W	125°C/W

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specification and standard. Unless otherwise specified, the following specification and standard form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

1/ All leads welded or soldered to PC board.

2/ Applies only when $T_A \geq 75°C$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein. Although eutectic die bonding is preferred, epoxy die bonding may be performed. However, the resin used shall be Dupont 5504A conductive silver paste, or equivalent, which is cured at 200°C ±10°C for a minimum of 2 hours. The use of equivalent epoxies or cure cycles shall be approved by the qualifying activity. Equivalency shall be demonstrated in data submitted to the qualifying activity for verification.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Functional diagrams. The function diagrams shall be as specified on figure 2.

3.2.3 Truth tables. The truth tables shall be as specified on figure 3.

3.2.4 Case outlines. The case outline "X" shall be as specified on figure 4, and case outline "E" shall be as specified in 1.2.3.

3.2.5 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturer's schematics shall be maintained by the agent activity and will be available upon request.

3.2.6 Package and sealing material. Package and sealing material shall be in accordance with MIL-M-38510.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein.

3.6.1 Serialization. All class S devices shall be serialized in accordance with MIL-M-38510.

3.6.2 Correctness of indexing and marking. All devices shall be subjected to the final electrical tests in table II after part number marking, to verify that they are correctly indexed and identified by part number. Optionally, an approved electrical test may be devised especially for this requirement.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 82 (see MIL-M-38510, appendix E).

4. PRODUCT ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in tests (method 1015 of MIL-STD-883).

(1) For class S devices: dynamic test (test condition D) using the circuit shown on figure 7. Test duration shall be 240 hours minimum. Static test (test condition C) using the circuit shown on figure 6. Test duration shall be 48 hours minimum.

(2) For class B devices: Test condition A using the circuit shown on figure 6 or test condition D using the circuit shown on figure 7 or test condition F using an accelerated burn-in circuit approved by the qualifying activity.

NOTE: Burn-in circuit resistor tolerances for figures 6 and 7 shall be ±10 percent.

b. Interim and final electrical parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) for class S and class B devices shall shall be as specified in MIL-M-38510, based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883 and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1 after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 5, 6, 7, and 8 of method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 4 (Ci measurements) shall be measured only for initial qualification and after process or design changes which may affect input capacitance. Capacitance shall be measured between the designated terminal and GND at a frequency of 1 MHz. Subgroup 4 shall be performed using a sample of 5 devices with no failures allowed.

d. Subgroup 13 shall be added to group A inspection using an LTPD of 10 and shall consist of the tests, conditions, and limits as specified in table III.

e. Subgroup 12 shall be performed for initial qualification only using a sample of 5 devices for each device type submitted to group A inspections with no failures allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Characteristic	Symbol	Conditions 1/ 2/ V^- = -15 V, V^+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ 125°C Unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Positive input clamping voltage	$V_{IC(POS)}$	T_A = 25°C, V^+ = V^- = 0 V I_{IN} = 1 mA	02,04,05, 06		1.5	V dc
Negative input clamping voltage	$V_{IC(NEG)}$	T_A = 25°C, V^+ = V^- = 0 V I_{IN} = -1 mA	02,04,05, 06	-1.5		
Input leakage current 3/	I_{IH}	Measure address inputs sequentially, connect all unused address inputs to GND	All	-0.1	+1.0	µA
Input leakage current 3/	I_{IL}	Measure address inputs sequentially connect all unused address inputs to 5 V	All	-1.0	+0.1	
Leakage current into the source terminal of an "OFF" switch	$I_{S(OFF)}$	V_S = 10 V, V_{EN} = 0.8 V All unused sources = -10 V T_A = 25°C	All	-1	1	nA
		-55°C ≤ T_A ≤ 125°C	All	-50	50	
		V_S = -10 V, V_{EN} = 0.8 V All unused sources to +10 V T_A = 25°C	All	-1	1	
		-55°C ≤ T_A ≤ 125°C	All	-50	50	
Leakage current into the drain terminal of an "OFF" switch	$I_{D+(OFF)}$	V_D = 10 V, V_{EN} = 0.8 V All unused sources to -10 V T_A = 25°C	01,02	-20	20	nA
			03,04, 05,06 07,08	-10	10	
		-55°C ≤ T_A ≤ 125°C	01,02,	-500	500	
			03,04	-250	250	
			05,07			
			06,08	-125	125	
	$I_{D-(OFF)}$	V_D = 10 V, V_{EN} = 0.8 V All unused sources to -10 V T_A = 25°C	01,02	-20	20	
			03,04, 05,06 07,08	-10	10	
		-55°C ≤ T_A ≤ 125°C	01,02,	-500	500	
			03,04	-250	250	
			05,07			
			06,08	-125	125	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Characteristic	Symbol	Conditions 1/ 2/ V^- = -15 V, V^+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ 125°C Unless otherwise specified	Device type	Limits Min	Limits Max	Unit
Leakage current from an "ON" driver into the switch (drain)	$I_{D(ON)}$	V_S = 10 V, V_D = 10 V Connect all unused sources to -10 V T_A = 25°C	01,02	-20	20	nA
			03,04, 05,06 07,08	-10	10	
		-55°C ≤ T_A ≤ 125°C	01,02,	-500	500	
			03,04 05,07	-250	250	
			06,08	-125	125	
		V_S = 10 V, V_D = -10 V Connect all unused sources to 10 V T_A = 25°C	01,02	-20	20	
			03,04, 05,06 07,08	-10	10	
		-55°C ≤ T_A ≤ 125°C	01,02,	-500	500	
			03,04 05,07	-250	250	
			06,08	-125	125	
Overvoltage protected, leakage current into the drain terminal of an "OFF" switch	$I_{D(OFF)}$ overvoltage	V_S = 33 V, V_D = 0 V, V_{EN} = 0.8 V	02,04,05, 06	-2.0	2.0	µA
		V_S = -33 V, V_D = 0 V, V_{EN} = 0.8 V	02,04,05, 06	-2.0	2.0	
Positive supply current	I(+)	V_A = 0 V, V_{EN} = 5 V	01,03		14	mA
			02,04,05, 06		2.0	
			07,08		12	
Negative supply current	I(-)	V_A = 0 V, V_{EN} = 5 V	01,03	-14		
			02,04,05, 06	-1		
			07,08	-12		
Standby positive supply current	I+SBY	V_A = 0 V, V_{EN} = 0 V	01,03		3.0	mA
			02,04,05, 06		2.0	
			07,08		3.5	
Standby negative supply current	I-SBY	V_A = 0 V, V_{EN} = 0 V	01,03	-4.0		
			02,04,05, 06	-1.0		
			07,08	-3.5		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Characteristic	Symbol	Conditions 1/ 2/ V^- = -15 V, V^+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, $-55°C \leq T_A \leq 125°C$ unless otherwise specified			Device type	Limits		Unit
						Min	Max	
Capacitance: Address	C_A	$V^+ = V^- = 0$ V, $T_A = 25°C$, f = 1 MHz			All		10	pF
Capacitance: Enable	C_{EN}	$V^+ = V^- = 0$ V, $T_A = 25°C$, f = 1 MHz			All		10	pF
Capacitance: Output switch	C_{OS}	$V^+ = V^- = 0$ V, See table III			01		90	pF
					02		85	
					03,04		50	
					05,07		45	
					06,08		25	
Capacitance: Input switch	C_{IS}	$V^+ = V^- = 0$ V, See table III			All		10	
Switch "ON" resistance	R_{DS1}	V_S = 10 V	I_D = 1 mA	$T_A = 25°C$, $T_A = -55°C$	01,03		600	Ω
				$T_A = 125°C$			700	
			I_D = 100 µA	$T_A = 25°C$, $T_A = -55°C$	02,04		1,500	
				$T_A = 125°C$			2,000	
				$T_A = 25°C$, $T_A = -55°C$	05,06		1,500	
				$T_A = 125°C$			1,800	
			I_D = 1 mA	$T_A = 25°C$, $T_A = -55°C$	07,08		400	
				$T_A = 125°C$			500	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Characteristic	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C < T_A < 125°C, Unless otherwise specified			Device type	Limits		Unit
						Min	Max	
Switch "ON" resistance	R_{DS1}	V_S = -10 V	I_D = -1 mA	T_A = 25°C, T_A = -55°C	01,03		600	Ω
				T_A = 125°C			700	
			I_D = -100 µA	T_A = 25°C, T_A = -55°C	02,04		1,500	
				T_A = 125°C			2,000	
				T_A = 25°C, T_A = -55°C	05,06		1,500	
				T_A = 125°C			1,800	
			I_D = -1 mA	T_A = 25°C, T_A = -55°C	07,08		400	
				T_A = 125°C			500	
	R_{DS2}	V+ = 10 V, V- = -10 V, V_S = 7.5 V		I_D = 1 mA	01,03,07, 08		1,000	
				I_D = 100 µA	02,04		2,400	
					05,06		2,200	
		V+ = 10 V, V- = -10 V, V_S = -7.5 V		ID = -1 mA	01,03,07, 08		1,000	
				I_D = -100 µA	02,04		2,400	
					05,06		2,200	
Single channel isolation	V_{ISO}	f = 200 kHz, V_{GEN} = 1 Vp-p, See figure 17			All	50		dB
Crosstalk between channels	V_{CT}	f = 200 kHz, V_{GEN} = 1 Vp-p, See figure 18			All	50		dB
Charge transfer error	V_{CTE}	V_S = GND, see figure 19			All		10	mV

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Characteristic	Symbol	Conditions 1/ 2/ V^- = -15 V, V^+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C < T_A < 125°C, Unless otherwise specified		Device type	Limits		Unit
					Min	Max	
Break-before-make time delay	t_D	See figure 16	T_A = 25°C	All	5		ns
Propagation delay times: Address inputs to I/O channels	$t_{ON(A)}$ $t_{OFF(A)}$	R_L = 1 kΩ C_L = 100 pF See figures 8, 10, 12, and 14	T_A = 25°C T_A = -55°C	All		1,000	ns
			T_A = 125°C			1,500	
Enable to I/O	$t_{ON(EN)}$ $t_{OFF(EN)}$	R_L = 1 kΩ C_L = 100 pF See figures 9, 11, 13, and 15	T_A = 25°C T_A = -55°C	All		1,000	
			T_A = 125°C			1,500	

1/ Current flowing in either direction between any associated input and output terminals of the switch shall be 30 mA maximum.

2/ Input = source; Output = drain.

3/ Input current of one input node.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III) 1/, 2/, 3/	
	Class S 4/	Class B
Interim electrical parameters (method 5004)	1	1
Final electrical parameters (method 5004)	1,2,3,9	1,2,3,9,
Group A test requirements (method 5005)	1,2,3,4,9, 10,11,12,13	1,2,3,4,9, 12,13
Group B test requirements (method 5005)	1, 2, 3 and table IV delta limits	N/A
Group C end-point electrical parameters (method 5005)	N/A	1 and table IV delta limits
Additional electrical subgroups for group C periodic inspection	N/A	10,11,12
Group D end-point electrical parameters (method 5005)	1, 2, 3	1
Additional electrical subgroups for group D periodic inspection	12**	None

1/ PDA applies to subgroup 1 (see 4.2c).

2/ See 4.4.1c.


3/ See 4.4.1e.

4/ See 4.4.4b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device type 01

Case X

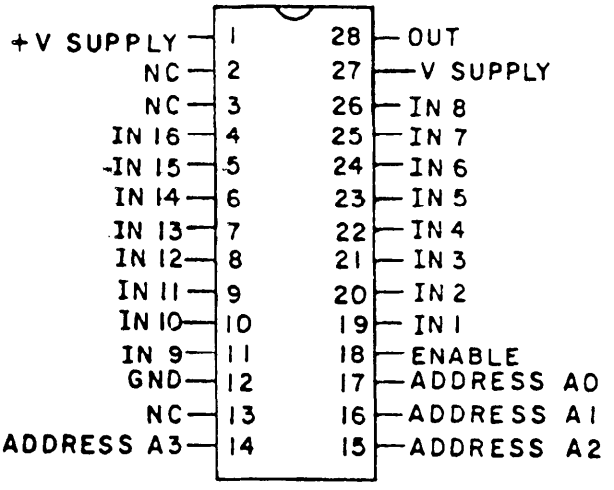

Device type 02

Case X


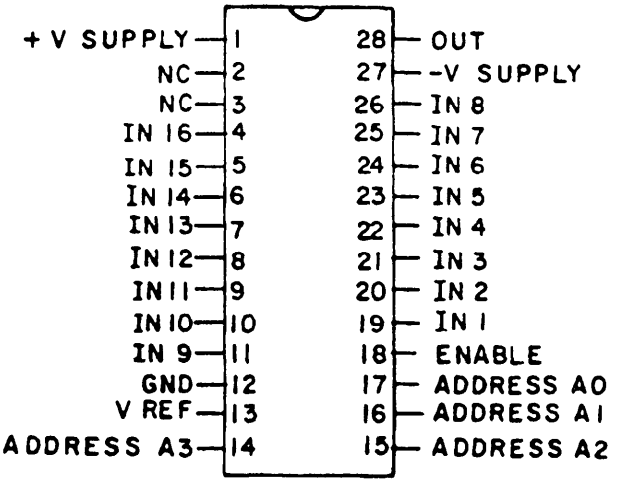


FIGURE 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device type 03

Case X

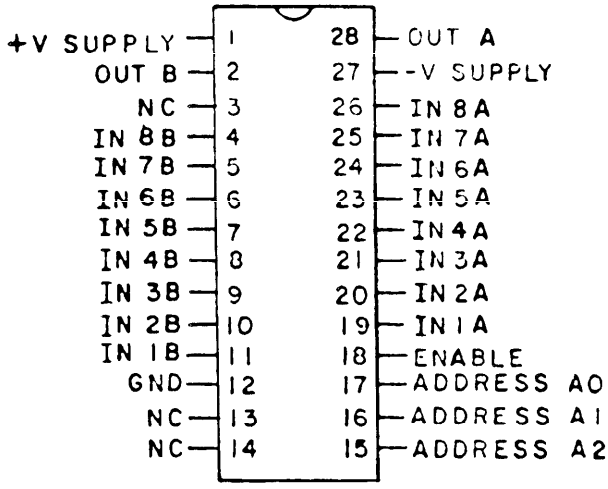

Device type 04

Case X


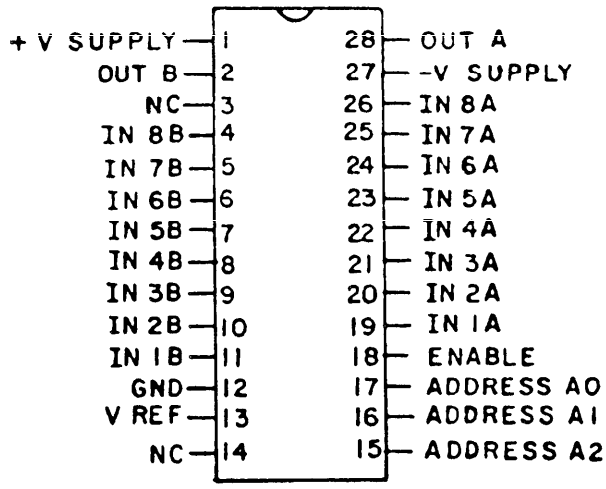


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

Case E

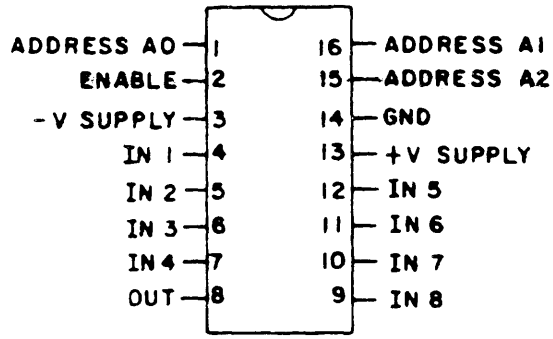

Device types 06 and 08

Case E

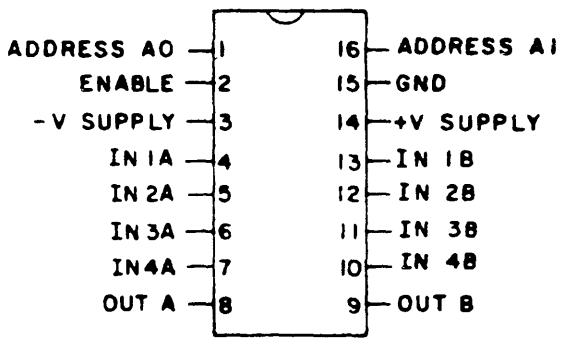


FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

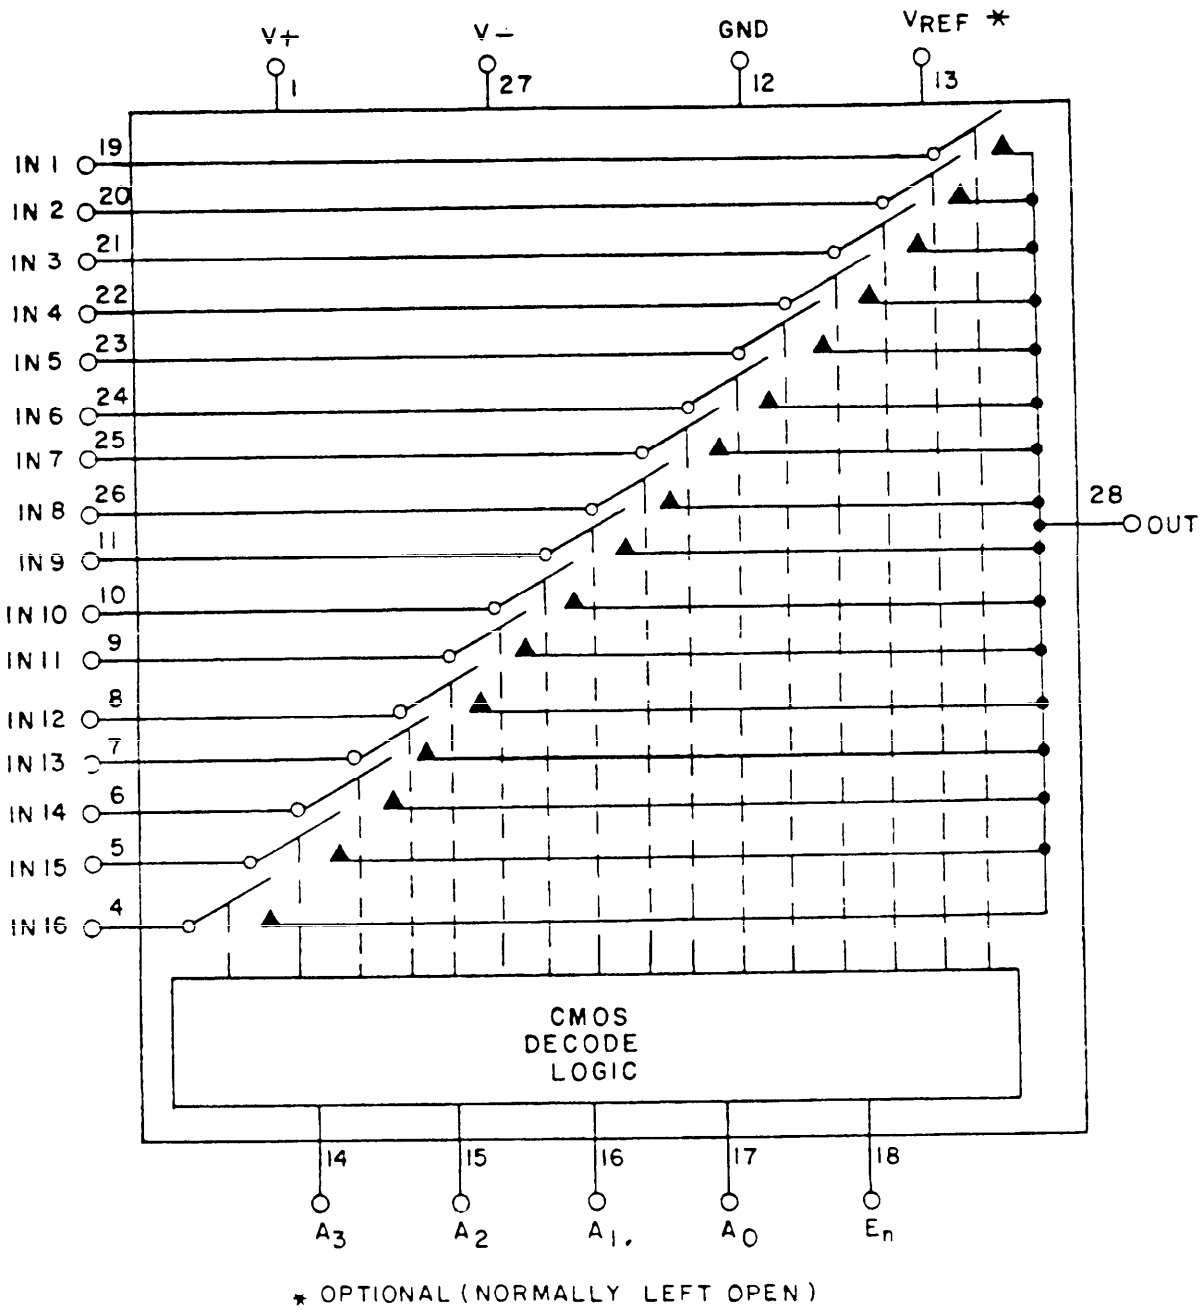


FIGURE 2. Functional diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04


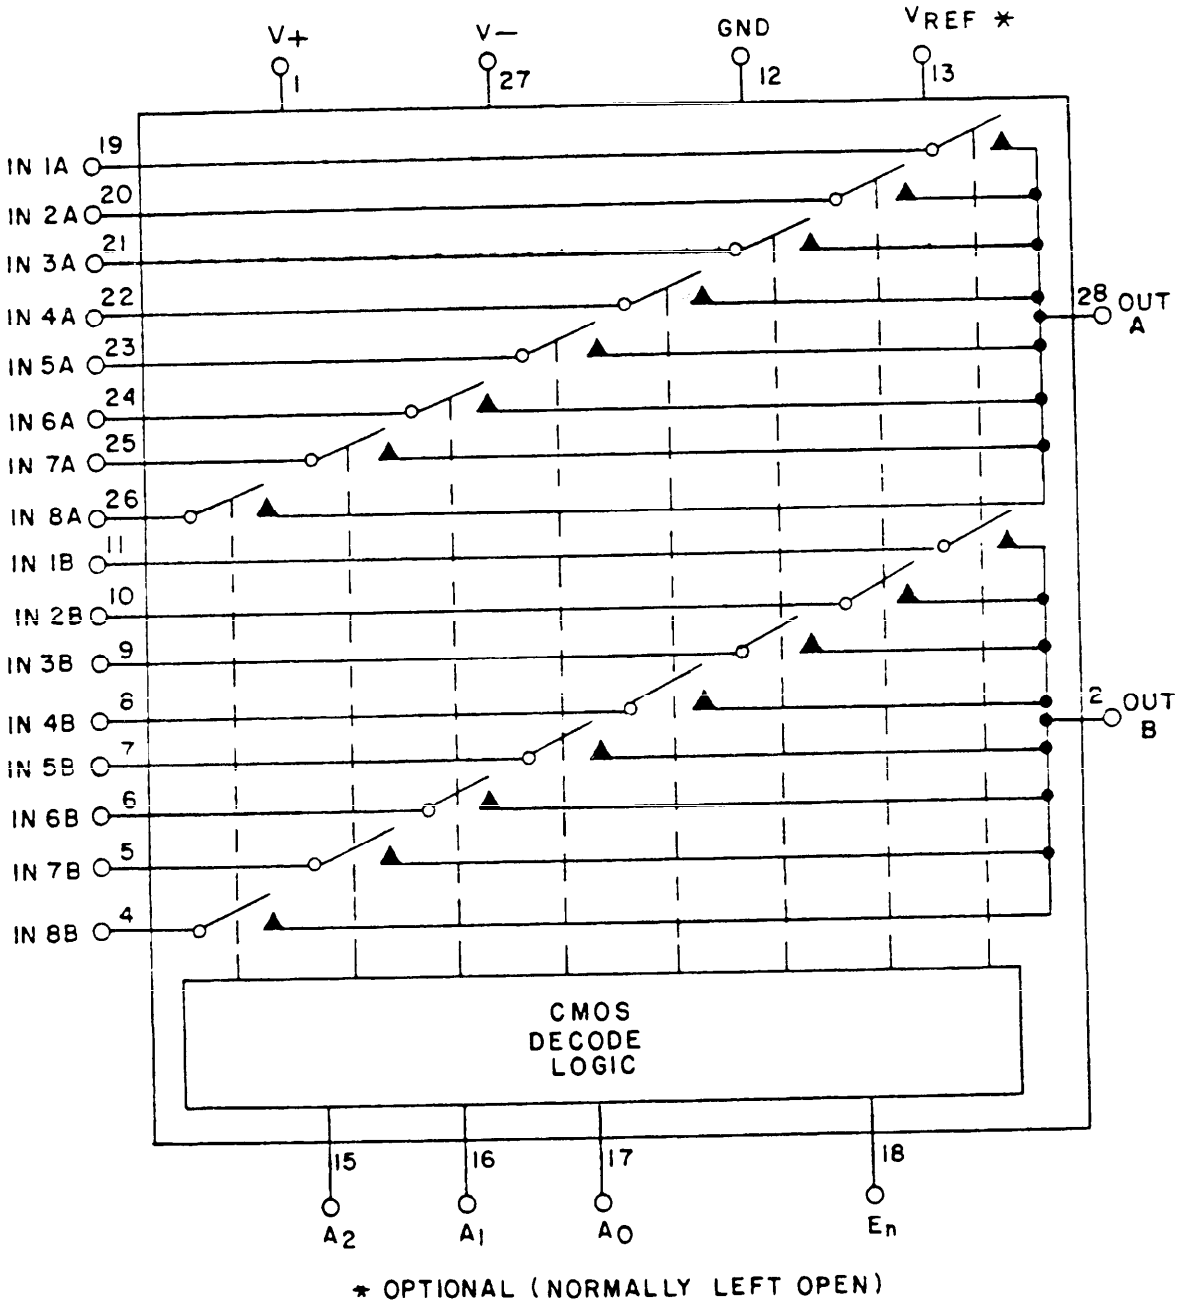


FIGURE 2. Functional diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

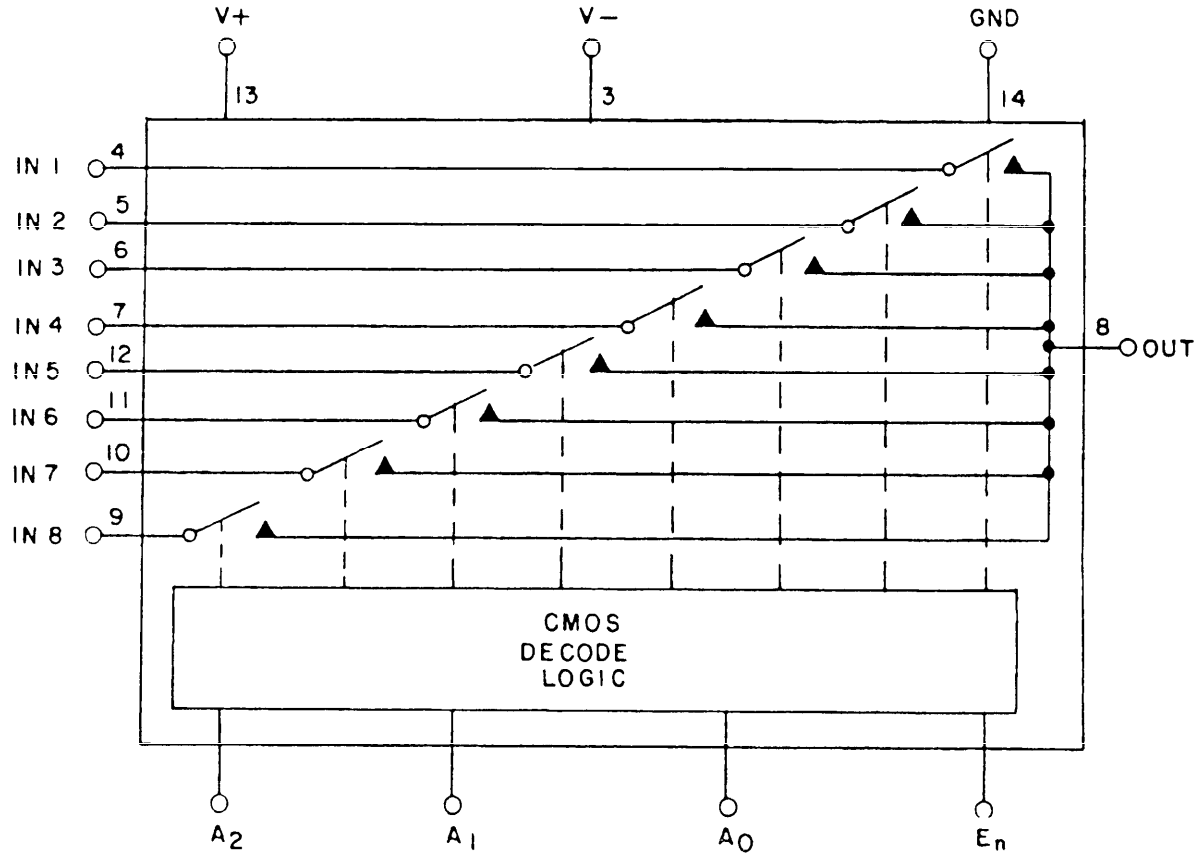

Device types 06 and 08

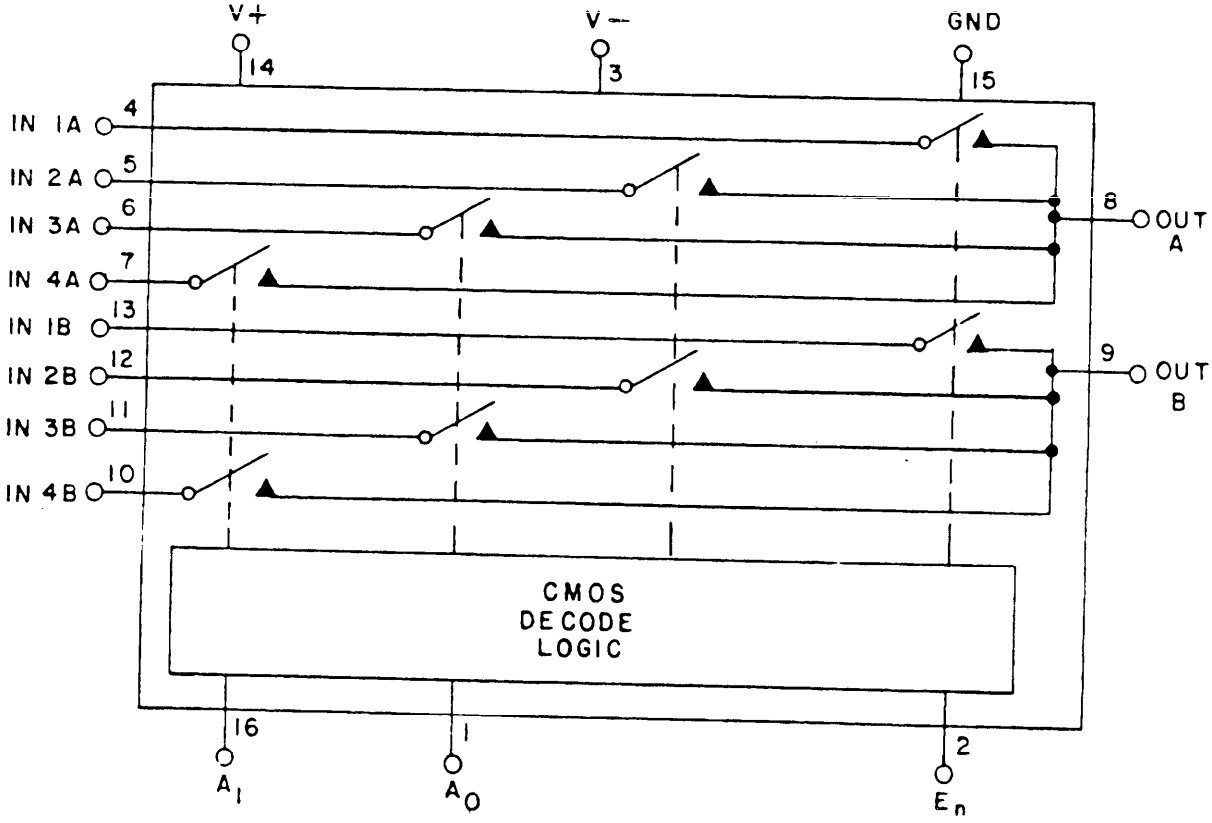


FIGURE 2. Functional diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

A3	A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	X	L	NONE
L	L	L	L	H	1
L	L	L	H	H	2
L	L	H	L	H	3
L	L	H	H	H	4
L	H	L	L	H	5
L	H	L	H	H	6
L	H	H	L	H	7
L	H	H	H	H	8
H	L	L	L	H	9
H	L	L	H	H	10
H	L	H	L	H	11
H	L	H	H	H	12
H	H	L	L	H	13
H	H	L	H	H	14
H	H	H	L	H	15
H	H	H	H	H	16

Device types 03 and 04

A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	L	NONE
L	L	L	H	1A,1B
L	L	H	H	2A,2B
L	H	L	H	3A,3B
L	H	H	H	4A,4B
H	L	L	H	5A,5B
H	L	H	H	6A,6B
H	H	L	H	7A,7B
H	H	H	H	8A,8B

Device types 05 and 07

A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	L	NONE
L	L	L	H	1
L	L	H	H	2
L	H	L	H	3
L	H	H	H	4
H	L	L	H	5
H	L	H	H	6
H	H	L	H	7
H	H	H	H	8

Device types 06 and 08

A1	A0	EN	CHANNEL SELECTED
X	X	L	NONE
L	L	H	1A,1B
L	H	H	2A,2B
H	L	H	3A,3B
H	H	H	4A,4B

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

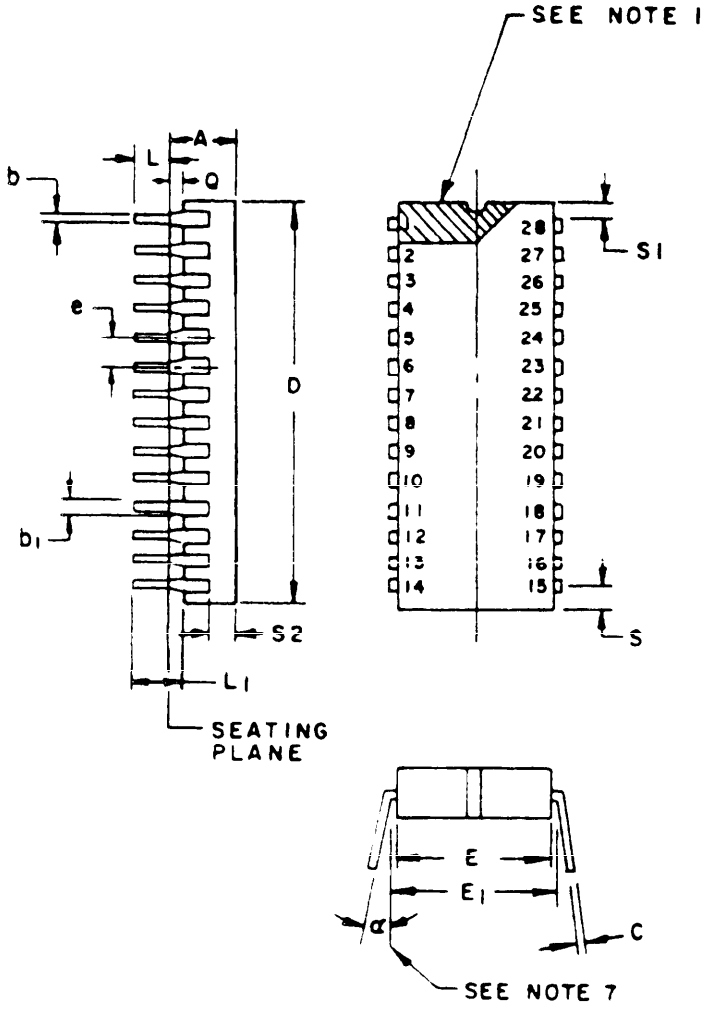


FIGURE 4. Case outline X (28-lead, 9/16" x 1-7/16").

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.


Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	---	.200	---	5.08	
b	.014	.023	0.36	0.58	8
b_1	.040	.070	1.02	1.78	2,8
C	.008	.014	.20	0.36	8
D	---	1.48	---	37.6	4
E	.520	.610	13.21	13.97	4
E_1	.585	.620	14.86	15.75	7
E_2	N/A	N/A	N/A	N/A	
E_3	N/A	N/A	N/A	N/A	
e	.100 BSC		2.54 BSC		5,9
L	.125	.200	3.18	5.08	
L_1	.150		3.81	5.08	
Q	.015	.060	0.51	1.52	3
Q_1	N/A	N/A	N/A	N/A	
S	---	.098	---	2.49	6
S_1	.005	---	0.13	---	6
S_2	.005	---	0.13	N/A	
α	0°	15°	0°	15°	

NOTES:
1. Index area; a notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark.
2. The minimum limit for dimension b_1 may be .023 (.58 mm) for leads number 1, 14, 15, and 28 only.
3. Dimension Q shall be measured from the seating plane to the base plane.
4. This dimension allows for off-center lid, meniscus and glass overrun.
5. The basic pin spacing is .100 (2.54 mm) between centerlines. Each pin centerline shall be located within ±.010 (.25 mm) of its exact logitudinal position relative to pins 1 and 28.
6. Applies to all four corners (leads number 1, 14, 15, and 28), and 40.5 appendix C of MIL-M-38510 shall apply.
7. Lead center when $\alpha=0^o$. E_1 shall be measured at the centerline of the leads (see 40.4 appendix C of MIL-M-38510).
8. All leads - Increase maximum limit by .003 (.08 mm) measured at the center of the flat, when lead finish A or B is applied.
9. Twenty six spaces.
10. If this configuration is used, no organic or polimeric materials shall be molded to the bottom of the package to cover the leads.

FIGURE 4. Case outline X (28-lead, 9/16" x 1-7/16") - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

Network A

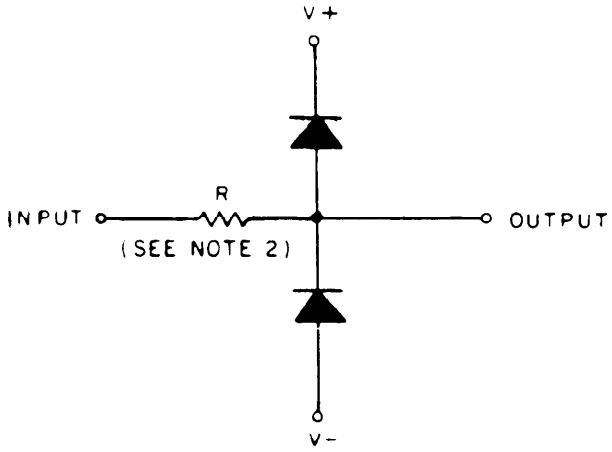


NOTES:
1. All device inputs shall be protected from transients such as electrostatic discharge. This circuit is intrinsic to the device.
2. This resistance is 200 to 2,000 ohms depending on device type.

FIGURE 5. Address and Enable input protection circuit for device types 02, 04, 05 and 06.

Source: https://assist.dla.mil Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, and 04

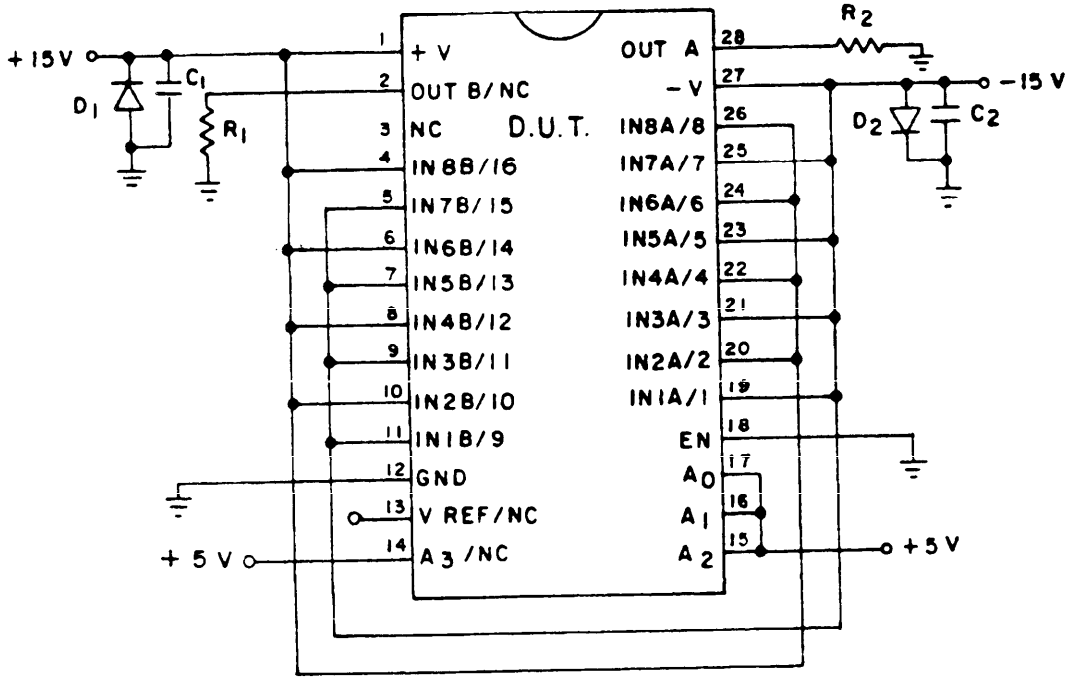


NOTE: R_1, R_2 = 10 kΩ ±10%, 1/2 or 1/4 W.
C_1, C_2 = .01 µf.
D_1, D_2 = 1N4002 (or equivalent).

FIGURE 6. Static burn-in test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

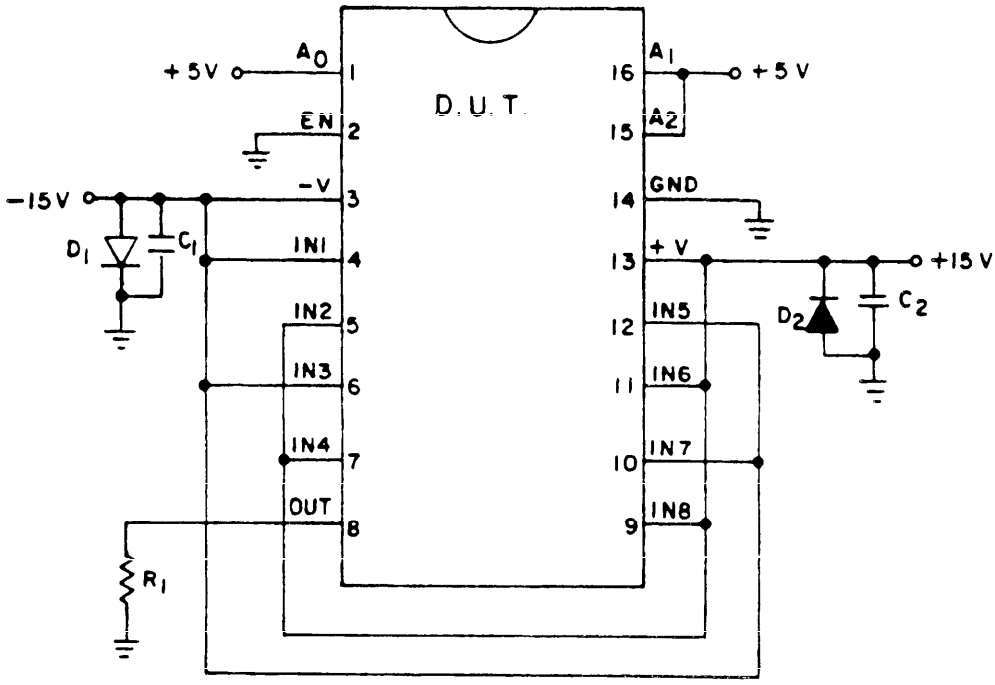


NOTE: R_1 = 10 kΩ ±10%, 1/4 or 1/2 W.
C_1, C_2 = .01 µf.
D_1, D_2 = 1N4002 (or equivalent).

FIGURE 6. Static burn-in test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08

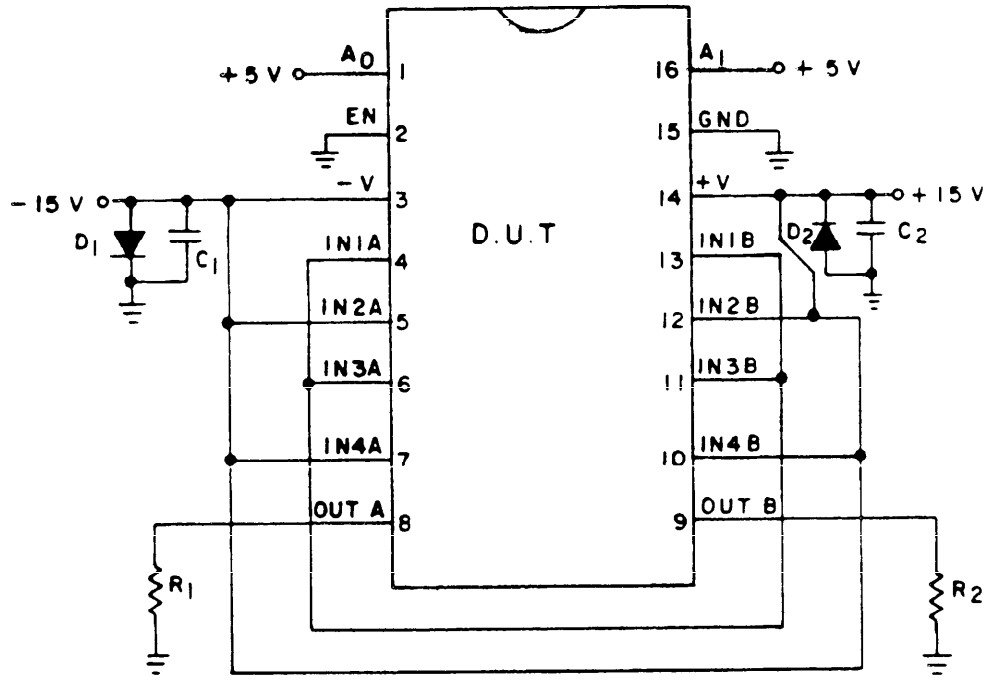


NOTE: R_1, R_2 = 10 kΩ ±10%, 1/2 or 1/4 W.
C_1, C_2 = .01 µf.
D_1, D_2 = 1N4002 (or equivalent).

FIGURE 6. Static burn-in test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01, 02, 03, and 04

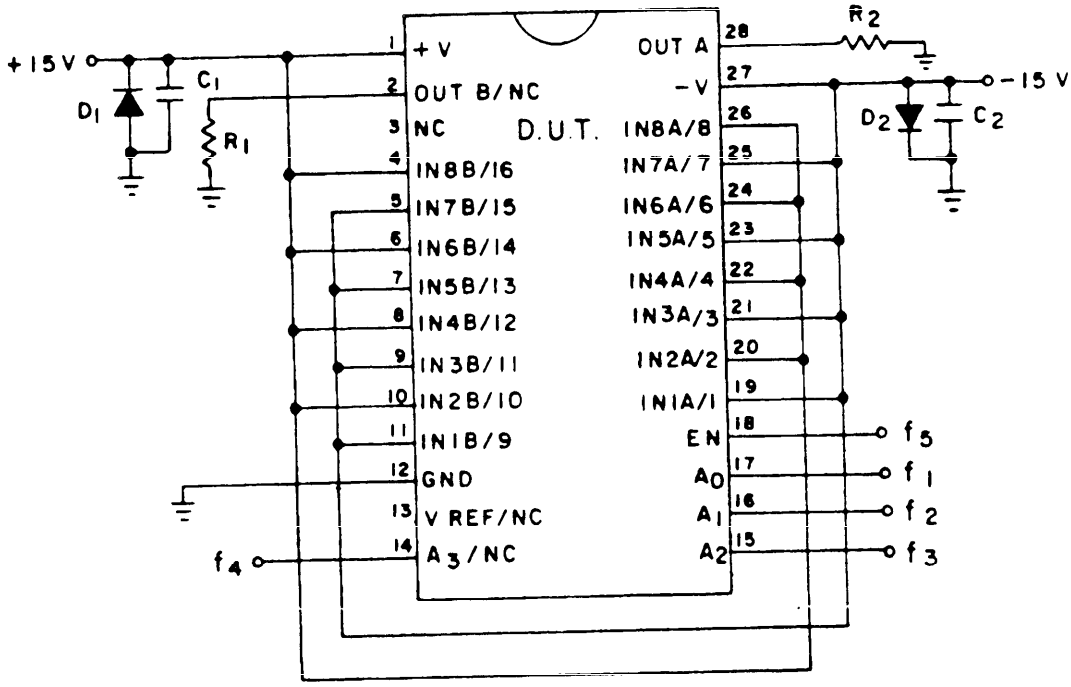


NOTES:
1. R_1, R_2 = 10 kΩ ±10%, 1/2 or 1/4 W.
   C_1, C_2 = .01 µf.
   D_1, D_2 = 1N4002 (or equivalent).
2. Input signal requirements:
   a. Square wave, 50% duty cycle.
   b. f_1 = 100 kHz.
      f_2 = 50 kHz.
      f_3 = 25 kHz.
      f_4 = 12.5 kHz.
      f_5 = 6.25 kHz.
   c. t_{TLH} and t_{THL} < 1 µs.
   d. Voltage = 0 to 15 V peak minimum.

FIGURE 7. Dynamic and steady state life test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

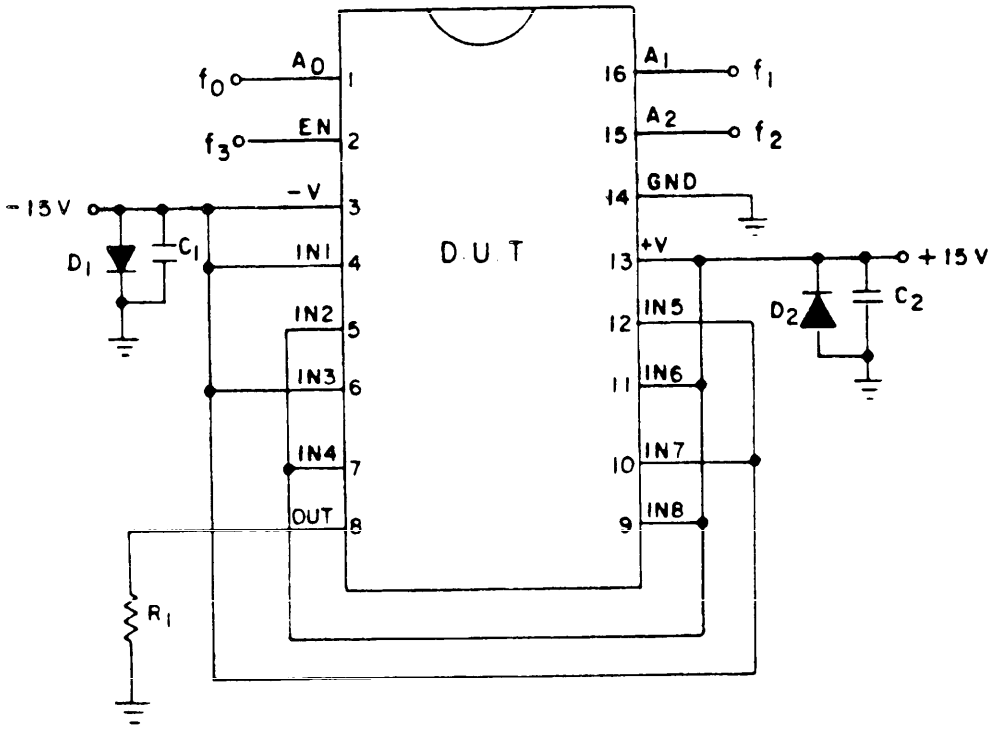


NOTES:
1. R_1 = 10 kΩ ±10 , 1/2 or 1/4 W.
   C_1, C_2 = .01 µf.
   D_1, D_2 = 1N4002 (or equivalent).
2. Input signal requirements:
   a. Square wave, 50 duty cycle.
   b. f_0 = 100 kHz.
      f_1 = 50 kHz.
      f_2 = 25 kHz.
      f_3 = 12.5 kHz.
   c. t_{TLH} and t_{THL} < 1 µs.
   d. Voltage = 0 to 15 V peak minimum.

FIGURE 7. Dynamic and steady state life test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08

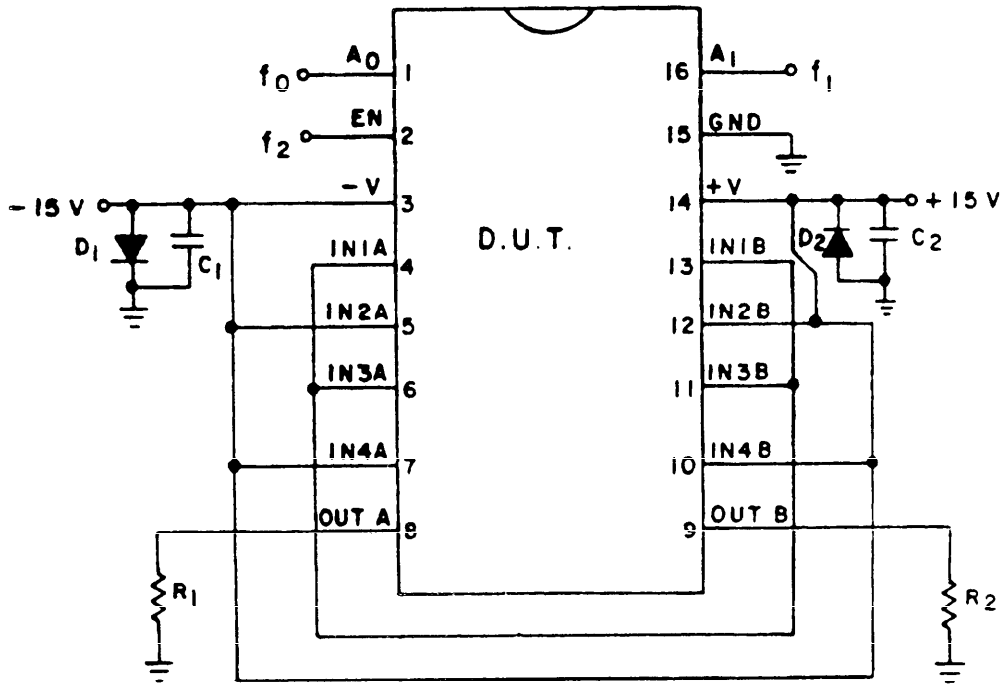



NOTES:
1. R_1, R_2 = 10 kΩ ±10%, 1/2 or 1/4 W.
   C_1, C_2 = .01 µf.
   D_1, D_2 = 1N4002 (or equivalent).
2. Input signal requirements:
   a. Square wave, 50% duty cycle.
   b. f_0 = 100 kHz.
      f_1 = 50 kHz.
      f_2 = 25 kHz.
   c. t_{TLH} and t_{THL} = 1 µs.
   d. Voltage = 0 to 15 V peak minimum.

FIGURE 7. Dynamic and steady state life test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

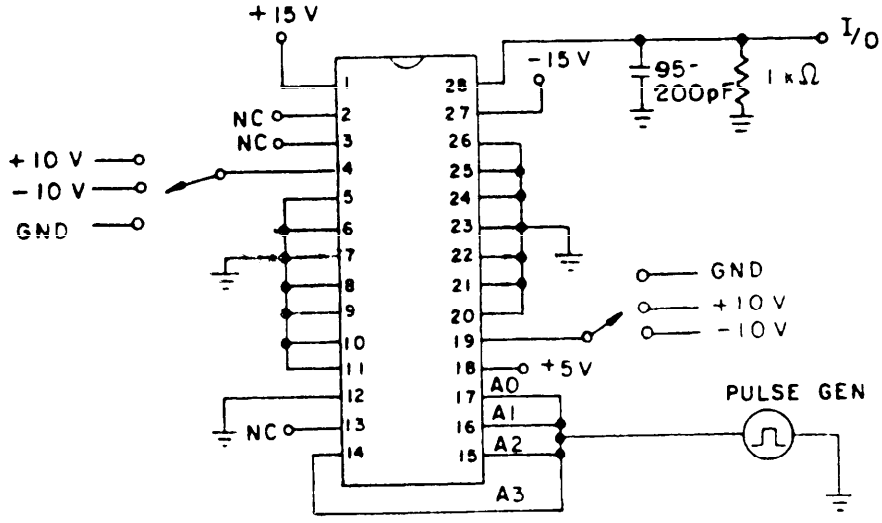

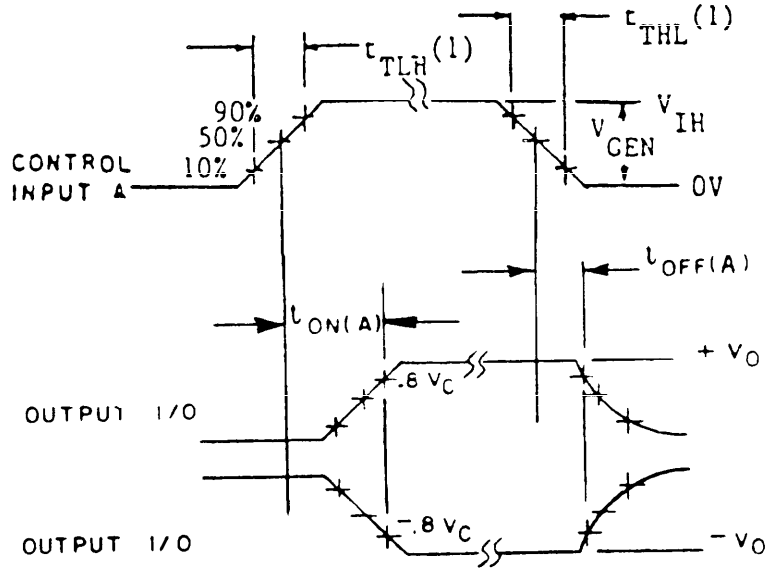


Input pulse requirements:
V_{GEN} =4V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 8. Switching times test circuit and waveforms.
(Address inputs to I/O)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

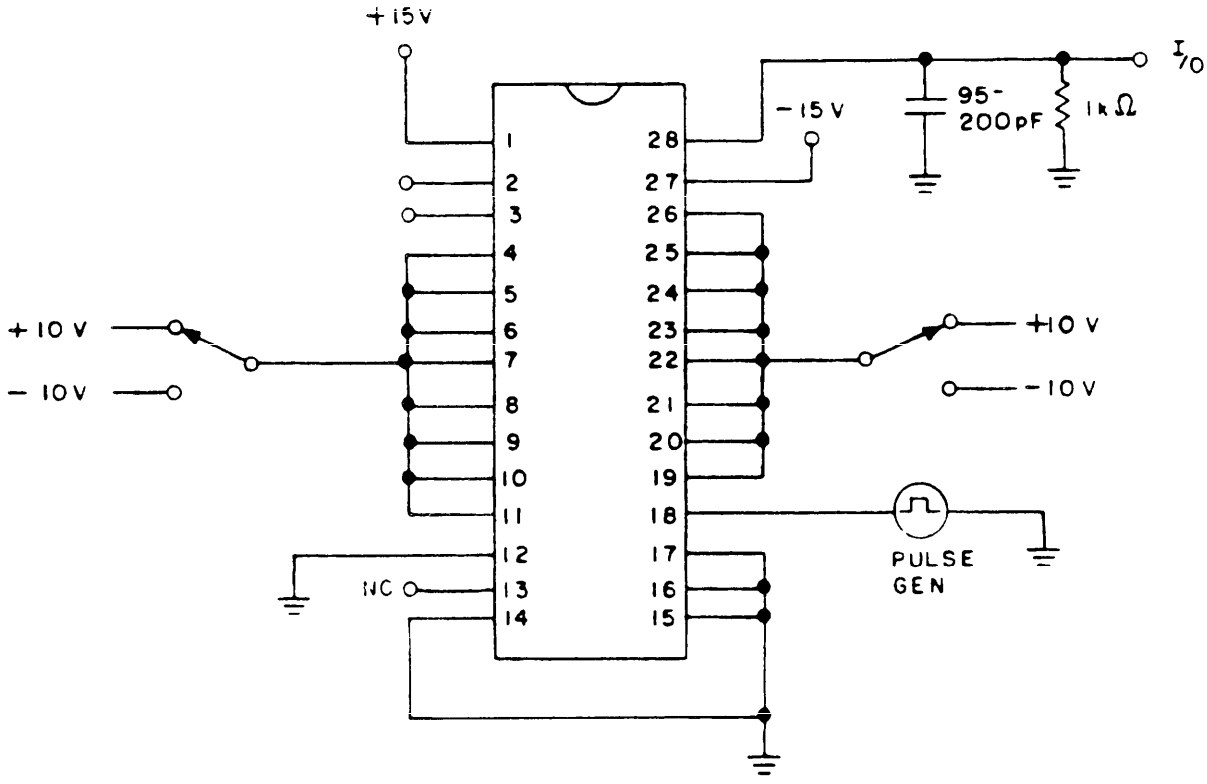

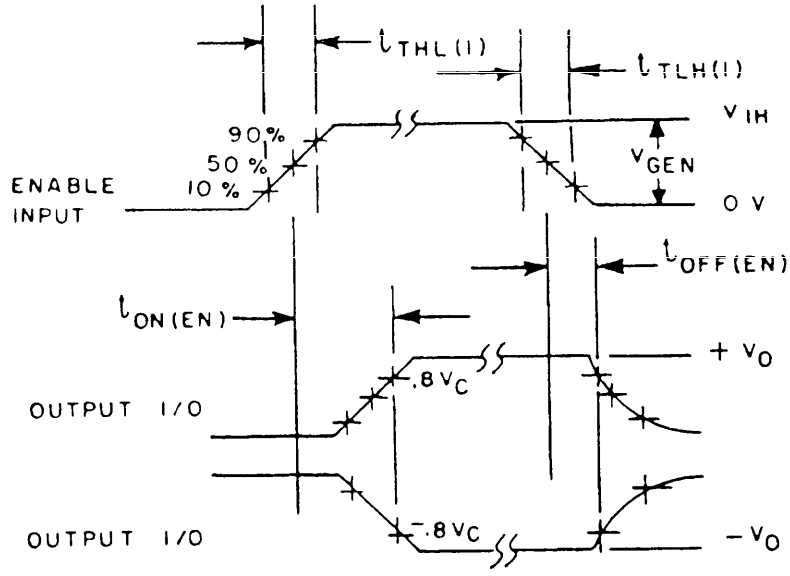


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 9. Switching times test circuit and waveforms.
(Enable to I/O)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04

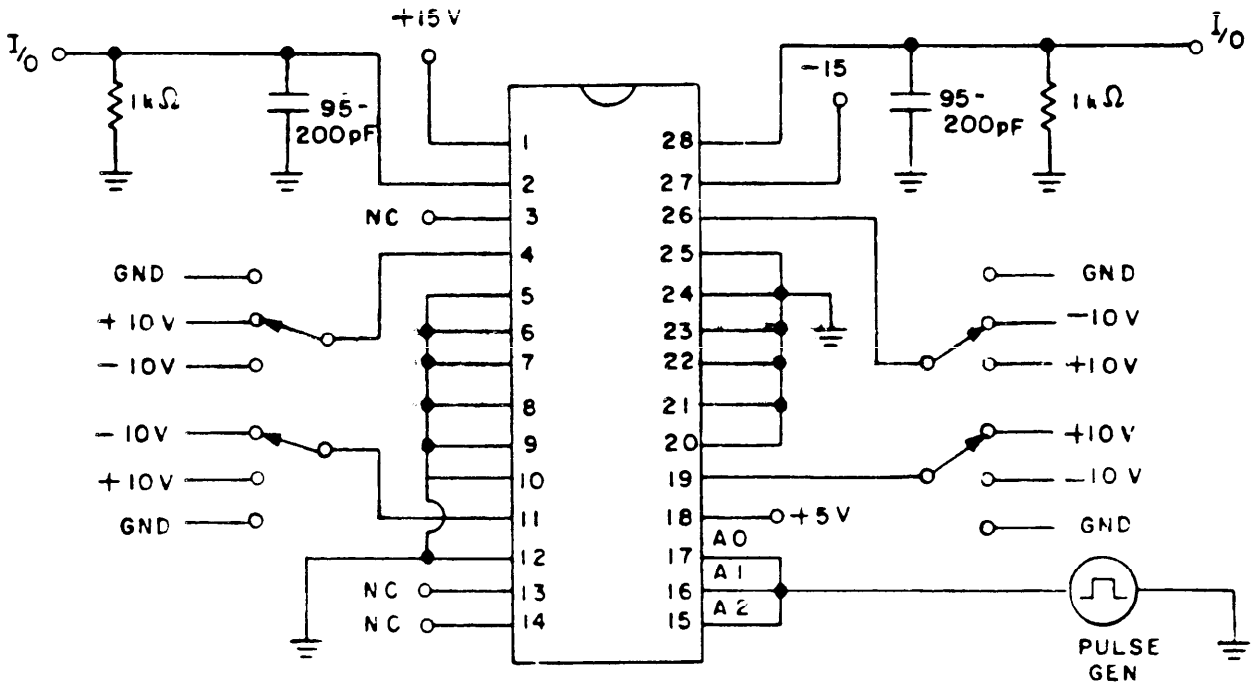

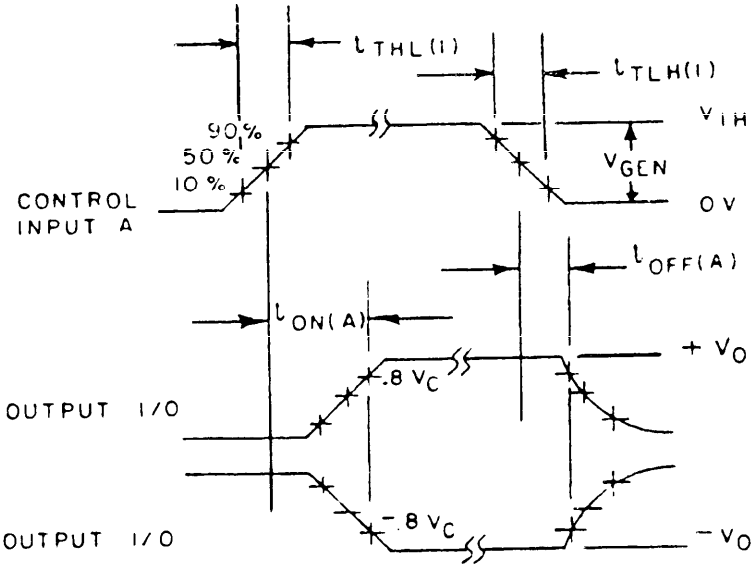


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 10. Switching times test circuit and waveforms.
(Address inputs to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04

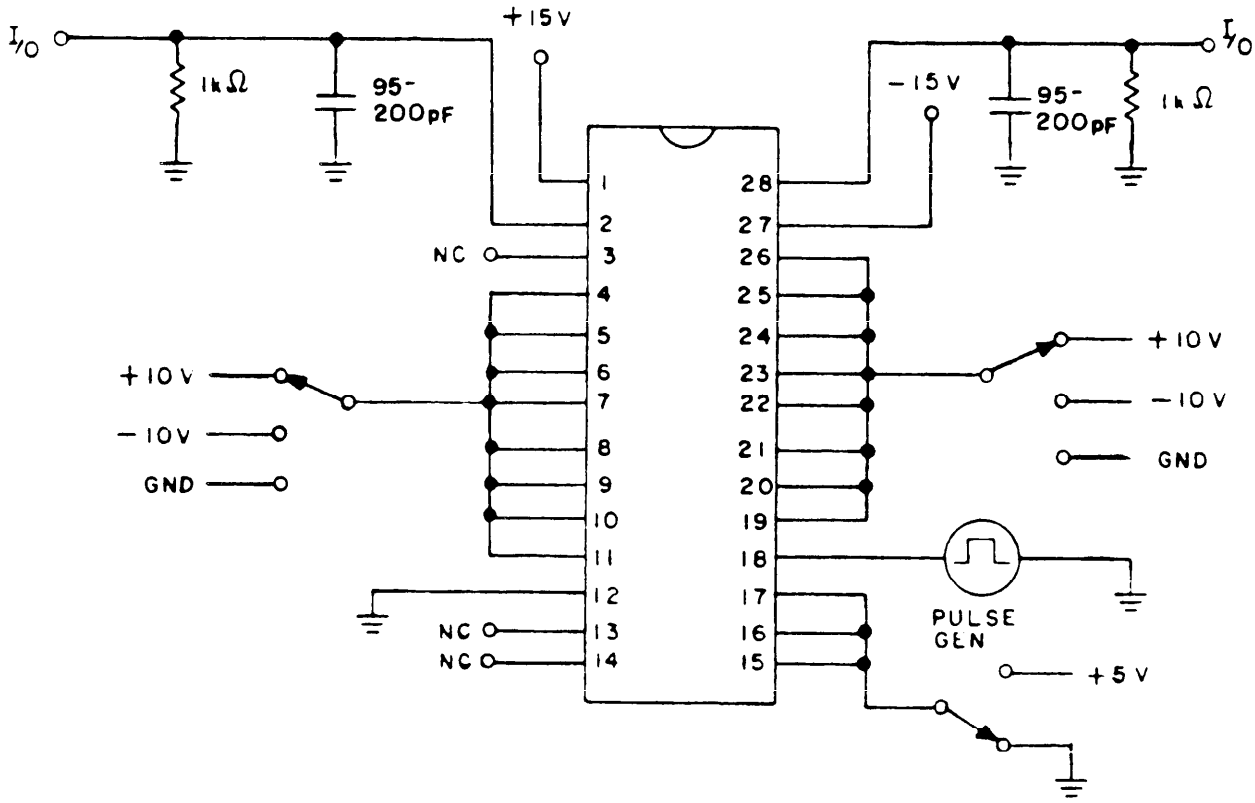

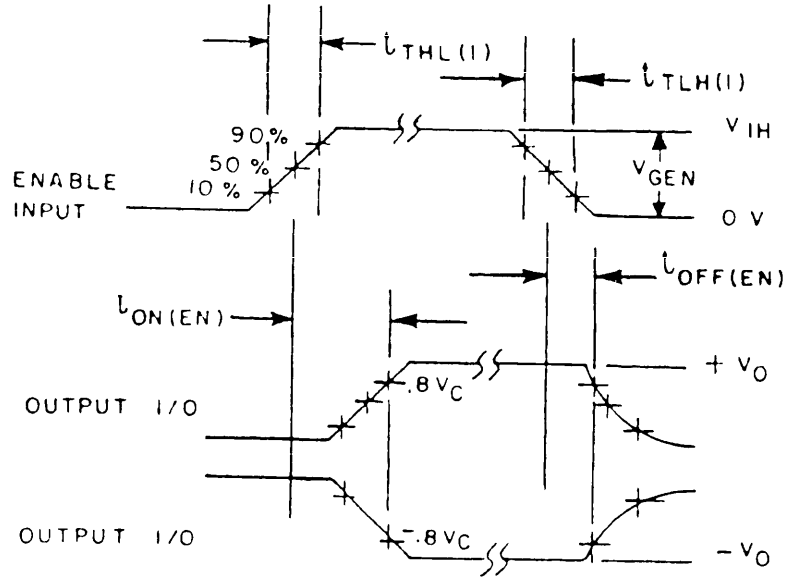


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 11. Switching times test circuit and waveforms.
(Enable to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

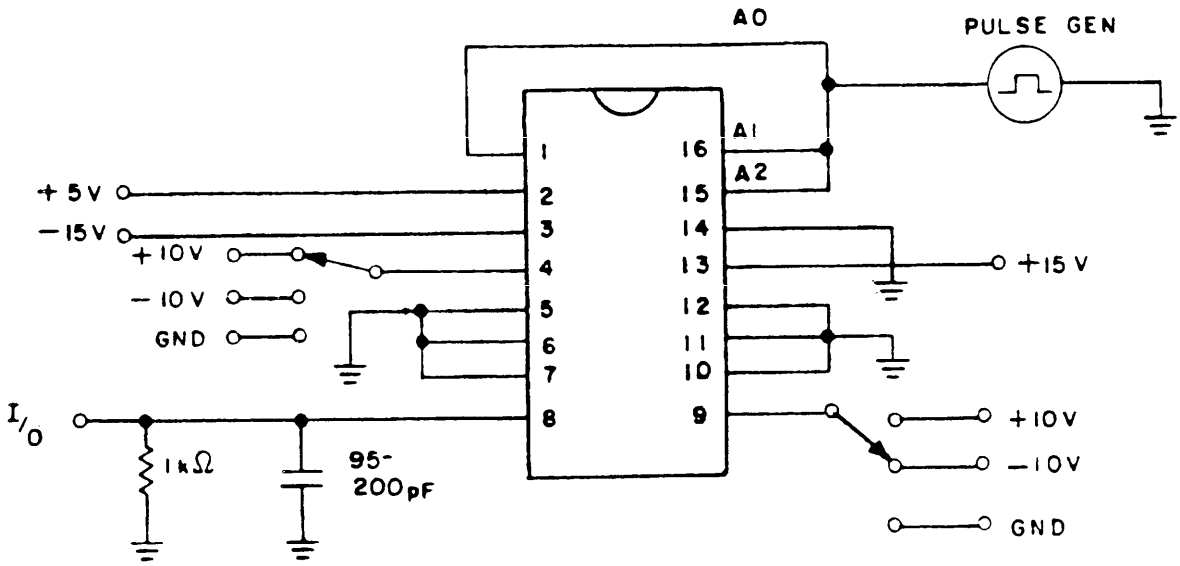

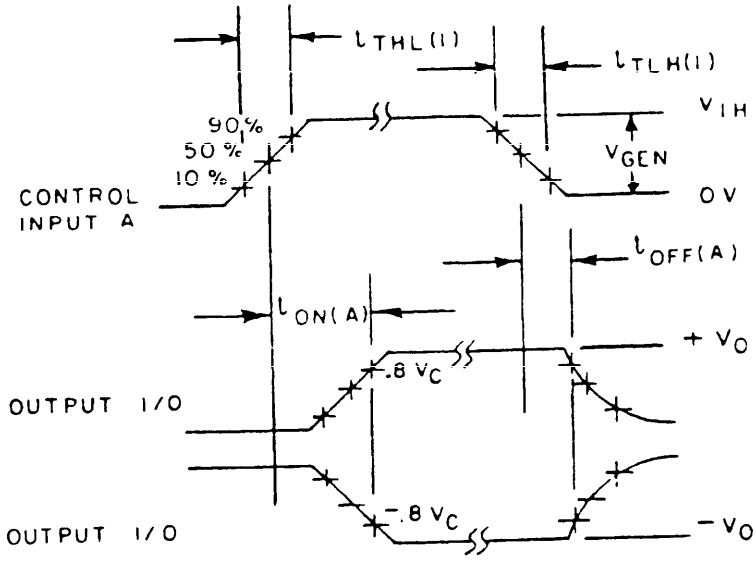


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 12. Switching times test circuit and waveforms.
(Address inputs to I/O)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

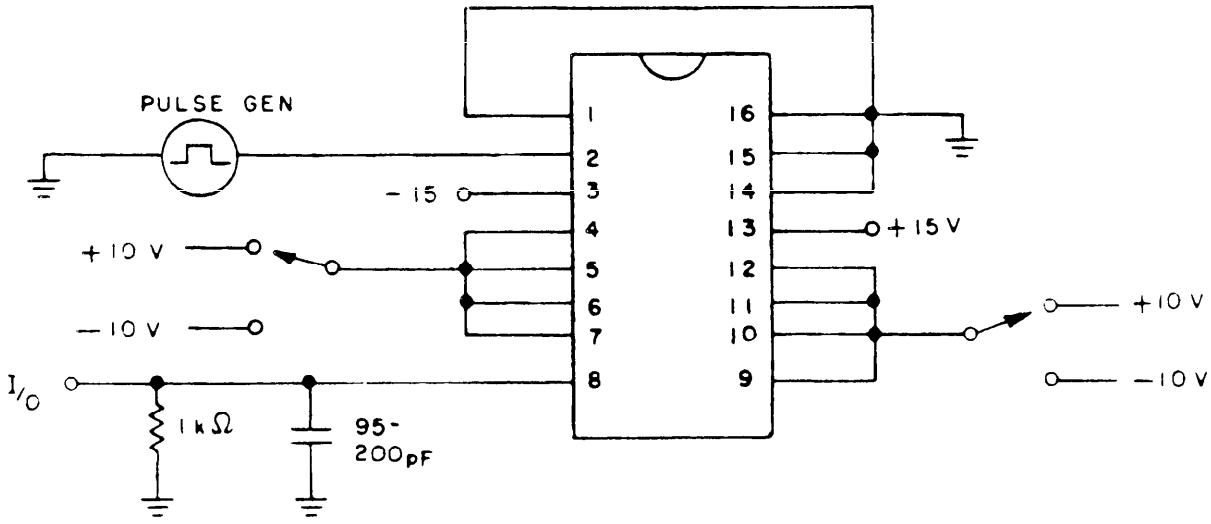

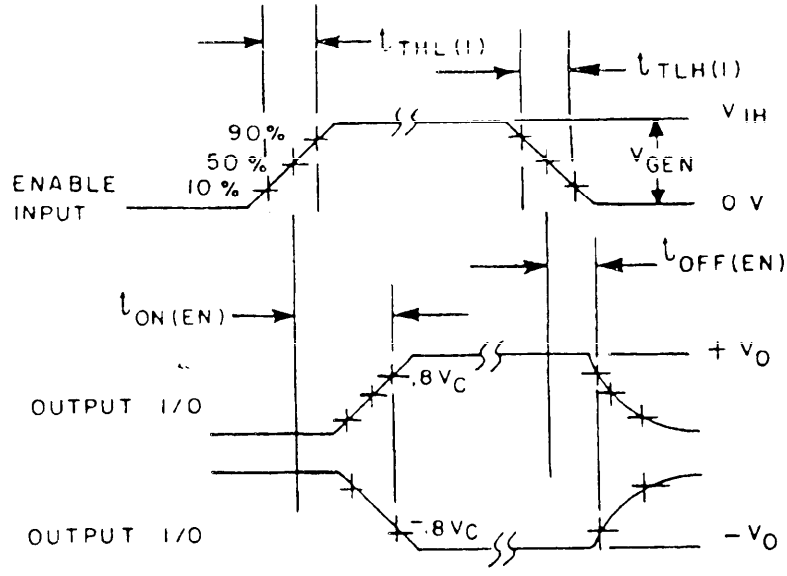


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 13. Switching times test circuit and waveforms.
(Enable to I/O)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08

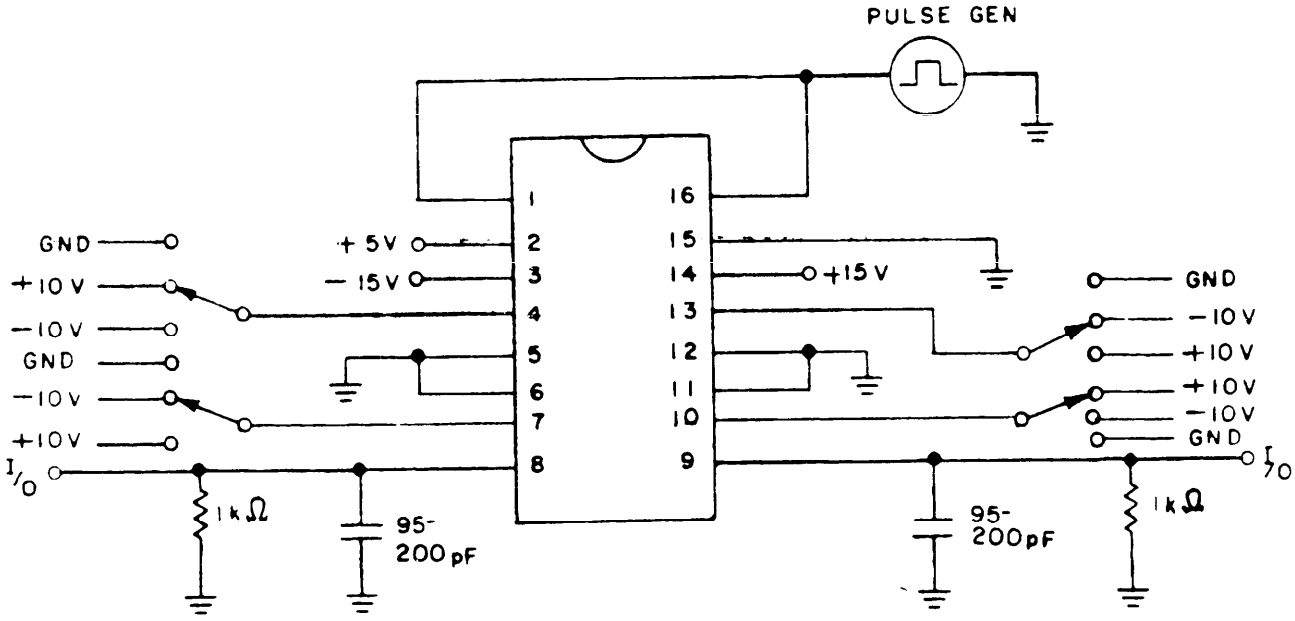

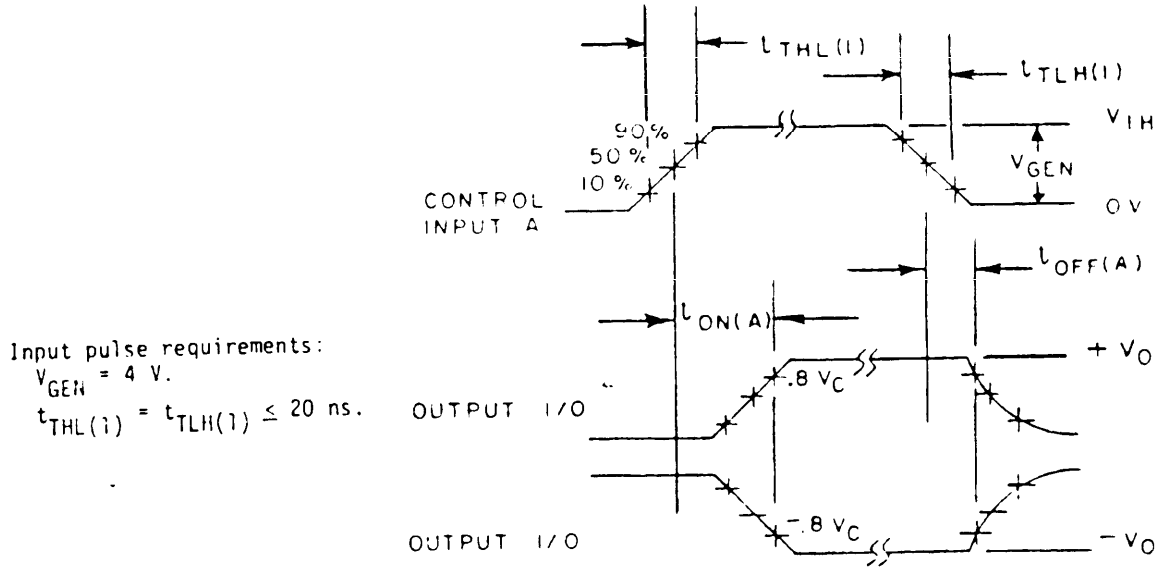


Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.


DYNAMIC TEST WAVEFORMS

FIGURE 14. Switching times test circuit and waveforms.
(Address inputs to I/O)

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08

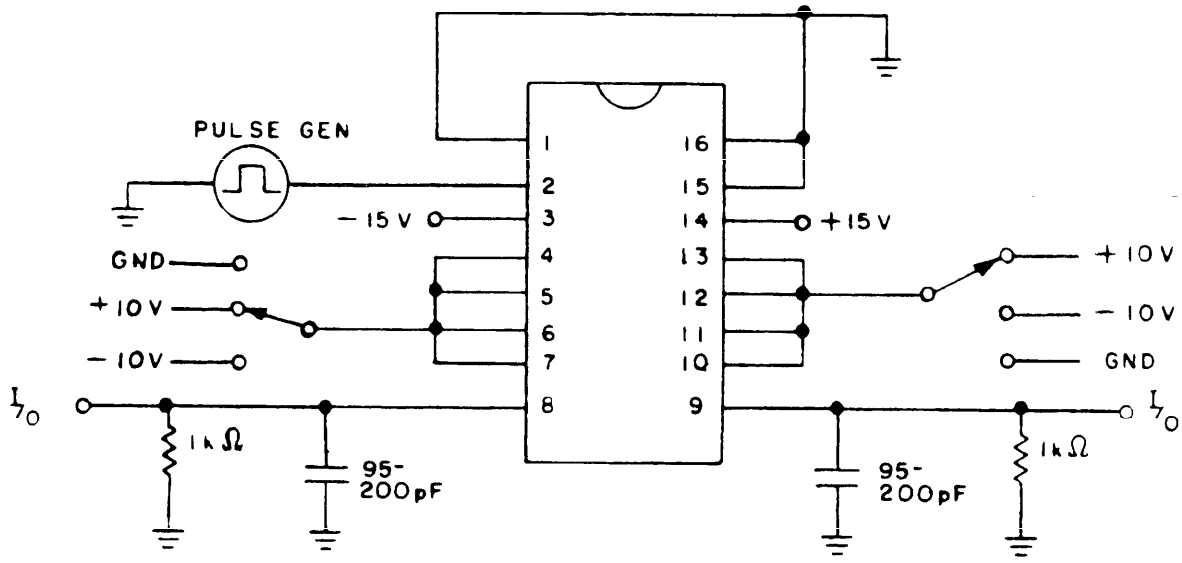

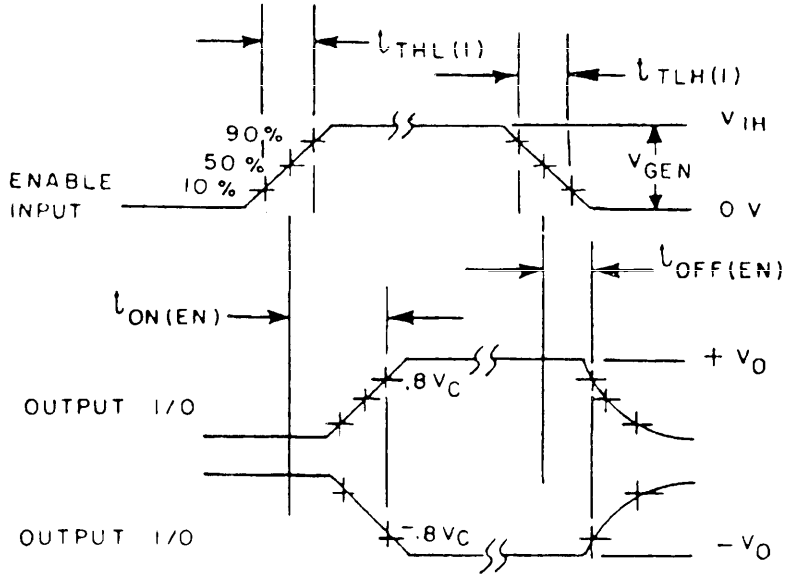

Input pulse requirements:
V_{GEN} = 4 V.
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns.

DYNAMIC TEST WAVEFORMS

FIGURE 15. Switching times test circuit and waveforms.
(Enable to I/O)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

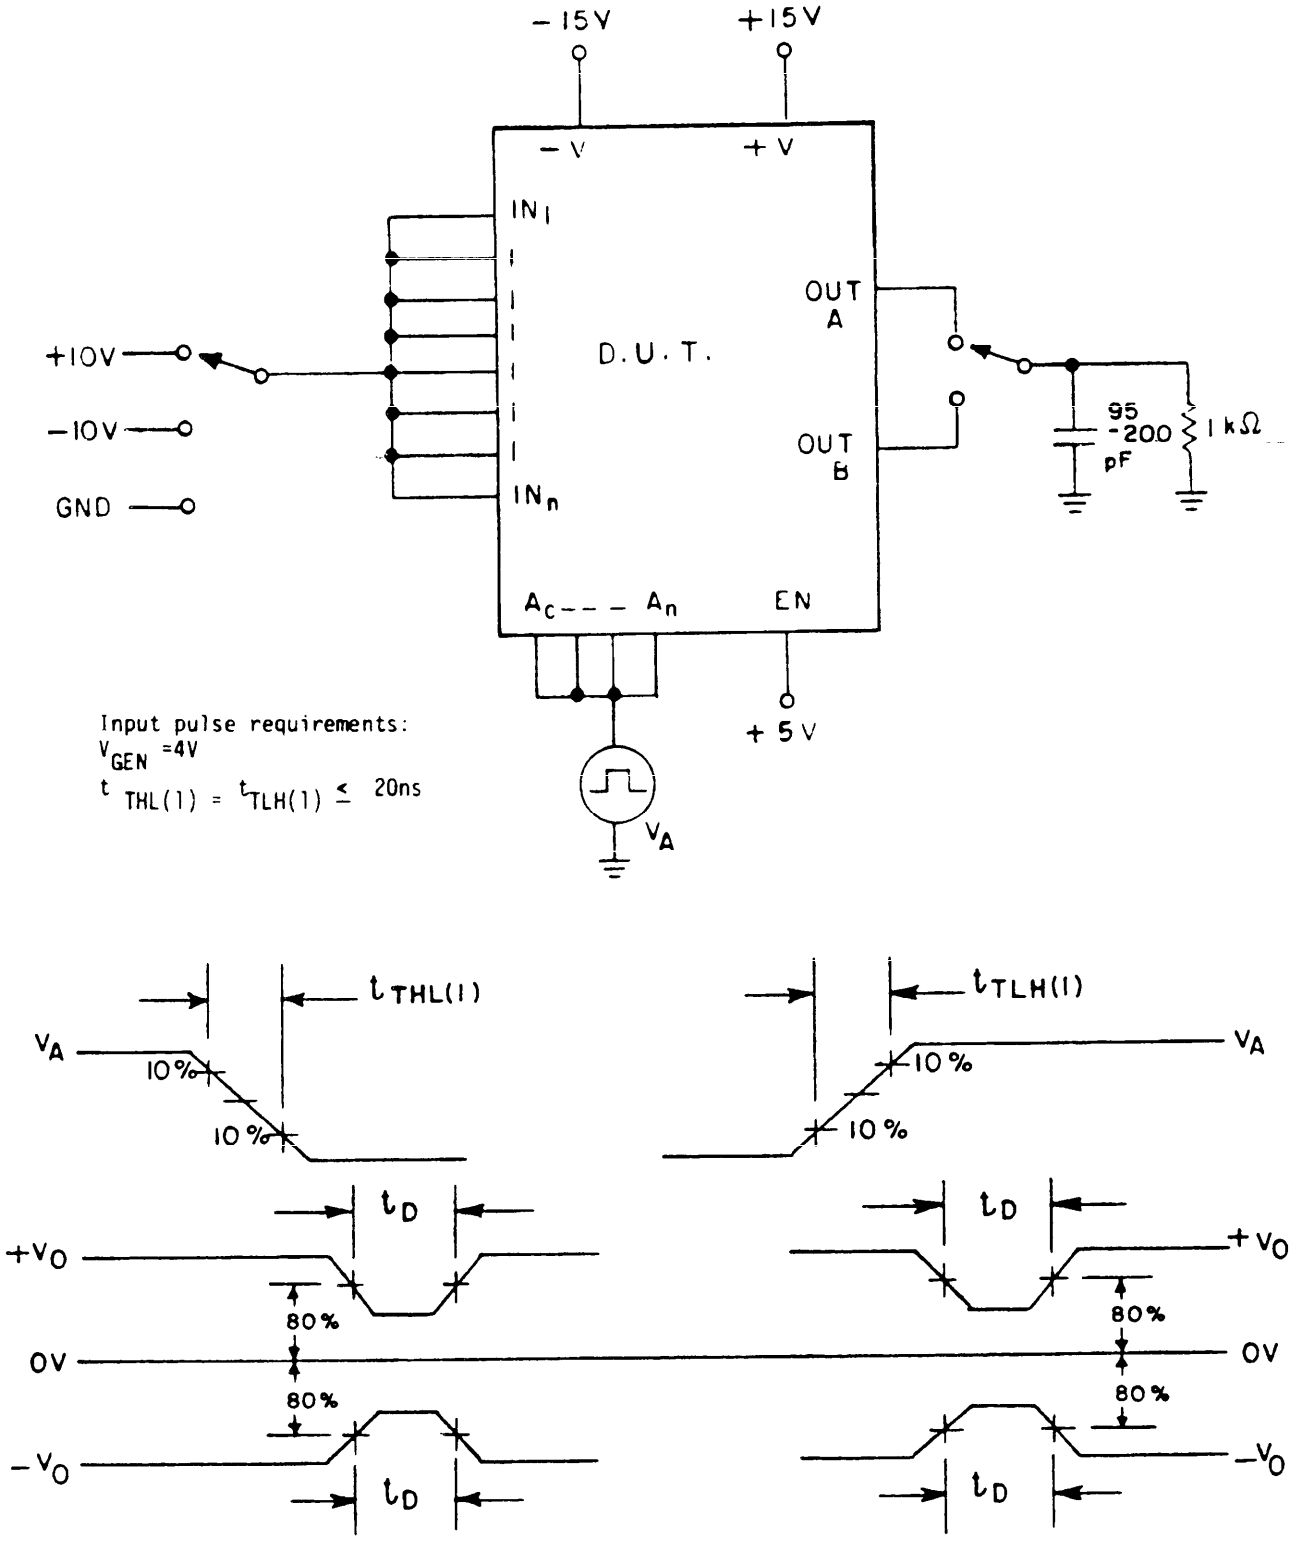


FIGURE 16. Break before make test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.


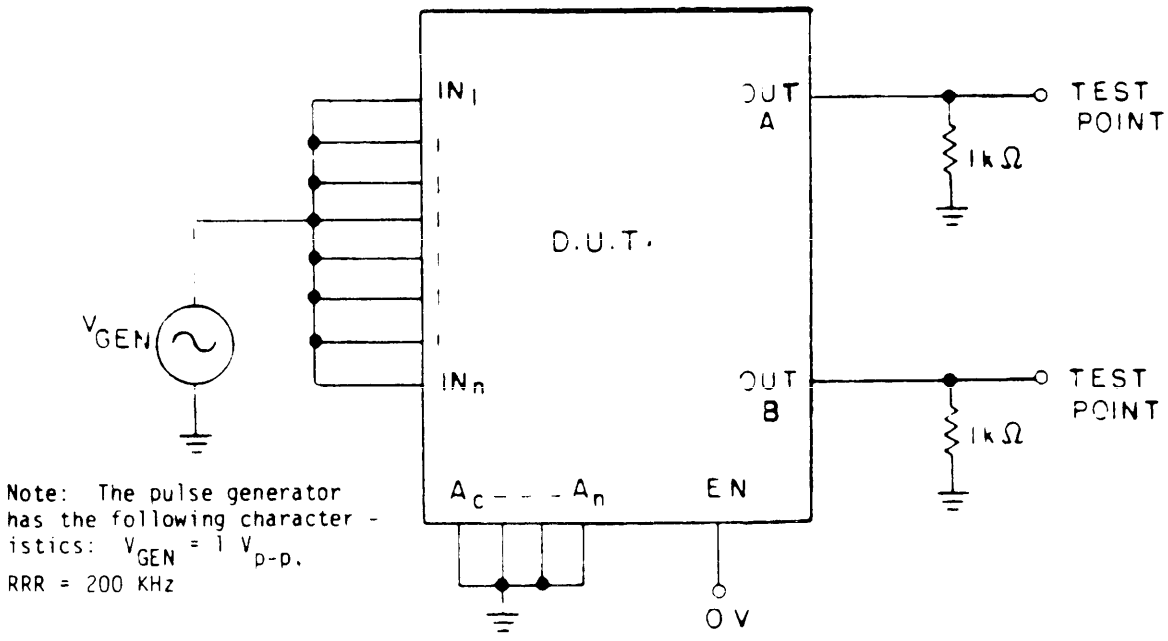



FIGURE 17. Single channel isolation test circuit.

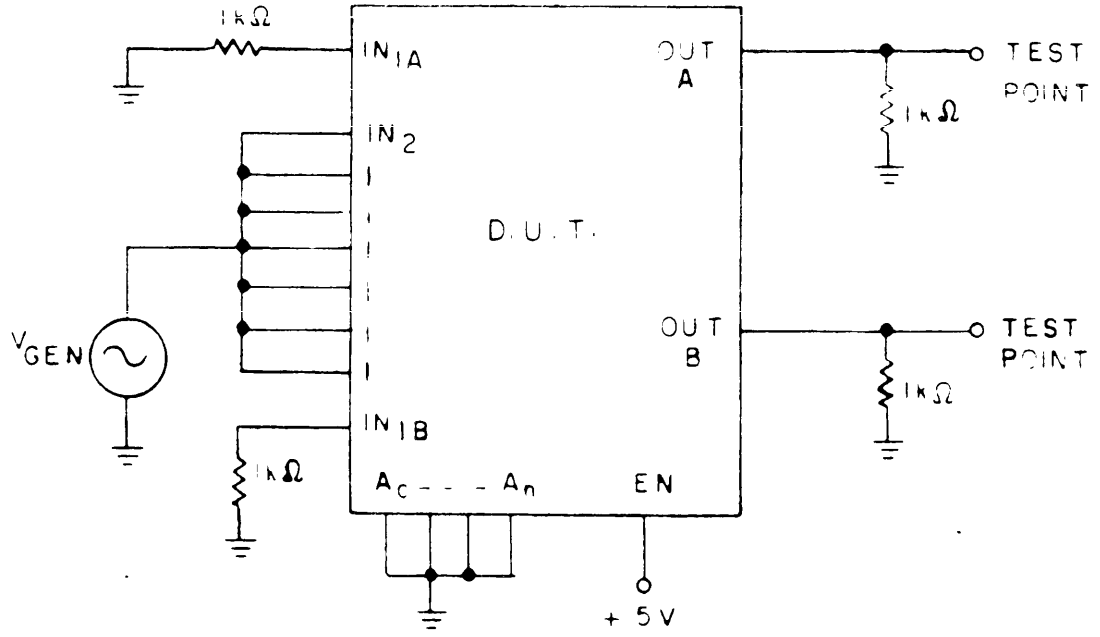

Note: The pulse generator has the following characteristics: V_{GEN} = 1V_{p-p}; PRR= 200KHz.

FIGURE 18. Crosstalk test circuit.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

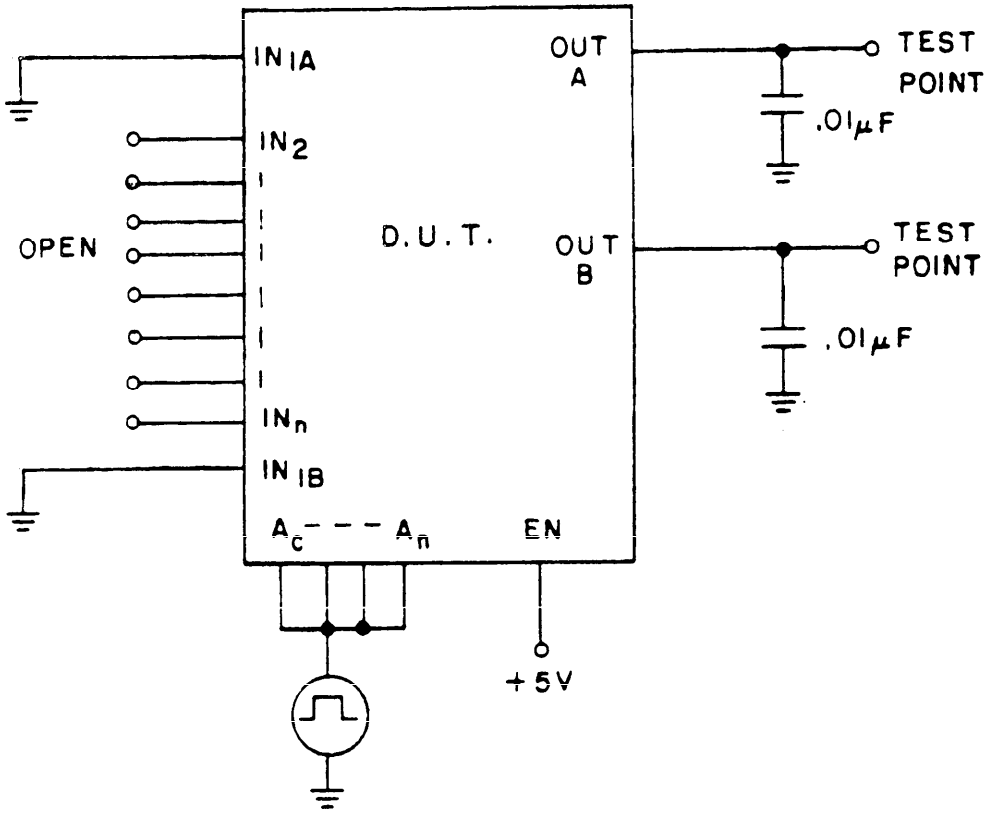

NOTE: The pulse generator has the following characteristics: V_{GEN} = 0 - 5V

FIGURE 19. Charge transfer error test circuit.

Source: https://assist.dla.mil -- Downloaded: 2022640-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Symbol	MIL-STD-883 method	Case X Test no.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
			V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3								
I_{IH} 2/	3010	1	15 V											GND		2.4 V	A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	"											"		GND	A2	"	"	"	"	"	"	"
	"	3	"											"		"	A1	"	"	"	"	"	"	"
	"	4	"											"		"	A0	"	"	"	"	"	"	"
	"	5	"											"		"	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	6	"											"		0.8 V	A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	7	"											"		5 V	A2	"	"	"	"	"	"	"
	"	8	"											"		"	A1	"	"	"	"	"	"	"
	"	9	"											"		"	A0	"	"	"	"	"	"	"
	"	10	"											"		"	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		11	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		0.8 V	IN1	-1	1	-50	50	-50	50	nA
		12	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		13	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		14	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		15	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		16	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		17	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		18	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		19	"			"	"	"	"	"	"	"	10 V	"		2.4 V	IN9	"	"	"	"	"	"	"
		20	"			"	"	"	"	"	"	10 V	-10 V	"		"	IN10	"	"	"	"	"	"	"
		21	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11	"	"	"	"	"	"	"
		22	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		23	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		24	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		25	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		26	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
		27	"			"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1	"	"	"	"	"	"	"
		28	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		29	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		30	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		31	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		32	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		33	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		34	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		35	"			"	"	"	"	"	"	"	-10 V	"		2.4 V	IN9	"	"	"	"	"	"	"
		36	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10	"	"	"	"	"	"	"
		37	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11	"	"	"	"	"	"	"
		38	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		39	"			"	"	"	-10 V	10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		40	"			"	"	-10 V	10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		41	"			"	-10 V	10 V	"	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		42	"			-10 V	10 V	10 V	"	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
$I_{D-(OFF)}$		43	"			10 V	10 V	10 V	"	"	"	"	"	"		0.8 V	OUT	-20	20	-500	500	-500	500	"
$I_{D+(OFF)}$		44	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	OUT	"	"	"	"	"	"	"
$I_{D+(ON)}$		45	"			"	"	"	"	"	"	"	"	"		"	IN1 & OUT	"	"	"	"	"	"	"
		46	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT	"	"	"	"	"	"	"
		47	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT	"	"	"	"	"	"	"
		48	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT	"	"	"	"	"	"	"
		49	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT	"	"	"	"	"	"	"
		50	"			"	"	"	"	"	"	"	"	"		"	IN6 & OUT	"	"	"	"	"	"	"
		51	"			"	"	"	"	"	"	"	"	"		"	IN7 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Symbol	Case X / Test no.	Terminal conditions 17/ 15	16	17	18	19	20	21	22	23	24	25	26	27	28	Measured terminal	Test Limits: Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
		A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT								
I_{IH} 2/	1	GND	GND	GND	GND									-15 V		A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	2	2.4 V	GND	GND	"									"		A2	"	"	"	"	"	"	"
	3	GND	2.4 V	GND	"									"		A1	"	"	"	"	"	"	"
	4	GND	GND	2.4 V	"									"		A0	"	"	"	"	"	"	"
	5	GND	GND	GND	2.4 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	6	5 V	5 V	5 V	5 V									"		A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	7	0.8 V	5 V	"	"									"		A2	"	"	"	"	"	"	"
	8	5 V	0.8 V	"	"									"		A1	"	"	"	"	"	"	"
	9	5 V	5 V	0.8 V	"									"		A0	"	"	"	"	"	"	"
	10	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	11	0.8 V	0.8 V	0.8 V	0.8 V	10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	"	-10 V	IN1	-1	1	-50	50	-50	50	nA
	12	"	0.8 V	2.4 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	13	"	2.4 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	14	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	15	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	16	"	0.8 V	2.4 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	17	"	2.4 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7	"	"	"	"	"	"	"
	18	"	2.4 V	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8	"	"	"	"	"	"	"
	19	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9	"	"	"	"	"	"	"
	20	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	21	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	22	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	23	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	24	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	25	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	26	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
	27	0.8 V	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1	"	"	"	"	"	"	"
	28	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	29	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	30	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	31	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	32	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	33	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7	"	"	"	"	"	"	"
	34	"	2.4 V	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8	"	"	"	"	"	"	"
	35	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9	"	"	"	"	"	"	"
	36	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	37	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	38	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	39	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	40	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	41	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	42	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
$I_{D-(OFF)}$	43	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	-10 V	OUT	-20	20	-500	500	-500	500	"
$I_{D+(OFF)}$	44	"	"	0.8 V	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUT	"	"	"	"	"	"	"
$I_{D+(ON)}$	45	"	"	0.8 V	4.5 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
	46	"	"	2.4 V	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	47	"	2.4 V	0.8 V	"	"	-10 V	10 V	"	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	48	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	49	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	50	2.4 V	0.8 V	2.4 V	"	"	"	"	-10 V	-10 V	10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	51	2.4 V	2.4 V	0.8 V	"	"	"	"	-10 V	-10 V	-10 V	10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD 883 method	Case X	Terminal conditions 1/															Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14			Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A1			Min	Max	Min	Max	Min	Max	
$I_{D+(ON)}$		52	15 V			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND		0.8 V	IN8 & OUT		-20	20	-500	500	-500	500	nA
		53	"			"	"	"	"	"	-10 V	-10 V	10 V	"		2.4 V	IN9 & OUT		"	"	"	"	"	"	"
		54	"			"	"	"	"	"	"	10 V	10 V	"		"	IN10 & OUT		"	"	"	"	"	"	"
		55	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11 & OUT		"	"	"	"	"	"	"
		56	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12 & OUT		"	"	"	"	"	"	"
		57	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13 & OUT		"	"	"	"	"	"	"
		58	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14 & OUT		"	"	"	"	"	"	"
		59	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15 & OUT		"	"	"	"	"	"	"
		60	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16 & OUT		"	"	"	"	"	"	"
$I_{D-(ON)}$		61	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1 & OUT		"	"	"	"	"	"	"
		62	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT		"	"	"	"	"	"	"
		63	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT		"	"	"	"	"	"	"
		64	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT		"	"	"	"	"	"	"
		65	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT		"	"	"	"	"	"	"
		66	"			"	"	"	"	"	"	"	"	"		"	IN6 & OUT		"	"	"	"	"	"	"
		67	"			"	"	"	"	"	"	"	"	"		"	IN7 & OUT		"	"	"	"	"	"	"
		68	"			"	"	"	"	"	"	"	"	"		"	IN8 & OUT		"	"	"	"	"	"	"
		69	"			"	"	"	"	"	"	"	10 V	"		2.4 V	IN9 & OUT		"	"	"	"	"	"	"
		70	"			"	"	"	"	"	"	10 V	10 V	"		"	IN10 & OUT		"	"	"	"	"	"	"
		71	"			"	"	"	"	"	10 V	"	"	"		"	IN11 & OUT		"	"	"	"	"	"	"
		72	"			"	"	"	"	10 V	"	"	"	"		"	IN12 & OUT		"	"	"	"	"	"	"
		73	"			"	"	"	10 V	10 V	"	"	"	"		"	IN13 & OUT		"	"	"	"	"	"	"
		74	"			"	"	10 V	10 V	"	"	"	"	"		"	IN14 & OUT		"	"	"	"	"	"	"
		75	"			"	10 V	10 V	10 V	"	"	"	"	"		"	IN15 & OUT		"	"	"	"	"	"	"
		76	"			10 V	10 V	10 V	10 V	"	"	"	"	"		"	IN16 & OUT		"	"	"	"	"	"	"
I^+		77	"											"		0 V	V^+			14		14		14	mA
I^-		78	"											"		"	V^-		-14		-14		-14		"
I^+_{SBY}		79	"											"		"	V^+			3.0		3.0		3.0	"
I^-_{SBY}		80	"											"		"	V^-		-4.0		-4.0		-4.0		"
$R_{D(ON)}$		81	"											"		"	IN1 & OUT			600		700		600	Ω
		82	"											"		"	IN2 & OUT			"		"		"	"
		83	"											"		"	IN3 & OUT			"		"		"	"
		84	"											"		"	IN4 & OUT			"		"		"	"
		85	"											"		"	IN5 & OUT			"		"		"	"
		86	"											"		"	IN6 & OUT			"		"		"	"
		87	"											"		"	IN7 & OUT			"		"		"	"
		88	"											"		"	IN8 & OUT			"		"		"	"
		89	"										10 V	"		2.4 V	IN9 & OUT			"		"		"	"
		90	"									10 V	"	"		"	IN10 & OUT			"		"		"	"
		91	"								10 V	"	"	"		"	IN11 & OUT			"		"		"	"
		92	"							10 V	"	"	"	"		"	IN12 & OUT			"		"		"	"
		93	"						10 V	"	"	"	"	"		"	IN13 & OUT			"		"		"	"
		94	"					10 V	"	"	"	"	"	"		"	IN14 & OUT			"		"		"	"
		95	"				10 V	"	"	"	"	"	"	"		"	IN15 & OUT			"		"		"	"
		96	"			10 V	"	"	"	"	"	"	"	"		"	IN16 & OUT			"		"		"	"
		97	"			"	"	"	"	"	"	"	"	"		0.8 V	IN1 & OUT			"		"		"	"
		98	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT			"		"		"	"
		99	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT			"		"		"	"
		100	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT			"		"		"	"
		101	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT			"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/ 15	16	17	18	19	20	21	22	23	24	25	26	27	28	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Max	Subgroup 2 T_A = 125°C Min	Max	Subgroup 3 T_A = -55°C Min	Max	Unit
		A2	A1	A0	EN	IN1	IN7	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT								
$I_{D+(ON)}$	52	2.4 V	2.4 V	2.4 V	4.5 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	15 V	10 V	IN8 & OUT	-20	20	-500	500	-500	500	nA
	53	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	54	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	55	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	56	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	57	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	58	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	59	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	60	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
$I_{D-(ON)}$	61	0.8 V	0.8 V	0.8 V	"	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	IN1 & OUT	"	"	"	"	"	"	"
	62	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	63	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	64	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	65	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	66	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	67	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	68	"	2.4 V	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	69	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	70	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	71	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	72	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	73	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	74	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	75	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	76	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
I_{+}	77	0 V	0 V	0 V	5 V									"		V_{+}		14		14		14	mA
I_{-}	78	"	"	"	5 V									"		V_{-}	-14		-14		-14		"
I_{+SBY}	79	"	"	"	0 V									"		V_{+}		3.0		3.0		3.0	"
I_{-SBY}	80	"	"	"	0 V									"		V_{-}	-4.0		-4.0		-4.0		"
R_{DS1}	81	0.8 V	0.8 V	0.8 V	4.5 V	10 V								"	100 µA	IN1 & OUT		600		700		600	Ω
	82	"	"	2.4 V	"		10 V							"	"	IN2 & OUT		"		"		"	"
	83	"	2.4 V	0.8 V	"			10 V						"	"	IN3 & OUT		"		"		"	"
	84	"	2.4 V	2.4 V	"				10 V					"	"	IN4 & OUT		"		"		"	"
	85	2.4 V	0.8 V	0.8 V	"					10 V				"	"	IN5 & OUT		"		"		"	"
	86	"	0.8 V	2.4 V	"						10 V			"	"	IN6 & OUT		"		"		"	"
	87	"	2.4 V	0.8 V	"							10 V		"	"	IN7 & OUT		"		"		"	"
	88	"	2.4 V	2.4 V	"								10 V	"	"	IN8 & OUT		"		"		"	"
	89	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
	90	"	0.8 V	2.4 V	"									"	"	IN10 & OUT		"		"		"	"
	91	"	2.4 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
	92	"	2.4 V	2.4 V	"									"	"	IN12 & OUT		"		"		"	"
	93	2.4 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
	94	"	0.8 V	2.4 V	"									"	"	IN14 & OUT		"		"		"	"
	95	"	2.4 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
	96	"	2.4 V	2.4 V	"									"	"	IN16 & OUT		"		"		"	"
	97	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1 & OUT		"		"		"	"
	98	"	0.8 V	2.4 V	"		-10 V							"	"	IN2 & OUT		"		"		"	"
	99	"	2.4 V	0.8 V	"			-10 V						"	"	IN3 & OUT		"		"		"	"
	100	"	2.4 V	2.4 V	"				-10 V					"	"	IN4 & OUT		"		"		"	"
	101	2.4 V	0.8 V	0.8 V	"					-10 V				"	"	IN5 & OUT		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V_a	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3		Min	Max	Min	Max	Min	Max	
R_{OS1}		102	15 V											GND		0.8 V	IN6 & OUT		600		700		600	Ω
		103	"											"		"	IN7 & OUT		"		"		"	"
		104	"											"		"	IN8 & OUT		"		"		"	"
		105	"											"		2.4 V	IN9 & OUT		"		"		"	"
		106	"									-10 V	-10 V	"		"	IN10 & OUT		"		"		"	"
		107	"								-10 V			"		"	IN11 & OUT		"		"		"	"
		108	"							-10 V				"		"	IN12 & OUT		"		"		"	"
		109	"						-10 V					"		"	IN13 & OUT		"		"		"	"
		110	"					-10 V						"		"	IN14 & OUT		"		"		"	"
		111	"				-10 V							"		"	IN15 & OUT		"		"		"	"
		112	"			-10 V								"		"	IN16 & OUT		"		"		"	"
R_{OS2}		113-128 - Same terminal conditions as for tests 81 thru 96, except V_a = +10 V, V_S = +7.5 V and limits as shown.																1			1		1	kΩ
R_{OS2}		129-144 - Same terminal conditions as for tests 97 thru 112, except V_a = +10 V, V_S = -7.5 V and limits as shown.																1			1		1	kΩ
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	145	GND											GND		4/	A3		10					pF
	"	146	"											"			A2		"					"
	"	147	"											"			A1		"					"
		148															A0		"					"
I_{OS}	"	149	"											"		0 V	OUT		90					"
C_{IS}	"	150	"											"		"	IN1		10					"
	"	151	"											"		"	IN2		"					"
	"	152	"											"		"	IN3		"					"
	"	153	"											"		"	IN4		"					"
	"	154	"											"		"	IN5		"					"
	"	155	"											"		"	IN6		"					"
	"	156	"											"		"	IN7		"					"
	"	157	"											"		"	IN8		"					"
	"	158	"										4/	"		"	IN9		"					"
	"	159	"									4/		"		"	IN10		"					"
	"	160	"								4/			"		"	IN11		"					"
	"	161	"							4/				"		"	IN12		"					"
	"	162	"						4/					"		"	IN13		"					"
	"	163	"					4/						"		"	IN14		"					"
	"	164	"				4/							"		"	IN15		"					"
	"	165	"			4/								"		"	IN16		"					"
C_{EN}	"	166	"											"		"	EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/ 15 (A2)	16 (A1)	17 (A0)	18 (EN)	19 (IN1)	20 (IN2)	21 (IN3)	22 (IN4)	23 (IN5)	24 (IN6)	25 (IN7)	26 (IN8)	27 (V-)	28 (OUT)	Measured terminal	Test limits: Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
R_{DS1}	102	2.4 V	0.8 V	2.4 V	4.5 V						-10 V	-10 V	-10 V	-15 V	-100 µA	IN6 & OUT		600		700		600	Ω
	103	2.4 V	2.4 V	0.8 V	"									"	"	IN7 & OUT		"		"		"	"
	104	2.4 V	2.4 V	2.4 V	"									"	"	IN8 & OUT		"		"		"	"
	105	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
	106	"	0.8 V	2.4 V	"									"	"	IN10 & OUT		"		"		"	"
	107	"	2.4 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
	108	"	2.4 V	2.4 V	"									"	"	IN12 & OUT		"		"		"	"
	109	2.4 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
	110	"	0.8 V	2.4 V	"									"	"	IN14 & OUT		"		"		"	"
	111	"	2.4 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
	112	"	2.4 V	2.4 V	"									"	"	IN16 & OUT		"		"		"	"
R_{DS2}	113 thru 128 - Same terminal conditions as for tests 81 thru 96, except $V_* = +10$ V, $V_S = +7.5$ V and limits as shown.																	1		1		1	kΩ
R_{DS2}	129 thru 144 - Same terminal conditions as for tests 97 thru 112, except $V_* = +10$ V, $V_S = -7.5$ V and limits as shown.																	1		1		1	kΩ
																	Subgroup 4 T_A = 25°C Min	Subgroup 4 T_A = 25°C Max					
C_A	145	4/	4/	4/										GND		A3		10					pF
	146													"		A2		"					"
	147													"		A1		"					"
	148													"		A0		"					"
C_{OS}	149	0 V	0 V	0 V	0 V									"	5/	OUT		90					"
C_{IS}	150	"	"	"	"	4/	4/	4/	4/	4/	4/	4/	4/	"		IN1		10					"
	151	"	"	"	"									"		IN2		"					"
	152	"	"	"	"									"		IN3		"					"
	153	"	"	"	"									"		IN4		"					"
	154	"	"	"	"									"		IN5		"					"
	155	"	"	"	"									"		IN6		"					"
	156	"	"	"	"									"		IN7		"					"
	157	"	"	"	"									"		IN8		"					"
	158	"	"	"	"									"		IN9		"					"
	159	"	"	"	"									"		IN10		"					"
	160	"	"	"	"									"		IN11		"					"
	161	"	"	"	"									"		IN12		"					"
	162	"	"	"	"									"		IN13		"					"
	163	"	"	"	"									"		IN14		"					"
	164	"	"	"	"									"		IN15		"					"
	165	"	"	"	"									"		IN16		"					"
C_{EN}	166	"	"	"	4/									"		EN		"					"

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 17															Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14			Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3			Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 8	167	15 V			-10 V	GND	GND	GND	GND	GND	GND	GND	GND				ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	"	168	"			10 V	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	169	"			-10 V	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	170	"			10 V	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	171	"			GND	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	172	"			"	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	173	"			"	"	"	"	"	"	"	"	"				"		"		"		"	"
	"	174	"			"	"	"	"	"	"	"	"	"				"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	fig. 9	175	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND		GND		ENABLE TO OUT		"		"		"	"
	"	176	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"		"		"		"		"	"
	"	177	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"		"		"		"		"	"
	"	178	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"		"		"		"		"	"
																			Subgroup 12 T_A = 25°C						
																			Min	Max					
V_{C1}	fig. 17	179	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND		OUT	50						dB
V_{CT}	fig. 18	180	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND		OUT	50						dB
V_{CTE}	fig. 19	181	15 V											GND		IN		OUT		10					mV
																			Subgroup 13 T_A = 25°C						
																			Min	Max					
t_D	fig. 16	182	15 V			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND				OUT	5						ns
	"	183	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"				"	"						"
	"	184	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"				"	"						"
	"	185	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"				"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V_-	OUT		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	167	⎍	⎍	⎍	5 V	GND	GND	GND	GND	GND	GND	GND	GND	-15 V	OUT	ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	168	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	169	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	170	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	171	⎍	⎍	⎍	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	172	⎍	⎍	⎍	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	173	⎍	⎍	⎍	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"		"
	174	⎍	⎍	⎍	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"		"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	175	GND	GND	GND	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	ENABLE TO OUT		"		"		"	"
	176	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
	177	"	"	"	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
	178	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
																	Subgroup 12 T_A = 25°C						
																	Min	Max					
V_{ISO}	179	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CT}	180	GND	GND	GND	5 V	6/	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CTE}	181	IN	IN	IN	5 V	GND								-15 V	OUT	OUT		10					mV
																	Subgroup 13 T_A = 25°C						
																	Min	Max					
t_D	182	⎍	⎍	⎍	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUT	5						ns
	183	⎍	⎍	⎍	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"							"
	184	⎍	⎍	⎍	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"							"
	195	⎍	⎍	⎍	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"							"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1	GND											GND		1 mA	A3		1.5					V
		2	"											"			A2		"					"
		3	"											"			A1		"					"
		4	"											"			A0		"					"
		5	"											"			EN		"					"
$V_{IC(NEG)}$		6												"		-1 mA	A3	-1.5						"
		7												"			A2	"						"
		8												"			A1	"						"
		9												"			A0	"						"
		10												"			EN	"						"
I_{IH} 2/	3010	11	15 V											"		4.0 V	A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	uA
	"	12	"											"		GND	A2	"	"	"	"	"	"	"
	"	13	"											"		"	A1	"	"	"	"	"	"	"
	"	14	"											"		"	A0	"	"	"	"	"	"	"
	"	15	"											"		"	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	16	"											"		0.8 V	A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	17	"											"		5 V	A2	"	"	"	"	"	"	"
	"	18	"											"		"	A1	"	"	"	"	"	"	"
	"	19	"											"		"	A0	"	"	"	"	"	"	"
	"	20	"											"		"	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		21	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		0.8 V	IN1	-1	1	-50	50	-50	50	nA
		22	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		23	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		24	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		25	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		26	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		27	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		28	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		29	"			"	"	"	"	"	"	"	10 V	"		4.0 V	IN9	"	"	"	"	"	"	"
		30	"			"	"	"	"	"	"	10 V	-10 V	"		"	IN10	"	"	"	"	"	"	"
		31	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11	"	"	"	"	"	"	"
		32	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		33	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		34	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		35	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		36	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
		37	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1	"	"	"	"	"	"	"
		38	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		39	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		40	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		41	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		42	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		43	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		44	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		45	"			"	"	"	"	"	"	"	-10 V	"		4.0 V	IN9	"	"	"	"	"	"	"
		46	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10	"	"	"	"	"	"	"
		47	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11	"	"	"	"	"	"	"
		48	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		49	"			"	"	"	-10 V	10 V	10 V	"	"	"		"	IN13	"	"	"	"	"	"	"
		50	"			"	"	-10 V	10 V	10 V	10 V	"	"	"		"	IN14	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	Case x / Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1	20 IN2	21 IN3	22 IN4	23 IN5	24 IN6	25 IN7	26 IN8	27 V-	28 OUT	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
$V_{IC(POS)}$	1	1 mA														A3		1.5					V
	2		1 mA													A2		"					"
	3			1 mA												A1		"					"
	4				1 mA											A0		"					"
	5															EN		"					"
$V_{IC(NEG)}$	6	-1 mA												GND		A3	-1.5						"
	7		-1 mA											"		A2	"						"
	8			-1 mA										"		A1	"						"
	9				-1 mA									"		A0	"						"
	10													"		EN	"						"
I_{IH} 2/	11	GND	GND	GND	15 V									-15 V		A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	12	4.0 V	GND	GND	"									"		A2	"	"	"	"	"	"	"
	13	GND	4.0 V	GND	"									"		A1	"	"	"	"	"	"	"
	14	GND	GND	4.0 V	"									"		A0	"	"	"	"	"	"	"
	15	GND	GND	GND	4.0 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	16	5 V	5 V	5 V	5 V									"		A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	17	0.8 V	5 V	5 V	"									"		A2	"	"	"	"	"	"	"
	18	5 V	0.8 V	5 V	"									"		A1	"	"	"	"	"	"	"
	19	5 V	5 V	0.8 V	"									"		A0	"	"	"	"	"	"	"
	20	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	21	0.8 V	0.8 V	0.8 V	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1	-1	1	-50	50	-50	50	nA
	22	"	0.8 V	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	23	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	24	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	25	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	26	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	27	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7	"	"	"	"	"	"	"
	28	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8	"	"	"	"	"	"	"
	29	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9	"	"	"	"	"	"	"
	30	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	31	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	32	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	33	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	34	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	35	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	36	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
	37	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1	"	"	"	"	"	"	"
	38	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	39	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	40	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	41	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	"	IN5	"	"	"	"	"	"	"
	42	"	0.8 V	4.0 V	"	"	"	"	"	10 V	10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	43	"	4.0 V	0.8 V	"	"	"	"	"	"	"	-10 V	"	"	"	IN7	"	"	"	"	"	"	"
	44	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8	"	"	"	"	"	"	"
	45	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9	"	"	"	"	"	"	"
	46	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	47	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	48	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	49	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	50	4.0 V	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Case x	Terminal conditions 1/															Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14			Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3			Min	Max	Min	Max	Min	Max	
$I_{I(OFF)}$ 2/		51	15 V			10 V	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND		4.0 V	IN15		-1	1	-50	50	-50	50	nA
		52	"			-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		4.0 V	IN16		"	"	-50	50	"	"	"
$I_{O(OFF)}$		53	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	OUT		-20	20	-500	500	500	500	"
		54	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	OUT		"	"	"	"	"	"	"
$I_{O(ON)}$		55	"			"	"	"	"	"	"	"	"	"		"	IN1 & OUT		"	"	"	"	"	"	"
		56	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT		"	"	"	"	"	"	"
		57	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT		"	"	"	"	"	"	"
		58	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT		"	"	"	"	"	"	"
		59	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT		"	"	"	"	"	"	"
		60	"			"	"	"	"	"	"	"	"	"		"	IN6 & OUT		"	"	"	"	"	"	"
		61	"			"	"	"	"	"	"	"	"	"		"	IN7 & OUT		"	"	"	"	"	"	"
		62	"			"	"	"	"	"	"	"	"	"		"	IN8 & OUT		"	"	"	"	"	"	"
		63	"			"	"	"	"	"	"	"	10 V	"		4.0 V	IN9 & OUT		"	"	"	"	"	"	"
		64	"			"	"	"	"	"	"	10 V	-10 V	"		"	IN10 & OUT		"	"	"	"	"	"	"
		65	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11 & OUT		"	"	"	"	"	"	"
		66	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12 & OUT		"	"	"	"	"	"	"
		67	"			"	"	"	10 V	10 V	"	"	"	"		"	IN13 & OUT		"	"	"	"	"	"	"
		68	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14 & OUT		"	"	"	"	"	"	"
		69	"			"	10 V	-10 V	"	"	"	"	"	"		"	IN15 & OUT		"	"	"	"	"	"	"
		70	"			10 V	-10 V	"	"	"	"	"	"	"		"	IN16 & OUT		"	"	"	"	"	"	"
		71	"			-10 V	"	"	"	"	"	"	"	"		0.8 V	IN1 & OUT		"	"	"	"	"	"	"
		72	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT		"	"	"	"	"	"	"
		73	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT		"	"	"	"	"	"	"
		74	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT		"	"	"	"	"	"	"
		75	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT		"	"	"	"	"	"	"
		76	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"	IN6 & OUT		"	"	"	"	"	"	"
		77	"			"	"	"	"	"	"	"	10 V	"		"	IN7 & OUT		"	"	"	"	"	"	"
		78	"			"	"	"	"	"	"	"	10 V	"		"	IN8 & OUT		"	"	"	"	"	"	"
		79	"			"	"	"	"	"	"	"	-10 V	"		4.0 V	IN9 & OUT		"	"	"	"	"	"	"
		80	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10 & OUT		"	"	"	"	"	"	"
		81	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11 & OUT		"	"	"	"	"	"	"
		82	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12 & OUT		"	"	"	"	"	"	"
		83	"			"	"	"	-10 V	10 V	"	"	"	"		"	IN13 & OUT		"	"	"	"	"	"	"
		84	"			"	"	10 V	10 V	"	"	"	"	"		"	IN14 & OUT		"	"	"	"	"	"	"
		85	"			"	-10 V	10 V	10 V	"	"	"	"	"		"	IN15 & OUT		"	"	"	"	"	"	"
		86	"			-10 V	10 V	10 V	10 V	"	"	"	"	"		"	IN16 & OUT		"	"	"	"	"	"	"
I^+		87	"											"		0 V	V^+			2.0		2.0		2.0	mA
I^-		88	"											"		"	V^-		-1		-1		-1		"
I^+_{SBY}		89	"											"		"	V^+			2.0		2.0		2.0	"
I^-_{SBY}		90	"											"		"	V^-		-1.0		-1.0		-1.0		"
$I_{O^+(OFF)}$ open voltage		91	"											"		0.8 V	OUT		-2.0	2.0	-2.0	2.0	-2.0	2.0	uA
		92	"											"		"	"		"	"	"	"	"	"	"
		93	"											"		"	"		"	"	"	"	"	"	"
		94	"											"		"	"		"	"	"	"	"	"	"
		95	"											"		"	"		"	"	"	"	"	"	"
		96	"											"		"	"		"	"	"	"	"	"	"
		97	"											"		"	"		"	"	"	"	"	"	"
		98	"											"		"	"		"	"	"	"	"	"	"
		99	"										33 V	"		4.0 V	"		"	"	"	"	"	"	"
		100	"									33 V		"		4.0 V	"		"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	Case A	Terminal conditions 1/														Measured terminal	Test Limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$I_{I(OFF)}$ 3/	51	4.0 V	4.0 V	0.8 V	0.8 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	10 V	IN15	-1	1	-50	50	-50	50	nA
	52	4.0 V	4.0 V	4.0 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN16	"	"	-50	50	"	"	"
$I_{I(OFF)}$	53	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	OUT	-20	20	-500	500	-500	500	"
	54	"	"	0.8 V	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUT	"	"	"	"	"	"	"
$I_{I(ON)}$	55	"	"	0.8 V	4.0 V	10 V	-10 V	-10 V	-10 V	"	"	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
	56	"	"	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	57	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	58	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	59	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	60	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	61	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	62	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	63	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	64	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	65	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	66	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	67	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	68	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	69	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	70	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
	71	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	IN1 & OUT	"	"	"	"	"	"	"
	72	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	73	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	74	"	4.0 V	4.0 V	"	"	10 V	10 V	-10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	75	4.0 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	-10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	76	"	0.8 V	4.0 V	"	"	"	"	"	"	-10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	77	"	4.0 V	0.8 V	"	"	"	"	"	"	"	-10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	78	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	79	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN9 & OUT	"	"	"	"	"	"	"
	80	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	81	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	82	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	83	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	84	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	85	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	86	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
I_{I+}	87	0 V	0 V	0 V	5.0 V									"		V_{I+}		2.0		2.0		2.0	mA
I_{I-}	88	"	"	"	"									"		V_{I-}	-1		-1		-1		"
I_{I+SBY}	89	"	"	"	0 V									"		V_{I+}		2.0		2.0		2.0	"
I_{I-SBY}	90	"	"	"	"									"		V_{I-}	-1.0		-1.0		-1.0		"
$I_{O+(OFF)}$ over-voltage	91	0.8 V	0.8 V	0.8 V	0.8 V	33 V	33 V	33 V	33 V	33 V	33 V	33 V	33 V	"	0 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	uA
	92	"	"	4.0 V	"									"	"	"	"	"	"	"	"	"	"
	93	"	4.0 V	0.8 V	"									"	"	"	"	"	"	"	"	"	"
	94	"	4.0 V	4.0 V	"									"	"	"	"	"	"	"	"	"	"
	95	4.0 V	0.8 V	0.8 V	"									"	"	"	"	"	"	"	"	"	"
	96	"	0.8 V	4.0 V	"									"	"	"	"	"	"	"	"	"	"
	97	"	4.0 V	0.8 V	"									"	"	"	"	"	"	"	"	"	"
	98	"	4.0 V	4.0 V	"									"	"	"	"	"	"	"	"	"	"
	99	0.8 V	0.8 V	0.8 V	"									"	"	"	"	"	"	"	"	"	"
	100	0.8 V	0.8 V	4.0 V	"									"	"	"	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V_S^*	VC	VC	IN15	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A1		Min	Max	Min	Max	Min	Max	
$I_{D^*(OFF)}$ over-voltage		101	15 V							33 V	33 V			GND		4.0 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		102	"						33 V					"		"	"	"	"	"	"	"	"	"
		103	"					33 V						"		"	"	"	"	"	"	"	"	"
		104	"				33 V							"		"	"	"	"	"	"	"	"	"
		105	"			33 V								"		"	"	"	"	"	"	"	"	"
		106	"											"		"	"	"	"	"	"	"	"	"
$I_{D^-(OFF)}$ over-voltage		107	"											"		0.8 V	"	"	"	"	"	"	"	"
		108	"											"		"	"	"	"	"	"	"	"	"
		109	"											"		"	"	"	"	"	"	"	"	"
		110	"											"		"	"	"	"	"	"	"	"	"
		111	"											"		"	"	"	"	"	"	"	"	"
		112	"											"		"	"	"	"	"	"	"	"	"
		113	"											"		"	"	"	"	"	"	"	"	"
		114	"											"		"	"	"	"	"	"	"	"	"
		115	"										-33 V	"		4.0 V	"	"	"	"	"	"	"	"
		116	"									-33 V		"		"	"	"	"	"	"	"	"	"
		117	"								-33 V			"		"	"	"	"	"	"	"	"	"
		118	"							-33 V				"		"	"	"	"	"	"	"	"	"
		119	"						-33 V					"		"	"	"	"	"	"	"	"	"
		120	"					-33 V						"		"	"	"	"	"	"	"	"	"
		121	"				-33 V							"		"	"	"	"	"	"	"	"	"
		122	"			-33 V								"		"	"	"	"	"	"	"	"	"
R_{DS1}		123	"											"		0.8 V	IN1 & OUT		1.5				1.5	kΩ
		124	"											"		"	IN2 & OUT		"				"	"
		125	"											"		"	IN3 & OUT		"				"	"
		126	"											"		"	IN4 & OUT		"				"	"
		127	"											"		"	IN5 & OUT		"				"	"
		128	"											"		"	IN6 & OUT		"				"	"
		129	"											"		"	IN7 & OUT		"				"	"
		130	"											"		"	IN8 & OUT		"				"	"
		131	"										10 V	"		4.0 V	IN9 & OUT		"				"	"
		132	"									10 V		"		"	IN10 & OUT		"				"	"
		133	"								10 V			"		"	IN11 & OUT		"				"	"
		134	"							10 V				"		"	IN12 & OUT		"				"	"
		135	"						10 V					"		"	IN13 & OUT		"				"	"
		136	"					10 V						"		"	IN14 & OUT		"				"	"
		137	"				10 V							"		"	IN15 & OUT		"				"	"
		138	"			10 V								"		"	IN16 & OUT		"				"	"
		139	"											"		0.8 V	IN1 & OUT		"				"	"
		140	"											"		"	IN2 & OUT		"				"	"
		141	"											"		"	IN3 & OUT		"				"	"
		142	"											"		"	IN4 & OUT		"				"	"
		143	"											"		"	IN5 & OUT		"				"	"
		144	"											"		"	IN6 & OUT		"				"	"
		145	"											"		"	IN7 & OUT		"				"	"
		146	"											"		"	IN8 & OUT		"				"	"
		147	"										10 V	"		4.0 V	IN9 & OUT		"				"	"
		148	"									-10 V		"		"	IN10 & OUT		"				"	"
		149	"								-10 V			"		"	IN11 & OUT		"				"	"
		150	"							-10 V				"		"	IN12 & OUT		"				"	"
		151	"						-10 V					"		"	IN13 & OUT		"				"	"
		152	"					-10 V						"		"	IN14 & OUT		"				"	"
		153	"				-10 V							"		"	IN15 & OUT		"				"	"
		154	"			-10 V								"		"	IN16 & OUT		"				"	"
R_{DS2}	155 thru 170 - Same terminal conditions as tests 123 thru 138, except V_S^* = +10 V, V_S = +7.5 V, and limits as shown.																		2.4		2.4		2.4	"
R_{DS2}	171 thru 186 - Same terminal conditions as tests 139 thru 154, except V_S^* = +10 V, V_S = -7.5 V, and limits as shown.																		2.4		2.4		2.4	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	Case C Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1	20 IN2	21 IN3	22 IN4	23 IN5	24 IN6	25 IN7	26 IN8	27 V-	28 V+	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Max	Subgroup 2 T_A = 125°C Min	Max	Subgroup 3 T_A = -55°C Min	Max	Unit
$I_{D+(OFF)}$ overvoltage	101	0.8 V	4.0 V	0.8 V	0.8 V									-15 V		OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
	102	0.8 V	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	103	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	104	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	105	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	106	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
$I_{D-(OFF)}$ overvoltage	107	0.8 V	0.8 V	0.8 V	"	-33 V								"		"	"	"	"	"	"	"	"
	108	"	0.8 V	4.0 V	"		-33 V							"		"	"	"	"	"	"	"	"
	109	"	4.0 V	0.8 V	"			-33 V						"		"	"	"	"	"	"	"	"
	110	"	4.0 V	4.0 V	"				-33 V					"		"	"	"	"	"	"	"	"
	111	4.0 V	0.8 V	0.8 V	"					-33 V				"		"	"	"	"	"	"	"	"
	112	"	0.8 V	4.0 V	"						-33 V			"		"	"	"	"	"	"	"	"
	113	"	4.0 V	0.8 V	"							-33 V		"		"	"	"	"	"	"	"	"
	114	"	4.0 V	4.0 V	"								-33 V	"		"	"	"	"	"	"	"	"
	115	0.8 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	116	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	117	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	118	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	119	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	120	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	121	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	122	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
R_{DS1}	123	0.8 V	0.8 V	0.8 V	4.0 V	10 V								"	100 µA	IN1 & OUT		1.5				1.5	kΩ
	124	"	0.8 V	4.0 V	"		10 V							"	"	IN2 & OUT		"				"	"
	125	"	4.0 V	0.8 V	"			10 V						"	"	IN3 & OUT		"				"	"
	126	"	4.0 V	4.0 V	"				10 V					"	"	IN4 & OUT		"				"	"
	127	4.0 V	0.8 V	0.8 V	"					10 V				"	"	IN5 & OUT		"				"	"
	128	"	0.8 V	4.0 V	"						10 V			"	"	IN6 & OUT		"				"	"
	129	"	4.0 V	0.8 V	"							10 V		"	"	IN7 & OUT		"				"	"
	130	"	4.0 V	4.0 V	"								10 V	"	"	IN8 & OUT		"				"	"
	131	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"				"	"
	132	"	0.8 V	4.0 V	"									"	"	IN10 & OUT		"				"	"
	133	"	4.0 V	0.8 V	"									"	"	IN11 & OUT		"				"	"
	134	"	4.0 V	4.0 V	"									"	"	IN12 & OUT		"				"	"
	135	4.0 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"				"	"
	136	"	0.8 V	4.0 V	"									"	"	IN14 & OUT		"				"	"
	137	"	4.0 V	0.8 V	"									"	"	IN15 & OUT		"				"	"
	138	"	4.0 V	4.0 V	"									"	"	IN16 & OUT		"				"	"
	139	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1 & OUT		"				"	"
	140	"	0.8 V	4.0 V	"		-10 V							"	"	IN2 & OUT		"				"	"
	141	"	4.0 V	0.8 V	"			-10 V						"	"	IN3 & OUT		"				"	"
	142	"	4.0 V	4.0 V	"				-10 V					"	"	IN4 & OUT		"				"	"
	143	4.0 V	0.8 V	0.8 V	"					-10 V				"	"	IN5 & OUT		"				"	"
	144	"	0.8 V	4.0 V	"						-10 V			"	"	IN6 & OUT		"				"	"
	145	"	4.0 V	0.8 V	"							-10 V		"	"	IN7 & OUT		"				"	"
	146	"	4.0 V	4.0 V	"								-10 V	"	"	IN8 & OUT		"				"	"
	147	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"				"	"
	148	"	0.8 V	4.0 V	"									"	"	IN10 & OUT		"				"	"
	149	"	4.0 V	0.8 V	"									"	"	IN11 & OUT		"				"	"
	150	"	4.0 V	4.0 V	"									"	"	IN12 & OUT		"				"	"
	151	4.0 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"				"	"
	152	"	0.8 V	4.0 V	"									"	"	IN14 & OUT		"				"	"
	153	"	4.0 V	0.8 V	"									"	"	IN15 & OUT		"				"	"
	154	"	4.0 V	4.0 V	"									"	"	IN16 & OUT		"				"	"
R_{DS2}	155 thru 170 - Same terminal conditions as tests 123 thru 138, except V_R = ±10 V, V_S = +7.5 V, and limits as shown.																	2.4		2.4		2.4	"
R_{DS2}	171 thru 186 - Same terminal conditions as tests 139 thru 154, except V_R = ±10 V, V_S = -7.5 V, and limits as shown.																	2.4		2.4		2.4	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Case x	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 4 T_A = 25°C						
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max					
C_A	3012	187	GND											GND		4/	A3		10					pF
	"	188	"											"			A2		"					"
	"	189	"											"			A1		"					"
	"	190	"											"			A0		"					"
C_{OS}	"	191	"											"		0 V	OUT		85					"
C_{IS}	"	192	"											"		"	IN1		10					"
	"	193	"											"		"	IN2		"					"
	"	194	"											"		"	IN3		"					"
	"	195	"											"		"	IN4		"					"
	"	196	"											"		"	IN5		"					"
	"	197	"											"		"	IN6		"					"
	"	198	"											"		"	IN7		"					"
	"	199	"											"		"	IN8		"					"
	"	200	"										4/	"		"	IN9		"					"
	"	201	"									4/		"		"	IN10		"					"
	"	202	"								4/			"		"	IN11		"					"
	"	203	"							4/				"		"	IN12		"					"
	"	204	"						4/					"		"	IN13		"					"
	"	205	"					4/						"		"	IN14		"					"
	"	206	"				4/							"		"	IN15		"					"
	"	207	"			4/								"		"	IN16		"					"
C_{EN}	"	208	"											"					"					"
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 8	209	15 V			-10 V	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	"	210	"			10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	211	"			-10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	212	"			10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	213	"			GND	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	214	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	215	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	216	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
$t_{ON(EN)}$ and $t_{ON(EN)}$	fig. 9	217	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		GND	"		"		"		"	"
	"	218	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"	"		"		"		"	"
	"	219	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	"		"		"		"	"
	"	220	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"	"		"		"		"	"

See footnotes at end of table.

MIL-M-38510/19OC

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	Case X Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1	20 IN2	21 IN3	22 IN4	23 IN5	24 IN6	25 IN7	26 IN8	27 V_-	28 OUT	Measured terminal	Test limits Subgroup 4 T_A = 25°C Min	Max	Unit
C_A	187	4/												GND		A3		10	pF
	188		4/											"		A2		"	"
	189			4/										"		A1		"	"
	190													"		A0		"	"
C_{OS}	191	0 V	0 V	0 V	0 V									"	5/	OUT		85	"
C_{IS}	192	"	"	"	"	4/								"		IN1		10	"
	193	"	"	"	"		4/							"		IN2		"	"
	194	"	"	"	"			4/						"		IN3		"	"
	195	"	"	"	"				4/					"		IN4		"	"
	196	"	"	"	"					4/				"		IN5		"	"
	197	"	"	"	"						4/			"		IN6		"	"
	198	"	"	"	"							4/		"		IN7		"	"
	199	"	"	"	"								4/	"		IN8		"	"
	200	"	"	"	"									"	0 V	IN9		"	"
	201	"	"	"	"									"	"	IN10		"	"
	202	"	"	"	"									"	"	IN11		"	"
	203	"	"	"	"									"	"	IN12		"	"
	204	"	"	"	"									"	"	IN13		"	"
	205	"	"	"	"									"	"	IN14		"	"
	206	"	"	"	"									"	"	IN15		"	"
	207	"	"	"	"									"	"	IN16		"	"
C_{EN}	208	"			4/									GND		EN		"	"

Symbol	Case X Test no.	15 A2	16 A1	17 A0	18 EN	19 IN1	20 IN2	21 IN3	22 IN4	23 IN5	24 IN6	25 IN7	26 IN8	27 V_-	28 OUT	Measured terminal	Subgroup 9 T_A = 25°C Min	Max	Subgroup 10 T_A = 125°C Min	Max	Subgroup 11 T_A = -55°C Min	Max	Unit
$t_{ON(A)}$ and $t_{OFF(A)}$	209				5 V	GND	GND	GND	GND	GND	GND	GND	GND	-15 V	OUT	ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	210				"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	211				"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	212				"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	213				"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	214				"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	215				"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	216				"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	217	GND	GND	GND	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
	218	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
	219	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
	220	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits							Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 12 T_A = 25°C							
		Test no.	V^+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max						
$V_{I(D)}$	fig. 17	221	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50							dB
A_{VT}	fig. 18	222	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50							dB
V_{OTE}	fig. 19	223	15 V											GND		IN	OUT		10						mV
																		Subgroup 13 T_A = 25°C							
																		Min	Max						
$t_{(D)}$	fig. 16	224	15 V			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND			OUT	5							ns
	"	225	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"							"
	"	226	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"	"							"
	"	227	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"							"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.

Symbol	Case X / Test no.	Terminal conditions 17														Measured terminal	Test limits							Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 12 T_A = 25°C							
		A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max						
V_{ISO}	221	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50							dB
V_{CT}	222	GND	GND	GND	5 V	6/	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50							dB
V_{CTE}	223	IN	IN	IN	5 V	GND									OUT	OUT		10						mV
																	Subgroup 13 T_A = 25°C							
																	Min	Max						
t_D	224	⌐	⌐	⌐	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUT	5							ns
	225	⌐	⌐	⌐	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"								"
	226	⌐	⌐	⌐	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"								"
	227	⌐	⌐	⌐	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"								"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Symbol	MIL-STD-883 method	Case X Test No.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 Max	Unit
I_{IH} 2/	3010	1	15 V											GND			A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
		2	"											"			A1	"	"	"	"	"	"	"
		3	"											"			A0	"	"	"	"	"	"	"
		4	"											"			EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	5	"											"			A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
		6	"											"			A1	"	"	"	"	"	"	"
		7	"											"			A0	"	"	"	"	"	"	"
		8	"											"			EN	"	"	"	"	"	"	"
$I_{D(OFF)}$		9	"	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	"			IN1B	-1	1	-50	50	-50	50	nA
		10	"	"		"	"	"	"	-10 V	-10 V	-10 V	-10 V	"			IN2B	"	"	"	"	"	"	"
		11	"	"		"	"	"	"	-10 V	-10 V	10 V	10 V	"			IN3B	"	"	"	"	"	"	"
		12	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		13	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		14	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		15	"	"		"	10 V	10 V	"	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		16	"	"		10 V	-10 V	"	"	"	"	"	"	"			IN8B	"	"	"	"	"	"	"
		17	"	"		-10 V	"	"	"	"	"	"	"	"			IN1A	"	"	"	"	"	"	"
		18	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		19	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		20	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		21	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		22	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		23	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		24	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		25	"	10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"			IN1B	"	"	"	"	"	"	"
		26	"	"		"	"	"	"	10 V	10 V	-10 V	10 V	"			IN2B	"	"	"	"	"	"	"
		27	"	"		"	"	"	"	10 V	-10 V	10 V	"	"			IN3B	"	"	"	"	"	"	"
		28	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		29	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		30	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		31	"	"		"	-10 V	10 V	"	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		32	"	"		-10 V	10 V	"	"	"	"	"	"	"			IN8B	"	"	"	"	"	"	"
		33	"	"		10 V	"	"	"	"	"	"	"	"			IN1A	"	"	"	"	"	"	"
		34	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		35	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		36	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		37	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		38	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		39	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		40	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
$I_{D(OFF)}$		41	"	"		"	"	"	"	"	"	"	"	"			OUTA	-10	10	-250	250	-250	250	"
		42	"	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTA	"	"	"	"	"	"	"
		43	"	-10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"	"	"	"	"	"	"
		44	"	10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		45	"	-10 V		"	"	"	"	"	"	"	"	"			IN1A & OUTA	"	"	"	"	"	"	"
		46	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		47	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		48	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		49	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		50	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
I_{IH} 2/	1	2.4 V	GND	GND	5.0 V									-15 V		A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	2	GND	2.4 V	GND	5.0 V									"		A1	"	"	"	"	"	"	"
	3	GND	GND	2.4 V	5.0 V									"		A0	"	"	"	"	"	"	"
	4	GND	GND	GND	4.5 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	5	0.8 V	5.0 V	5.0 V	5.0 V									"		A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	6	5.0 V	0.8 V	5.0 V	5.0 V									"		A1	"	"	"	"	"	"	"
	7	5.0 V	5.0 V	0.8 V	5.0 V									"		A0	"	"	"	"	"	"	"
	8	5.0 V	5.0 V	5.0 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	9	0.8 V	0.8 V	0.8 V	0.8 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1B	-1	1	-50	50	-50	50	nA
	10	"	0.8 V	2.4 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN2B	"	"	"	"	"	"	"
	11	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	12	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	13	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	14	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	15	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	16	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	17	0.8 V	0.8 V	0.8 V	"	10 V	"	"	"	"	"	"	"	"	"	IN1A	"	"	"	"	"	"	"
	18	"	0.8 V	2.4 V	"	-10 V	10 V	"	"	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	19	"	2.4 V	0.8 V	"	"	-10 V	10 V	"	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	20	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	21	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	22	"	0.8 V	2.4 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	23	"	2.4 V	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	24	"	2.4 V	2.4 V	"	"	"	"	"	-10 V	-10 V	-10 V	10 V	"	"	IN8A	"	"	"	"	"	"	"
	25	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	10 V	IN1B	"	"	"	"	"	"	"
	26	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	27	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	28	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	29	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	30	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	31	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	32	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	33	0.8 V	0.8 V	0.8 V	"	-10 V	"	"	"	"	"	"	"	"	"	IN1A	"	"	"	"	"	"	"
	34	"	0.8 V	2.4 V	"	10 V	-10 V	"	"	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	35	"	2.4 V	0.8 V	"	"	10 V	-10 V	"	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	36	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	37	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	38	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	39	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	40	"	2.4 V	2.4 V	"	"	"	"	"	"	10 V	10 V	-10 V	"	"	IN8A	"	"	"	"	"	"	"
$I_{D(OFF)}$	41	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	10 V	10 V	10 V	"	-10 V	OUTA	-10	10	-250	250	-250	250	"
	42	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUTA	"	"	"	"	"	"	"
	43	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	OUTB	"	"	"	"	"	"	"
	44	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$	45	"	"	"	4.5 V	10 V	-10 V	-10 V	-10 V	"	"	"	"	"	10 V	IN1A & OUTA	"	"	"	"	"	"	"
	46	"	"	2.4 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	47	"	2.4 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	48	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	49	2.4 V	0.8 V	0.8 V	"	"	"	-10 V	-10 V	10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	50	2.4 V	0.8 V	2.4 V	"	"	"	-10 V	-10 V	-10 V	10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"

See footnotes at end of table.

MIL-M-38510/13502

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test Limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$	8	51	15 V	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND			IN7A & OUTA	-10	10	-250	250	-250	250	nA
		52	"	-10 V		"	"	"	"	"	"	-10 V	-10 V	"			IN8A & OUTA	"	"	"	"	"	"	"
		53	"	10 V		"	"	"	"	"	"	-10 V	10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		54	"	"		"	"	"	"	"	"	10 V	-10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		55	"	"		"	"	"	"	"	10 V	-10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		56	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		57	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		58	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		59	"	"		"	10 V	-10 V	-10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		60	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
		61	"	"		"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		62	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		63	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		64	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		65	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		66	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		67	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		68	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTA	"	"	"	"	"	"	"
		69	"	-10 V		"	"	"	"	"	"	"	-10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		70	"	"		"	"	"	"	"	"	-10 V	10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		71	"	"		"	"	"	"	"	-10 V	10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		72	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		73	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		74	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		75	"	"		"	-10 V	10 V	10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		76	"	"		-10 V	10 V	10 V	10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
I^+		77	"											"			V^+		14		14		14	mA
I^-		78	"											"			V^-	-14		-14		-14		"
I^+_{SBY}		79	"											"			V^+		3.0		3.0		3.0	"
I^-_{SBY}		80	"											"			V^-	-4.0		-4.0		-4.0		"
R_{DS1}		81	"											"			IN1A & OUTA		600		700		600	Ω
		82	"											"			IN2A & OUTA		"		"		"	"
		83	"											"			IN3A & OUTA		"		"		"	"
		84	"											"			IN4A & OUTA		"		"		"	"
		85	"											"			IN5A & OUTA		"		"		"	"
		86	"											"			IN6A & OUTA		"		"		"	"
		87	"											"			IN7A & OUTA		"		"		"	"
		88	"											"			IN8A & OUTA		"		"		"	"
		89	"	1 mA									10 V	"			IN1B & OUTB		"		"		"	"
		90	"	"								10 V		"			IN2B & OUTB		"		"		"	"
		91	"	"							10 V			"			IN3B & OUTB		"		"		"	"
		92	"	"						10 V				"			IN4B & OUTB		"		"		"	"
		93	"	"					10 V					"			IN5B & OUTB		"		"		"	"
		94	"	"				10 V						"			IN6B & OUTB		"		"		"	"
		95	"	"			10 V							"			IN7B & OUTB		"		"		"	"
		96	"			10 V								"			IN8B & OUTB		"		"		"	"
		97	"											"			IN1A & OUTA		"		"		"	"
		98	"											"			IN2A & OUTA		"		"		"	"
		99	"											"			IN3A & OUTA		"		"		"	"
		100	"											"			IN4A & OUTA		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	Case A	Terminal conditions 1/														Measured terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$	51	2.4 V	2.4 V	0.8 V	4.5 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-15 V	10 V	IN7A & OUTA	-10	10	-250	250	-250	250	nA
	52	2.4 V	2.4 V	2.4 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN8A & OUTA	"	"	"	"	"	"	"
	53	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	-10 V	IN1B & OUTB	"	"	"	"	"	"	"
	54	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	55	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	56	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	57	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	58	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	59	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	60	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
	61	0.8 V	0.8 V	0.8 V	"	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
	62	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	63	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	64	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	65	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	66	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
	67	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
	68	"	2.4 V	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A & OUTA	"	"	"	"	"	"	"
	69	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN1B & OUTB	"	"	"	"	"	"	"
	70	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	71	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	72	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	73	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	74	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	75	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	76	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
I^+	77	0 V	0 V	0 V	5.0 V									"		V^+		14		14		14	mA
I^-	78	"	"	"	5.0 V									"		V^-	-14		-14		-14		"
I^+_{SBY}	79	"	"	"	0 V									"		V^+		3.0		3.0		3.0	"
I^-_{SBY}	80	"	"	"	0 V									"		V^-	-4.0		-4.0		-4.0		"
R_{DS}	81	0.8 V	0.8 V	0.8 V	4.5 V	10 V								"	1 mA	IN1A & OUTA		600		700		600	Ω
	82	"	"	2.4 V	"		10 V							"	"	IN2A & OUTA		"		"		"	"
	83	"	2.4 V	0.8 V	"			10 V						"	"	IN3A & OUTA		"		"		"	"
	84	"	2.4 V	2.4 V	"				10 V					"	"	IN4A & OUTA		"		"		"	"
	85	2.4 V	0.8 V	0.8 V	"					10 V				"	"	IN5A & OUTA		"		"		"	"
	86	"	0.8 V	2.4 V	"						10 V			"	"	IN6A & OUTA		"		"		"	"
	87	"	2.4 V	0.8 V	"							10 V		"	"	IN7A & OUTA		"		"		"	"
	88	"	2.4 V	2.4 V	"								10 V	"	"	IN8A & OUTA		"		"		"	"
	89	0.8 V	0.8 V	0.8 V	"									"	"	IN1B & OUTB		"		"		"	"
	90	"	0.8 V	2.4 V	"									"	"	IN2B & OUTB		"		"		"	"
	91	"	2.4 V	0.8 V	"									"	"	IN3B & OUTB		"		"		"	"
	92	"	2.4 V	2.4 V	"									"	"	IN4B & OUTB		"		"		"	"
	93	2.4 V	0.8 V	0.8 V	"									"	"	IN5B & OUTB		"		"		"	"
	94	"	0.8 V	2.4 V	"									"	"	IN6B & OUTB		"		"		"	"
	95	"	2.4 V	0.8 V	"									"	"	IN7B & OUTB		"		"		"	"
	96	"	2.4 V	2.4 V	"									"	"	IN8B & OUTB		"		"		"	"
	97	0.8 V	0.8 V	0.8 V	"	-10 V								"	-1 mA	IN1A & OUTA		"		"		"	"
	98	"	0.8 V	2.4 V	"		-10 V							"	"	IN2A & OUTA		"		"		"	"
	99	"	2.4 V	0.8 V	"			-10 V						"	"	IN3A & OUTA		"		"		"	"
	100	"	2.4 V	2.4 V	"				-10 V					"	"	IN4A & OUTA		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V_+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
R_{OS1}		101	15 V											GND			IN5A & OUTA		600		700		600	Ω
		102	"											"			IN6A & OUTA		"		"		"	"
		103	"											"			IN7A & OUTA		"		"		"	"
		104	"											"			IN8A & OUTA		"		"		"	"
		105	"	-1 mA		-10 V								"			IN1B & OUTB		"		"		"	"
		106	"	"		"	-10 V							"			IN2B & OUTB		"		"		"	"
		107	"	"		"	"	-10 V						"			IN3B & OUTB		"		"		"	"
		108	"	"		"	"	"	-10 V					"			IN4B & OUTB		"		"		"	"
		109	"	"		"	"	"	"	-10 V				"			IN5B & OUTB		"		"		"	"
		110	"	"		"	"	"	"	"	-10 V			"			IN6B & OUTB		"		"		"	"
		111	"	"		"	"	"	"	"	"	-10 V		"			IN7B & OUTB		"		"		"	"
		112	"	"		"	"	"	"	"	"	"	-10 V	"			IN8B & OUTB		"		"		"	"
R_{OS2}	113 thru 128 - Same terminal conditions as for tests 81 thru 96, except V_+ = +10 V, V_S = +7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ
R_{OS2}	129 thru 144 - Same terminal conditions as for tests 97 thru 112, except V_+ = +10 V, V_S = -7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ

																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	145	GND											GND			A2		10					pF
	"	146	"											"			A1		10					"
	"	147	"											"			A0		10					"
C_{OS}	"	148	"											"			OUTA		50					"
	"	149	"	5/										"			OUTB		50					"
C_{IS}	"	150	"											"			IN1A		10					"
	"	151	"											"			IN2A		"					"
	"	152	"											"			IN3A		"					"
	"	153	"											"			IN4A		"					"
	"	154	"											"			IN5A		"					"
	"	155	"											"			IN6A		"					"
	"	156	"											"			IN7A		"					"
	"	157	"											"			IN8A		"					"
	"	158	"										4/	"			IN1B		"					"
	"	159	"									4/		"			IN2B		"					"
	"	160	"								4/			"			IN3B		"					"
	"	161	"							4/				"			IN4B		"					"
	"	162	"						4/					"			IN5B		"					"
	"	163	"					4/						"			IN6B		"					"
	"	164	"				4/							"			IN7B		"					"
	"	165	"			4/								"			IN8B		"					"
C_{EN}	"	166	"											"			EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	Case X Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test Limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
R_{DS1}	101	2.4 V	0.8 V	0.8 V	2.4 V					-10 V				-15 V	-1 mA	IN5A & OUTA		600		700		600	Ω
	102	"	0.8 V	2.4 V	"						-10 V			"	"	IN6A & OUTA		"		"		"	"
	103	"	2.4 V	0.8 V	"							-10 V		"	"	IN7A & OUTA		"		"		"	"
	104	"	2.4 V	2.4 V	"								-10 V	"	"	IN8A & OUTB		"		"		"	"
	105	0.8 V	0.8 V	0.8 V	"									"	"	IN1B & OUTB		"		"		"	"
	106	"	0.8 V	2.4 V	"									"	"	IN2B & OUTB		"		"		"	"
	107	"	2.4 V	0.8 V	"									"	"	IN3B & OUTB		"		"		"	"
	108	"	2.4 V	2.4 V	"									"	"	IN4B & OUTB		"		"		"	"
	109	2.4 V	0.8 V	0.8 V	"									"	"	IN5B & OUTB		"		"		"	"
	110	"	0.8 V	2.4 V	"									"	"	IN6B & OUTB		"		"		"	"
	111	"	2.4 V	0.8 V	"									"	"	IN7B & OUTB		"		"		"	"
	112	"	2.4 V	2.4 V	"									"	"	IN8B & OUTB		"		"		"	"
R_{DS2}	113 thru 128 - Same terminal conditions as for tests 81 thru 96, except $V_* = +10$ V, $V_S = +7.5$ V, and limits as shown.																	1.0		1.0		1.0	kΩ
R_{DS2}	129 thru 144 - Same terminal conditions as for tests 97 thru 112, except $V_* = +10$V, $V_S = -7.5$ V, and limits as shown.																	1.0		1.0		1.0	kΩ
																	Subgroup 4 T_A = 25°C Min	Subgroup 4 T_A = 25°C Max					
C_A	145	4/												GND		A2		10					pF
	146		4/											"		A1		10					"
	147			4/										"		A0		10					"
C_{OS}	148	0 V	0 V	0 V	0 V									"	5/	OUTA		50					"
	149	"	"	"	"									"	"	OUTB		50					"
C_{IS}	150	"	"	"	"	4/	4/	4/	4/	4/	4/	4/	4/	"		IN1A		10					"
	151	"	"	"	"									"		IN2A		"					"
	152	"	"	"	"									"		IN3A		"					"
	153	"	"	"	"									"		IN4A		"					"
	154	"	"	"	"									"		IN5A		"					"
	155	"	"	"	"									"		IN6A		"					"
	156	"	"	"	"									"		IN7A		"					"
	157	"	"	"	"									"		IN8A		"					"
	158	"	"	"	"									"		IN1B		"					"
	159	"	"	"	"									"		IN2B		"					"
	160	"	"	"	"									"		IN3B		"					"
	161	"	"	"	"									"		IN4B		"					"
	162	"	"	"	"									"		IN5B		"					"
	163	"	"	"	"									"		IN6B		"					"
	164	"	"	"	"									"		IN7B		"					"
	165	"	"	"	"									"		IN8B		"					"
C_{EN}	166				4/									"		EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V^+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 10	167	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	"	168	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	169	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	170	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	171	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	172	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	173	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	174	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	175	"	OUT		10 V	"	"	"	"	"	"	"	"			ADDRESS IN TO OUTB		"		"		"	"
	"	176	"	"		-10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	177	"	"		10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	178	"	"		-10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	179	"	"		GND	"	"	"	"	"	"	10 V	"			"		"		"		"	"
	"	180	"	"		"	"	"	"	"	"	"	-10 V	"			"		"		"		"	"
	"	181	"	"		"	"	"	"	"	"	"	10 V	"			"		"		"		"	"
	"	182	"	"		"	"	"	"	"	"	"	-10 V	"			"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 11	183	"			"	"	"	"	GND	GND	GND	GND	"			ENABLE TO OUTA		"		"		"	"
	"	184	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	185	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	186	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	187	"	OUT		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			ENABLE TO OUTB		"		"		"	"
	"	188	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"		"		"		"	"
	"	189	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"		"		"		"	"
	"	190	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"		"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}	fig. 17 fig. 17	191	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND			OUTA	50						dB
		192	"	OUT		"	"	"	"	"	"	"	"	"			OUTB	"						"
V_{CT}	fig. 18 fig. 18	193	"			"	"	"	"	"	"	"	6/	"			OUTA	"						"
		194	"	OUT		"	"	"	"	"	"	"	6/	"			OUTB	"						"
V_{CTE}	fig. 19 fig. 19	195	"						"				GND	"			OUTA		10					mV
		196	"	OUT					"				GND	"			OUTB		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 16	197	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			OUTA	5						ns
	"	198	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	199	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	200	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	201	"	OUT		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"						"
	"	202	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"
	"	203	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"	"						"
	"	204	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test limits Subgroup 9 T_A = 25°C Min	Subgroup 9 T_A = 25°C Max	Subgroup 10 T_A = 125°C Min	Subgroup 10 T_A = 125°C Max	Subgroup 11 T_A = -55°C Min	Subgroup 11 T_A = -55°C Max	Unit
$t_{ON(A)}$ and $t_{OFF(A)}$	167	⌇	⌇	⌇	5 V	GND	GND	GND	GND	GND	GND	GND	10 V	-15 V	OUT	ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	168	⌇	⌇	⌇	"	"	"	"	"	"	"	"	-10 V	"	"	"		"		"		"	"
	169	⌇	⌇	⌇	"	"	"	"	"	"	"	"	10 V	"	"	"		"		"		"	"
	170	⌇	⌇	⌇	"	"	"	"	"	"	"	"	-10 V	"	"	"		"		"		"	"
	171	⌇	⌇	⌇	"	10 V	"	"	"	"	"	"	GND	"	"	"		"		"		"	"
	172	⌇	⌇	⌇	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	173	⌇	⌇	⌇	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	174	⌇	⌇	⌇	"	-10 V	"	"	"	"	"	"	"	"	"	"	ADDRESS IN TO OUTB	"		"		"	"
	175	⌇	⌇	⌇	"	GND	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	176	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	177	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	178	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	179	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	180	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	181	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	182	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	183	GND	GND	GND	⌇	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	OUT	ENABLE TO OUTA		"		"		"	"
	184	"	"	"	⌇	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
	185	"	"	"	⌇	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	ENABLE TO OUTB		"		"		"	"
	186	"	"	"	⌇	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
	187	"	"	"	⌇	GND	GND	GND	GND	GND	GND	GND	GND	"	"	"		"		"		"	"
	188	"	"	"	⌇	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	189	"	"	"	⌇	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	190	"	"	"	⌇	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
																	Subgroup 12 T_A = 25°C Min	Subgroup 12 T_A = 25°C Max					
V_{ISO}	191	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUTA	50						dB
	192	"	"	"	0 V	"	"	"	"	"	"	"	"	"	"	OUTB	"						"
V_{CT}	193	"	"	"	5 V	6/	"	"	"	"	"	"	"	"	OUT	OUTA	"						"
	194	"	"	"	"	6/	"	"	"	"	"	"	"	"	"	OUTB	"						"
V_{CTE}	195	IN	IN	IN	"	GND								"	OUT	OUTA		10					mV
	196	IN	IN	IN	"	GND								"	"	OUTB		10					mV
																	Subgroup 13 T_A = 25°C Min	Subgroup 13 T_A = 25°C Max					
t_D	197	⌇	⌇	⌇	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUTA	5						ns
	198	⌇	⌇	⌇	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
	199	⌇	⌇	⌇	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"						"
	200	⌇	⌇	⌇	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
	201	⌇	⌇	⌇	"	GND	GND	GND	GND	GND	GND	GND	GND	"	"	OUTB	"						"
	202	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"	"						"
	203	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"	"						"
	204	⌇	⌇	⌇	"	"	"	"	"	"	"	"	"	"	"	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test Limits						Unit
		Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C	
			V^+	OUT8	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$V_{TC(POS)}$		1	GND											GND			A2		1.5					V
		2	"											"			A1		"					"
		3	"											"			A0		"					"
		4	"											"			EN		"					"
$V_{TC(NEG)}$		5												"			A2	-1.5						"
		6												"			A1	"						"
		7												"			A0	"						"
		8												"			EN	"						"
I_{IH} 2/	3010	9	15 V											"			A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	μA
	"	13	"											"			A1	"	"	"	"	"	"	"
	"	11	"											"			A0	"	"	"	"	"	"	"
	"	12	"											"			EN	"	"	"	"	"	"	"
I_{IH} 2/	3009	13	"											"			A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	14	"											"			A1	"	"	"	"	"	"	"
	"	15	"											"			A0	"	"	"	"	"	"	"
	"	16	"											"			EN	"	"	"	"	"	"	"
$I_{S(OFF)}$		17	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			IN1A	-1	1	-50	50	-50	50	nA
		18	"			"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		19	"			"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		20	"			"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		21	"			"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		22	"			"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		23	"			"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		24	"			"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		25	"			"	"	"	"	"	"	"	"	"			IN1B	"	"	"	"	"	"	"
		26	"	-10 V		"	"	"	"	"	"	"	"	"			IN2B	"	"	"	"	"	"	"
		27	"	"		"	"	"	"	"	"	"	"	"			IN3B	"	"	"	"	"	"	"
		28	"	"		"	"	"	"	"	"	"	"	"			IN4B	"	"	"	"	"	"	"
		29	"	"		"	"	"	10 V	10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		30	"	"		"	"	"	-10 V	-10 V	"	"	"	"			IN6B	"	"	"	"	"	"	"
		31	"	"		"	10 V	10 V	-10 V	-10 V	"	"	"	"			IN7B	"	"	"	"	"	"	"
		32	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	"	"			IN8B	"	"	"	"	"	"	"
		33	"	10 V		"	10 V	10 V	10 V	10 V	"	"	"	"			IN1A	"	"	"	"	"	"	"
		34	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		35	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		36	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		37	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		38	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		39	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		40	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		41	"	"		"	"	"	"	"	"	"	"	"			IN1B	"	"	"	"	"	"	"
		42	"	"		"	"	"	"	"	"	"	"	"			IN2B	"	"	"	"	"	"	"
		43	"	"		"	"	"	"	"	"	"	"	"			IN3B	"	"	"	"	"	"	"
		44	"	"		"	"	"	"	"	"	"	"	"			IN4B	"	"	"	"	"	"	"
		45	"	"		"	"	"	"	"	"	"	"	"			IN5B	"	"	"	"	"	"	"
		46	"	"		"	"	"	"	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		47	"	"		"	"	"	"	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		48	"	"		-10 V	10 V	10 V	10 V	10 V	"	"	"	"			IN8B	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Symbol	Case X / Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Subgroup 1 Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 Max	Unit
$V_{IC(POS)}$	1	1 mA														A2		1.5					V
	2		1 mA													A1		"					"
	3			1 mA												A0		"					"
	4				1 mA											EN		"					"
$V_{IC(NEG)}$	5	-1 mA												GND		A2	-1.5						"
	6		-1 mA											"		A1	"						"
	7			-1 mA										"		A0	"						"
	8				-1 mA									"		EN	"						"
I_{IH} 2/	9	4.0 V	GND	GND	5 V									-15 V		A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	10	GND	4.0 V	GND	5 V									"		A1	"	"	"	"	"	"	"
	11	GND	GND	4.0 V	5 V									"		A0	"	"	"	"	"	"	"
	12	GND	GND	GND	4.0 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	13	0.8 V	5 V	5 V	5 V									"		A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	14	5 V	0.8 V	5 V	5 V									"		A1	"	"	"	"	"	"	"
	15	5 V	5 V	0.8 V	5 V									"		A0	"	"	"	"	"	"	"
	16	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	17	0.8 V	0.8 V	0.8 V	0.8 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1A	-1	1	-50	50	-50	50	nA
	18	"	0.8 V	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	19	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	20	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	21	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	22	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	23	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	24	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8A	"	"	"	"	"	"	"
	25	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN1B	"	"	"	"	"	"	"
	26	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	27	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	28	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	29	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	30	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	31	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	32	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	33	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1A	"	"	"	"	"	"	"
	34	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	35	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	36	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	37	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	38	"	0.8 V	4.0 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	39	"	4.0 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	40	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A	"	"	"	"	"	"	"
	41	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN1B	"	"	"	"	"	"	"
	42	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	43	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	44	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	45	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	46	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	47	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	48	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test Limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$I_{D(OFF)}$		49	15 V	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND			OUTA	-10	10	-250	250	-250	250	nA
		50	"	10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTA	"	"	"	"	"	"	"
		51	"	10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTB	"	"	"	"	"	"	"
		52	"	-10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		53	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		54	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		55	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		56	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		57	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		58	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		59	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		60	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTA	"	"	"	"	"	"	"
		61	"	10 V		"	"	"	"	"	"	"	10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		62	"	"		"	"	"	"	"	"	10 V	-10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		63	"	"		"	"	"	"	"	10 V	-10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		64	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		65	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		66	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		67	"	"		"	10 V	-10 V	-10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		68	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
		69	"	"		"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		70	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		71	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		72	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		73	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		74	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		75	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		76	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTA	"	"	"	"	"	"	"
		77	"	-10 V		"	"	"	"	"	"	"	-10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		78	"	"		"	"	"	"	"	"	-10 V	10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		79	"	"		"	"	"	"	"	-10 V	10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		80	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		81	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		82	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		83	"	"		"	-10 V	10 V	10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		84	"	"		-10 V	10 V	10 V	10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
$I_{D+(OFF)}$ over-voltage		85	"											"			OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		86	"											"			"	"	"	"	"	"	"	"
		87	"											"			"	"	"	"	"	"	"	"
		88	"											"			"	"	"	"	"	"	"	"
		89	"											"			"	"	"	"	"	"	"	"
		90	"											"			"	"	"	"	"	"	"	"
		91	"											"			"	"	"	"	"	"	"	"
		92	"											"			"	"	"	"	"	"	"	"
		93	"	0 V									33 V	"			OUTB	"	"	"	"	"	"	"
		94	"	"								33 V		"			"	"	"	"	"	"	"	"
		95	"	"							33 V			"			"	"	"	"	"	"	"	"
		96	"	"						33 V				"			"	"	"	"	"	"	"	"
		97	"	"					33 V					"			"	"	"	"	"	"	"	"
		98	"	"				33 V						"			"	"	"	"	"	"	"	"
		99	"	"			33 V							"			"	"	"	"	"	"	"	"
		100	"	"		33 V								"			"	"	"	"	"	"	"	"

See footnotes at end of table.

MIL-M-38510/19C

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/ 15 (AZ)	16 (A1)	17 (A0)	18 (EN)	19 (IN1A)	20 (IN2A)	21 (IN3A)	22 (IN4A)	23 (IN5A)	24 (IN6A)	25 (IN7A)	26 (IN8A)	27 (V-)	28 (OUTA)	Measured terminal	Test limits: Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
$I_{D(OFF)}$	49	0.8 V	0.8 V	0.8 V	0.8 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-15 V	10 V	OUTA	-10	10	-250	250	-250	250	nA
	50	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	OUTA	"	"	"	"	"	"	"
	51	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	OUTB	"	"	"	"	"	"	"
	52	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$	53	"	"	"	4.0 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
	54	"	"	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	55	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	56	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	57	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	58	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
	59	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
	60	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8A & OUTA	"	"	"	"	"	"	"
	61	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	-10 V	IN1B & OUTB	"	"	"	"	"	"	"
	62	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	63	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	64	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	65	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	66	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	67	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	68	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
	69	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
	70	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	71	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	72	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	73	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	74	"	0.8 V	4.0 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
	75	"	4.0 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
	76	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A & OUTA	"	"	"	"	"	"	"
	77	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN1B & OUTB	"	"	"	"	"	"	"
	78	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	79	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	80	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	81	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	82	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	83	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	84	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
$I_{D+(OFF)}$ over-voltage	85	0.8 V	0.8 V	0.8 V	0.8 V	33 V								"	0 V	OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
	86	"	0.8 V	4.0 V	"		33 V							"	"	"	"	"	"	"	"	"	"
	87	"	4.0 V	0.8 V	"			33 V						"	"	"	"	"	"	"	"	"	"
	88	"	4.0 V	4.0 V	"				33 V					"	"	"	"	"	"	"	"	"	"
	89	4.0 V	0.8 V	0.8 V	"					33 V				"	"	"	"	"	"	"	"	"	"
	90	"	0.8 V	4.0 V	"						33 V			"	"	"	"	"	"	"	"	"	"
	91	"	4.0 V	0.8 V	"							33 V		"	"	"	"	"	"	"	"	"	"
	92	"	4.0 V	4.0 V	"								33 V	"	"	"	"	"	"	"	"	"	"
	93	0.8 V	0.8 V	0.8 V	"									"		OUTB	"	"	"	"	"	"	"
	94	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	95	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	96	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	97	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	98	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	99	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	100	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"

MIL-M-38510/19OC

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits: Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14								
		Test no.	V_+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$I_{D-(OFF)}$ over-voltage		101	15 V											GND			OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	uA
		102	"											"			"	"	"	"	"	"	"	"
		103	"											"			"	"	"	"	"	"	"	"
		104	"											"			"	"	"	"	"	"	"	"
		105	"											"			"	"	"	"	"	"	"	"
		106	"											"			"	"	"	"	"	"	"	"
		107	"											"			"	"	"	"	"	"	"	"
		108	"										-33 V	"			OUTB	"	"	"	"	"	"	"
		109	"	0 V								-33 V		"			"	"	"	"	"	"	"	"
		110	"	"							-33 V			"			"	"	"	"	"	"	"	"
		111	"	"						-33 V				"			"	"	"	"	"	"	"	"
		112	"	"					-33 V					"			"	"	"	"	"	"	"	"
		113	"	"				-33 V						"			"	"	"	"	"	"	"	"
		114	"	"			-33 V							"			"	"	"	"	"	"	"	"
		115	"	"										"			"	"	"	"	"	"	"	"
		116	"	"		-33 V								"			"	"	"	"	"	"	"	"
I_+		117	"											"			V_+		"		"		"	mA
I_-		118	"											"			V_-	-1		-1		-1		"
I_{+SBY}		119	"											"			V_+		2.0		2.0		2.0	"
I_{-SBY}		120	"											"			V_-	-1.0		-1.0		-1.0		"
R_{DS1}		121	"	100 uA										"			IN1A & OUTA		1.5		2.0		1.5	kΩ
		122	"	"										"			IN2A & OUTA		"		"		"	"
		123	"	"										"			IN3A & OUTA		"		"		"	"
		124	"	"										"			IN4A & OUTA		"		"		"	"
		125	"	"										"			IN5A & OUTA		"		"		"	"
		126	"	"										"			IN6A & OUTA		"		"		"	"
		127	"	"										"			IN7A & OUTA		"		"		"	"
		128	"	"									10 V	"			IN8A & OUTA		"		"		"	"
		129	"	"								10 V		"			IN1B & OUTB		"		"		"	"
		130	"	"							10 V			"			IN2B & OUTB		"		"		"	"
		131	"	"						10 V				"			IN3B & OUTB		"		"		"	"
		132	"	"					10 V					"			IN4B & OUTB		"		"		"	"
		133	"	"				10 V						"			IN5B & OUTB		"		"		"	"
		134	"	"			10 V							"			IN6B & OUTB		"		"		"	"
		135	"	"		10 V								"			IN7B & OUTB		"		"		"	"
		136	"											"			IN8B & OUTB		"		"		"	"
		137	"											"			IN1A & OUTA		"		"		"	"
		138	"											"			IN2A & OUTA		"		"		"	"
		139	"											"			IN3A & OUTA		"		"		"	"
		140	"											"			IN4A & OUTA		"		"		"	"
		141	"											"			IN5A & OUTA		"		"		"	"
		142	"											"			IN6A & OUTA		"		"		"	"
		143	"											"			IN7A & OUTA		"		"		"	"
		144	"										-10 V	"			IN8A & OUTA		"		"		"	"
		145	"	-100 uA								-10 V		"			IN1B & OUTB		"		"		"	"
		146	"	"							-10 V			"			IN2B & OUTB		"		"		"	"
		147	"	"						-10 V				"			IN3B & OUTB		"		"		"	"
		148	"	"					-10 V					"			IN4B & OUTB		"		"		"	"
		149	"	"				-10 V						"			IN5B & OUTB		"		"		"	"
		150	"	"										"			IN6B & OUTB		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	Case X Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test Limits Subgroup 1 T_A = 25°C Min	Subgroup 1 T_A = 25°C Max	Subgroup 2 T_A = 125°C Min	Subgroup 2 T_A = 125°C Max	Subgroup 3 T_A = -55°C Min	Subgroup 3 T_A = -55°C Max	Unit
$I_{D(OFF)}$	101	0.8 V	0.8 V	0.8 V	0.8 V	-33 V								-15 V		OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
over-	102	"	0.8 V	4.0 V	"		-33 V							"		"	"	"	"	"	"	"	"
voltage	103	"	4.0 V	0.8 V	"			-33 V						"		"	"	"	"	"	"	"	"
	104	"	4.0 V	4.0 V	"				-33 V					"		"	"	"	"	"	"	"	"
	105	4.0 V	0.8 V	0.8 V	"					-33 V				"		"	"	"	"	"	"	"	"
	106	"	0.8 V	4.0 V	"						-33 V			"		"	"	"	"	"	"	"	"
	107	"	4.0 V	0.8 V	"							-33 V		"		"	"	"	"	"	"	"	"
	108	"	4.0 V	4.0 V	"								-33 V	"		"	"	"	"	"	"	"	"
	109	0.8 V	0.8 V	0.8 V	"									"		OUTB	"	"	"	"	"	"	"
	110	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	111	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	112	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	113	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	114	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	115	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	116	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
I_+	117	0 V	0 V	0 V	5 V									"		V_+		"		"		"	mA
I_-	118	"	"	"	5 V									"		V_-	-1		-1		-1		"
I_{+SBY}	119	"	"	"	0 V									"		V_+		2.0		2.0		2.0	"
I_{-SBY}	120	"	"	"	0 V									"		V_-	-1.0		-1.0		-1.0		"
R_{DS1}	121	0.8 V	0.8 V	0.8 V	4.0 V	10 V								"	100 µA	IN1A & OUTA		1.5		2.0		1.5	kΩ
	122	"	"	4.0 V	"		10 V							"	"	IN2A & OUTA		"		"		"	"
	123	"	4.0 V	0.8 V	"			10 V						"	"	IN3A & OUTA		"		"		"	"
	124	"	4.0 V	4.0 V	"				10 V					"	"	IN4A & OUTA		"		"		"	"
	125	4.0 V	0.8 V	0.8 V	"					10 V				"	"	IN5A & OUTA		"		"		"	"
	126	"	0.8 V	4.0 V	"						10 V			"	"	IN6A & OUTA		"		"		"	"
	127	"	4.0 V	0.8 V	"							10 V		"	"	IN7A & OUTA		"		"		"	"
	128	"	4.0 V	4.0 V	"								10 V	"	"	IN8A & OUTA		"		"		"	"
	129	0.8 V	0.8 V	0.8 V	"									"	"	IN1B & OUTB		"		"		"	"
	130	"	0.8 V	4.0 V	"									"	"	IN2B & OUTB		"		"		"	"
	131	"	4.0 V	0.8 V	"									"	"	IN3B & OUTB		"		"		"	"
	132	"	4.0 V	4.0 V	"									"	"	IN4B & OUTB		"		"		"	"
	133	4.0 V	0.8 V	0.8 V	"									"	"	IN5B & OUTB		"		"		"	"
	134	"	0.8 V	4.0 V	"									"	"	IN6B & OUTB		"		"		"	"
	135	"	4.0 V	0.8 V	"									"	"	IN7B & OUTB		"		"		"	"
	136	"	4.0 V	4.0 V	"									"	"	IN8B & OUTB		"		"		"	"
	137	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1A & OUTA		"		"		"	"
	138	"	0.8 V	4.0 V	"		-10 V							"	"	IN2A & OUTA		"		"		"	"
	139	"	4.0 V	0.8 V	"			-10 V						"	"	IN3A & OUTA		"		"		"	"
	140	"	4.0 V	4.0 V	"				-10 V					"	"	IN4A & OUTA		"		"		"	"
	141	4.0 V	0.8 V	0.8 V	"					-10 V				"	"	IN5A & OUTA		"		"		"	"
	142	"	0.8 V	4.0 V	"						-10 V			"	"	IN6A & OUTA		"		"		"	"
	143	"	4.0 V	0.8 V	"							-10 V		"	"	IN7A & OUTA		"		"		"	"
	144	"	4.0 V	4.0 V	"								-10 V	"	"	IN8A & OUTA		"		"		"	"
	145	0.8 V	0.8 V	0.8 V	"									"	"	IN1B & OUTB		"		"		"	"
	146	"	0.8 V	4.0 V	"									"	"	IN2B & OUTB		"		"		"	"
	147	"	4.0 V	0.8 V	"									"	"	IN3B & OUTB		"		"		"	"
	148	"	4.0 V	4.0 V	"									"	"	IN4B & OUTB		"		"		"	"
	149	4.0 V	0.8 V	0.8 V	"									"	"	IN5B & OUTB		"		"		"	"
	150	4.0 V	0.8 V	4.0 V	"									"	"	IN6B & OUTB		"		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits: Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14								
		Test no.	V^+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
R_{DS1}		151	15 V	-100 µA			-10 V							GND			IN7B		1.5		2.0		1.5	kΩ
		152	15 V	-100 µA		-10 V								GND			IN8B		1.5		2.0		1.5	kΩ
R_{DS2}	153 thru 168 - Same terminal conditions as for tests 121 thru 136, except V^+ = +10 V, V_S = +7.5 V, and limits as shown.																		2.4		2.4		2.4	"
R_{DS2}	169 thru 184 - Same terminal conditions as for tests 137 thru 152, except V^+ = +10 V, V_S = -7.5 V, and limits as shown.																		2.4		2.4		2.4	"
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	185	GND											GND			A2		10					pF
	"	186	"											"			A1		10					"
	"	187	"											"			A0		10					"
C_{OS}	"	188	"											"			OUTA		50					"
	"	189	"	5/										"			OUTB		50					"
C_{IS}	"	190	"											"			IN1A		10					"
	"	191	"											"			IN2A		"					"
	"	192	"											"			IN3A		"					"
	"	193	"											"			IN4A		"					"
	"	194	"											"			IN5A		"					"
	"	195	"											"			IN6A		"					"
	"	196	"											"			IN7A		"					"
	"	197	"											"			IN8A		"					"
	"	198	"										4/	"			IN1B		"					"
	"	199	"									4/		"			IN2B		"					"
	"	200	"								4/			"			IN3B		"					"
	"	201	"							4/				"			IN4B		"					"
	"	202	"						4/					"			IN5B		"					"
	"	203	"					4/						"			IN6B		"					"
	"	204	"				4/							"			IN7B		"					"
	"	205	"			4/								"			IN8B		"					"
C_{EN}	"	206	"											"			EN		"					"
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 10	207	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	"	208	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	209	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	210	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	211	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	212	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	213	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	214	"			"	"	"	"	"	"	"	"	"			"		"		"		"		
	"	215	"	OUT		10 V	"	"	"	"	"	"	"	"			ADDRESS IN TO OUTB		"		"		"		
	"	216	"	"		-10 V	"	"	"	"	"	"	"	"			"		"		"		"		
	"	217	"	"		10 V	"	"	"	"	"	"	"	"			"		"		"		"		
	"	218	"	"		-10 V	"	"	"	"	"	"	"	"			"		"		"		"		
	"	219	"	"		GND	"	"	"	"	"	"	"	10 V			"		"		"		"		
	"	220	"	"		"	"	"	"	"	"	"	"	-10 V			"		"		"		"		
	"	221	"	"		"	"	"	"	"	"	"	"	10 V			"		"		"		"		
	"	222	"	"		"	"	"	"	"	"	"	"	-10 V			"		"		"		"		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	Case X Test no.	Terminal conditions 1/ 15 A2	16 A1	17 A0	18 EN	19 IN1A	20 IN2A	21 IN3A	22 IN4A	23 IN5A	24 IN6A	25 IN7A	26 IN8A	27 V-	28 OUTA	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Max	Subgroup 2 T_A = 125°C Min	Max	Subgroup 3 T_A = -55°C Min	Max	Unit
R_{DS1}	151 152															IN7B IN8B		1.5 1.5		2.0 2.0		1.5 1.5	kΩ "
R_{DS2}	153 thru 168 - Same terminal conditions as for tests 121 thru 136, except V_R = +10 V, V_S = +7.5 V, and limits as shown.																	2.4		2.4		2.4	"
R_{DS2}	169 thru 184 - Same terminal conditions as for tests 137 thru 152, except V_R = +10 V, V_S = -7.5 V, and limits as shown.																	2.4		2.4		2.4	"
																	Subgroup 4 T_A = 25°C Min	Max					
C_A	185 186 187	4/	4/	4/										GND "		A2 A1 A0		10 10 10					pF "
C_{OS}	188 189	0 V "	0 V "	0 V "	0 V "									"	5/	OUTA OUTB		50 50					"
C_{IS}	190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205	"	"	"	"	4/	4/	4/	4/	4/	4/	4/	4/	"		IN1A IN2A IN3A IN4A IN5A IN6A IN7A IN8A IN1B IN2B IN3B IN4B IN5B IN6B IN7B IN8B		10 " " " " " " " " " " " " " " "					"
C_{EN}	206				4/									"		EN		"					"
																	Subgroup 9 T_A = 25°C Min	Max	Subgroup 10 T_A = 125°C Min	Max	Subgroup 11 T_A = -55°C Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222				5 V " " " " " " " " " " " " " " "	GND " " " 10 V -10 V 10 V -10 V GND " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	GND " " " " " " " " " " " " " " "	10 V -10 V 10 V -10 V GND " " " " " " " " " "	-15 V " " " " " " " " " " " " " " "		ADDRESS IN TO OUTA " " " " " " " ADDRESS IN TO OUTB " " " " " " "		11,000 " " " " " " " " " " " " " " "		11,500 " " " " " " " " " " " " " " "		11,000 " " " " " " " " " " " " " " "	ns " " " " " " " " " " " " " " "

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V^+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003	223	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ENABLE TO OUTA		1,000		1,500		1,000	ns
	fig. 11	224	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	225	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	226	"			"	"	"	"	"	"	"	"	"			ENABLE TO OUTB		"		"		"	"
	"	227	"	OUT		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"		"		"		"	"
	"	228	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"		"		"		"	"
	"	229	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V											
	"	230	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V											

																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}	fig. 17	231	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND			OUTA OUTB	50						dB
	fig. 17	232	"	OUT		"	"	"	"	"	"	"	"	"			"	"							"
V_{CT}	fig. 18	233	"			"	"	"	"	"	"	"	6/	"			OUTA OUTB	"						"
	fig. 18	234	"	OUT		"	"	"	"	"	"	"	6/	"			"	"							"
V_{CTE}	fig. 19	235	"										GND	"			OUTA		10					mV
	fig. 19	236	"	OUT									GND	"			OUTB		10					mV

																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 16	237	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			OUTA	5						ns
	"	238	"			"	"	"	"	"	"	"	"	"			"	"							"
	"	239	"			"	"	"	"	"	"	"	"	"			"	"							"
	"	240	"			"	"	"	"	"	"	"	"	"			"	"							"
	"	241	"	OUT		10 V	10 V	10 V	10 V	10 V	10 /	10 V	10 V	"			OUTB	"							"
	"	242	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 /	-10 V	-10 V	"			"	"							"
	"	243	"	"		10 V	10 V	10 V	10 V	10 V	10 /	10 V	10 V	"			"	"							"
	"	244	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 /	-10 V	-10 V	"			"	"							"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.

Symbol	Case X / Test no.	Terminal conditions 1/														Measured terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		A2	A1	A0	EN	INIA	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$t_{ON(EN)}$ and $t_{OFF(EN)}$	223	GND	GND	GND	⎍	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	ENABLE TO OUTA		11,000		11,500		11,000	ns
	224	"	"	"	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
	225	"	"	"	⎍	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
	226	"	"	"	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
	227	"	"	"	⎍	GND	GND	GND	GND	GND	GND	GND	GND	"	"	ENABLE TO OUTB		"		"		"	"
	228	"	"	"	⎍	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	229	"	"	"	⎍	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
	230	"	"	"	⎍	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
																	Subgroup 12 T_A = 25°C						
																	Min	Max					
V_{ISO}	231	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUTA OUTB	50						dB
	232	"	"	"	0 V	"	"	"	"	"	"	"	"	"	"	"	"							"
V_{CT}	233	"	"	"	5 V	6/ 6/	"	"	"	"	"	"	"	"	OUT	OUTA OUTB	"							"
	234	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"							"
V_{CTF}	235	IN	IN	IN	"	GND								"	OUT	OUTA OUTB		10					mV
	236	IN	IN	IN	"	GND								"	"	"		10					mV
																	Subgroup 13 T_A = 25°C						
																	Min	Max					
t_D	237	⎍	⎍	⎍	⎍	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUTA	5						ns
	238	⎍	⎍	⎍	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
	239	⎍	⎍	⎍	⎍	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"						"
	240	⎍	⎍	⎍	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
	241	⎍	⎍	⎍	⎍	GND	GND	GND	GND	GND	GND	GND	GND	"	"	OUTB	"						"
	242	⎍	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"						"
	243	⎍	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"						"
	244	⎍	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test Limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	AO	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1													GND		1 mA		A2		1.5					V
		2													"			1 mA	A1		"					"
		3	1 mA												"				AO		"					"
		4		1 mA											"				EN		"					"
$V_{IC(NEG)}$		5			GND											GND	-1 mA		A2	-1.5						"
		6			"											"		-1 mA	A1	"						"
		7	-1 mA		"											"			AO	"						"
		8		-1 mA	"											"			EN	"						"
I_{IH} 2/	3010	9	GND	5 V	-15 V										15 V	"	4.0 V	GND	A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	10	GND	"	"										"	"	GND	4.0 V	A1	"	"	"	"	"	"	"
	"	11	4.0 V	"	"										"	"	"	GND	AO	"	"	"	"	"	"	"
	"	12	GND	4.0 V	"										"	"	"	GND	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	13	5 V	5 V	"										"	"	0.8 V	5 V	A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	14	5 V	5 V	"										"	"	5 V	0.8 V	A1	"	"	"	"	"	"	"
	"	15	0.8 V	5 V	"										"	"	5 V	5 V	AO	"	"	"	"	"	"	"
	"	16	5 V	0.8 V	"										"	"	5 V	5 V	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		17	0.8 V	"	"	10 V	-10 V	-10 V	-10 V		-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	IN1	-1	1	-50	50	-50	50	nA
		18	4.0 V	"	"	-10 V	10 V	-10 V	-10 V		"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	-10 V	10 V	-10 V		"	"	"	"	"	"	"	4.0 V	IN3	"	"	"	"	"	"	"
		20	4.0 V	"	"	"	"	-10 V	10 V		"	"	"	"	"	"	"	4.0 V	IN4	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	-10 V		"	"	"	10 V	"	"	4.0 V	0.8 V	IN5	"	"	"	"	"	"	"
		22	4.0 V	"	"	"	"	"	"		"	"	10 V	-10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	"	"	"		"	10 V	-10 V	-10 V	"	"	"	4.0 V	IN7	"	"	"	"	"	"	"
		24	4.0 V	"	"	"	"	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	4.0 V	IN8	"	"	"	"	"	"	"
		25	0.8 V	"	"	"	10 V	10 V	10 V		"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IN1	"	"	"	"	"	"	"
		26	4.0 V	"	"	10 V	-10 V	10 V	10 V		"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		27	0.8 V	"	"	"	10 V	-10 V	10 V		"	"	"	"	"	"	"	4.0 V	IN3	"	"	"	"	"	"	"
		28	4.0 V	"	"	"	"	10 V	-10 V		"	"	"	"	"	"	"	4.0 V	IN4	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	"	"	10 V		"	"	"	-10 V	"	"	4.0 V	0.8 V	IN5	"	"	"	"	"	"	"
		30	4.0 V	"	"	"	"	"	"		"	"	-10 V	10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	"		"	-10 V	10 V	10 V	"	"	"	4.0 V	IN7	"	"	"	"	"	"	"
		32	4.0 V	"	"	"	"	"	"		-10 V	10 V	10 V	10 V	"	"	"	4.0 V	IN8	"	"	"	"	"	"	"
$I_{D(OFF)}$		33	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	OUT	-10	10	-250	250	-250	250	"
$I_{D(OFF)}$		34	0.8 V	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	"	OUT	"	"	"	"	"	"	"
$I_{D(ON)}$		35	0.8 V	4.0 V	"	10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
		36	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3 & OUT	"	"	"	"	"	"	"
		38	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN4 & OUT	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	"	"	"	4.0 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		40	4.0 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	4.0 V	IN7 & OUT	"	"	"	"	"	"	"
		42	4.0 V	"	"	"	"	"	"	"	"	-10 V	-10 V	-10 V	"	"	"	4.0 V	IN8 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$		43	0.8 V	4.0 V	-15 V	-10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	15 V	GND	0.8 V	0.8 V	IN1 & OUT	-10	10	-250	250	-250	250	nA
		44	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2 & OUT	"	"	"	"	"	"	"
		45	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3 & OUT	"	"	"	"	"	"	"
		46	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN4 & OUT	"	"	"	"	"	"	"
		47	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	4.0 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		48	4.0 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		49	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	4.0 V	IN7 & OUT	"	"	"	"	"	"	"
		50	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	4.0 V	IN8 & OUT	"	"	"	"	"	"	"
I^+		51	0 V	5.0 V	"										"	"	0 V	0 V	V+		2.0		2.0		2.0	mA
I^-		52	"	5.0 V	"										"	"	"	"	V-	-1		-1		-1		"
I^+_{SBY}		53	"	0 V	"										"	"	"	"	V+		2.0		2.0		2.0	"
I^-_{SBY}		54	"	0 V	"										"	"	"	"	V-	-1.0		-1.0		-1.0		"
$I_{D+(OFF)}$ over-voltage		55	0.8 V	0.8 V	"	33 V				0 V					"	"	GND	0.8 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	μA
		56	4.0 V	"	"		33 V			"					"	"	"	0.8 V		"	"	"	"	"	"	"
		57	0.8 V	"	"			33 V		"					"	"	"	4.0 V		"	"	"	"	"	"	"
		58	4.0 V	"	"				33 V	"					"	"	"	4.0 V		"	"	"	"	"	"	"
		59	0.8 V	"	"					"				33 V	"	"	15 V	0.8 V		"	"	"	"	"	"	"
		60	4.0 V	"	"					"			33 V		"	"	"	0.8 V		"	"	"	"	"	"	"
		61	0.8 V	"	"					"		33 V			"	"	"	4.0 V		"	"	"	"	"	"	"
		62	4.0 V	"	"					"	33 V				"	"	"	4.0 V		"	"	"	"	"	"	"
$I_{D-(OFF)}$ over-voltage		63	0.8 V	"	"	-33 V				"					"	"	GND	0.8 V	"	"	"	"	"	"	"	"
		64	4.0 V	"	"		-33 V			"					"	"	"	0.8 V		"	"	"	"	"	"	"
		65	0.8 V	"	"			-33 V		"					"	"	"	4.0 V		"	"	"	"	"	"	"
		66	4.0 V	"	"				-33 V	"					"	"	"	4.0 V		"	"	"	"	"	"	"
		67	0.8 V	"	"					"				-33 V	"	"	15 V	0.8 V		"	"	"	"	"	"	"
		68	4.0 V	"	"					"			-33 V		"	"	"	0.8 V		"	"	"	"	"	"	"
		69	0.8 V	"	"					"		-33 V			"	"	"	4.0 V		"	"	"	"	"	"	"
		70	4.0 V	"	"					"	-33 V				"	"	"	4.0 V		"	"	"	"	"	"	"
R_{DS1}		71	0.8 V	4.0 V	"	10 V				100 μA					"	"	0.8 V	0.8 V	IN1 & OUT		1.5		1.8		1.5	kΩ
		72	4.0 V	"	"		10 V			"					"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		73	0.8 V	"	"			10 V		"					"	"	"	4.0 V	IN3 & OUT		"		"		"	"
		74	4.0 V	"	"				10 V	"					"	"	"	4.0 V	IN4 & OUT		"		"		"	"
		75	0.8 V	"	"					"				10 V	"	"	4.0 V	0.8 V	IN5 & OUT		"		"		"	"
		76	4.0 V	"	"					"			10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		77	0.8 V	"	"					"		10 V			"	"	"	4.0 V	IN7 & OUT		"		"		"	"
		78	4.0 V	"	"					"	10 V				"	"	"	4.0 V	IN8 & OUT		"		"		"	"
		79	0.8 V	"	"	-10 V				-100 μA					"	"	0.8 V	0.8 V	IN1 & OUT		"		"		"	"
		80	4.0 V	"	"		-10 V			"					"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		81	0.8 V	"	"			-10 V		"					"	"	"	4.0 V	IN3 & OUT		"		"		"	"
		82	4.0 V	"	"				-10 V	"					"	"	"	4.0 V	IN4 & OUT		"		"		"	"
		83	0.8 V	"	"					"				-10 V	"	"	4.0 V	0.8 V	IN5 & OUT		"		"		"	"
		84	4.0 V	"	"					"			-10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		85	0.8 V	"	"					"		-10 V			"	"	"	4.0 V	IN7 & OUT		"		"		"	"
		86	4.0 V	"	"					"	-10 V				"	"	"	4.0 V	IN8 & OUT		"		"		"	"
R_{DS2}	87 thru 102 - Same terminal conditions as for tests 71 thru 86, except V_e = ±10 V, V_S = ±7.5, and limits as shown.																				2.2		2.2		2.2	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/														Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 4 T_A = 25°C				
		Test no.	AO	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max				
C_A	3012	103			GND										GND	GND	4/		A2		10				pF
	"	104			"										"	"		4/	A1		10				"
	"	105	4/		"														AO		10				"
C_{OS}	"	106	0 V		"					5/					"	"	0 V	0 V	OUT		45				"
C_{IS}	"	107	"	0 V	"	4/									"	"	"	"	IN1		10				"
	"	108	"	"	"		4/								"	"	"	"	IN2		"				"
	"	109	"	"	"			4/							"	"	"	"	IN3		"				"
	"	110	"	"	"				4/						"	"	"	"	IN4		"				"
	"	111	"	"	"								4/		"	"	"	"	IN5		"				"
	"	112	"	"	"							4/		4/	"	"	"	"	IN6		"				"
	"	113	"	"	"						4/				"	"	"	"	IN7		"				"
	"	114	"	"	"										"	"	"	"	IN8		"				"
C_{EN}	"	115		4/	"														EN						
																				Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C	
																				Min	Max	Min	Max	Min	Max
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 12	116		5 V	-15 V	GND	GND	GND	GND	OUT	10 V	GND	GND	GND	15 V	GND			OUT		1,000		1,500		1,000	ns
	"	117		"	"	"	"	"	"	"	10 V	"	"	"	"	"			"		"		"		"	"
	"	118		"	"	"	"	"	"	"	10 V	"	"	"	"	"			"		"		"		"	"
	"	119		"	"	"	"	"	"	"	-10 V	"	"	"	"	"			"		"		"		"	"
	"	120		"	"	10 V	"	"	"	"	GND	"	"	"	"	"			"		"		"		"	"
	"	121		"	"	-10 V	"	"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	122		"	"	10 V	"	"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	123		"	"	-10 V	"	"	"	"	"	"	"	"	"	"			"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 13	124	GND		"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	GND	GND	"		"		"		"	"
	"	125	"		"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
	"	126	"		"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	"	"	"		"		"		"	"
	"	127	"		"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C					
																				Min	Max				
V_{ISO}	fig. 17	128	GND	0 V	-15 V	IN	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CT}	fig. 18	129	GND	5 V	-15 V	6/	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CTE}	fig. 19	130	IN	5 V	-15 V	GND									15 V	GND	IN	IN	OUT		10					mV
																				Subgroup 13 T_A = 25°C					
																				Min	Max				
t_D	fig. 16	131		5 V	-15 V	10 V	10 V	10 V	10 V	OUT	10 V	10 V	10 V	10 V	15 V	GND			OUT	5						ns
	"	132		"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"			"	"						"
	"	133		"	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"			"	"						"
	"	134		"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"			"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Symbol	MIL-STD-883 test method	Case F	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	AO	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1	1 mA													GND		1 mA	A1		1.5					V
		2		1 mA												GND			AO		1.5					"
		3														GND			EN		1.5					"
$V_{IC(NEG)}$		4			GND												GND	-1 mA	A1	-1.5						"
		5	-1 mA		GND												"		AO	-1.5						"
		6		-1 mA	GND												"		EN	-1.5						"
I_{IH} 2/		7	GND	5 V	-15 V											15 V	"	4.0 V	A1	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
		8	4.0 V	5 V	"											"	"		GND	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
		9	GND	4.0 V	"											"	"		EN	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
I_{IL} 2/		10	5.0 V	5 V	"											"	"	0.8 V	A1	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
		11	0.8 V	5 V	"											"	"	5.0 V	AO	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
		12	5.0 V	0.8 V	"											"	"	5.0 V	EN	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
$I_{S(OFF)}$ 3/		13	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	IN1A	-1	1	-50	50	-50	50	nA
		14	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN2A	"	"	"	"	"	"	"
		15	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A	"	"	"	"	"	"	"
		16	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	10 V	"	"	0.8 V	IN4A	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		18	4.0 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	4.0 V	IN2B	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	4.0 V	IN3B	"	"	"	"	"	"	"
		20	4.0 V	"	"	"	"	"	"	"	"	"	10 V	10 V	-10 V	"	"	0.8 V	IN4B	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	10 V	10 V	10 V	10 V	"	"	"	"	"	"	"	0.8 V	IN1A	"	"	"	"	"	"	"
		22	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN2A	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A	"	"	"	"	"	"	"
		24	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	-10 V	"	"	0.8 V	IN4A	"	"	"	"	"	"	"
		25	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		26	4.0 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	4.0 V	IN2B	"	"	"	"	"	"	"
		27	0.8 V	"	"	"	"	"	"	"	"	"	10 V	10 V	10 V	"	"	4.0 V	IN3B	"	"	"	"	"	"	"
		28	4.0 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	4.0 V	IN4B	"	"	"	"	"	"	"
$I_{D(OFF)}$		29	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	OUTA	-10	10	-125	125	-125	125	"
		30	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	OUTB	"	"	"	"	"	"	"
		31	"	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	OUTA	"	"	"	"	"	"	"
		32	"	"	"	10 V	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		33	"	4.0 V	"	10 V	-10 V	-10 V	-10 V	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	IN1A & OUTA	"	"	"	"	"	"	"
		34	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN2A & OUTA	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A & OUTA	"	"	"	"	"	"	"
		36	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	10 V	"	"	0.8 V	IN4A & OUTA	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	10 V	-10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		38	4.0 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	4.0 V	IN2B & OUTB	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	4.0 V	IN3B & OUTB	"	"	"	"	"	"	"
		40	4.0 V	"	"	"	"	"	"	"	"	"	10 V	10 V	10 V	"	"	0.8 V	IN4B & OUTB	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	10 V	10 V	10 V	10 V	"	"	"	"	"	"	"	0.8 V	IN1A & OUTA	"	"	"	"	"	"	"
		42	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN2A & OUTA	"	"	"	"	"	"	"
		43	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A & OUTA	"	"	"	"	"	"	"
		44	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	-10 V	"	"	0.8 V	IN4A & OUTA	"	"	"	"	"	"	"
		45	0.8 V	"	"	"	"	"	10 V	10 V	-10 V	"	"	-10 V	10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		46	4.0 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	4.0 V	IN2B & OUTB	"	"	"	"	"	"	"
		47	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	4.0 V	IN3B & OUTB	"	"	"	"	"	"	"
		48	4.0 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	4.0 V	IN4B & OUTB	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	INIA	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
I^+		49	0 V	5.0 V	-15 V											15 V	GND	0 V	V+		2.0		2.0		2.0	mA
I^-		50	"	5.0 V	"											"	"	"	V-	-1		-1		-1		"
I^+SBY		51	"	0 V	"											"	"	"	V+		2.0		2.0		2.0	"
I^-SBY		52	"	"	"											"	"	"	V-	-1.0		-1.0		-1.0		"
$I_{D^+(OFF)}$ over-voltage		53	0.8 V	0.8 V	"	33 V				0 V						"	"	0.8 V	OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	uA
		54	4.0 V	"	"		33 V			"						"	"	"	"	"	"	"	"	"	"	"
		55	0.8 V	"	"			33 V		"						"	"	4.0 V	"	"	"	"	"	"	"	"
		56	4.0 V	"	"				33 V	"						"	"	4.0 V	"	"	"	"	"	"	"	"
		57	0.8 V	"	"						0 V				33 V	"	"	0.8 V	OUTB	"	"	"	"	"	"	"
		58	4.0 V	"	"						"			33 V		"	"	0.8 V	"	"	"	"	"	"	"	"
		59	0.8 V	"	"								33 V			"	"	4.0 V	"	"	"	"	"	"	"	"
		60	4.0 V	"	"							33 V				"	"	4.0 V	"	"	"	"	"	"	"	"
$I_{D^-(OFF)}$ over-voltage		61	0.8 V	"	"	-33 V				0 V						"	"	0.8 V	OUTA	"	"	"	"	"	"	"
		62	4.0 V	"	"		-33 V			"						"	"	0.8 V	"	"	"	"	"	"	"	"
		63	0.8 V	"	"			-33 V		"						"	"	4.0 V	"	"	"	"	"	"	"	"
		64	4.0 V	"	"				-33 V	"						"	"	4.0 V	"	"	"	"	"	"	"	"
		65	0.8 V	"	"						0 V				-33 V	"	"	0.8 V	OUTB	"	"	"	"	"	"	"
		66	4.0 V	"	"						"			-33 V		"	"	0.8 V	"	"	"	"	"	"	"	"
		67	0.8 V	"	"						"		-33 V			"	"	4.0 V	"	"	"	"	"	"	"	"
		68	4.0 V	"	"						"	-33 V				"	"	4.0 V	"	"	"	"	"	"	"	"
R_{DS1}		69	0.8 V	4.0 V	"	10 V				100 uA						"	"	0.8 V	IN1A & OUTA		1.5		1.8		1.5	k
		70	4.0 V	"	"		10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		71	0.8 V	"	"			10 V		"						"	"	4.0 V	IN3A & OUTA		"		"		"	"
		72	4.0 V	"	"				10 V	"						"	"	4.0 V	IN4A & OUTA		"		"		"	"
		73	0.8 V	"	"						100 uA				10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		74	4.0 V	"	"						"			10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		75	0.8 V	"	"								10 V			"	"	4.0 V	IN3B & OUTB		"		"		"	"
		76	4.0 V	"	"						"	10 V				"	"	4.0 V	IN4B & OUTB		"		"		"	"
		77	0.8 V	"	"	-10 V				-100 uA						"	"	0.8 V	IN1A & OUTA		"		"		"	"
		78	4.0 V	"	"		-10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		79	0.8 V	"	"			-10 V		"						"	"	4.0 V	IN3A & OUTA		"		"		"	"
		80	4.0 V	"	"				-10 V	"						"	"	4.0 V	IN4A & OUTA		"		"		"	"
		81	0.8 V	"	"						-100 uA				-10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		82	4.0 V	"	"						"			-10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		83	0.8 V	"	"								-10 V			"	"	4.0 V	IN3B & OUTB		"		"		"	"
		84	4.0 V	"	"						"	-10 V				"	"	4.0 V	IN4B & OUTB		"		"		"	"
R_{DS2}	85 thru 100 - Same terminal conditions as for tests 69 thru 84, except V^+ = +10 V, V_S = +7.5 V and limits as shown.																				2.2		2.2		2.2	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.

Symbol	MIL-STD-883 test method	Case E Test no.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test Limits Subgroup 4 T_A = 25°C Min	Max	Unit
			A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V^+	GND	A1				
C_A	3012	101	4/		GND											GND	GND	4/	A0		10	pF
	"	102			"											"	"		A1		10	"
C_{OS}	"	103	0 V	0 V	"					5/	5/					"	"	0 V	OUTA		25	"
	"	104	"	"	"											"	"	"	OUTB		25	"
C_{IS}	"	105	"	"	"	4/										"	"	"	IN1A		10	"
	"	106	"	"	"		4/									"	"	"	IN2A		"	"
	"	107	"	"	"			4/								"	"	"	IN3A		"	"
	"	108	"	"	"				4/							"	"	"	IN4A		"	"
	"	109	"	"	"											"	"	"	IN1B		"	"
	"	110	"	"	"											"	"	"	IN2B		"	"
	"	111	"	"	"											"	"	"	IN3B		"	"
	"	112	"	"	"											"	"	"	IN4B		"	"
C_{EN}	"	113		4/	"												GND	"	EN		"	"

Symbol	MIL-STD-883 test method	Case E Test no.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test Limits Subgroup 9 T_A = 25°C Min	Max	Subgroup 10 T_A = 125°C Min	Max	Subgroup 11 T_A = -55°C Min	Max	Unit
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 14	114		5 V	-15 V	GND	GND	GND	10 V	OUT		GND	GND	GND	GND	15 V	GND		ADDRESS IN		1,000		1,500		1,000	ns
	"	115		"	"	"	"	"	-10 V	"		"	"	"	"	"	"		TO OUTA		"		"		"	"
	"	116		"	"	"	"	"	10 V	"		"	"	"	"	"	"				"		"		"	"
	"	117		"	"	"	"	"	-10 V	"		"	"	"	"	"	"				"		"		"	"
	"	118		"	"	10 V	"	"	GND	"		"	"	"	"	"	"				"		"		"	"
	"	119		"	"	-10 V	"	"	"	"		"	"	"	"	"	"				"		"		"	"
	"	120		"	"	10 V	"	"	"	"		"	"	"	"	"	"				"		"		"	"
	"	121		"	"	-10 V	"	"	"	"		"	"	"	"	"	"				"		"		"	"
	"	122		"	"	GND	"	"	"	"	OUT	"	"	"	"	"	"		ADDRESS IN		"		"		"	"
	"	123		"	"	"	"	"	"	"	"	"	"	"	"	"	"		TO OUTB		"		"		"	"
	"	124		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
	"	125		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
	"	126		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
	"	127		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
	"	128		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
	"	129		"	"	"	"	"	"	"	"	"	"	"	"	"	"				"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 15	130	GND			10 V	10 V	10 V	10 V	OUT		GND			GND			GND	ENABLE							ns
	"	131	"			-10 V	-10 V	-10 V	-10 V	"		"			"			"	TO OUTA							"
	"	132	"			10 V	10 V	10 V	10 V	"		"			"			"								"
	"	133	"			-10 V	-10 V	-10 V	-10 V	"		"			"			"	ENABLE							"
	"	134	"			GND	GND	GND	GND	"	OUT	"	"	"	"	"	"	"	TO OUTB							"
	"	135	"			"	"	"	"	"	"	"	"	"	"	"	"	"									"
	"	136	"			"	"	"	"	"	"	"	"	"	"	"	"	"									"
	"	137	"			"	"	"	"	"	"	"	"	"	"	"	"	"									"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits							Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 12 T_A = 25°C							
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max						
V_{ISO}	fig. 17 fig. 17	138 139	GND "	0 V 0 V	-15 V "	IN "	IN "	IN "	IN "	OUT	OUT	IN "	IN "	IN "	IN "	15 V "	GND "	GND "	OUTA OUTB	50 "							dB "
V_{CT}	fig. 18 fig. 18	140 141	" "	5 V "	" "	6/ 6/	" "	" "	" "	OUT	OUT	" "	" "	" "	" "	" "	" "	" "	OUTA OUTB	" "							" "
V_{CTE}	fig. 19 fig. 19	142 143	IN IN	" "	" "	GND GND				OUT	OUT						" "	IN IN	OUTA OUTB	" "	10 10						mV mV
																				Subgroup 13 T_A = 25°C							
																				Min	Max						
t_D	fig. 16 " " " " " " "	144 145 146 147 148 149 150 151		5 V " " " " " " "	-15 V " " " " " " "	10 V -10 V 10 V -10 V GND " " "	10 V -10 V 10 V -10 V GND " " "	10 V -10 V 10 V -10 V GND " " "	10 V -10 V 10 V -10 V GND " " "	OUT " " " " " " "	 OUT " " "	GND " " " " 10 V -10 V 10 V -10 V	GND " " " " 10 V -10 V 10 V -10 V	GND " " " " 10 V -10 V 10 V -10 V	GND " " " " 10 V -10 V 10 V -10 V	15 V " " " " " " "	GND " " " " " " "	 	OUTA " " " " OUTB " "	5 " " " " " " "							ns " " " " " " "

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	GND	5.0 V	-15 V										15 V	GND	2.4 V	GND	A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	GND	5.0 V	"										"	"	GND	2.4 V	A1	"	"	"	"	"	"	"
	"	3	2.4 V	5.0 V	"										"	"	GND	GND	A0	"	"	"	"	"	"	"
	"	4	GND	4.5 V	"										"	"	GND	GND	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	5	5.0 V	5.0 V	"										"	"	0.8 V	5 V	A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	6	5.0 V	"	"										"	"	5 V	0.8 V	A1	"	"	"	"	"	"	"
	"	7	0.8 V	"	"										"	"	5 V	5 V	A0	"	"	"	"	"	"	"
	"	8	5.0 V	0.8 V	"										"	"	5 V	5 V	EN	"	"	"	"	"	"	"
$I_{I(OFF)}$ 3/		9	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	IN1	-1	1	-50	50	-50	50	nA
		10	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		11	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3	"	"	"	"	"	"	"
		12	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	10 V	"	"	"	2.4 V	IN4	"	"	"	"	"	"	"
		13	0.8 V	"	"	"	"	"	-10 V	"	"	"	10 V	-10 V	"	"	2.4 V	0.8 V	IN5	"	"	"	"	"	"	"
		14	2.4 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	2.4 V	IN6	"	"	"	"	"	"	"
		15	0.8 V	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	"	2.4 V	IN7	"	"	"	"	"	"	"
		16	2.4 V	"	"	"	"	"	"	"	"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IN8	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	10 V	10 V	10 V	10 V	"	"	"	"	"	"	"	0.8 V	IN1	"	"	"	"	"	"	"
		18	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN2	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3	"	"	"	"	"	"	"
		20	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	2.4 V	0.8 V	IN5	"	"	"	"	"	"	"
		22	2.4 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	2.4 V	IN7	"	"	"	"	"	"	"
		24	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	2.4 V	IN8	"	"	"	"	"	"	"
$I_{O(OFF)}$		25	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	OUT	-10	10	-250	250	-250	250	"
$I_{O(OFF)}$		26	0.8 V	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	"	OUT	"	"	"	"	"	"	"
$I_{O(ON)}$		27	0.8 V	4.0 V	"	10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"	IIN1 & OUT	"	"	"	"	"	"	"
		28	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IIN2 & OUT	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IIN3 & OUT	"	"	"	"	"	"	"
		30	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IIN4 & OUT	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	10 V	"	"	2.4 V	0.8 V	IIN5 & OUT	"	"	"	"	"	"	"
		32	2.4 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	"	0.8 V	IIN6 & OUT	"	"	"	"	"	"	"
		33	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	2.4 V	IIN7 & OUT	"	"	"	"	"	"	"
		34	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	"	2.4 V	IIN8 & OUT	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	10 V	10 V	10 V	-10 V	"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IIN1 & OUT	"	"	"	"	"	"	"
		36	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IIN2 & OUT	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IIN3 & OUT	"	"	"	"	"	"	"
		38	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IIN4 & OUT	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	2.4 V	0.8 V	IIN5 & OUT	"	"	"	"	"	"	"
		40	2.4 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IIN6 & OUT	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	2.4 V	IIN7 & OUT	"	"	"	"	"	"	"
		42	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	2.4 V	IIN8 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Symbol	MIL-STD-883 test method	Case E Test no.	Terminal conditions 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test limits Subgroup 1 T_A = 25°C Min	Max	Subgroup 2 T_A = 125°C Min	Max	Subgroup 3 T_A = -55°C Min	Max	Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16								
			AO	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1								
I^+		43	0 V	5.0 V	-15 V										15 V	GND	0 V	0 V	V+		12		12		12	mA
I^-		44	"	5.0 V	"										"	"	"	"	V-	-12		-12		-12		"
I^+_{SBY}		45	"	0 V	"										"	"	"	"	V+		3.5		3.5		3.5	"
I^-_{SBY}		46	"	0 V	"										"	"	"	"	V-	-3.5		-3.5		-3.5		"
R_{DS1}		47	0.8 V	4.5 V	"	10 V				1 mA					"	"	0.8 V	0.8 V	IN1 & OUT		400		500		400	Ω
		48	2.4 V	"	"	"				"					"	"	"	"	IN2 & OUT		"		"		"	"
		49	0.8 V	"	"	"	10 V			"					"	"	"	2.4 V	IN3 & OUT		"		"		"	"
		50	2.4 V	"	"	"	"	10 V		"					"	"	"	"	IN4 & OUT		"		"		"	"
		51	0.8 V	"	"	"	"	"	10 V	"					"	"	2.4 V	0.8 V	IN5 & OUT		"		"		"	"
		52	2.4 V	"	"	"	"	"	"	"			10 V	10 V	"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		53	0.8 V	"	"	"	"	"	"	"		10 V	"	"	"	"	"	2.4 V	IN7 & OUT		"		"		"	"
		54	2.4 V	"	"	"	"	"	"	"	10 V	"	"	"	"	"	"	0.8 V	IN8 & OUT		"		"		"	"
		55	0.8 V	"	"	-10 V	"	"	"	-1 mA	"	"	"	"	"	"	"	"	IN1 & OUT		"		"		"	"
		56	2.4 V	"	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		57	0.8 V	"	"	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	IN3 & OUT		"		"		"	"
		58	2.4 V	"	"	"	"	"	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4 & OUT		"		"		"	"
		59	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	-10 V	"	"	"	"	IN5 & OUT		"		"		"	"
		60	2.4 V	"	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	"	IN6 & OUT		"		"		"	"
		61	0.8 V	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	"	"	IN7 & OUT		"		"		"	"
		62	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	IN8 & OUT		"		"		"	"
R_{DS2}	63 thru 78 - Same terminal conditions as tests 47 thru 62, except V^+ = +10 V, V_S = +7.5 V and limits as shown.																				1,000		1,000		1,000	"
R_{DS2}	79 thru 94 - Same terminal conditions as tests 47 thru 62, except V^+ = +10 V, V_S = -7.5 V and limits as shown.																				1,000		1,000		1,000	"
																				Subgroup 4 T_A = 25°C Min	Max					
C_A	3012	95			GND										GND	GND	4/	4/	A2		10					pF
	"	96			"										"	"			A1		10					"
	"	97	4/		"														AO		10					"
C_{OS}	"	98	0 V		"					5/					"	"	0 V	0 V	OUT		45					"
C_{IS}	"	99	"	0 V	"	4/									"	"	"	"	IN1		10					"
	"	100	"	"	"		4/								"	"	"	"	IN2		"					"
	"	101	"	"	"			4/							"	"	"	"	IN3		"					"
	"	102	"	"	"				4/						"	"	"	"	IN4		"					"
	"	103	"	"	"								4/	4/	"	"	"	"	IN5		"					"
	"	104	"	"	"							4/			"	"	"	"	IN6		"					"
	"	105	"	"	"						4/				"	"	"	"	IN7		"					"
	"	106	"	"	"										"	"	"	"	IN8		"					"
C_{EN}	"	107	"	4/	"										"	"			EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 12	108	⌐	5 V	-15 V	GND	GND	GND	GND	OUT	10 V	GND	GND	GND	15 V	GND	⌐	⌐	OUT		1,000		1,500		1,000	ns
	"	109	⌐	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	110	⌐	"	"	"	"	"	"	"	10 V	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	111	⌐	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	112	⌐	"	"	10 V	"	"	"	"	GND	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	113	⌐	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	114	⌐	"	"	10 V	"	"	"	"	"	"	"	"	"	"	⌐	⌐	"		"		"		"	"
	"	115	⌐	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	⌐	⌐	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 13	116	GND	⌐	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	GND	GND	"		"		"		"	"
	"	117	"	⌐	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
	"	118	"	⌐	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	"	"	"		"		"		"	"
	"	119	"	⌐	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C						
																				Min	Max					
V_{ISO}	fig. 17	120	GND	0 V	-15 V	IN	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CT}	fig. 18	121	GND	5 V	-15 V	6/	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CTE}	fig. 19	122	IN	5 V	-15 V	GND				OUT					15 V	GND	IN	IN	OUT		10					mV
																				Subgroup 13 T_A = 25°C						
																				Min	Max					
t_D	fig. 16	123	⌐	5 V	-15 V	10 V	10 V	10 V	10 V	OUT	10 V	10 V	10 V	10 V	15 V	GND	⌐	⌐	OUT	5						ns
	"	124	⌐	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	⌐	⌐	"	"						"
	"	125	⌐	"	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	⌐	⌐	"	"						"
	"	126	⌐	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	⌐	⌐	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	AO	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	GND	GND	-15 V											15 V	GND	2.4 V	A1	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	3010	2	2.4 V	GND	"											"	"	GND	AO	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
	3010	3	GND	4.5 V	"											"	"	GND	EN	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
I_{IL} 2/	3009	4	5 V	5 V	"											"	"	0.8 V	A1	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	3009	5	0.8 V	5 V	"											"	"	5 V	AO	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	3009	6	5 V	0.8 V	"											"	"	5 V	EN	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
$I_{S(OFF)}$ 3/		7	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	IN1A	-1	1	-50	50	-50	50	nA
		8	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
		9	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A	"	"	"	"	"	"	"
		10	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A	"	"	"	"	"	"	"
		11	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	"	10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		12	2.4 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		13	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	2.4 V	IN3B	"	"	"	"	"	"	"
		14	2.4 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	2.4 V	IN4B	"	"	"	"	"	"	"
		15	0.8 V	"	"	"	10 V	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	"	"	0.8 V	IN1A	"	"	"	"	"	"	"
		16	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A	"	"	"	"	"	"	"
		18	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	"	"	10 V	"	"	"	"	"	-10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		20	2.4 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	2.4 V	IN3B	"	"	"	"	"	"	"
		22	2.4 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	2.4 V	IN4B	"	"	"	"	"	"	"
$I_{D(OFF)}$		23	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	OUTA	-10	10	-125	125	-125	125	"
		24	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	OUTB	"	"	"	"	"	"	"
		25	"	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	OUTA	"	"	"	"	"	"	"
		26	"	"	"	10 V	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		27	"	4.0 V	"	10 V	-10 V	-10 V	-10 V	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	IN1A & OUTA	"	"	"	"	"	"	"
		28	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA	"	"	"	"	"	"	"
		30	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	"	10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		32	2.4 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		33	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	2.4 V	IN3B & OUTB	"	"	"	"	"	"	"
		34	2.4 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	2.4 V	IN4B & OUTB	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	10 V	10 V	10 V	"	"	"	10 V	10 V	10 V	"	"	0.8 V	IN1A & OUTA	"	"	"	"	"	"	"
		36	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A & OUTA	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA	"	"	"	"	"	"	"
		38	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	10 V	10 V	-10 V	"	"	"	-10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		40	2.4 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	2.4 V	IN3B & OUTB	"	"	"	"	"	"	"
		42	2.4 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	2.4 V	IN4B & OUTB	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured terminal	Test Limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	AO	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
I^+		43	0 V	5.0 V	-15 V											15 V	GND	0 V	V+		12		12		12	mA
I^-		44	"	5.0 V	"											"	"	"	V-	-12		-12		-12		"
I^+SBY		45	"	0 V	"											"	"	"	V+		3.5		3.5		3.5	"
I^-SBY		46	"	0 V	"											"	"	"	V-	-3.5		-3.5		-3.5		"
R_{DS1}		47	0.8 V	4.5 V	"	10 V	10 V	10 V	10 V	1 mA	1 mA	10 V	10 V	10 V	10 V	"	"	"	0.8 V	IN1A & OUTA		400		500		400	"
		48	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN2A & OUTA		"		"		"	"
		49	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA		"		"		"	"
		50	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA		"		"		"	"
		51	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	-1 mA	-1 mA	10 V	10 V	10 V	-10 V	"	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		52	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN2B & OUTB		"		"		"	"
		53	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN3B & OUTB		"		"		"	"
		54	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN4B & OUTB		"		"		"	"
		55	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN1A & OUTA		"		"		"	"
		56	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN2A & OUTA		"		"		"	"
		57	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA		"		"		"	"
		58	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA		"		"		"	"
		59	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		60	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	0.8 V	IN2B & OUTB		"		"		"	"
		61	0.8 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN3B & OUTB		"		"		"	"
		62	2.4 V	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	2.4 V	IN4B & OUTB		"		"		"	"
R_{DS2}	63 thru 78 - Same terminal conditions as tests 47 thru 62, except V^+ = +10 V, V_S = +7.5 V and limits as shown.																				1,000		1,000		1,000	"
																				Subgroup 4 T_A = 25°C						
																				Min	Max					
C_A	3012	79	4/		GND											GND	GND	4/	AO		10					pF
	"	80			"											"	"		A1		10					"
C_{OS}	"	81	0 V	0 V	"					5/	5/					"	"		OUTA		25					"
	"	82	"	"	"											"	"		OUTB		25					"
C_{IS}	"	83	"	"	"	4/	4/	4/	4/							"	"	0 V	IN1A		10					"
	"	84	"	"	"											"	"	"	IN2A		"					"
	"	85	"	"	"											"	"	"	IN3A		"					"
	"	86	"	"	"											"	"	"	IN4A		"					"
	"	87	"	"	"											"	"	"	IN1B		"					"
	"	88	"	"	"							4/	4/	4/	4/	"	"	"	IN2B		"					"
	"	89	"	"	"											"	"	"	IN3B		"					"
	"	90	"	"	"											"	"	"	IN4B		"					"
C_{EN}	"	91		4/	"											"	"		EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.

Symbol	MIL-STD-883 test method	Case F Test no.	Terminal conditions 1/ 1 A0	2 EN	3 V-	4 IN1A	5 IN2A	6 IN3A	7 IN4A	8 OUTA	9 OUTB	10 IN4B	11 IN3B	12 IN2B	13 IN1B	14 V+	15 GND	16 A1	Measured terminal	Test limits: Subgroup 9 T_A = 25°C Min	Subgroup 9 T_A = 25°C Max	Subgroup 10 T_A = 125°C Min	Subgroup 10 T_A = 125°C Max	Subgroup 11 T_A = -55°C Min	Subgroup 11 T_A = -55°C Max	Unit
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 14	92		5 V	-15 V	GND	GND	GND	10 V	OUT		GND	GND	GND	GND	15 V	GND		ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	"	93		"	"	"	"	"	-10 V	"		"	"	"	"	"	"		"		"		"		"	"
	"	94		"	"	"	"	"	10 V	"		"	"	"	"	"	"		"		"		"		"	"
	"	95		"	"	"	"	"	-10 V	"		"	"	"	"	"	"		"		"		"		"	"
	"	96		"	"	10 V	"	"	GND	"		"	"	"	"	"	"		"		"		"		"	"
	"	97		"	"	-10 V	"	"	"	"		"	"	"	"	"	"		"		"		"		"	"
	"	98		"	"	10 V	"	"	"	"		"	"	"	"	"	"		"		"		"		"	"
	"	99		"	"	-10 V	"	"	"	"		"	"	"	"	"	"		"		"		"		"	"
	"	100		"	"	GND	"	"	"	"	OUT	10 V	"	"	"	"	"		ADDRESS IN TO OUTB		"		"		"	"
	"	101		"	"	"	"	"	"	"	"	-10 V	"	"	"	"	"		"		"		"		"	"
	"	102		"	"	"	"	"	"	"	"	10 V	"	"	"	"	"		"		"		"		"	"
	"	103		"	"	"	"	"	"	"	"	-10 V	"	"	"	"	"		"		"		"		"	"
	"	104		"	"	"	"	"	"	"	"	GND	"	"	"	"	"		"		"		"		"	"
	"	105		"	"	"	"	"	"	"	"	"	"	"	10 V	"	"		"		"		"		"	"
	"	106		"	"	"	"	"	"	"	"	"	"	"	-10 V	"	"		"		"		"		"	"
	"	107		"	"	"	"	"	"	"	"	"	"	"	10 V	"	"		"		"		"		"	"
															-10 V											
$t_{ON(EN)}$ and $t_{OFF(EN)}$	fig. 15	108	GND		"	10 V	10 V	10 V	10 V	OUT		"	"	"	GND	"	"	GND	ENABLE TO OUTA		"		"		"	"
	"	109	"		"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"		"		"		"	"
	"	110	"		"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	"	"		"		"		"	"
	"	111	"		"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"		"		"		"	"
	"	112	"		"	GND	GND	GND	GND	"	OUT	10 V	10 V	10 V	10 V	"	"	"	ENABLE TO OUTB		"		"		"	"
	"	113	"		"	"	"	"	"	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"		"		"		"	"
	"	114	"		"	"	"	"	"	"	"	10 V	10 V	10 V	10 V	"	"	"	"		"		"		"	"
	"	115	"		"	"	"	"	"	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C Min	Subgroup 12 T_A = 25°C Max					
V_{ISO}	fig. 17	116	GND	0 V	-15 V	IN	IN	IN	IN	OUT		IN	IN	IN	IN	15 V	GND	GND	OUTA	50						dB
	fig. 17	117	"	0 V	"	"	"	"	"	"	OUT	"	"	"	"	"	"	"	OUTB	"						"
V_{CT}	fig. 18	118	"	5 V	"	6/	"	"	"	OUT		"	"	"	6/	"	"	"	OUTA	"						-
	fig. 18	119	"	"	"	6/	"	"	"	"	OUT	"	"	"	6/	"	"	"	OUTB	"						-
V_{CTE}	fig. 19	120	IN	"	"	GND				OUT					GND	"	"	IN	OUTA		10					mV
	fig. 19	121	IN	"	"	GND				"	OUT				GND	"	"	IN	OUTB		10					mV
																				Subgroup 13 T_A = 25°C Min	Subgroup 13 T_A = 25°C Max					
t_D	fig. 16	122		5 V	-15 V	10 V	10 V	10 V	10 V	OUT		GND	GND	GND	GND	15 V	GND	IN	OUTA	5						ns
	"	123		"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"	"						"
	"	124		"	"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	"	"	"						"
	"	125		"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"	"						"
	"	126		"	"	GND	GND	GND	GND	"	OUT	10 V	10 V	10 V	10 V	"	"	"	OUTB	"						"
	"	127		"	"	"	"	"	"	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"						"
	"	128		"	"	"	"	"	"	"	"	10 V	10 V	10 V	10 V	"	"	"	"	"						"
	"	129		"	"	"	"	"	"	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

1/ Pins not designated may be high-level logic or open. Exceptions are as follows: $V_{IC(POS)}$ tests, the V-, GND terminal shall be open; $V_{IC(NEG)}$ tests, the V+ terminal shall be open.

2/ The device manufacturer may, at his option, measure I_{IL} and I_{IH} at 25°C for each individual input or measure all inputs together.

3/ The I_S and I_D measurements shall be performed in sequence.

4/ C_A, C_{FN}, and C_{IS} - Connect capacitance bridge between measured terminal and V_{SS}, frequency = 1 MHz, see 4.4.1c.

5/ C_{OS} - Connect capacitance bridge between measured output and V_{SS}, frequency = 1 MHz, see 4.4.1c.

6/ Connect input to ground through a 1 kΩ ±5% resistor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. Electrical parameters shall be as specified in table II herein. For class S devices, delta limits shall apply only to subgroup 5 of group B inspection.

b. Steady state life test for class S devices shall be in accordance with table IIa of method 5005 of MIL-STD-883, using an accelerated burn-in circuit approved by the qualifying activity. If the alternate burn-in conditions are used, the circuit shown on figure 7 shall be used.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein. Delta limits shall apply only to subgroup 1 of group C inspection.

b. Steady state life test (method 1005 of MIL-STD-883) conditions:

1. Test condition C using the circuit shown on figure 6 or test condition D using the circuit shown on figure 7.

2. T_A = 125°C, minimum for 1,000 hours.

c. A special subgroup shall be added to the group C inspection requirements for class B devices, and shall consist of the tests, conditions, and limits as specified for subgroups 10 and 11 of group A.

d. A special subgroup shall be added to group C inspection for class B devices only and it shall consist of group A, subgroup 12 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. A sample of 5 devices (of the device type to be inspected) shall be chosen and submitted to test with no failures allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed. When more than one device type is qualified, the single device type selected shall be a different device for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfull the periodic inspection requirement.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table III herein.

b. A special subgroup shall be added to group D inspection for class S devices only and it shall consist of the group A subgroups 4 and 7 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. When more than one device type is qualified, the single device type selected shall be a different device type for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated fulfill the periodic inspection requirement.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables. Electrical test circuits as prescribed herein or in the referenced test methods of MIL-STD-883 shall be acceptable. Other test circuits shall require the approval of the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device type 02

4.5.1 Voltages and currents. All voltages values given are referenced to the ground terminal of the device under test (DUT). Current values given are for conventional current and are positive when flowing into the referenced terminal.

4.5.2 Life test and burn-in cooldown procedure. When the devices are measured at 25°C following application of the steady state life or burn-in test condition, they shall be cooled to within 10°C of their power stable condition prior to removal of the bias.

4.6 Data reporting. When specified in the contract or purchase order, a copy of the following data, as applicable, shall be supplied:

a. Attributes data for all screening tests (see 4.2) and variables data for all static burn-in, dynamic burn-in, and operating life tests.

b. The quality conformance inspection data (see 4.4).

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510. The devices covered by this specification require electrostatic protection.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design application and logistic support of existing equipment.

6.2 Ordering data. The contract or purchase order should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment supplied by the device manufacturer, if applicable.

c. Requirement for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to procuring activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements special lead lengths or lead forming, if applicable. These requirements shall not affect the part number.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1313, and as follows:

V_{IC} - - - - - - - - - -	Input clamp voltage.
I_{IL} - - - - - - - - - -	Low level (address) input current.
I_{IH} - - - - - - - - - -	High level (address) input current.
$I_{S(OFF)}$ - - - - - - -	Leakage current into the source terminal of an "OFF" switch.
$I_{D(OFF)}$ - - - - - - -	Leakage current into the drain terminal of an "OFF" switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

$I_{D(ON)}$	Leakage current from an "ON" driver into the switch.
I(+)	Positive supply current.
I(-)	Negative supply current.
$I_{(SBY)}$	Standby supply current.
R_{ON}	Resistance of an "ON" switch.
C_A	Address capacitance.
C_{OS}	Output switch capacitance.
C_{IS}	Input switch capacitance.
C_{IOS}	Input to output (feedthrough) capacitance.
t_{PLH}	Propagation delay time: low to high level.
t_{PHL}	Propagation delay time: high to low level.
GND	Electrical ground.
V_{REF}	Reference voltage.
A	Address input to switch.
EN	Enable.
O/I	Output/Input.
I/O	Input/Output.

TABLE IV. Group C end-point electrical parameters (T_A = 25°C).

	Device types					
Parameter	01, 07	02	03, 08	04	05	06
R_{ON}	50Ω or 10% 1/	150Ω or 10%	50Ω or 10%	150Ω or 10%	150Ω or 10% 1/	150Ω or 10% 1/
$I_{D(OFF)}$	15 nA	15 nA	15 nA	15 nA	15 nA	15 nA
$I_{S(OFF)}$	15 nA	15 nA	15 nA	15 nA	15 nA	15 nA

1/ Whichever is greater.

2/ Each of the above parameters shall be recorded before and after the required burn-in or life tests to determine deltas (Δ).

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired to Government logistic support will be procured to device class B (see 1.2.2), and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Military device type	Generic-industry type
01	506, 6116
02	506A
03	507, 6216
04	507A
05	508A
06	509A
07	508, 6108
08	509, 6208

6.6 Handling. MOS devices must be handled with certain precautions to avoid damage due to accumulation of static charge. Input protective devices have been designed in the chip to minimize the effect of this static buildup. However, the following handling practices are recommended:

a. Devices should be handled on benches with conductive and grounded surface.

b. Ground test equipment, tools and operator.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - MI
Air Force - 11, 19, 80, 85, 99
DLA - ES

User activities:
Army - AR, SM
Navy - AS, CG, OS, MC, SH

Civil Agency Coordinating Activity:
NASA - NA

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5962-0909)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

National Aeronautics and
Space Administration

Washington, D C
20546

Official Business
Penalty for Private Use $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATE

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12028 WASHINGTON, D C

POSTAGE WILL BE PAID BY NASA

NASA PART PROJECT OFFICE
CODE 311.A
NASA/GODDARD SPACE FLIGHT CENTER
GREENBELT MD 20771

NASA

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/190C	Microcircuits, Linear, CMOS/Analog Multiplexers/ Demultiplexers with Overvoltage Protection, Monolithic, Silicon.

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
Positive Logic	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 20261021T13:46Z
Check the source to verify that this is the current version before use.