INCH-POUND
MIL-M-38510/190D
12 October 2005
SUPERSEDING
MIL-M-38510/190C
22 October 1986

MILITARY SPECIFICATION

MICROCIRCUITS, LINEAR, CMOS/ANALOG MULTIPLEXERS/DEMULTIPLEXERS WITH OVERVOLTAGE PROTECTION, MONOLITHIC SILICON, POSITIVE LOGIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design as of 10 July 1995

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF-38535

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, CMOS/Analog logic microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.4)

1.2 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types are as follows:

Device type	Circuit
01	Single 16-channel MUX/DEMUX
02	Single 16-channel MUX/DEMUX with overvoltage protection
03	Differential 8-channel MUX/DEMUX
04	Differential 8-channel MUX/DEMUX with overvoltage protection
05	Single 8-channel MUX/DEMUX with overvoltage protection
06	Differential 4-channel MUX/DEMUX with overvoltage protection
07	Single 8-channel MUX/DEMUX
08	Differential 4-channel MUX/DEMUX

1.2.2 Device class. The device class is the product assurance level as defined in MIL-PRF-38535.

1.2.3 Case outline. The case outlines are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
E	GDIP1-T16 or CDIP2-T16	16	Dual-in-line
X	See figure 4	28	Dual-in-line

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, 3990 East Broad St., Columbus, OH 43218-3990, or email mailto:linear@dscc.dla.mil . Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil .

AMSC N/A FSC 5962

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Supply voltage between V+ and V-:
- Device types 02, 04, 05, and 06 ..... +40 V
- Device types 01, 03, 07, and 08 ..... +32 V

V+ to ground:
- Device types 02, 04, 05, and 06 ..... +20 V
- Device types 01, 03, 07, and 08 ..... +16 V

Digital input voltage:
- Device types 02, 04, 05, and 06 ..... $((V-) - 4\ V) \leq V_D \leq ((V+) + 4\ V)$
- Device types 01, 03, 07, and 08 ..... $-0.3\ V \leq V_D \leq (V+)$

Analog input:
- Device types 02, 04, 05, and 06 ..... $((V-) - 20\ V \leq V_A \leq ((V+) + 20\ V)$
- Device types 01, 03, 07, and 08 ..... $(V-) \leq V_A \leq (V+)$

Storage temperature ..... -65°C to +150°C
Lead temperature (soldering, 10 seconds) ..... 300°C
Junction temperature (T_J) ..... +175°C

1.4 Recommended operating conditions.

V+ ..... +15 V
V- ..... -15 V
V_{REF} ..... Open
V_{IL} (max) ..... 0.8 V
V_{IH} (min):
- Device types 01, 03, 07, and 08 ..... 2.4 V
- Device types 02, 04, 05, and 06 ..... 4.0 V

V_{EN}:
- Device types 02, 04, 05, and 06 ..... 4.0 V
- Device types 01, 03, 07, and 08 ..... 4.5 V

Ambient operating temeperature range (T_A) ..... -55°C to +125°C

1.5 Power and thermal characteristics.

Case outline	Maximum allowable power dissipation 1/	Maximum θ_{JC} 2/	Maximum θ_{JA}
E	400 mW @ T_A = 125°C	50°C/W	125°C/W
X	400 mW @ T_A = 125°C	51°C/W	125°C/W

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

1/ All leads welded or soldered to PC board.
2/ Applies only when $T_A \geq 75$°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications and Standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.3).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein. Although eutectic die bonding is preferred, epoxy die bonding may be performed. However, the resin used shall be Dupont 5504A conductive silver paste, or equivalent, which is cured at 200°C ±10°C for a minimum of 2 hours. The use of equivalent epoxies or cure cycles shall be approved by the qualifying activity. Equivalency shall be demonstrated in data submitted to the qualifying acivity for verification.

3.3.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.3.2 Functional diagrams. The functional diagrams shall be as specified on figure 2.

3.3.3 Truth tables. The truth tables shall be as specified on figure 3.

3.3.4 Case outline. The case outline shall be as specified in 1.2.3 and figure 4.

3.3.5 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity (DSCC-VA) upon request.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.6 Electrical test requirements. Electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.7 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 82 (see MIL-PRF-38535, appendix A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ +125°C unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Positive input clamping voltage	$V_{IC(POS)}$	T_A = 25°C, V+ = V- = 0 V, I_{IN} = 1 mA	02, 04, 05, 06		1.5	V dc
Negative input clamping voltage	$V_{IC(NEG)}$	T_A = 25°C, V+ = V- = 0 V, I_{IN} = -1 mA	02, 04, 05, 06	-1.5		V dc
Input leakage current 3/	I_{IH}	Measure address inputs sequentially, connect all unused address inputs to GND	All	-0.1	+1.0	µA
Input leakage current 3/	I_{IL}	Measure address inputs sequentially, connect all unused address inputs to 5 V	All	-1.0	+0.1	µA
Leakage current into the source terminal of an “OFF” switch	$I_{S(OFF)}$	V_S = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, T_A = 25°C	All	-1	1	nA
		V_S = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, -55°C ≤ T_A ≤ 125°C		-50	50	
		V_S = -10 V, V_{EN} = 0.8 V, All unused sources= +10 V, T_A = 25°C		-1	1	
		V_S = -10 V, V_{EN} = 0.8 V, All unused sources= +10 V, -55°C ≤ T_A ≤ 125°C		-50	50	
Leakage current into the drain terminal of an “OFF” switch	$I_{D+(OFF)}$	V_D = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, T_A = 25°C	01, 02	-20	20	nA
			03, 04, 05, 06, 07, 08	-10	10	
		V_D = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, -55°C ≤ T_A ≤ 125°C	01, 02	-500	500	
			03, 04, 05, 07	-250	250	
			06, 08	-125	125	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ +125°C unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Leakage current into the drain terminal of an “OFF” switch	$I_{D-(OFF)}$	V_D = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, T_A = 25°C	01, 02	-20	20	nA
			03, 04, 05, 06, 07, 08	-10	10	
		V_D = 10 V, V_{EN} = 0.8 V, All unused sources = -10 V, -55°C ≤ T_A ≤ 125°C	01, 02	-500	500	
			03, 04, 05, 07	-250	250	
			06, 08	-125	125	
Leakage current from an “ON” driver into the switch (drain)	$I_{D(ON)}$	V_S = 10 V, V_D = 10 V, Connect all unused sources to -10 V, T_A = 25°C	01, 02	-20	20	nA
			03, 04, 05, 06, 07, 08	-10	10	
		V_S = 10 V, V_D = 10 V, Connect all unused sources to -10 V, -55°C ≤ T_A ≤ 125°C	01, 02	-500	500	
			03, 04, 05, 07	-250	250	
			06, 08	-125	125	
		V_S = 10 V, V_D = -10 V, Connect all unused sources to -10 V, T_A = 25°C	01, 02	-20	20	
			03, 04, 05, 06, 07, 08	-10	10	
		V_S = 10 V, V_D = -10 V, Connect all unused sources to -10 V, -55°C ≤ T_A ≤ 125°C	01, 02	-500	500	
			03, 04, 05, 07	-250	250	
			06, 08	-125	125	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ +125°C unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Overvoltage protected, leakage current into the drain terminal of an "OFF" switch	$I_{D(OFF)}$ overvoltage	V_S = 33 V, V_D = 0 V, V_{EN} = 0.8 V	02, 04, 05, 06	-2.0	2.0	µA
		V_S = -33 V, V_D = 0 V, V_{EN} = 0.8 V		-2.0	2.0	
Positive supply current	I(+)	V_A = 0 V, V_{EN} = 5 V	01, 03		14	mA
			02, 04, 05, 06		2.0	
			07, 08		12	
Negative supply current	I(-)	V_A = 0 V, V_{EN} = 5 V	01, 03	-14		mA
			02, 04, 05, 06	-1		
			07, 08	-12		
Standby positive supply current	I+SBY	V_A = 0 V, V_{EN} = 0 V	01, 03		3.0	mA
			02, 04, 05, 06		2.0	
			07, 08		3.5	
Standby negative supply current	I-SBY	V_A = 0 V, V_{EN} = 0 V	01, 03	-4.0		mA
			02, 04, 05, 06	-1.0		
			07, 08	-3.5		
Capacitance: Address	C_A	V+ = V- = 0 V, T_A = 25°C, f = 1 MHz	All		10	pF
Capacitance: Enable	C_{EN}	V+ = V- = 0 V, T_A = 25°C, f = 1 MHz	All		10	pF
Capacitance: Output switch	C_{OS}	V+ = V- = 0 V, See table III	01		90	pF
			02		85	
			03, 04		50	
			05, 07		45	
			06, 08		25	
Capacitance: Input switch	C_{IS}	V+ = V- = 0 V, See table III	All		10	pF

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ +125°C unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Switch “ON” resistance	R_{DS1}	V_S = 10 V, I_D = 1 mA, T_A = 25°C, T_A = -55°C	01, 03		600	Ω
		V_S = 10 V, I_D = 1 mA, T_A = 125°C			700	
		V_S = 10 V, I_D = 100 µA, T_A = 25°C, T_A = -55°C	02, 04		1,500	
		V_S = 10 V, I_D = 100 µA, T_A = 125°C			2,000	
		V_S = 10 V, I_D = 100 µA, T_A = 25°C, T_A = -55°C	05, 06		1,500	
		V_S = 10 V, I_D = 100 µA, T_A = 125°C			1,800	
		V_S = 10 V, I_D = 1 mA, T_A = 25°C, T_A = -55°C	07, 08		400	
		V_S = 10 V, I_D = 1 mA, T_A = 125°C			500	
Switch “ON” resistance	R_{DS1}	V_S = -10 V, I_D = -1 mA, T_A = 25°C, T_A = -55°C	01, 03		600	Ω
		V_S = -10 V, I_D = -1 mA, T_A = 125°C			700	
		V_S = -10 V, I_D = -100 µA, T_A = 25°C, T_A = -55°C	02, 04		1,500	
		V_S = -10 V, I_D = -100 µA, T_A = 125°C			2,000	
		V_S = -10 V, I_D = -100 µA, T_A = 25°C, T_A = -55°C	05, 06		1,500	
		V_S = -10 V, I_D = -100 µA, T_A = 125°C			1,800	
		V_S = -10 V, I_D = -1 mA, T_A = 25°C, T_A = -55°C	07, 08		400	
		V_S = -10 V, I_D = -1 mA, T_A = 125°C			500	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Test	Symbol	Conditions 1/ 2/ V- = -15 V, V+ = +15 V, V_{EN} = 4.5 V, GND = 0 V, -55°C ≤ T_A ≤ +125°C unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Switch "ON" resistance	R_{DS2}	V+ = 10 V, V- = -10 V, V_S = 7.5 V, I_D = 1 mA	01, 03, 07, 08		1,000	Ω
		V+ = 10 V, V- = -10 V, V_S = 7.5 V, I_D = 100 µA	02, 04		2,400	
			05, 06		2,200	
		V+ = 10 V, V- = -10 V, V_S = -7.5 V, I_D = -1 mA	01, 03, 07, 08		1,000	
		V+ = 10 V, V- = -10 V, V_S = -7.5 V, I_D = -100 µA	02, 04		2,400	
			05, 06		2,200	
Single channel isolation	V_{ISO}	f = 200 kHz, V_{GEN} = 1 V_{P-P}, see figure 15	All	50		dB
Crosstalk between channels	V_{CT}	F = 200 kHz, V_{GEN} = 1 V_{P-P}, see figure 16	All	50		dB
Charge transfer error	V_{CTE}	V_S = GND, see figure 17	All		10	mV
Break-before-make time delay	t_D	See figure 14, T_A = 25°C	All	5		ns
Propagation delay times: Address inputs to I/O channels	$t_{ON(A)}$ $t_{OFF(A)}$	R_L = 1 kΩ, C_L = 100 pF, see figures 6, 8, 10, and 12, T_A = 25°C, T_A = -55°C	All		1,000	ns
		R_L = 1 kΩ, C_L = 100 pF, see figures 6, 8, 10, and 12, T_A = 125°C			1,500	
Enable to I/O	$t_{ON(EN)}$ $t_{OFF(EN)}$	R_L = 1 kΩ, C_L = 100 pF, see figures 7, 9, 11, and 13, T_A = 25°C, T_A = -55°C	All		1,000	ns
		R_L = 1 kΩ, C_L = 100 pF, see figures 7, 9, 11, and 13, T_A = 125°C			1,500	

1/ Current flowing in either direction between any associated input and output terminals of the switch shall be 30 mA maximum.

2/ Input = source; Output = drain.

3/ Input current of one input node.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

4. VERIFICATION.

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. Additional screening for space level product shall be as specified in MIL-PRF-38535.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

4.4 Technology Conformance inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).


TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III) 1/ 2/ 3/	
	Class S devices 4/	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1, 2, 3, 9	1, 2, 3,9
Group A test requirements	1,2,3,4,9,10, 11,12,13	1,2,3,4,9,12,13
Group B electrical test parameters when using the method 5005 QCI option	1,2,3 and table IV delta limits	N/A
Group C end-point electrical parameters	1,2,3 and table IV delta limits	1 and table IV delta limits
Additional electrical subgroups for group C periodic inspections	N/A	10, 11, 12
Group D end-point electrical parameters	1,2,3	1
Additional electrical subgroups for group D periodic inspection	12	None

1/ PDA applies to subgroup 1.
2/ See 4.4.1c
3/ See 4.4.1e
4/ See 4.4.4b

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device type 01
Case X

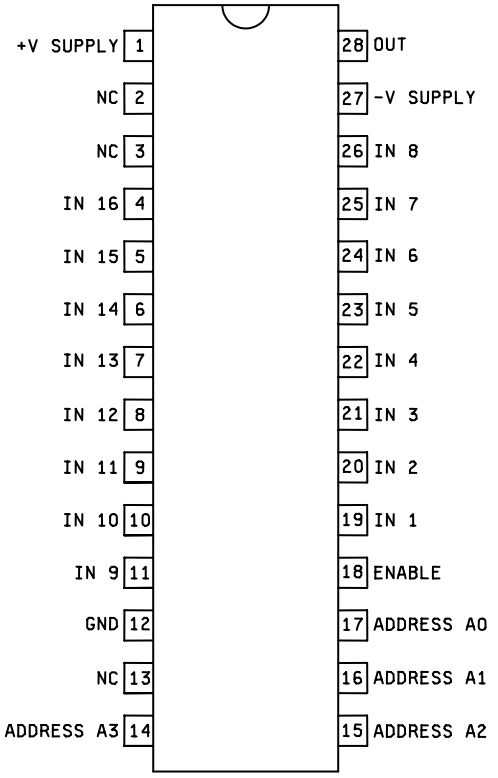

Device type 02
Case X


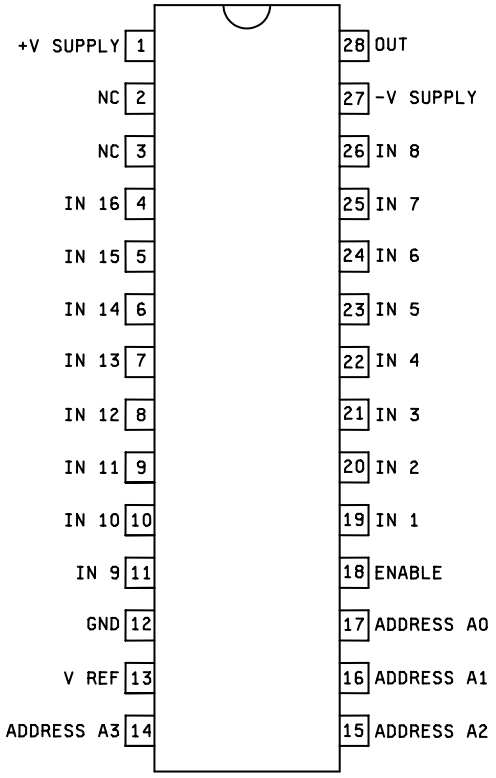


Figure 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device type 03
Case X

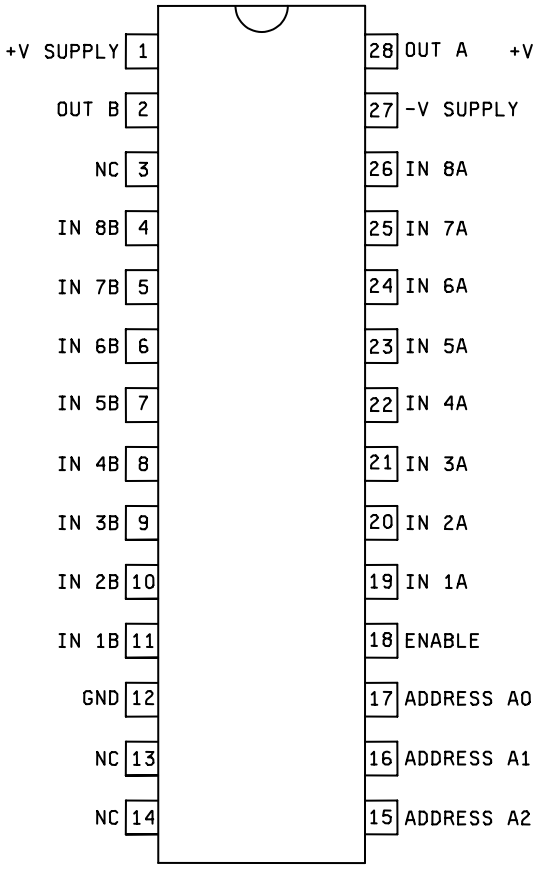

Device type 04
Case X


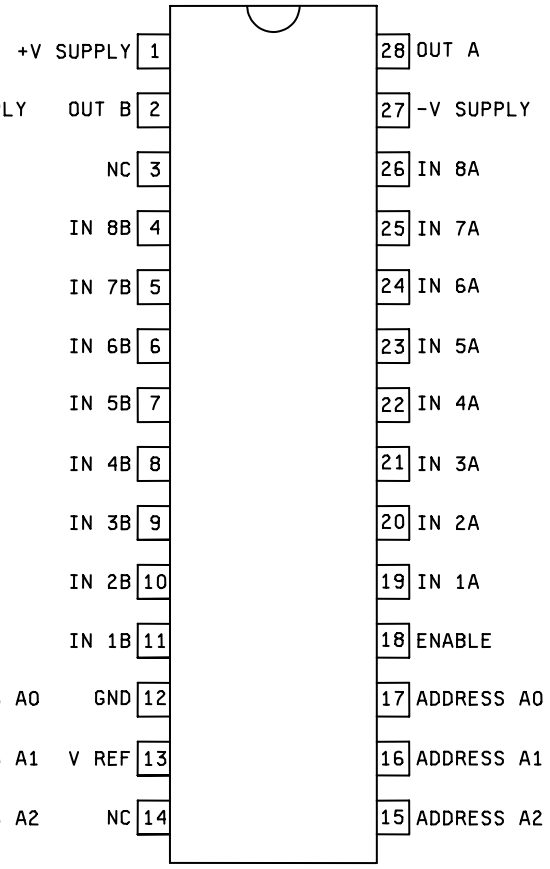


Figure 1. Terminal connections – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07
Case E

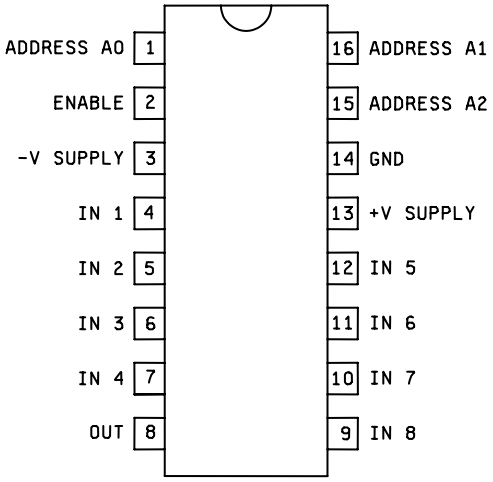

Device types 06 and 08
Case E


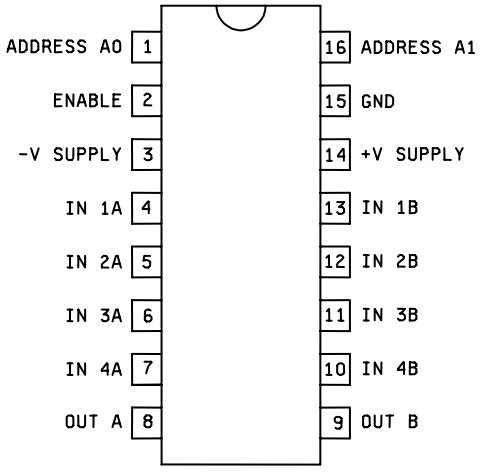


Figure 1. Terminal connections – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

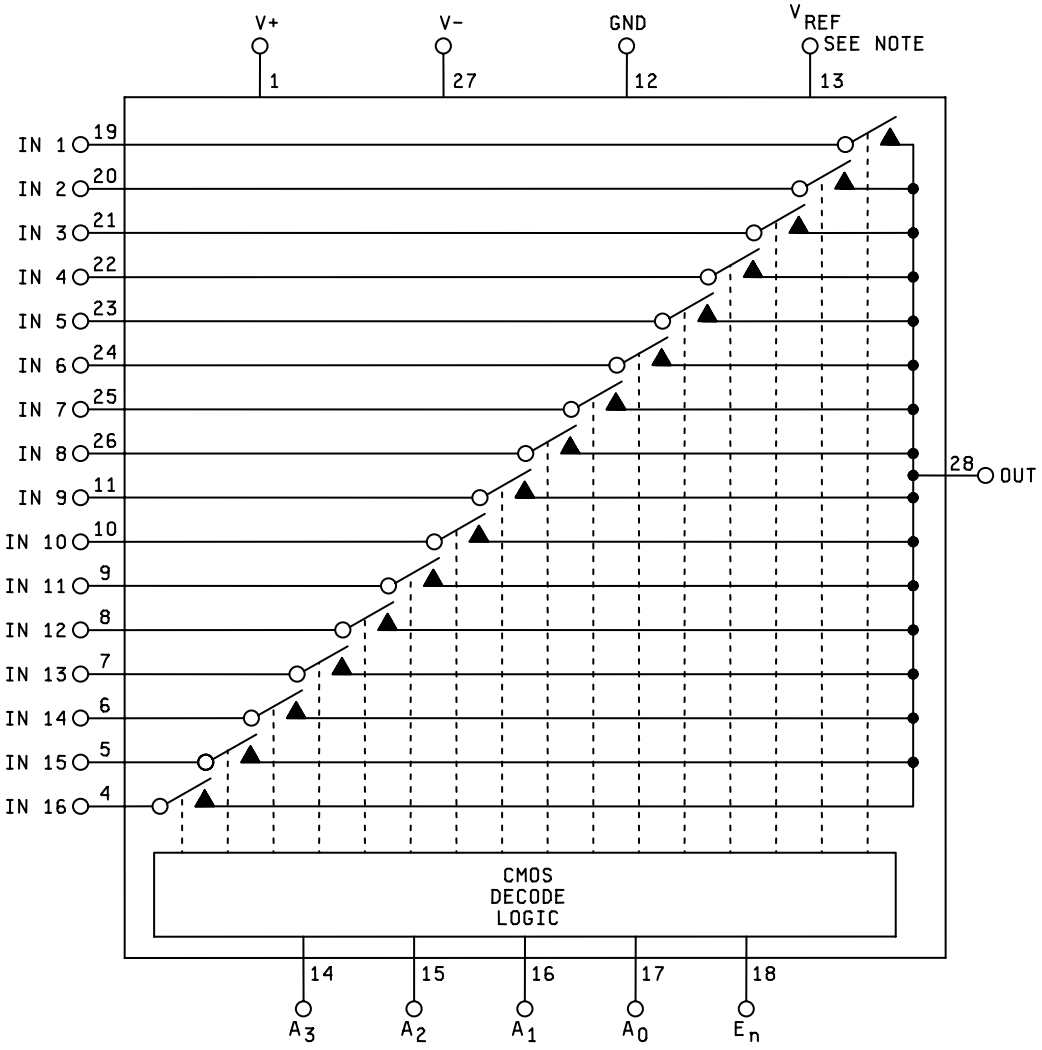


NOTE: Optional (normally left open)

FIGURE 2. Functional diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04

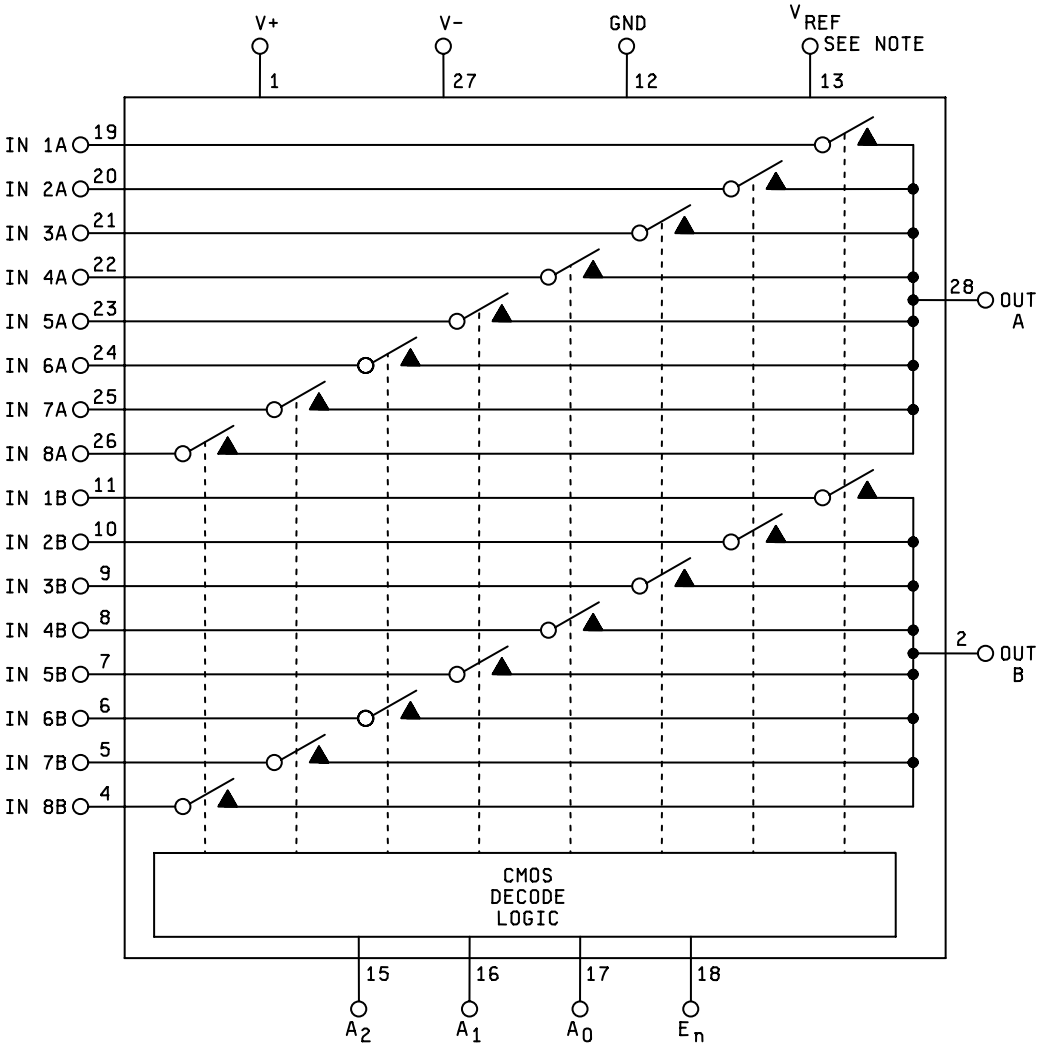


NOTE: Optional (normally left open)

FIGURE 2. Functional diagrams – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

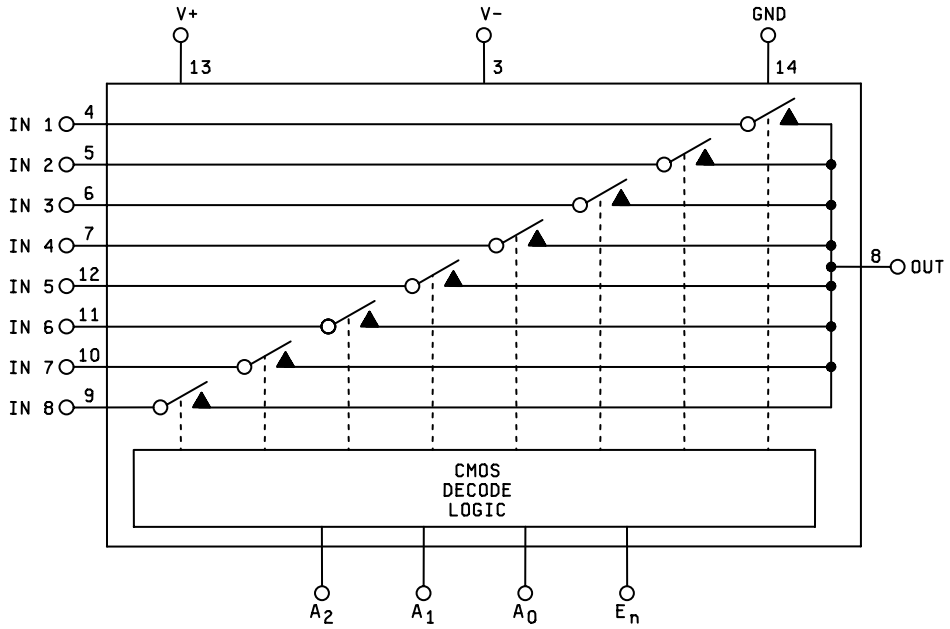

Device types 06 and 08

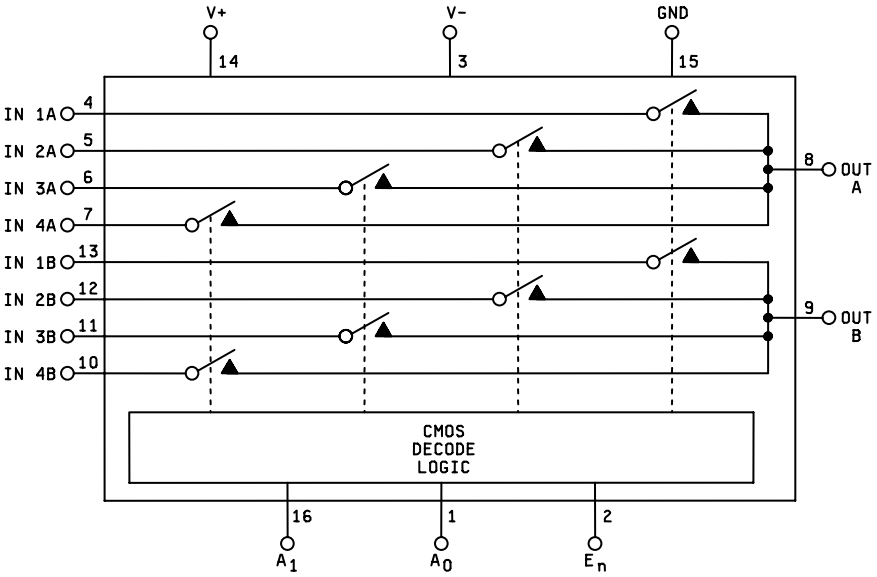


FIGURE 2. Functional diagrams – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

A3	A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	X	L	NONE
L	L	L	L	H	1
L	L	L	H	H	2
L	L	H	L	H	3
L	L	H	H	H	4
L	H	L	L	H	5
L	H	L	H	H	6
L	H	H	L	H	7
L	H	H	H	H	8
H	L	L	L	H	9
H	L	L	H	H	10
H	L	H	L	H	11
H	L	H	H	H	12
H	H	L	L	H	13
H	H	L	H	H	14
H	H	H	L	H	15
H	H	H	H	H	16

Device types 03 and 04

A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	L	NONE
L	L	L	H	1A, 1B
L	L	H	H	2A, 2B
L	H	L	H	3A, 3B
L	H	H	H	4A, 4B
H	L	L	H	5A, 5B
H	L	H	H	6A, 6B
H	H	L	H	7A, 7B
H	H	H	H	8A, 8B

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07

A2	A1	A0	EN	CHANNEL SELECTED
X	X	X	L	NONE
L	L	L	H	1
L	L	H	H	2
L	H	L	H	3
L	H	H	H	4
H	L	L	H	5
H	L	H	H	6
H	H	L	H	7
H	H	H	H	8

Device types 06 and 08

A1	A0	EN	CHANNEL SELECTED
X	X	L	NONE
L	L	H	1A, 1B
L	H	H	2A, 2B
H	L	H	3A, 3B
H	H	H	4A, 4B

FIGURE 3. Truth tables – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

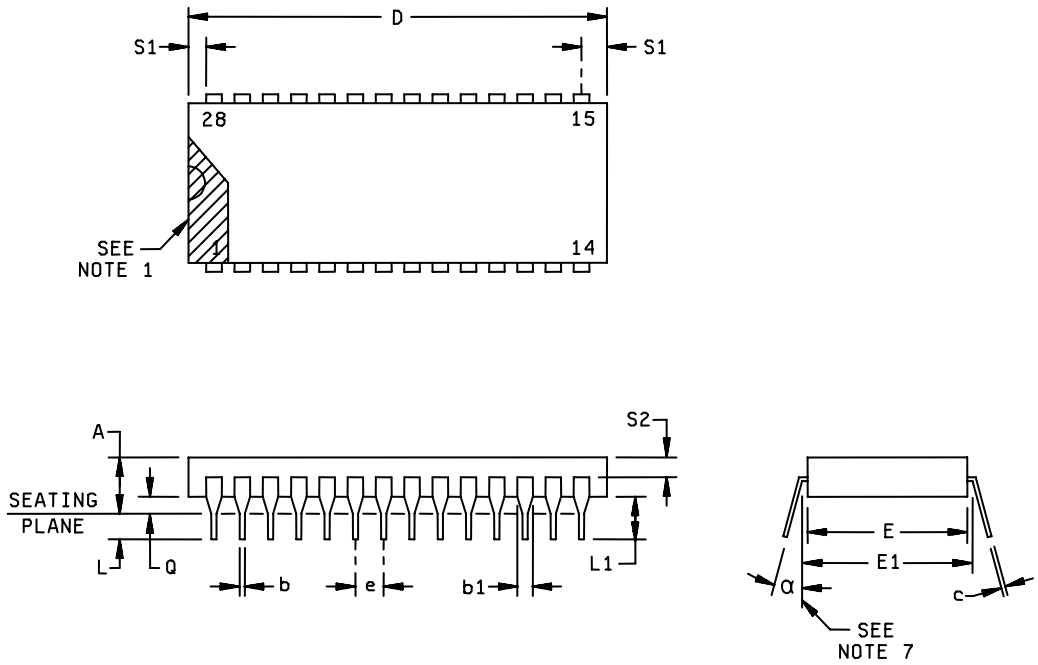


FIGURE 4. Case outline X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.


Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	----	.200	----	5.08	
b	.014	.023	0.36	0.58	8
b_1	.040	.070	1.02	1.78	2, 8
C	.008	.014	.20	0.36	8
D	----	1.48	----	37.6	4
E	.520	.610	13.21	13.97	4
E_1	.585	.620	14.86	15.75	7
E_2	N/A	N/A	N/A	N/A	
E_3	N/A	N/A	N/A	N/A	
e	.100 BSC		2.54 BSC		5, 9
L	.125	.200	3.18	5.08	
L_1	.150		3.81	5.08	
Q	.015	.060	0.51	1.52	3
Q_1	N/A	N/A	N/A	N/A	
S	----	.098	----	2.49	6
S_1	.005	----	0.13	----	6
S_2	.005	----	0.13	N/A	
α	0°	15°	0°	15°	

NOTES:
1. Index area; a notch or a pin one identification mark shall be located adjacent to pin one and shall be located Within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark.
2. The minimum limit for dimension b_1 may be .023 (.58 mm) for leads number 1, 14, 15, and 28 only.
3. Dimension Q shall be measured from the seating plane to the base plane.
4. This dimension allows for off-center lid, meniscus and glass overrun.
5. The basic pin spacing is .100 (2.54 mm) between centerlines. Each pin centerline shall be located within ±.010 (.25 mm) of its exact longitudinal position relative to pins 1 and 28.
6. Applies to all four corners (leads number 1, 14, 15, and 28).
7. Lead center when α = 0°. E_1 shall be measured at the centerline of the leads.
8. All leads – Increase maximum limit by .003 (.08 mm) measured at the center of the flat, when lead finish A or B is applied.
9. Twenty six spaces.
10. If this configuration is used, no organic or polymeric materials shall be molded to the bottom of the package to cover the leads.

FIGURE 4. Case outline X – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 02, 04, 05, and 06

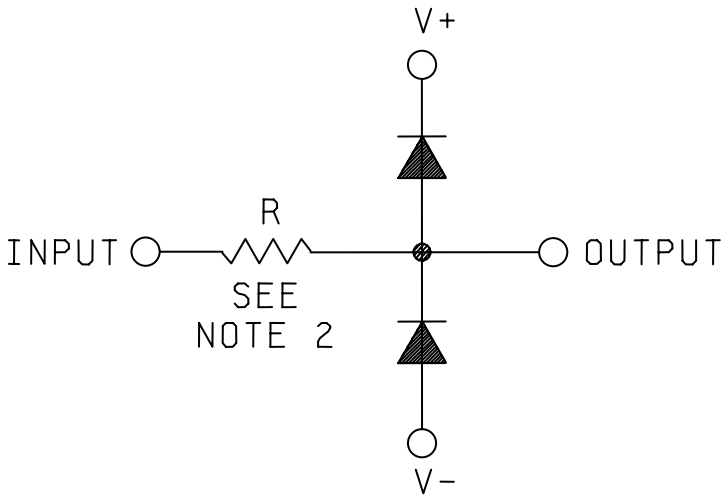


NOTES:
1. All device inputs shall be protected from transients such a electrostatic discharge. This circuit is Intrinsic to the device.
2. This resistance is 200 to 2,000 Ω depending on device type.

FIGURE 5. Address and Enable input protection circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02
Address inputs to I/O

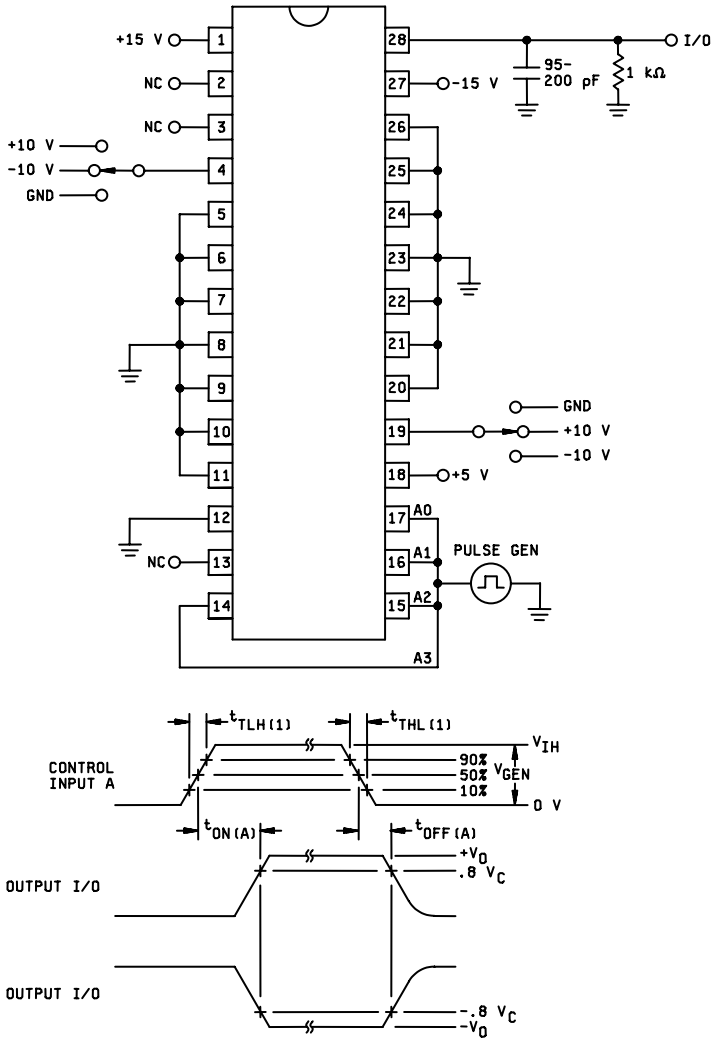


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns

DYNAMIC TEST WAVEFORMS

FIGURE 6. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02
Enable to I/O

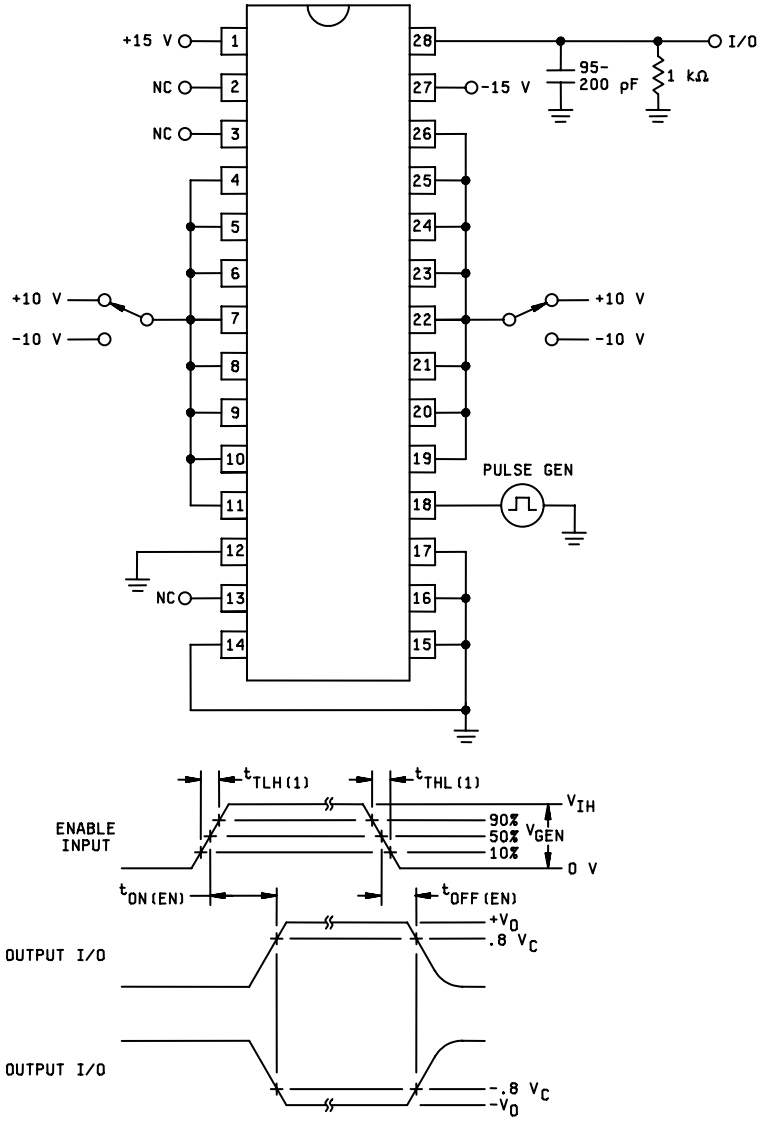


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns

DYNAMIC TEST WAVEFORMS

FIGURE 7. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04
Address inputs to I/O

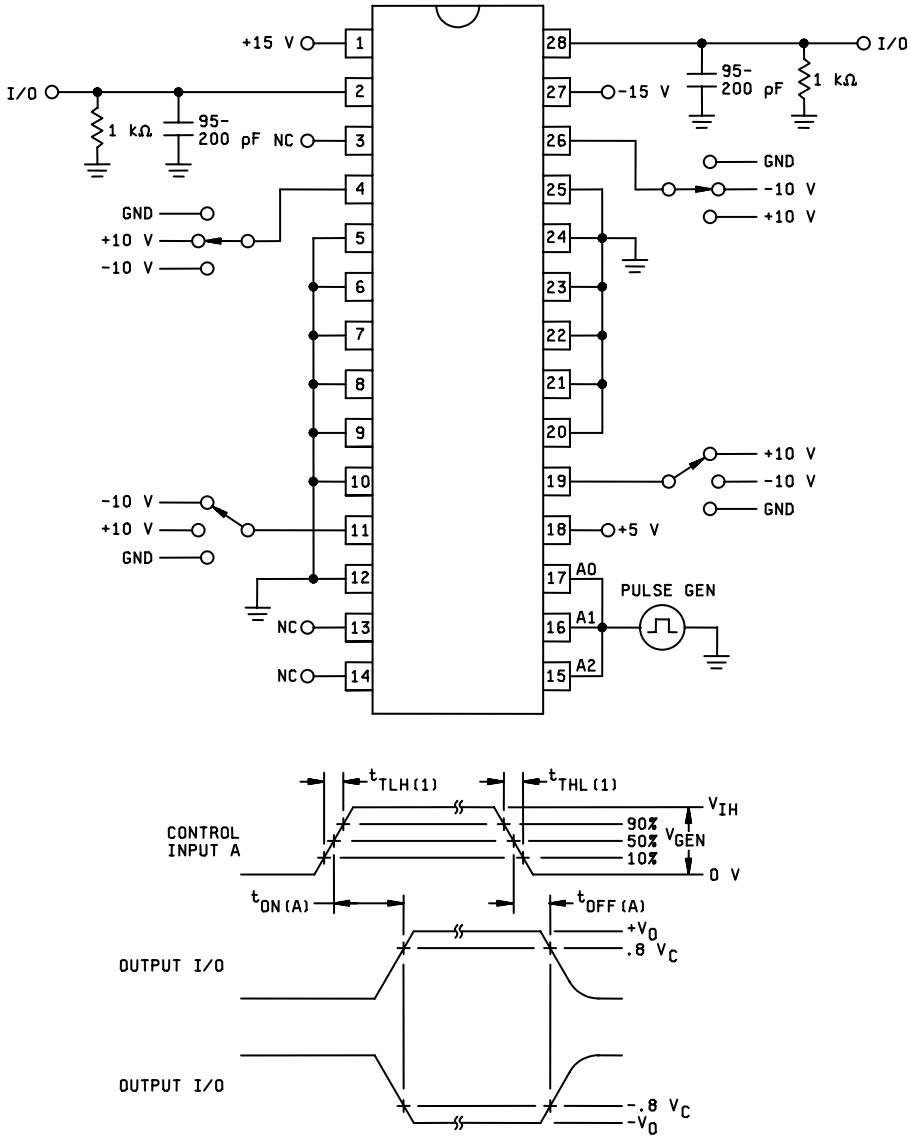


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns


DYNAMIC TEST WAVEFORMS

FIGURE 8. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 03 and 04
Enable to I/O

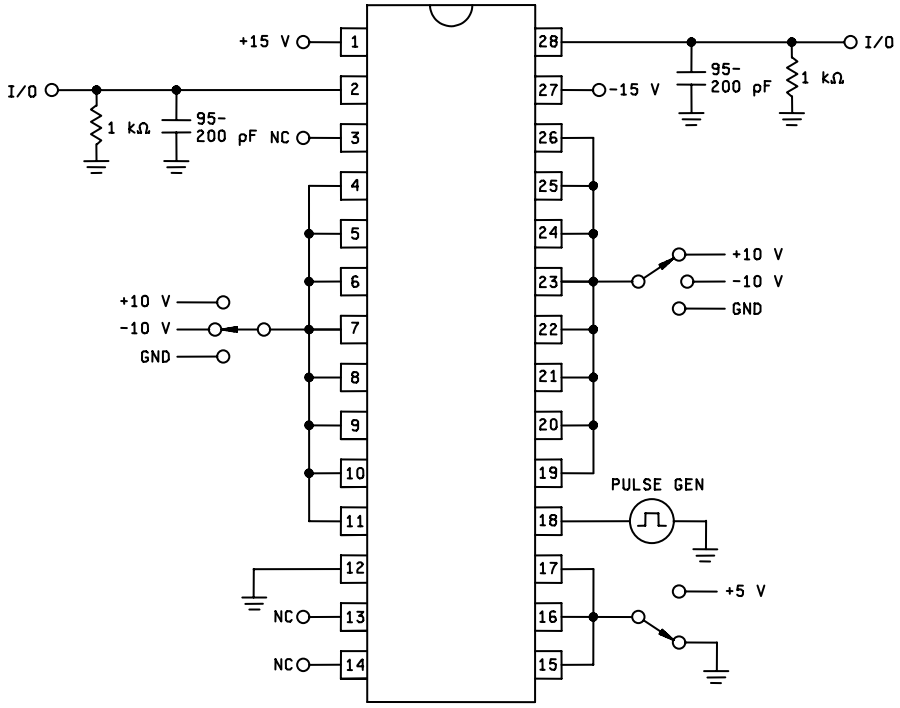

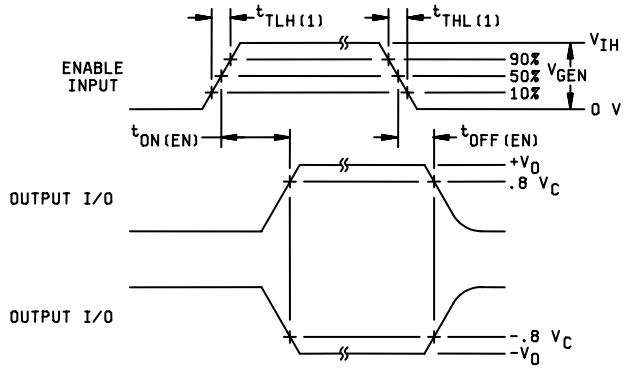


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns


DYNAMIC TEST WAVEFORMS

FIGURE 9. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07
Address inputs to I/O

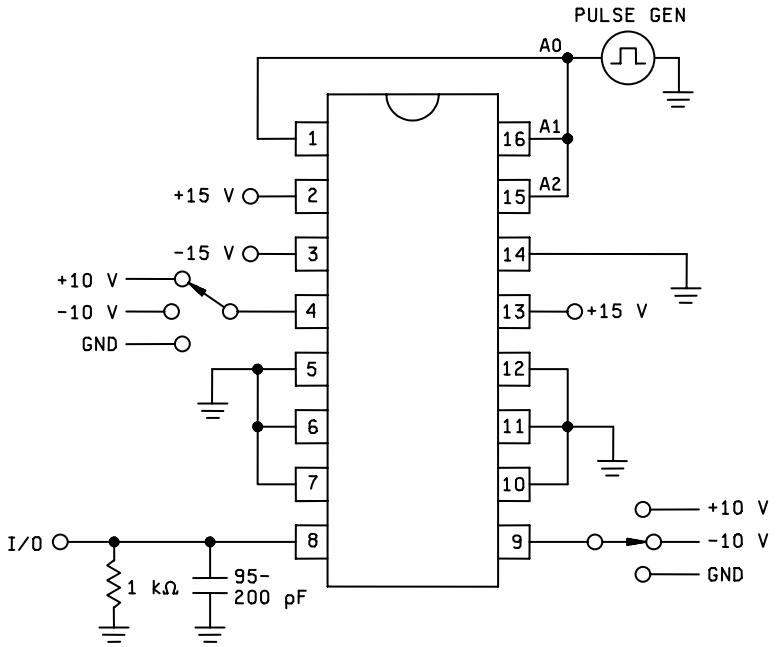

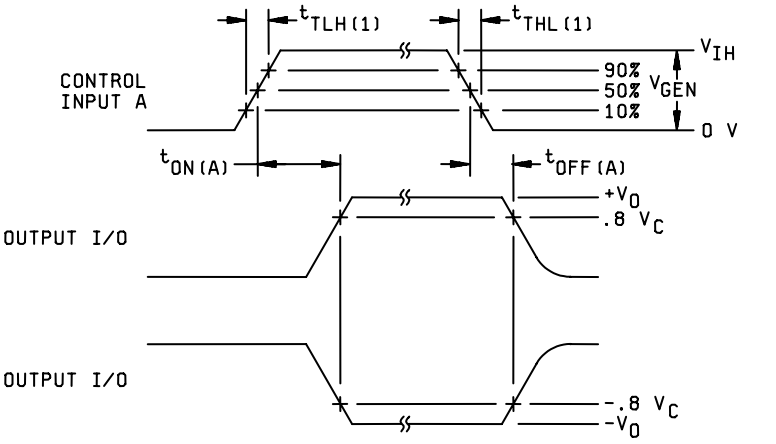


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns

DYNAMIC TEST WAVEFORMS

FIGURE 10. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 05 and 07
Enable to I/O

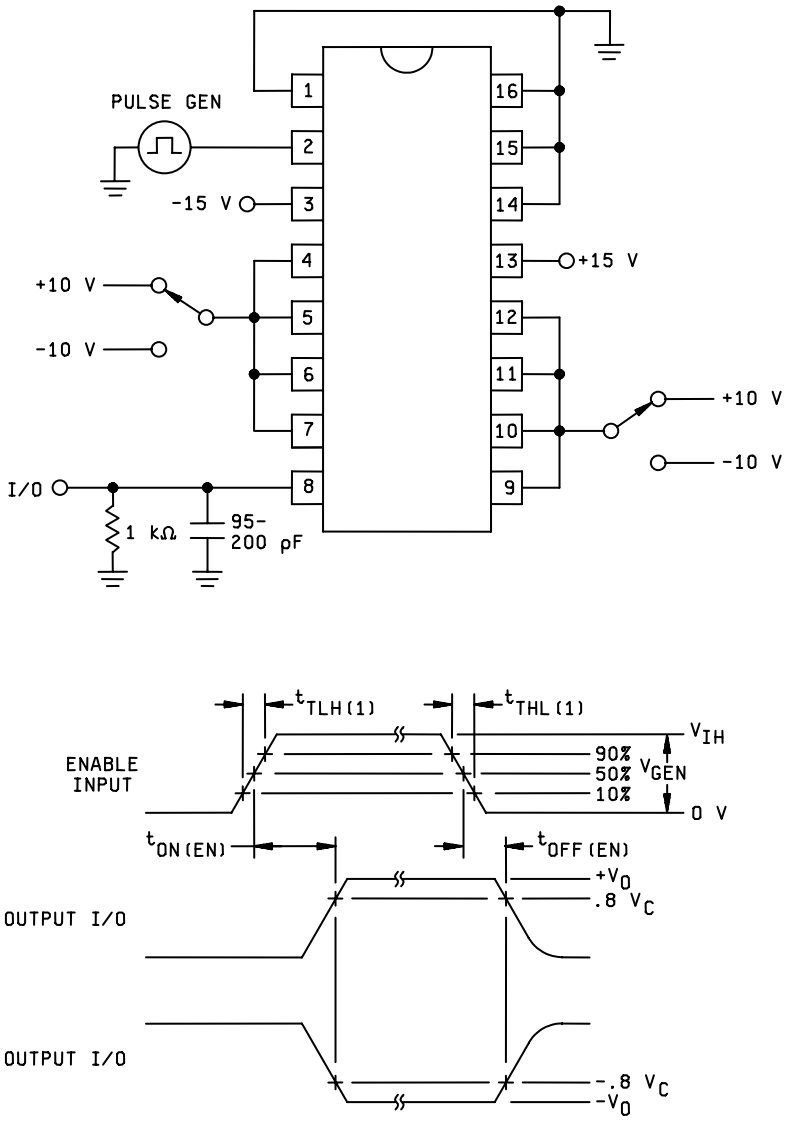


DYNAMIC TEST WAVEFORMS


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns

FIGURE 11. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08
Address inputs to I/O

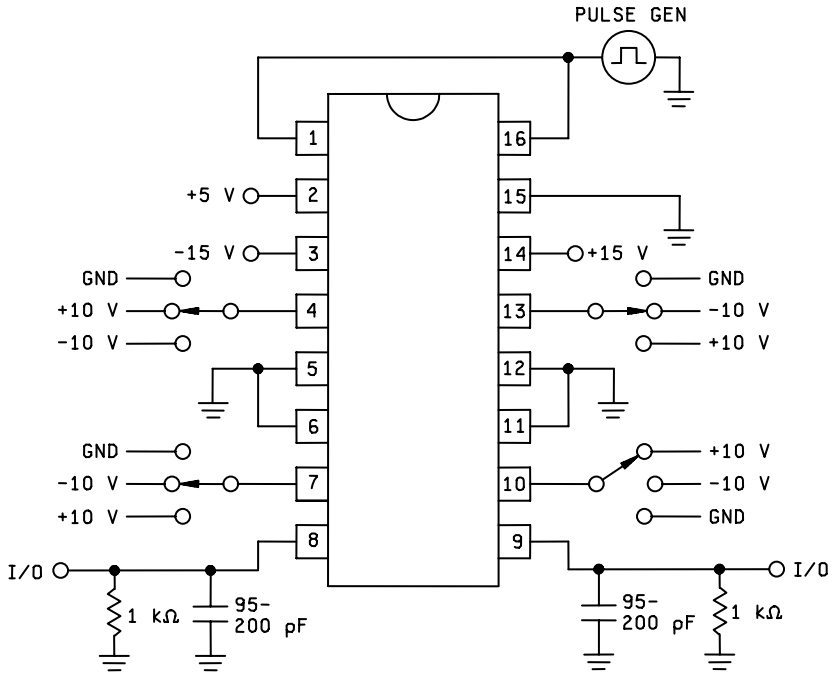

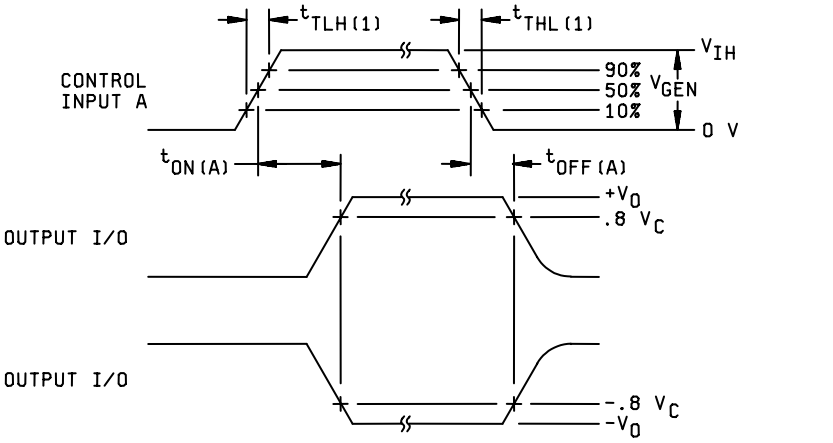


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns


DYNAMIC TEST WAVEFORMS

FIGURE 12. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 06 and 08
Enable to I/O

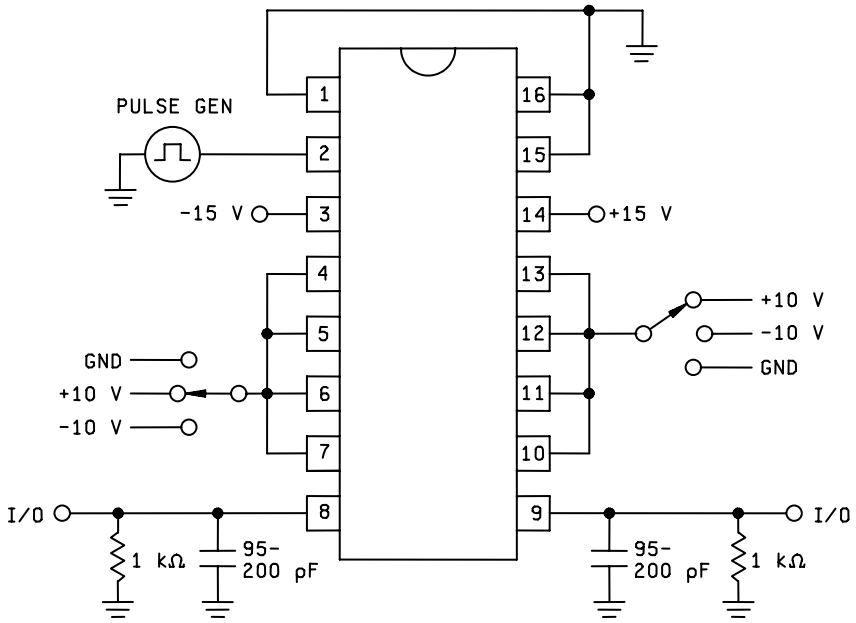

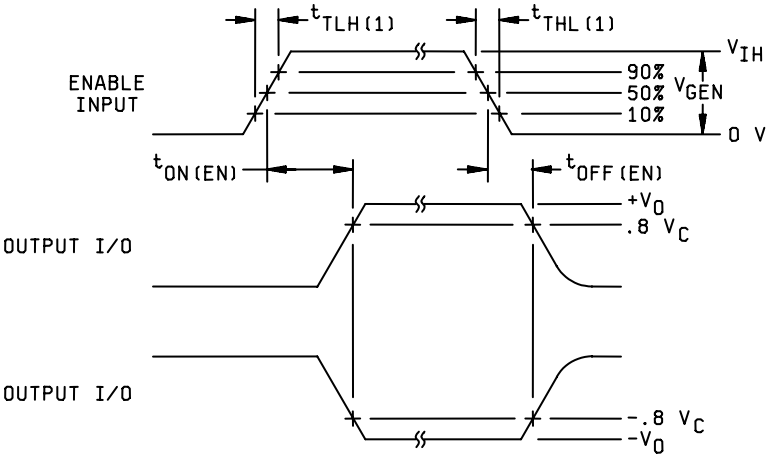


Input pulse requirements:
V_{GEN} = 4 V
$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns

DYNAMIC TEST WAVEFORMS

FIGURE 13. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

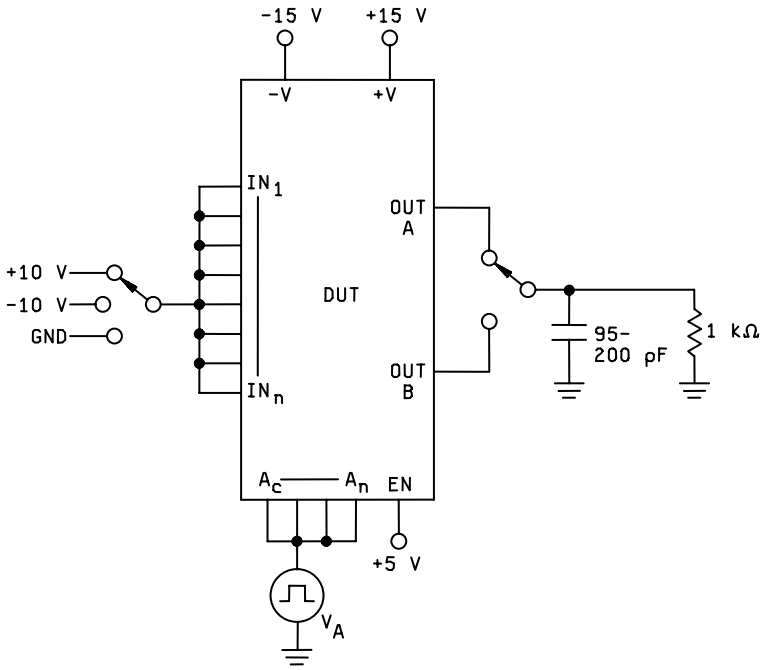

Input pulse requirements:

V_{GEN} = 4 V

$t_{THL(1)} = t_{TLH(1)} \leq 20$ ns


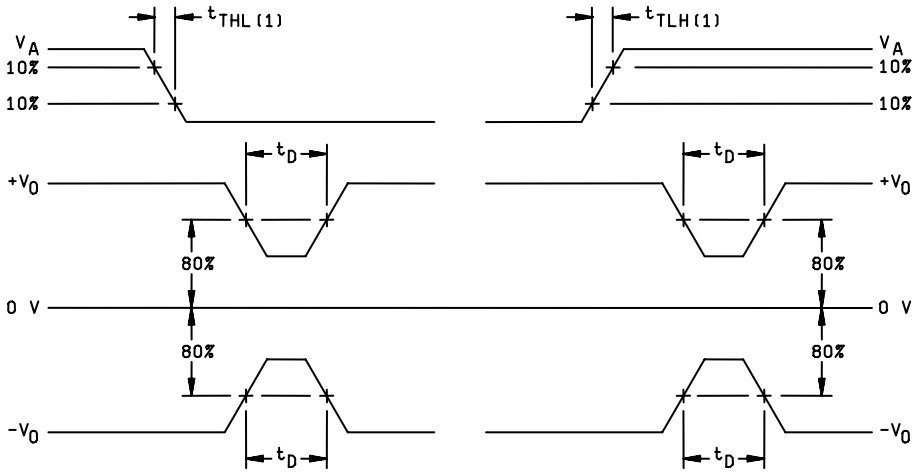



FIGURE 14. Break before make test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

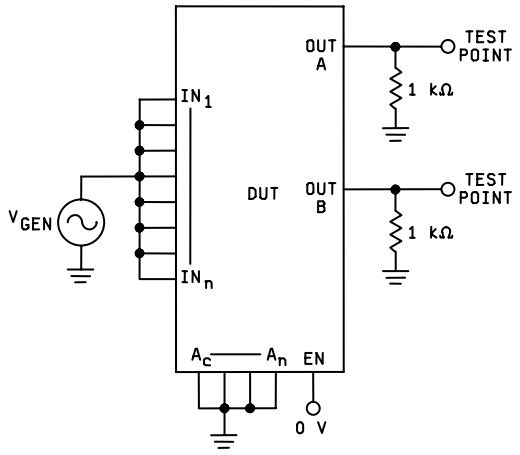

NOTE: The pulse generator has the following characteristics: V_{GEN} = 1 V_{P-P}, PRR = 200 kHz.


FIGURE 15. Single channel isolation test circuit.

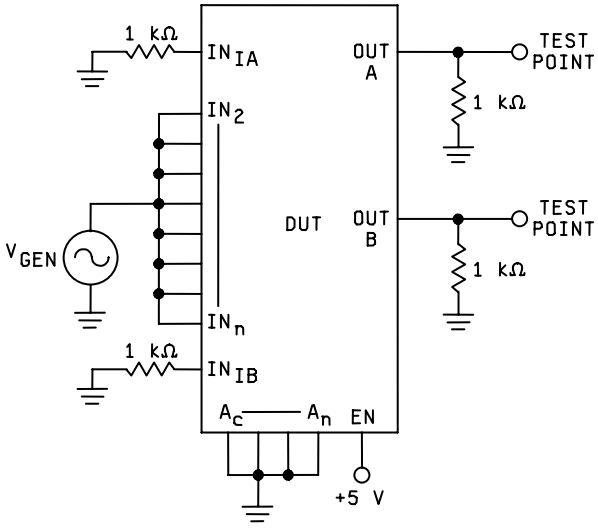

NOTE: The pulse generator has the following characteristics: V_{GEN} = 1 V_{P-P}, PRR = 200 kHz.

FIGURE 16. Crosstalk test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

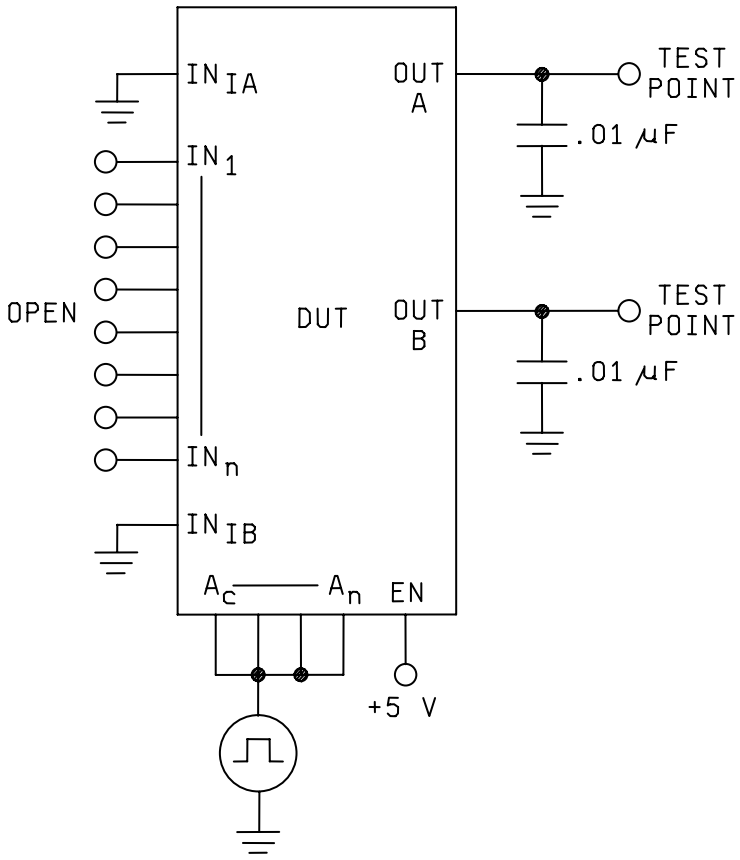

NOTE: The pulse generator has the following characteristics: V_{GEN} = 0 – 5 V.

FIGURE 17. Charge transfer error test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	15 V											GND		2.4 V	A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	"											"		GND	A2	"	"	"	"	"	"	"
	"	3	"											"		"	A1	"	"	"	"	"	"	"
	"	4	"											"		"	A0	"	"	"	"	"	"	"
	"	5	"											"		"	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	6	"											"		0.8 V	A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	
	"	7	"											"		5 V	A2	"	"	"	"	"	"	"
	"	8	"											"		"	A1	"	"	"	"	"	"	"
	"	9	"											"		"	A0	"	"	"	"	"	"	"
	"	10	"											"		"	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		11	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		0.8 V	IN1	-1	1	-50	50	-50	50	nA
		12	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		13	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		14	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		15	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		16	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		17	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		18	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		19	"			"	"	"	"	"	"	"	10 V	"		2.4 V	IN9	"	"	"	"	"	"	"
		20	"			"	"	"	"	"	"	10 V	-10 V	"		"	IN10	"	"	"	"	"	"	"
		21	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11	"	"	"	"	"	"	"
		22	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		23	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		24	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		25	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		26	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
		27	"			"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1	"	"	"	"	"	"	"
		28	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		29	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		30	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		31	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		32	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		33	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		34	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		35	"			"	"	"	"	"	"	"	-10 V	"		2.4 V	IN9	"	"	"	"	"	"	"
		36	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10	"	"	"	"	"	"	"
		37	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11	"	"	"	"	"	"	"
		38	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		39	"			"	"	"	-10 V	10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		40	"			"	"	-10 V	10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		41	"			"	-10 V	10 V	"	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		42	"			-10 V	10 V	10 V	"	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
$I_{D-(OFF)}$		43	"			10 V	10 V	10 V	"	"	"	"	"	"		0.8 V	OUT	-20	20	-500	500	-500	500	"
$I_{D+(OFF)}$		44	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	OUT	"	"	"	"	"	"	"
$I_{D+(ON)}$		45	"			"	"	"	"	"	"	"	"	"		"	IN1 & OUT	"	"	"	"	"	"	"
		46	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT	"	"	"	"	"	"	"
		47	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT	"	"	"	"	"	"	"
		48	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT	"	"	"	"	"	"	"
		49	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT	"	"	"	"	"	"	"
		50	"			"	"	"	"	"	"	"	"	"		"	IN6 & OUT	"	"	"	"	"	"	"
		51	"			"	"	"	"	"	"	"	"	"		"	IN7 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	1	GND	GND	GND	GND									-15 V		A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	2	2.4 V	GND	GND	"									"		A2	"	"	"	"	"	"	"
	3	GND	2.4 V	GND	"									"		A1	"	"	"	"	"	"	"
	4	GND	GND	2.4 V	"									"		A0	"	"	"	"	"	"	"
	5	GND	GND	GND	2.4 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	6	5 V	5 V	5 V	5 V									"		A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	
	7	0.8 V	5 V	"	"									"		A2	"	"	"	"	"	"	"
	8	5 V	0.8 V	"	"									"		A1	"	"	"	"	"	"	"
	9	5 V	5 V	0.8 V	"									"		A0	"	"	"	"	"	"	"
	10	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	11	0.8 V	0.8 V	0.8 V	0.8 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1	-1	1	-50	50	-50	50	nA
	12	"	0.8 V	2.4 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	13	"	2.4 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	14	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	15	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	16	"	0.8 V	2.4 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	17	"	2.4 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7	"	"	"	"	"	"	"
	18	"	2.4 V	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8	"	"	"	"	"	"	"
	19	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9	"	"	"	"	"	"	"
	20	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	21	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	22	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	23	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	24	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	25	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	26	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
	27	0.8 V	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1	"	"	"	"	"	"	"
	28	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	29	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	30	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	31	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	32	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	33	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7	"	"	"	"	"	"	"
	34	"	2.4 V	2.4 V	'	'	'	'	'	"	"	10 V	-10 V	"	"	IN8	"	"	"	"	"	"	"
	35	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9	"	"	"	"	"	"	"
	36	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	37	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	38	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	39	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	40	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	41	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	42	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
$I_{D-(OFF)}$	43	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	-10 V	OUT	-20	20	-500	500	-500	500	"
$I_{D+(OFF)}$	44	"	"	0.8 V	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUT	"	"	"	"	"	"	"
$I_{D+(ON)}$	45	"	"	0.8 V	4.5 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
	46	"	"	2.4 V	"	-10 V	10 V	10 V	"	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	47	"	2.4 V	0.8 V	"	"	-10 V	-10 V	"	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	48	"	2.4 V	2.4 V	"	"	"	"	10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	49	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	50	2.4 V	0.8 V	2.4 V	"	"	"	"	-10 V	-10 V	10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	51	2.4 V	2.4 V	0.8 V	"	"	"	"	-10 V	-10 V	-10 V	"	"	"	"	IN7 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device types 01 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3		Min	Max	Min	Max	Min	Max	
$I_{D+(ON)}$		52	15 V			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND		0.8 V	IN8 & OUT	-20	20	-500	500	-500	500	nA
		53	"			"	"	"	"	"	-10 V	-10 V	10 V	"		2.4 V	IN9 & OUT	"	"	"	"	"	"	"
		54	"			"	"	"	"	"	-10 V	10 V	-10 V	"		"	IN10 & OUT	"	"	"	"	"	"	"
		55	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11 & OUT	"	"	"	"	"	"	"
		56	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12 & OUT	"	"	"	"	"	"	"
		57	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13 & OUT	"	"	"	"	"	"	"
		58	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14 & OUT	"	"	"	"	"	"	"
		59	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15 & OUT	"	"	"	"	"	"	"
		60	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16 & OUT	"	"	"	"	"	"	"
$I_{D-(ON)}$		61	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1 & OUT	"	"	"	"	"	"	"
		62	"			"	"	"	"	"	"	"	"	"		"	IN2 & OUT	"	"	"	"	"	"	"
		63	"			"	"	"	"	"	"	"	"	"		"	IN3 & OUT	"	"	"	"	"	"	"
		64	"			"	"	"	"	"	"	"	"	"		"	IN4 & OUT	"	"	"	"	"	"	"
		65	"			"	"	"	"	"	"	"	"	"		"	IN5 & OUT	"	"	"	"	"	"	"
		66	"			"	"	"	"	"	"	"	"	"		"	IN6 & OUT	"	"	"	"	"	"	"
		67	"			"	"	"	"	"	"	"	"	"		"	IN7 & OUT	"	"	"	"	"	"	"
		68	"			"	"	"	"	"	"	"	"	"		"	IN8 & OUT	"	"	"	"	"	"	"
		69	"			"	"	"	"	"	"	"	-10 V	"		2.4 V	IN9 & OUT	"	"	"	"	"	"	"
		70	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10 & OUT	"	"	"	"	"	"	"
		71	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11 & OUT	"	"	"	"	"	"	"
		72	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12 & OUT	"	"	"	"	"	"	"
		73	"			"	"	"	-10 V	10 V	"	"	"	"		"	IN13 & OUT	"	"	"	"	"	"	"
		74	"			"	"	-10 V	10 V	"	"	"	"	"		"	IN14 & OUT	"	"	"	"	"	"	"
		75	"			"	-10 V	10 V	10 V	"	"	"	"	"		"	IN15 & OUT	"	"	"	"	"	"	"
		76	"			-10 V	10 V	10 V	10 V	"	"	"	"	"		"	IN16 & OUT	"	"	"	"	"	"	"
I+		77	"											"		0 V	V+	"	14		14		14	mA
I-		78	"											"		"	V-	-14		-14		-14		"
I+SBY		79	"											"		"	V+	"	3.0		3.0		3.0	"
I-SBY		80	"											"		"	V-	-4.0		-4.0		-4.0		"
R_{DS1}		81	"											"		"	IN1 & OUT		600		700		600	Ω
		82	"											"		"	IN2 & OUT		"		"		"	"
		83	"											"		"	IN3 & OUT		"		"		"	"
		84	"											"		"	IN4 & OUT		"		"		"	"
		85	"											"		"	IN5 & OUT		"		"		"	"
		86	"											"		"	IN6 & OUT		"		"		"	"
		87	"											"		"	IN7 & OUT		"		"		"	"
		88	"											"		"	IN8 & OUT		"		"		"	"
		89	"										10 V	"		2.4 V	IN9 & OUT		"		"		"	"
		90	"									10 V		"		"	IN10 & OUT		"		"		"	"
		91	"								10 V			"		"	IN11 & OUT		"		"		"	"
		92	"							10 V				"		"	IN12 & OUT		"		"		"	"
		93	"						10 V					"		"	IN13 & OUT		"		"		"	"
		94	"					10 V						"		"	IN14 & OUT		"		"		"	"
		95	"				10 V							"		"	IN15 & OUT		"		"		"	"
		96	"			10 V								"		"	IN16 & OUT		"		"		"	"
		97	"											"		0.8 V	IN1 & OUT		"		"		"	"
		98	"											"		"	IN2 & OUT		"		"		"	"
		99	"											"		"	IN3 & OUT		"		"		"	"
		100	"											"		"	IN4 & OUT		"		"		"	"
		101	"											"		"	IN5 & OUT		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$I_{D+(ON)}$	52	2.4 V	2.4 V	2.4 V	4.5 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-15 V	10 V	IN8 & OUT	-20	20	-500	500	-500	500	nA
	53	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	54	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	55	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	56	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	57	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	58	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	59	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	60	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
$I_{D-(ON)}$	61	0.8 V	0.8 V	0.8 V	"	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	IN1 & OUT	"	"	"	"	"	"	"
	62	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	63	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	64	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	65	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	66	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	67	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	68	"	2.4 V	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	69	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	70	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	71	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	72	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	73	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	74	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	75	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	76	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
I+	77	0 V	0 V	0 V	5 V									"		V+		14		14		14	mA
I-	78	"	"	"	5 V									"		V-	-14		-14		-14		"
I+SBY	79	"	"	"	0 V									"		V+		3.0		3.0		3.0	"
I-SBY	80	"	"	"	0 V									"		V-	-4.0		-4.0		-4.0		"
R_{DS1}	81	0.8 V	0.8 V	0.8 V	4.5 V	10 V								"	100 µA	IN1 & OUT		600		700		600	Ω
	82	"	0.8 V	2.4 V	"		10 V							"	"	IN2 & OUT		"		"		"	"
	83	"	2.4 V	0.8 V	"			10 V						"	"	IN3 & OUT		"		"		"	"
	84	"	2.4 V	2.4 V	"				10 V					"	"	IN4 & OUT		"		"		"	"
	85	2.4 V	0.8 V	0.8 V	"					10 V				"	"	IN5 & OUT		"		"		"	"
	86	"	0.8 V	2.4 V	"						10 V			"	"	IN6 & OUT		"		"		"	"
	87	"	2.4 V	0.8 V	"							10 V		"	"	IN7 & OUT		"		"		"	"
	88	"	2.4 V	2.4 V	"								10 V	"	"	IN8 & OUT		"		"		"	"
	89	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
	90	"	0.8 V	2.4 V	"									"	"	IN10 & OUT		"		"		"	"
	91	"	2.4 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
	92	"	2.4 V	2.4 V	"									"	"	IN12 & OUT		"		"		"	"
	93	2.4 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
	94	"	0.8 V	2.4 V	"									"	"	IN14 & OUT		"					"
	95	"	2.4 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
	96	"	2.4 V	2.4 V	"									"	"	IN16 & OUT		"		"		"	"
	97	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1 & OUT		"		"		"	"
	98	"	0.8 V	2.4 V	"		-10 V							"	"	IN2 & OUT		"		"		"	"
	99	"	2.4 V	0.8 V	"			-10 V						"	"	IN3 & OUT		"		"		"	"
	100	"	2.4 V	2.4 V	"				-10 V					"	"	IN4 & OUT		"		"		"	"
	101	2.4 V	0.8 V	0.8 V	"					-10 V				"	"	IN5 & OUT		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3		Min	Max	Min	Max	Min	Max	
R_{DS1}		102	15 V											GND		0.8 V	IN6 & OUT		600		700		600	Ω
		103	"											"		"	IN7 & OUT		"		"		"	"
		104	"											"		"	IN8 & OUT		"		"		"	"
		105	"										-10 V	"		2.4 V	IN9 & OUT		"		"		"	"
		106	"									-10 V		"		"	IN10 & OUT		"		"		"	"
		107	"								-10 V			"		"	IN11 & OUT		"		"		"	"
		108	"							-10 V				"		"	IN12 & OUT		"		"		"	"
		109	"						-10 V					"		"	IN13 & OUT		"		"		"	"
		110	"					-10 V						"		"	IN14 & OUT		"		"		"	"
		111	"				-10 V							"		"	IN15 & OUT		"		"		"	"
		112	"			-10 V								"		"	IN16 & OUT		"		"		"	"
R_{DS2}		113-128 - Same terminal conditions as for tests 81 thru 96, except V± = ± 10 V, V_S = +7.5 V and limits as shown.																	1		1		1	kΩ
R_{DS2}		129-144 - Same terminal conditions as for tests 97 thru 112, except V± = ± 10 V, V_S = -7.5 V and limits as shown.																	1		1		1	kΩ
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	145	GND											GND		4/	A3		10					pF
	"	146	"											"			A2		"					"
	"	147	"											"			A1		"					"
	"	148	"											"			A0		"					"
C_{OS}		149	"											"		0 V	OUT		90					"
C_{IS}		150	"											"		"	IN1		10					"
		151	"											"		"	IN2		"					"
		152	"											"		"	IN3		"					"
		153	"											"		"	IN4		"					"
		154	"											"		"	IN5		"					"
		155	"											"		"	IN6		"					"
		156	"											"		"	IN7		"					"
		157	"											"		"	IN8		"					"
		158	"										4/	"		"	IN9		"					"
		159	"									4/		"		"	IN10		"					"
		160	"								4/			"		"	IN11		"					"
		161	"							4/				"		"	IN12		"					"
		162	"						4/					"		"	IN13		"					"
		163	"					4/						"		"	IN14		"					"
		164	"				4/							"		"	IN15		"					"
		165	"			4/								"		"	IN16		"					"
C_{EN}		166	"											"		"	EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
			Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
R_{DS1}		102	2.4 V	0.8 V	2.4 V	4.5 V						-10 V			-15 V	-100 µA	IN6 & OUT		600		700		600	Ω
		103	2.4 V	2.4 V	0.8 V	"							-10 V		"	"	IN7 & OUT		"		"		"	"
		104	2.4 V	2.4 V	2.4 V	"								-10 V	"	"	IN8 & OUT		"		"		"	"
		105	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
		106	"	0.8 V	2.4 V	"									"	"	IN10 & OUT		"		"		"	"
		107	"	2.4 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
		108	"	2.4 V	2.4 V	"									"	"	IN12 & OUT		"		"		"	"
		109	2.4 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
		110	"	0.8 V	2.4 V	"									"	"	IN14 & OUT		"		"		"	"
		111	"	2.4 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
		112	"	2.4 V	2.4 V	"									"	"	IN16 & OUT		"		"		"	"
R_{DS2}		113-128 - Same terminal conditions as for tests 81 thru 96, except V± = ± 10 V, V_S = +7.5 V and limits as shown.																	1		1		1	kΩ
R_{DS2}		129-144 - Same terminal conditions as for tests 97 thru 112, except V± = ± 10 V, V_S = -7.5 V and limits as shown.																	1		1		1	kΩ
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A		145													GND		A3		10					pF
		146	4/												"		A2		"					"
		147		4/											"		A1		"					"
		148			4/										"		A0		"					"
C_{OS}		149	0 V	0 V	0 V	0 V									"	5/	OUT		90					"
C_{IS}		150	"	"	"	"	4/								"		IN1		10					"
		151	"	"	"	"		4/							"		IN2		"					"
		152	"	"	"	"			4/						"		IN3		"					"
		153	"	"	"	"				4/					"		IN4		"					"
		154	"	"	"	"					4/				"		IN5		"					"
		155	"	"	"	"						4/			"		IN6		"					"
		156	"	"	"	"							4/		"		IN7		"					"
		157	"	"	"	"								4/	"		IN8		"					"
		158	"	"	"	"									"		IN9		"					"
		159	"	"	"	"									"		IN10		"					"
		160	"	"	"	"									"		IN11		"					"
		161	"	"	"	"									"		IN12		"					"
		162	"	"	"	"									"		IN13		"					"
		163	"	"	"	"									"		IN14		"					"
		164	"	"	"	"									"		IN15		"					"
		165	"	"	"	"									"		IN16		"					"
C_{EN}		166	"	"	"	4/									"		EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	NC	A3		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 6	167	15 V			-10 V	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	"	168	"			10 V	"	"	"	"	"	"	"	"					"		"		"	"
	"	169	"			-10 V	"	"	"	"	"	"	"	"					"		"		"	"
	"	170	"			10 V	"	"	"	"	"	"	"	"					"		"		"	"
	"	171	"			GND	"	"	"	"	"	"	"	"					"		"		"	"
	"	172	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	173	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	174	"			"	"	"	"	"	"	"	"	"					"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	fig. 7	175	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND		GND	ENABLE TO OUT		"		"		"	"
	"	176	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"			"		"		"	"
	"	177	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"			"		"		"	"
	"	178	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"			"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}	fig. 15	179	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50						dB
V_{CT}	fig. 16	180	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50						dB
V_{CTE}	fig. 17	181	15 V											GND		IN	OUT		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 14	182	15 V			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND			OUT	5						ns
	"	183	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"
	"	184	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"	"						"
	"	185	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$		167	⎍	⎍	⎍	5 V	GND	GND	GND	GND	GND	GND	GND	GND	-15 V	OUT	ADDRESS IN TO OUT		1,000		1,500		1,000	ns
		168	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"			"		"		"	"
		169	⎎	⎎	⎎	"	"	"	"	"	"	"	"	"	"	"			"		"		"	"
		170	⎏	⎏	⎏	"	"	"	"	"	"	"	"	"	"	"			"		"		"	"
		171	⎍	⎍	⎍	"	-10 V	"	"	"	"	"	"	"	"	"			"		"		"	"
		172	⎍	⎍	⎍	"	10 V	"	"	"	"	"	"	"	"	"			"		"		"	"
		173	⎎	⎎	⎎	"	-10 V	"	"	"	"	"	"	"	"	"			"		"		"	"
		174	⎏	⎏	⎏	"	10 V	"	"	"	"	"	"	"	"	"			"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$		175	GND	GND	GND	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	ENABLE TO OUT		"		"		"	"
		176	"	"	"	⎎	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"			"		"		"	"
		177	"	"	"	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"			"		"		"	"
		178	"	"	"	⎎	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"			"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}		179	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CT}		180	GND	GND	GND	5 V	6/	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CTE}		181	IN	IN	IN	5 V	GND								-15 V	OUT	OUT		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D		182	⎍	⎍	⎍	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUT	5						ns
		183	⎍	⎍	⎍	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
		184	⎎	⎎	⎎	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"						"
		185	⎏	⎏	⎏	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 .

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1	GND											GND		1 mA	A3		1.5					V
		2	"											"			A2		"					"
		3	"											"			A1		"					"
		4	"											"			A0		"					"
		5	"											"			EN		"					"
$V_{IC(NEG)}$		6												"		-1 mA	A3	-1.5						"
		7												"			A2	"						"
		8												"			A1	"						"
		9												"			A0	"						"
		10												"			EN	"						"
I_{IH} 2/	3010	11	15 V											"		4.0 V	A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
"	"	12	"											"		GND	A2	"	"	"	"	"	"	"
"	"	13	"											"		"	A1	"	"	"	"	"	"	"
"	"	14	"											"		"	A0	"	"	"	"	"	"	"
"	"	15	"											"		"	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	16	"											"		0.8 V	A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
"	"	17	"											"		5 V	A2	"	"	"	"	"	"	"
"	"	18	"											"		"	A1	"	"	"	"	"	"	"
"	"	19	"											"		"	A0	"	"	"	"	"	"	"
"	"	20	"											"		"	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		21	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		0.8 V	IN1	-1	1	-50	50	-50	50	nA
		22	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		23	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		24	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		25	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		26	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		27	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		28	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		29	"			"	"	"	"	"	"	"	10 V	"		4.0 V	IN9	"	"	"	"	"	"	"
		30	"			"	"	"	"	"	"	10 V	-10 V	"		"	IN10	"	"	"	"	"	"	"
		31	"			"	"	"	"	"	10 V	-10 V	"	"		"	IN11	"	"	"	"	"	"	"
		32	"			"	"	"	"	10 V	-10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		33	"			"	"	"	10 V	-10 V	"	"	"	"		"	IN13	"	"	"	"	"	"	"
		34	"			"	"	10 V	-10 V	"	"	"	"	"		"	IN14	"	"	"	"	"	"	"
		35	"			"	10 V	-10 V	-10 V	"	"	"	"	"		"	IN15	"	"	"	"	"	"	"
		36	"			10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"	IN16	"	"	"	"	"	"	"
		37	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	IN1	"	"	"	"	"	"	"
		38	"			"	"	"	"	"	"	"	"	"		"	IN2	"	"	"	"	"	"	"
		39	"			"	"	"	"	"	"	"	"	"		"	IN3	"	"	"	"	"	"	"
		40	"			"	"	"	"	"	"	"	"	"		"	IN4	"	"	"	"	"	"	"
		41	"			"	"	"	"	"	"	"	"	"		"	IN5	"	"	"	"	"	"	"
		42	"			"	"	"	"	"	"	"	"	"		"	IN6	"	"	"	"	"	"	"
		43	"			"	"	"	"	"	"	"	"	"		"	IN7	"	"	"	"	"	"	"
		44	"			"	"	"	"	"	"	"	"	"		"	IN8	"	"	"	"	"	"	"
		45	"			"	"	"	"	"	"	"	-10 V	"		4.0 V	IN9	"	"	"	"	"	"	"
		46	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10	"	"	"	"	"	"	"
		47	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11	"	"	"	"	"	"	"
		48	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12	"	"	"	"	"	"	"
		49	"			"	"	"	-10 V	10 V	10 V	"	"	"		"	IN13	"	"	"	"	"	"	"
		50	"			"	"	-10 V	10 V	10 V	10 V	"	"	"		"	IN14	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$	1	1 mA														A3		1.5					V
	2		1 mA													A2		"					"
	3			1 mA												A1		"					"
	4				1 mA											A0		"					"
	5															EN		"					"
$V_{IC(NEG)}$	6	-1 mA												GND		A3	-1.5						"
	7		-1 mA											"		A2	"						"
	8			-1 mA										"		A1	"						"
	9				-1 mA									"		A0	"						"
	10													"		EN	"						"
I_{IH} 2/	11	GND	GND	GND	15 V									-15 V		A3	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	12	4.0 V	GND	GND	"									"		A2	"	"	"	"	"	"	"
	13	GND	4.0 V	GND	"									"		A1	"	"	"	"	"	"	"
	14	GND	GND	4.0 V	"									"		A0	"	"	"	"	"	"	"
	15	GND	GND	GND	4.0 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	16	5 V	5 V	5 V	5 V									"		A3	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	17	0.8 V	5 V	5 V	"									"		A2	"	"	"	"	"	"	"
	18	5 V	0.8 V	5 V	"									"		A1	"	"	"	"	"	"	"
	19	5 V	5 V	0.8 V	"									"		A0	"	"	"	"	"	"	"
	20	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	21	0.8 V	0.8 V	0.8 V	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1	-1	1	-50	50	-50	50	nA
	22	"	0.8 V	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	23	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	24	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	25	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	26	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	27	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7	"	"	"	"	"	"	"
	28	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8	"	"	"	"	"	"	"
	29	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9	"	"	"	"	"	"	"
	30	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	31	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	32	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	33	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	34	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"
	35	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15	"	"	"	"	"	"	"
	36	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16	"	"	"	"	"	"	"
	37	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1	"	"	"	"	"	"	"
	38	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2	"	"	"	"	"	"	"
	39	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3	"	"	"	"	"	"	"
	40	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4	"	"	"	"	"	"	"
	41	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5	"	"	"	"	"	"	"
	42	"	0.8 V	4.0 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6	"	"	"	"	"	"	"
	43	"	4.0 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7	"	"	"	"	"	"	"
	44	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8	"	"	"	"	"	"	"
	45	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN9	"	"	"	"	"	"	"
	46	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10	"	"	"	"	"	"	"
	47	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11	"	"	"	"	"	"	"
	48	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12	"	"	"	"	"	"	"
	49	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13	"	"	"	"	"	"	"
	50	4.0 V	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max	Min	Max	Min	Max	
$I_{S(OFF)}$ 3/		51	15 V			10 V	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND		4.0 V	IN15	-1	1	-50	50	-50	50	nA
		52	"			-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		4.0 V	IN16	"	"	-50	50	"	"	"
$I_{D(OFF)}$		53	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		0.8 V	OUT	-20	20	-500	500	-500	500	"
		54	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	OUT	"	"	"	"	"	"	"
$I_{D(ON)}$		55	"			"	"	"	"	"	"	"	"	"			IN1 & OUT	"	"	"	"	"	"	"
		56	"			"	"	"	"	"	"	"	"	"			IN2 & OUT	"	"	"	"	"	"	"
		57	"			"	"	"	"	"	"	"	"	"			IN3 & OUT	"	"	"	"	"	"	"
		58	"			"	"	"	"	"	"	"	"	"			IN4 & OUT	"	"	"	"	"	"	"
		59	"			"	"	"	"	"	"	"	"	"			IN5 & OUT	"	"	"	"	"	"	"
		60	"			"	"	"	"	"	"	"	"	"			IN6 & OUT	"	"	"	"	"	"	"
		61	"			"	"	"	"	"	"	"	"	"			IN7 & OUT	"	"	"	"	"	"	"
		62	"			"	"	"	"	"	"	"	"	"			IN8 & OUT	"	"	"	"	"	"	"
		63	"			"	"	"	"	"	"	"	10 V	"		4.0 V	IN9 & OUT	"	"	"	"	"	"	"
		64	"			"	"	"	"	"	"	10 V	-10 V	"			IN10 & OUT	"	"	"	"	"	"	"
		65	"			"	"	"	"	"	10 V	-10 V	"	"			IN11 & OUT	"	"	"	"	"	"	"
		66	"			"	"	"	"	10 V	-10 V	"	"	"			IN12 & OUT	"	"	"	"	"	"	"
		67	"			"	"	"	10 V	-10 V	"	"	"	"			IN13 & OUT	"	"	"	"	"	"	"
		68	"			"	"	10 V	-10 V	"	"	"	"	"			IN14 & OUT	"	"	"	"	"	"	"
		69	"			"	10 V	-10 V	"	"	"	"	"	"			IN15 & OUT	"	"	"	"	"	"	"
		70	"			10 V	-10 V	"	"	"	"	"	"	"			IN16 & OUT	"	"	"	"	"	"	"
		71	"			-10 V	"	"	"	"	"	"	"	"		0.8 V	IN1 & OUT	"	"	"	"	"	"	"
		72	"			"	"	"	"	"	"	"	"	"			IN2 & OUT	"	"	"	"	"	"	"
		73	"			"	"	"	"	"	"	"	"	"			IN3 & OUT	"	"	"	"	"	"	"
		74	"			"	"	"	"	"	"	"	"	"			IN4 & OUT	"	"	"	"	"	"	"
		75	"			"	"	"	"	"	"	"	"	"			IN5 & OUT	"	"	"	"	"	"	"
		76	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN6 & OUT	"	"	"	"	"	"	"
		77	"			"	"	"	"	"	"	"	10 V	"			IN7 & OUT	"	"	"	"	"	"	"
		78	"			"	"	"	"	"	"	"	10 V	"			IN8 & OUT	"	"	"	"	"	"	"
		79	"			"	"	"	"	"	"	"	-10 V	"		4.0 V	IN9 & OUT	"	"	"	"	"	"	"
		80	"			"	"	"	"	"	"	-10 V	10 V	"		"	IN10 & OUT	"	"	"	"	"	"	"
		81	"			"	"	"	"	"	-10 V	10 V	"	"		"	IN11 & OUT	"	"	"	"	"	"	"
		82	"			"	"	"	"	-10 V	10 V	"	"	"		"	IN12 & OUT	"	"	"	"	"	"	"
		83	"			"	"	"	-10 V	10 V	"	"	"	"		"	IN13 & OUT	"	"	"	"	"	"	"
		84	"			"	"	-10 V	10 V	"	"	"	"	"		"	IN14 & OUT	"	"	"	"	"	"	"
		85	"			"	-10 V	10 V	10 V	"	"	"	"	"		"	IN15 & OUT	"	"	"	"	"	"	"
		86	"			-10 V	10 V	10 V	10 V	"	"	"	"	"		"	IN16 & OUT	"	"	"	"	"	"	"
I+		87	"											"		0 V	V+		2.0		2.0		2.0	mA
I-		88	"											"		"	V-	-1		-1		-1		"
I+SBY		89	"											"		"	V+		2.0		2.0		2.0	"
I-SBY		90	"											"		"	V-	-1.0		-1.0		-1.0		"
$I_{D+(OFF)}$ open voltage		91	"											"		0.8 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		92	"											"		"	"	"	"	"	"	"	"	"
		93	"											"		"	"	"	"	"	"	"	"	"
		94	"											"		"	"	"	"	"	"	"	"	"
		95	"											"		"	"	"	"	"	"	"	"	"
		96	"											"		"	"	"	"	"	"	"	"	"
		97	"											"		"	"	"	"	"	"	"	"	"
		98	"											"		"	"	"	"	"	"	"	"	"
		99	"										33 V	"		4.0 V	"	"	"	"	"	"	"	"
		100	"									33 V		"		4.0 V	"	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$I_{S(OFF)}$ 3/	51	4.0 V	4.0 V	0.8 V	0.8 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	10 V	IN15	-1	1	-50	50	-50	50	nA
	52	4.0 V	4.0 V	4.0 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN16	"	"	-50	50	"	"	"
$I_{D(OFF)}$	53	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	OUT	-20	20	-500	500	-500	500	"
	54	"	"	0.8 V	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUT	"	"	"	"	"	"	"
$I_{D(ON)}$	55	"	"	0.8 V	4.0 V	10 V	-10 V	-10 V	-10 V	"	"	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
	56	"	"	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	57	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	58	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	59	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	60	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	61	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	62	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	63	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN9 & OUT	"	"	"	"	"	"	"
	64	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	65	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	66	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	67	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	68	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	69	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	70	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
	71	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	IN1 & OUT	"	"	"	"	"	"	"
	72	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
	73	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3 & OUT	"	"	"	"	"	"	"
	74	"	4.0 V	4.0 V	"	"	10 V	10 V	-10 V	"	"	"	"	"	"	IN4 & OUT	"	"	"	"	"	"	"
	75	4.0 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	-10 V	"	"	"	"	"	IN5 & OUT	"	"	"	"	"	"	"
	76	"	0.8 V	4.0 V	"	"	"	"	"	"	-10 V	"	"	"	"	IN6 & OUT	"	"	"	"	"	"	"
	77	"	4.0 V	0.8 V	"	"	"	"	"	"	"	-10 V	"	"	"	IN7 & OUT	"	"	"	"	"	"	"
	78	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN8 & OUT	"	"	"	"	"	"	"
	79	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN9 & OUT	"	"	"	"	"	"	"
	80	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN10 & OUT	"	"	"	"	"	"	"
	81	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN11 & OUT	"	"	"	"	"	"	"
	82	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN12 & OUT	"	"	"	"	"	"	"
	83	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN13 & OUT	"	"	"	"	"	"	"
	84	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN14 & OUT	"	"	"	"	"	"	"
	85	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN15 & OUT	"	"	"	"	"	"	"
	86	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN16 & OUT	"	"	"	"	"	"	"
I+	87	0 V	0 V	0 V	5.0 V									"		V+		2.0		2.0		2.0	mA
I-	88	"	"	"	"									"		V-	-1		-1		-1		"
I+SBY	89	"	"	"	0 V									"		V+		2.0		2.0		2.0	"
I-SBY	90	"	"	"	"									"		V-	-1.0		-1.0		-1.0		"
$I_{D+(OFF)}$	91	0.8 V	0.8 V	0.8 V	0.8 V	33 V								"	0 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
over	92	"	"	4.0 V	"		33 V							"	"	"	"	"	"	"	"	"	"
voltage	93	"	4.0 V	0.8 V	"			33 V						"	"	"	"	"	"	"	"	"	"
	94	"	4.0 V	4.0 V	"				33 V					"	"	"	"	"	"	"	"	"	"
	95	4.0 V	0.8 V	0.8 V	"					33 V				"	"	"	"	"	"	"	"	"	"
	96	"	0.8 V	4.0 V	"						33 V			"	"	"	"	"	"	"	"	"	"
	97	"	4.0 V	0.8 V	"							33 V		"	"	"	"	"	"	"	"	"	"
	98	"	4.0 V	4.0 V	"								33 V	"	"	"	"	"	"	"	"	"	"
	99	0.8 V	0.8 V	0.8 V	"									"	"	"	"	"	"	"	"	"	"
	100	0.8 V	0.8 V	4.0 V	"									"	"	"	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max	Min	Max	Min	Max	
$I_{D+(OFF)}$ over-voltage		101	15 V								33 V			GND		4.0 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		102	"							33 V				"		"	"	"	"	"	"	"	"	"
		103	"						33 V					"		"	"	"	"	"	"	"	"	"	"
		104	"					33 V						"		"	"	"	"	"	"	"	"	"	"
		105	"				33 V							"		"	"	"	"	"	"	"	"	"	"
		106	"			33 V								"		"	"	"	"	"	"	"	"	"	"
$I_{D-(OFF)}$ over-voltage		107	"											"		0.8 V	"	"	"	"	"	"	"	"	"
		108	"											"		"	"	"	"	"	"	"	"	"	"
		109	"											"		"	"	"	"	"	"	"	"	"	"
		110	"											"		"	"	"	"	"	"	"	"	"	"
		111	"											"		"	"	"	"	"	"	"	"	"	"
		112	"											"		"	"	"	"	"	"	"	"	"	"
		113	"											"		"	"	"	"	"	"	"	"	"	"
		114	"											"		"	"	"	"	"	"	"	"	"	"
		115	"										-33 V	"		4.0 V	"	"	"	"	"	"	"	"	"
		116	"									-33 V		"		"	"	"	"	"	"	"	"	"	"
		117	"								-33 V			"		"	"	"	"	"	"	"	"	"	"
		118	"							-33 V				"		"	"	"	"	"	"	"	"	"	"
		119	"						-33 V					"		"	"	"	"	"	"	"	"	"	"
		120	"					-33 V						"		"	"	"	"	"	"	"	"	"	"
		121	"				-33 V							"		"	"	"	"	"	"	"	"	"	"
		122	"			-33 V								"		"	"	"	"	"	"	"	"	"	"
R_{DS1}		123	"											"		0.8 V	IN1 & OUT		1.5		"		1.5	kΩ
		124	"											"		"	IN2 & OUT		"		"		"	"
		125	"											"		"	IN3 & OUT		"		"		"	"
		126	"											"		"	IN4 & OUT		"		"		"	"
		127	"											"		"	IN5 & OUT		"		"		"	"
		128	"											"		"	IN6 & OUT		"		"		"	"
		129	"											"		"	IN7 & OUT		"		"		"	"
		130	"											"		"	IN8 & OUT		"		"		"	"
		131	"										10 V	"		4.0 V	IN9 & OUT		"		"		"	"
		132	"									10 V		"		"	IN10 & OUT		"		"		"	"
		133	"								10 V			"		"	IN11 & OUT		"		"		"	"
		134	"							10 V				"		"	IN12 & OUT		"		"		"	"
		135	"						10 V					"		"	IN13 & OUT		"		"		"	"
		136	"					10 V						"		"	IN14 & OUT		"		"		"	"
		137	"				10 V							"		"	IN15 & OUT		"		"		"	"
		138	"			10 V								"		"	IN16 & OUT		"		"		"	"
		139	"											"		0.8 V	IN1 & OUT		"		"		"	"
		140	"											"		"	IN2 & OUT		"		"		"	"
		141	"											"		"	IN3 & OUT		"		"		"	"
		142	"											"		"	IN4 & OUT		"		"		"	"
		143	"											"		"	IN5 & OUT		"		"		"	"
		144	"											"		"	IN6 & OUT		"		"		"	"
		145	"											"		"	IN7 & OUT		"		"		"	"
		146	"											"		"	IN8 & OUT		"		"		"	"
		147	"										-10 V	"		4.0 V	IN9 & OUT		"		"		"	"
		148	"									-10 V		"		"	IN10 & OUT		"		"		"	"
		149	"								-10 V			"		"	IN11 & OUT		"		"		"	"
		150	"							-10 V				"		"	IN12 & OUT		"		"		"	"
		151	"						-10 V					"		"	IN13 & OUT		"		"		"	"
		152	"					-10 V						"		"	IN14 & OUT		"		"		"	"
		153	"				-10 V							"		"	IN15 & OUT		"		"		"	"
		154	"			-10 V								"		"	IN16 & OUT		"		"		"	"
R_{DS2}	155 thru 170 – Same terminal conditions as tests 123 thru 138, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																		2.4		2.4		2.4	"
R_{DS2}	171 thru 186 – Same terminal conditions as tests 139 thru 154, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																		2.4		2.4		2.4	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max	Min	Max	Min	Max	
$I_{D+(OFF)}$ over-voltage	101	0.8 V	4.0 V	0.8 V	0.8 V									-15 V		OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
	102	0.8 V	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	103	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	104	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	105	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	106	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
$I_{D-(OFF)}$ over-voltage	107	0.8 V	0.8 V	0.8 V	"	-33 V								"		"	"	"	"	"	"	"	"
	108	"	0.8 V	4.0 V	"		-33 V							"		"	"	"	"	"	"	"	"
	109	"	4.0 V	0.8 V	"			-33 V						"		"	"	"	"	"	"	"	"
	110	"	4.0 V	4.0 V	"				-33 V					"		"	"	"	"	"	"	"	"
	111	4.0 V	0.8 V	0.8 V	"					-33 V				"		"	"	"	"	"	"	"	"
	112	"	0.8 V	4.0 V	"						-33 V			"		"	"	"	"	"	"	"	"
	113	"	4.0 V	0.8 V	"							-33 V		"		"	"	"	"	"	"	"	"
	114	"	4.0 V	4.0 V	"								-33 V	"		"	"	"	"	"	"	"	"
	115	0.8 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	116	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	117	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	118	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	119	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	120	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	121	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	122	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
R_{DS1}	123	0.8 V	0.8 V	0.8 V	4.0 V	10 V								"	100 µA	IN1 & OUT		1.5		"		1.5	kΩ
	124	"	0.8 V	4.0 V	"		10 V							"	"	IN2 & OUT		"		"		"	"
	125	"	4.0 V	0.8 V	"			10 V						"	"	IN3 & OUT		"		"		"	"
	126	"	4.0 V	4.0 V	"				10 V					"	"	IN4 & OUT		"		"		"	"
	127	4.0 V	0.8 V	0.8 V	"					10 V				"	"	IN5 & OUT		"		"		"	"
	128	"	0.8 V	4.0 V	"						10 V			"	"	IN6 & OUT		"		"		"	"
	129	"	4.0 V	0.8 V	"							10 V		"	"	IN7 & OUT		"		"		"	"
	130	"	4.0 V	4.0 V	"								10 V	"	"	IN8 & OUT		"		"		"	"
	131	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
	132	"	0.8 V	4.0 V	"									"	"	IN10 & OUT		"		"		"	"
	133	"	4.0 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
	134	"	4.0 V	4.0 V	"									"	"	IN12 & OUT		"		"		"	"
	135	4.0 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
	136	"	0.8 V	4.0 V	"									"	"	IN14 & OUT		"		"		"	"
	137	"	4.0 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
	138	"	4.0 V	4.0 V	"									"	"	IN16 & OUT		"		"		"	"
	139	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1 & OUT		"		"		"	"
	140	"	0.8 V	4.0 V	"		-10 V							"	"	IN2 & OUT		"		"		"	"
	141	"	4.0 V	0.8 V	"			-10 V						"	"	IN3 & OUT		"		"		"	"
	142	"	4.0 V	4.0 V	"				-10 V					"	"	IN4 & OUT		"		"		"	"
	143	4.0 V	0.8 V	0.8 V	"					-10 V				"	"	IN5 & OUT		"		"		"	"
	144	"	0.8 V	4.0 V	"						-10 V			"	"	IN6 & OUT		"		"		"	"
	145	"	4.0 V	0.8 V	"							-10 V		"	"	IN7 & OUT		"		"		"	"
	146	"	4.0 V	4.0 V	"								-10 V	"	"	IN8 & OUT		"		"		"	"
	147	0.8 V	0.8 V	0.8 V	"									"	"	IN9 & OUT		"		"		"	"
	148	"	0.8 V	4.0 V	"									"	"	IN10 & OUT		"		"		"	"
	149	"	4.0 V	0.8 V	"									"	"	IN11 & OUT		"		"		"	"
	150	"	4.0 V	4.0 V	"									"	"	IN12 & OUT		"		"		"	"
	151	4.0 V	0.8 V	0.8 V	"									"	"	IN13 & OUT		"		"		"	"
	152	"	0.8 V	4.0 V	"									"	"	IN14 & OUT		"		"		"	"
	153	"	4.0 V	0.8 V	"									"	"	IN15 & OUT		"		"		"	"
	154	"	4.0 V	4.0 V	"									"	"	IN16 & OUT		"		"		"	"
R_{DS2}	155 thru 170 – Same terminal conditions as tests 123 thru 138, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																	2.4		2.4		2.4	"
R_{DS2}	171 thru 186 – Same terminal conditions as tests 139 thru 154, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																	2.4		2.4		2.4	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 4 T_A = 25°C						
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max					
C_A	3012	187	GND											GND			A3		10					pF
	"	188	"											"			A2		"					"
	"	189	"											"			A1		"					"
	"	190	"											"			A0		"					"
C_{OS}	"	191	"											"			OUT		85					"
C_{IS}	"	192	"											"			IN1		10					"
	"	193	"											"			IN2		"					"
	"	194	"											"			IN3		"					"
	"	195	"											"			IN4		"					"
	"	196	"											"			IN5		"					"
	"	197	"											"			IN6		"					"
	"	198	"											"			IN7		"					"
	"	199	"											"			IN8		"					"
	"	200	"										4/	"			IN9		"					"
	"	201	"									4/		"			IN10		"					"
	"	202	"								4/			"			IN11		"					"
	"	203	"							4/				"			IN12		"					"
	"	204	"						4/					"			IN13		"					"
	"	205	"					4/						"			IN14		"					"
	"	206	"				4/							"			IN15		"					"
	"	207	"			4/								"			IN16		"					"
C_{EN}	"	208	"											"					"					"
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 6	209	15 V			-10 V	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUT		1,000		1,500		1,000	ns
	"	210	"			10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	211	"			-10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	212	"			10 V	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	213	"			GND	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	214	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	215	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	216	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	fig. 7	217	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		GND	"		"		"		"	"
		218	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"	"		"		"		"	"
	"	219	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"		"	"		"		"		"	"
	"	220	"			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"		"	"		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 4 T_A = 25°C						
		Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max					
C_A		187													GND		A3		10					pF
		188	4/												"		A2		"					"
		189		4/											"		A1		"					"
		190			4/										"		A0		"					"
C_{OS}		191	0 V	0 V	0 V	0 V									"	5/	OUT		85					"
C_{IS}		192	"	"	"	"	4/								"		IN1		10					"
		193	"	"	"	"		4/							"		IN2		"					"
		194	"	"	"	"			4/						"		IN3		"					"
		195	"	"	"	"				4/					"		IN4		"					"
		196	"	"	"	"					4/				"		IN5		"					"
		197	"	"	"	"						4/			"		IN6		"					"
		198	"	"	"	"							4/		"		IN7		"					"
		199	"	"	"	"								4/	"		IN8		"					"
		200	"	"	"	"									"		IN9		"					"
		201	"	"	"	"									"	0 V	IN10		"					"
		202	"	"	"	"									"	"	IN11		"					"
		203	"	"	"	"									"	"	IN12		"					"
		204	"	"	"	"									"	"	IN13		"					"
		205	"	"	"	"									"	"	IN14		"					"
		206	"	"	"	"									"	"	IN15		"					"
		207	"	"	"	"									"	"	IN16		"					"
C_{EN}		208	"			4/									GND		EN		"					"
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$		209	⎍	⎍	⎍	5 V	GND	GND	GND	GND	GND	GND	GND	GND	-15 V	OUT	ADDRESS IN TO OUT		1,000		1,500		1,000	ns
		210	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		211	⎎	⎎	⎍	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		212	⎎	⎎	⎎	"	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		213	⎍	⎍	⎍	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		214	⎍	⎍	⎍	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		215	⎎	⎎	⎎	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		216	⎎	⎎	⎎	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$		217	GND	GND	GND	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"		"		"		"	"
		218	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"		"		"		"	"
		219	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"		"		"		"	"
		220	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 4 T_A = 25°C						
		Test no.	V+	NC	NC	IN16	IN15	IN14	IN13	IN12	IN11	IN10	IN9	GND	V_{REF}	A3		Min	Max					
V_{ISO}	fig. 15	221	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50						dB
V_{CT}	fig. 16	222	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND		GND	OUT	50						dB
V_{CTE}	fig. 17	223	15 V											GND		IN	OUT		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 14	224	15 V			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	GND		_/‾	OUT	5						ns
	“	225	“			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	“		_/‾	“	“						“
	“	226	“			10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	“		‾_	“	“						“
	“	227	“			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	“		‾_	“	“						“

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 4 T_A = 25°C						
		Test no.	A2	A1	A0	EN	IN1	IN2	IN3	IN4	IN5	IN6	IN7	IN8	V-	OUT		Min	Max					
V_{ISO}		221	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CT}		222	GND	GND	GND	5 V	6/	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUT	50						dB
V_{CTE}		223	IN	IN	IN	5 V	GND									OUT	OUT		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D		224	_/‾	_/‾	_/‾	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUT	5						ns
		225	/‾	/‾	/‾	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"							"
		226	‾_	‾_	‾_	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"							"
		227	‾_	‾_	‾_	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"							"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	15 V											GND			A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	"											"			A1	"	"	"	"	"	"	"
	"	3	"											"			A0	"	"	"	"	"	"	"
	"	4	"											"			EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	5	"											"			A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	6	"											"			A1	"	"	"	"	"	"	"
	"	7	"											"			A0	"	"	"	"	"	"	"
	"	8	"											"			EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		9	"	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	"			IN1B	-1	1	-50	50	-50	50	nA
		10	"	"		"	"	"	"	-10 V	-10 V	10 V	-10 V	"			IN2B	"	"	"	"	"	"	"
		11	"	"		"	"	"	"	-10 V	10 V	-10 V	"	"			IN3B	"	"	"	"	"	"	"
		12	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		13	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		14	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		15	"	"		"	10 V	-10 V	"	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		16	"	"		10 V	-10 V	"	"	"	"	"	"	"			IN8B	"	"	"	"	"	"	"
		17	"	"		-10 V	"	"	"	"	"	"	"	"			IN1A	"	"	"	"	"	"	"
		18	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		19	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		20	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		21	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		22	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		23	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		24	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		25	"	10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"			IN1B	"	"	"	"	"	"	"
		26	"	"		"	"	"	"	10 V	10 V	-10 V	10 V	"			IN2B	"	"	"	"	"	"	"
		27	"	"		"	"	"	"	10 V	-10 V	10 V	"	"			IN3B	"	"	"	"	"	"	"
		28	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		29	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		30	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		31	"	"		"	-10 V	10 V	"	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		32	"	'		-10 V	10 V	"	"	"	"	"	"	"			IN8B	"	"	"	"	"	"	"
		33	"	"		10 V	"	"	"	"	"	"	"	"			IN1A	"	"	"	"	"	"	"
		34	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		35	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		36	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		37	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		38	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		39	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		40	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
$I_{D(OFF)}$		41	"	"		"	"	"	"	"	"	"	"	"			OUTA	-10	10	-250	250	-250	250	"
		42	"	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTA	"	"	"	"	"	"	"
		43	"	-10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"	"	"	"	"	"	"
		44	"	10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		45	"	-10 V		"	"	"	"	"	"	"	"	"			IN1A & OUTA	"	"	"	"	"	"	"
		46	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		47	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		48	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		49	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		50	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	1	2.4 V	GND	GND	5.0 V									-15 V		A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	2	GND	2.4 V	GND	5.0 V									"		A1	"	"	"	"	"	"	"
	3	GND	GND	2.4 V	5.0 V									"		A0	"	"	"	"	"	"	"
	4	GND	GND	GND	4.5 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	5	0.8 V	5.0 V	5.0 V	5.0 V									"		A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	6	5.0 V	0.8 V	5.0 V	5.0 V									"		A1	"	"	"	"	"	"	"
	7	5.0 V	5.0 V	0.8 V	5.0 V									"		A0	"	"	"	"	"	"	"
	8	5.0 V	5.0 V	5.0 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	9	0.8 V	0.8 V	0.8 V	0.8 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1B	-1	1	-50	50	-50	50	nA
	10	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	11	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	12	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	13	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	14	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	15	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	16	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	17	0.8 V	0.8 V	0.8 V	"	10 V	"	"	"	"	"	"	"	"	"	IN1A	"	"	"	"	"	"	"
	18	"	0.8 V	2.4 V	"	-10 V	10 V	"	"	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	19	"	2.4 V	0.8 V	"	"	-10 V	10 V	"	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	20	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	21	2.4 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	22	"	0.8 V	2.4 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	23	"	2.4 V	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	24	"	2.4 V	2.4 V	"	"	"	"	"	-10 V	-10 V	-10 V	10 V	"	"	IN8A	"	"	"	"	"	"	"
	25	0.8 V	0.8 V	0.8 V	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	10 V	IN1B	"	"	"	"	"	"	"
	26	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	27	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	28	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	29	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	30	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	31	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	32	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	33	0.8 V	0.8 V	0.8 V	"	-10 V	"	"	"	"	"	"	"	"	"	IN1A	"	"	"	"	"	"	"
	34	"	0.8 V	2.4 V	"	10 V	-10 V	"	"	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	35	"	2.4 V	0.8 V	"	"	10 V	-10 V	"	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	36	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	37	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	38	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	39	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	40	"	2.4 V	2.4 V	"	"	"	"	"	"	10 V	10 V	-10 V	"	"	IN8A	"	"	"	"	"	"	"
$I_{D(OFF)}$	41	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	10 V	10 V	10 V	"	-10 V	OUTA	-10	10	-250	250	-250	250	"
	42	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	10 V	OUTA	"	"	"	"	"	"	"
	43	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	OUTB	"	"	"	"	"	"	"
	44	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$	45	"	"	"	4.5 V	10 V	-10 V	-10 V	-10 V	"	"	"	"	"	10 V	IN1A & OUTA	"	"	"	"	"	"	"
	46	"	"	2.4 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	47	"	2.4 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	48	"	2.4 V	2.4 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	49	2.4 V	0.8 V	0.8 V	"	"	"	-10 V	-10 V	10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	50	2.4 V	0.8 V	2.4 V	"	"	"	-10 V	-10 V	-10 V	10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$		51	15 V	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND			IN7A & OUTA	-10	10	-250	250	-250	250	nA
		52	"	-10 V		"	"	"	"	"	"	-10 V	-10 V	"			IN8A & OUTB	"	"	"	"	"	"	"
		53	"	10 V		"	"	"	"	"	"	-10 V	10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		54	"	"		"	"	"	"	"	"	10 V	-10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		55	"	"		"	"	"	"	"	10 V	-10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		56	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		57	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		58	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		59	"	"		"	10 V	-10 V	-10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		60	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
		61	"	"		"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		62	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		63	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		64	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		65	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		66	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		67	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		68	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTB	"	"	"	"	"	"	"
		69	"	-10 V		"	"	"	"	"	"	"	-10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		70	"	"		"	"	"	"	"	"	-10 V	10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		71	"	"		"	"	"	"	"	-10 V	10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		72	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		73	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		74	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		75	"	"		"	-10 V	10 V	10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		76	"	"		-10 V	10 V	10 V	10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
I+		77	"											"			V+		14		14		14	mA
I-		78	"											"			V-	-14		-14		-14		"
I+SBY		79	"											"			V+		3.0		3.0		3.0	"
I-SBY		80	"											"			V-	-4.0		-4.0		-4.0		"
R_{DS1}		81	"											"			IN1A & OUTA		600		700		600	Ω
		82	"										10 V	"			IN2A & OUTA		"		"		"	"
		83	"									10 V		"			IN3A & OUTA		"		"		"	"
		84	"								10 V			"			IN4A & OUTA		"		"		"	"
		85	"							10 V				"			IN5A & OUTA		"		"		"	"
		86	"						10 V					"			IN6A & OUTA		"		"		"	"
		87	"					10 V						"			IN7A & OUTA		"		"		"	"
		88	"				10 V							"			IN8A & OUTB		"		"		"	"
		89	"	1 mA		10 V								"			IN1B & OUTB		"		"		"	"
		90	"	"										"			IN2B & OUTB		"		"		"	"
		91	"	"										"			IN3B & OUTB		"		"		"	"
		92	"	"										"			IN4B & OUTB		"		"		"	"
		93	"	"										"			IN5B & OUTB		"		"		"	"
		94	"	"										"			IN6B & OUTB		"		"		"	"
		95	"	"										"			IN7B & OUTB		"		"		"	"
		96	"	"										"			IN8B & OUTB		"		"		"	"
		97	"											"			IN1A & OUTA		"		"		"	"
		98	"											"			IN2A & OUTA		"		"		"	"
		99	"											"			IN3A & OUTA		"		"		"	"
		100	"											"			IN4A & OUTA		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$		51	2.4 V	2.4 V	0.8 V	4.5 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-15 V	10 V	IN7A & OUTA	-10	10	-250	250	-250	250	nA
		52	2.4 V	2.4 V	2.4 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN8A & OUTB	"	"	"	"	"	"	"
		53	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	-10 V	IN1B & OUTB	"	"	"	"	"	"	"
		54	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
		55	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
		56	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
		57	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
		58	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
		59	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
		60	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
		61	0.8 V	0.8 V	0.8 V	"	-10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
		62	"	0.8 V	2.4 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
		63	"	2.4 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
		64	"	2.4 V	2.4 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
		65	2.4 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
		66	"	0.8 V	2.4 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
		67	"	2.4 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
		68	"	2.4 V	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A & OUTB	"	"	"	"	"	"	"
		69	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN1B & OUTB	"	"	"	"	"	"	"
		70	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
		71	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
		72	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
		73	2.4 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
		74	"	0.8 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
		75	"	2.4 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
		76	"	2.4 V	2.4 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
I+		77	0 V	0 V	0 V	5.0 V									"		V+		14		14		14	mA
I-		78	"	"	"	5.0 V									"		V-	-14		-14		-14		"
I+SBY		79	"	"	"	0 V									"		V+		3.0		3.0		3.0	"
I-SBY		80	"	"	"	0 V									"		V-	-4.0		-4.0		-4.0		"
R_{DS1}		81	0.8 V	0.8 V	0.8 V	4.5 V	10 V								"	1 mA	IN1A & OUTA		600		700		600	Ω
		82	"	"	2.4 V	"		10 V							"	"	IN2A & OUTA		"		"		"	"
		83	"	2.4 V	0.8 V	"			10 V						"	"	IN3A & OUTA		"		"		"	"
		84	"	2.4 V	2.4 V	"				10 V					"	"	IN4A & OUTA		"		"		"	"
		85	2.4 V	0.8 V	0.8 V	"					10 V				"	"	IN5A & OUTA		"		"		"	"
		86	"	0.8 V	2.4 V	"						10 V			"	"	IN6A & OUTA		"		"		"	"
		87	"	2.4 V	0.8 V	"							10 V		"	"	IN7A & OUTA		"		"		"	"
		88	"	2.4 V	2.4 V	"								10 V	"	"	IN8A & OUTA		"		"		"	"
		89	0.8 V	0.8 V	0.8 V	"									"		IN1B & OUTB		"		"		"	"
		90	"	0.8 V	2.4 V	"									"		IN2B & OUTB		"		"		"	"
		91	"	2.4 V	0.8 V	"									"		IN3B & OUTB		"		"		"	"
		92	"	2.4 V	2.4 V	"									"		IN4B & OUTB		"		"		"	"
		93	2.4 V	0.8 V	0.8 V	"									"		IN5B & OUTB		"		"		"	"
		94	"	0.8 V	2.4 V	"									"		IN6B & OUTB		"		"		"	"
		95	"	2.4 V	0.8 V	"									"		IN7B & OUTB		"		"		"	"
		96	"	2.4 V	2.4 V	"									"		IN8B & OUTB		"		"		"	"
		97	0.8 V	0.8 V	0.8 V	"	-10 V								"	-1 mA	IN1A & OUTA		"		"		"	"
		98	"	0.8 V	2.4 V	"		-10 V							"	"	IN2A & OUTA		"		"		"	"
		99	"	2.4 V	0.8 V	"			-10 V						"	"	IN3A & OUTA		"		"		"	"
		100	"	2.4 V	2.4 V	"				-10 V					"	"	IN4A & OUTA		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
R_{DS1}		101	15 V											"			IN5A & OUTA		600		700		600	Ω
		102	"											"			IN6A & OUTA		"		"		"	"
		103	"											"			IN7A & OUTA		"		"		"	"
		104	"											"			IN8A & OUTB		"		"		"	"
		105	"	-1 mA		-10 V								"			IN1B & OUTB		"		"		"	"
		106	"	"			-10 V							"			IN2B & OUTB		"		"		"	"
		107	"	"				-10 V						"			IN3B & OUTB		"		"		"	"
		108	"	"					-10 V					"			IN4B & OUTB		"		"		"	"
		109	"	"						-10 V				"			IN5B & OUTB		"		"		"	"
		110	"	"							-10 V			"			IN6B & OUTB		"		"		"	"
		111	"	"								-10 V		"			IN7B & OUTB		"		"		"	"
		112	"	"									-10 V	"			IN8B & OUTB		"		"		"	"
R_{DS2}	113 thru 128 – Same terminal conditions as for tests 81 thru 96, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ
R_{DS2}	129 thru 144 – Same terminal conditions as for tests 97 thru 112, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	145	GND											GND			A2		10					pF
	"	146	"											"			A1		10					"
	"	147	"											"			A0		10					"
C_{OS}	"	148	"											"			OUTA		50					"
	"	149	"	5/										"			OUTB		50					"
C_{IS}	"	150	"											"			IN1A		10					"
	"	151	"											"			IN2A		"					"
	"	152	"											"			IN3A		"					"
	"	153	"											"			IN4A		"					"
	"	154	"											"			IN5A		"					"
	"	155	"											"			IN6A		"					"
	"	156	"											"			IN7A		"					"
	"	157	"											"			IN8A		"					"
	"	158	"										4/	"			IN1B		"					"
	"	159	"									4/		"			IN2B		"					"
	"	160	"								4/			"			IN3B		"					"
	"	161	"							4/				"			IN4B		"					"
	"	162	"						4/					"			IN5B		"					"
	"	163	"					4/						"			IN6B		"					"
	"	164	"				4/							"			IN7B		"					"
	"	165	"			4/								"			IN8B		"					"
C_{EN}	"	166	"											"			EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
R_{DS1}		101	2.4 V	0.8 V	0.8 V	2.4 V					-10 V				-15 V	-1 mA	IN5A & OUTA		600		700		600	Ω
		102	"	0.8 V	2.4 V	"						-10 V			"	"	IN6A & OUTA		"		"		"	"
		103	"	2.4 V	0.8 V	"							-10 V		"	"	IN7A & OUTA		"		"		"	"
		104	"	2.4 V	2.4 V	"								-10 V	"	"	IN8A & OUTB		"		"		"	"
		105	0.8 V	0.8 V	0.8 V	"									"		IN1B & OUTB		"		"		"	"
		106	"	0.8 V	2.4 V	"									"		IN2B & OUTB		"		"		"	"
		107	"	2.4 V	0.8 V	"									"		IN3B & OUTB		"		"		"	"
		108	"	2.4 V	2.4 V	"									"		IN4B & OUTB		"		"		"	"
		109	2.4 V	0.8 V	0.8 V	"									"		IN5B & OUTB		"		"		"	"
		110	"	0.8 V	2.4 V	"									"		IN6B & OUTB		"		"		"	"
		111	"	2.4 V	0.8 V	"									"		IN7B & OUTB		"		"		"	"
		112	"	2.4 V	2.4 V	"									"		IN8B & OUTB		"		"		"	"
R_{DS2}	113 thru 128 – Same terminal conditions as for tests 81 thru 96, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ
R_{DS2}	129 thru 144 – Same terminal conditions as for tests 97 thru 112, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																		1.0		1.0		1.0	kΩ
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A		145	4/												GND		A2		10					pF
		146		4/											"		A1		10					"
		147			4/										"		A0		10					"
C_{OS}		148	0 V	0 V	0 V	0 V									"	5/	OUTA		50					"
		149	"	"	"	"									"		OUTB		50					"
C_{IS}		150	"	"	"	"	4/								"		IN1A		10					"
		151	"	"	"	"		4/							"		IN2A		"					"
		152	"	"	"	"			4/						"		IN3A		"					"
		153	"	"	"	"				4/					"		IN4A		"					"
		154	"	"	"	"					4/				"		IN5A		"					"
		155	"	"	"	"						4/			"		IN6A		"					"
		156	"	"	"	"							4/		"		IN7A		"					"
		157	"	"	"	"								4/	"		IN8A		"					"
		158	"	"	"	"									"		IN1B		"					"
		159	"	"	"	"									"		IN2B		"					"
		160	"	"	"	"									"		IN3B		"					"
		161	"	"	"	"									"		IN4B		"					"
		162	"	"	"	"									"		IN5B		"					"
		163	"	"	"	"									"		IN6B		"					"
		164	"	"	"	"									"		IN7B		"					"
		165	"	"	"	"									"		IN8B		"					"
C_{EN}		166				4/									"		EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	NC	NC		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 8	167	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	"	168	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	169	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	170	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	171	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	172	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	173	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	174	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	175	"	OUT		10 V	"	"	"	"	"	"	"	"				ADDRESS IN TO OUTB		"		"		"	"
	"	176	"	"		-10 V	"	"	"	"	"	"	"	"						"		"		"	"
	"	177	"	"		10 V	"	"	"	"	"	"	"	"						"		"		"	"
	"	178	"	"		-10 V	"	"	"	"	"	"	"	"						"		"		"	"
	"	179	"	"		GND	"	"	"	"	"	"	"	10 V						"		"		"	"
	"	180	"	"		"	"	"	"	"	"	"	"	-10 V						"		"		"	"
	"	181	"	"		"	"	"	"	"	"	"	"	10 V						"		"		"	"
	"	182	"	"		"	"	"	"	"	"	"	"	-10 V						"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 9	183	"			"	"	"	"	GND	GND	GND	GND	"				ENABLE TO OUTA		"		"		"	"
		184	"			"	"	"	"	"	"	"	"	"							"		"		"	"
	"	185	"			"	"	"	"	"	"	"	"	"							"		"		"	"
	"	186	"			"	"	"	"	"	"	"	"	"							"		"		"	"
	"	187	"	OUT		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"				ENABLE TO OUTB		"		"		"	"
	"	188	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"						"		"		"	"
	"	189	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"						"		"		"	"
	"	190	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"						"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}	fig. 15	191	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND			OUTA	50						dB
	fig. 15	192	"	OUT		"	"	"	"	"	"	"	"	"			OUTB	"						"
V_{CT}	fig. 16	193	"			"	"	"	"	"	"	"	6/	"			OUTA	"						"
	fig. 16	194	"	OUT		"	"	"	"	"	"	"	6/	"			OUTB	"						"
V_{CTE}	fig. 17	195	"						"				GND	"			OUTA		10					mV
	fig. 17	196	"	OUT					"				GND	"			OUTB		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 14	197	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			OUTA	5						ns
	"	198	"			"	"	"	"	"	"	"	"	"					"						"
	"	199	"			"	"	"	"	"	"	"	"	"					"						"
	"	200	"			"	"	"	"	"	"	"	"	"					"						"
	"	201	"	OUT		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"						"
	"	202	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"				"						"
	"	203	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"				"						"
	"	204	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"				"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$		167	_/‾	_/‾	_/‾	5 V	GND	GND	GND	GND	GND	GND	GND	-10 V	-15	OUT	ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
		168	_/‾	_/‾	_/‾	"	"	"	"	"	"	"	"	10 V	"	"	"		"		"		"	"
		169	‾_	‾_	‾_	"	"	"	"	"	"	"	"	-10 V	"	"	"		"		"		"	"
		170	‾_	‾_	‾_	"	"	"	"	"	"	"	"	10 V	"	"	"		"		"		"	"
		171	_/‾	_/‾	_/‾	"	10 V	"	"	"	"	"	"	GND	"	"	"		"		"		"	"
		172	_/‾	_/‾	_/‾	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		173	‾_	‾_	‾_	"	10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		174	‾_	‾_	‾_	"	-10 V	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		175	_/‾	_/‾	_/‾	"	GND	"	"	"	"	"	"	"	"		ADDRESS IN TO OUTB		"		"		"	"
		176	_/‾	_/‾	_/‾	"	"	"	"	"	"	"	"	"	"				"		"		"	"
		177	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		178	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		179	_/‾	_/‾	_/‾	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		180	_/‾	_/‾	_/‾	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		181	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		182	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$		183	GND	GND	GND	_/‾	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	OUT	ENABLE TO OUTA		"		"		"	"
		184	"	"	"	_/‾	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"			"		"		"	"
		185	"	"	"	‾_	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
		186	"	"	"	‾_	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
		187	"	"	"	_/‾	GND	GND	GND	GND	GND	GND	GND	GND	"		ENABLE TO OUTB		"		"		"	"
		188	"	"	"	_/‾	"	"	"	"	"	"	"	"	"				"		"		"	"
		189	"	"	"	_/‾	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		190	"	"	"	_/‾	"	"	"	"	"	"	"	"	"		"		"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}		191	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUTA	50						dB
		192	"	"	"	0 V	"	"	"	"	"	"	"	"	"		OUTB	"						"
V_{CT}		193	"	"	"	5 V	6/	"	"	"	"	"	"	"	"	OUT	OUTA	"						"
		194	"	"	"	"	6/	"	"	"	"	"	"	"	"		OUTB	"						"
V_{CTE}		195	IN	IN	IN	"	GND								"	OUT	OUTA		10					mV
		196	IN	IN	IN	"	GND								"		OUTB		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D		197	_/‾	_/‾	_/‾	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUTA	5						ns
		198	_/‾	_/‾	_/‾	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
		199	‾_	‾_	‾_	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"						"
		200	‾_	‾_	‾_	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
		201	_/‾	_/‾	_/‾	"	GND	GND	GND	GND	GND	GND	GND	GND	"	"	OUTB	"						"
		202	_/‾	_/‾	_/‾	"	"	"	"	"	"	"	"	"	"	"	"	"						"
		203	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"	"	"	"						"
		204	‾_	‾_	‾_	"	"	"	"	"	"	"	"	"	"	"	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1	GND											GND			A2		1.5					V
		2	"											"			A1		"					"
		3	"											"			A0		"					"
		4	"											"			EN		"					"
$V_{IC(NEG)}$		5	"											"			A2	-1.5						"
		6												"			A1	"						"
		7												"			A0	"						"
		8												"			EN	"						"
I_{IH} 2/	3010	9	15 V											"			A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
"		10	"											"			A1	"	"	"	"	"	"	"
"		11	"											"			A0	"	"	"	"	"	"	"
"		12	"											"			EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	13	"											"			A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
"		14	"											"			A1	"	"	"	"	"	"	"
"		15	"											"			A0	"	"	"	"	"	"	"
"		16	"											"			EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		17	"			-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			IN1A	-1	1	-50	50	-50	50	nA
		18	"			"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		19	"			"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		20	"			"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		21	"			"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		22	"			"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		23	"			"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		24	"			"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		25	"			"	"	"	"	"	"	"	10 V	"			IN1B	"	"	"	"	"	"	"
		26	"	-10 V		"	"	"	"	"	"	10 V	-10 V	"			IN2B	"	"	"	"	"	"	"
		27	"	"		"	"	"	"	"	10 V	-10 V	"	"			IN3B	"	"	"	"	"	"	"
		28	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		29	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		30	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		31	"	"		"	10 V	-10 V	-10 V	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		32	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	"	"			IN8B	"	"	"	"	"	"	"
		33	"	10 V		"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN1A	"	"	"	"	"	"	"
		34	"	"		"	"	"	"	"	"	"	"	"			IN2A	"	"	"	"	"	"	"
		35	"	"		"	"	"	"	"	"	"	"	"			IN3A	"	"	"	"	"	"	"
		36	"	"		"	"	"	"	"	"	"	"	"			IN4A	"	"	"	"	"	"	"
		37	"	"		"	"	"	"	"	"	"	"	"			IN5A	"	"	"	"	"	"	"
		38	"	"		"	"	"	"	"	"	"	"	"			IN6A	"	"	"	"	"	"	"
		39	"	"		"	"	"	"	"	"	"	"	"			IN7A	"	"	"	"	"	"	"
		40	"	"		"	"	"	"	"	"	"	"	"			IN8A	"	"	"	"	"	"	"
		41	"	"		"	"	"	"	"	"	"	-10 V	"			IN1B	"	"	"	"	"	"	"
		42	"	"		"	"	"	"	"	"	-10 V	10 V	"			IN2B	"	"	"	"	"	"	"
		43	"	"		"	"	"	"	"	-10 V	10 V	"	"			IN3B	"	"	"	"	"	"	"
		44	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B	"	"	"	"	"	"	"
		45	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B	"	"	"	"	"	"	"
		46	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B	"	"	"	"	"	"	"
		47	"	"		"	-10 V	10 V	10 V	"	"	"	"	"			IN7B	"	"	"	"	"	"	"
		48	"	"		-10 V	10 V	10 V	10 V	"	"	"	"	"			IN8B	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$	1	1 mA														A2		1.5					V
	2		1 mA													A1		"					"
	3			1 mA												A0		"					"
	4				1 mA											EN		"					"
$V_{IC(NEG)}$	5	-1 mA												GND		A2	-1.5						"
	6		-1 mA											"		A1	"						"
	7			-1 mA										"		A0	"						"
	8				-1 mA									"		EN	"						"
I_{IH} 2/	9	4.0 V	GND	GND	5 V									-15 V		A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	10	GND	4.0 V	GND	5 V									"		A1	"	"	"	"	"	"	"
	11	GND	GND	4.0 V	5 V									"		A0	"	"	"	"	"	"	"
	12	GND	GND	GND	4.0 V									"		EN	"	"	"	"	"	"	"
I_{IL} 2/	13	0.8 V	5 V	5 V	5 V									"		A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	14	5 V	0.8 V	5 V	5 V									"		A1	"	"	"	"	"	"	"
	15	5 V	5 V	0.8 V	5 V									"		A0	"	"	"	"	"	"	"
	16	5 V	5 V	5 V	0.8 V									"		EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	17	0.8 V	0.8 V	0.8 V	0.8 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	IN1A	-1	1	-50	50	-50	50	nA
	18	"	0.8 V	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	19	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	20	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	21	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	22	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	23	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	24	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8A	"	"	"	"	"	"	"
	25	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	"	IN1B	"	"	"	"	"	"	"
	26	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	27	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	28	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	29	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	30	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	31	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	32	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"
	33	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	IN1A	"	"	"	"	"	"	"
	34	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A	"	"	"	"	"	"	"
	35	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A	"	"	"	"	"	"	"
	36	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A	"	"	"	"	"	"	"
	37	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A	"	"	"	"	"	"	"
	38	"	0.8 V	4.0 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A	"	"	"	"	"	"	"
	39	"	4.0 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A	"	"	"	"	"	"	"
	40	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A	"	"	"	"	"	"	"
	41	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	"	IN1B	"	"	"	"	"	"	"
	42	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B	"	"	"	"	"	"	"
	43	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B	"	"	"	"	"	"	"
	44	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B	"	"	"	"	"	"	"
	45	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B	"	"	"	"	"	"	"
	46	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B	"	"	"	"	"	"	"
	47	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B	"	"	"	"	"	"	"
	48	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B	"	"	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$I_{D(OFF)}$		49	15 V	-10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	GND			OUTA	-10	10	-250	250	-250	250	nA
		50	"	10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTA	"	"	"	"	"	"	"
		51	"	10 V		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			OUTB	"	"	"	"	"	"	"
		52	"	-10 V		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		53	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		54	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		55	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		56	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		57	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		58	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		59	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		60	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTA	"	"	"	"	"	"	"
		61	"	10 V		"	"	"	"	"	"	"	10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		62	"	"		"	"	"	"	"	"	10 V	-10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		63	"	"		"	"	"	"	"	10 V	-10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		64	"	"		"	"	"	"	10 V	-10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		65	"	"		"	"	"	10 V	-10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		66	"	"		"	"	10 V	-10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		67	"	"		"	10 V	-10 V	-10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		68	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
		69	"	"		"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			IN1A & OUTA	"	"	"	"	"	"	"
		70	"	"		"	"	"	"	"	"	"	"	"			IN2A & OUTA	"	"	"	"	"	"	"
		71	"	"		"	"	"	"	"	"	"	"	"			IN3A & OUTA	"	"	"	"	"	"	"
		72	"	"		"	"	"	"	"	"	"	"	"			IN4A & OUTA	"	"	"	"	"	"	"
		73	"	"		"	"	"	"	"	"	"	"	"			IN5A & OUTA	"	"	"	"	"	"	"
		74	"	"		"	"	"	"	"	"	"	"	"			IN6A & OUTA	"	"	"	"	"	"	"
		75	"	"		"	"	"	"	"	"	"	"	"			IN7A & OUTA	"	"	"	"	"	"	"
		76	"	"		"	"	"	"	"	"	"	"	"			IN8A & OUTA	"	"	"	"	"	"	"
		77	"	-10 V		"	"	"	"	"	"	"	-10 V	"			IN1B & OUTB	"	"	"	"	"	"	"
		78	"	"		"	"	"	"	"	"	-10 V	10 V	"			IN2B & OUTB	"	"	"	"	"	"	"
		79	"	"		"	"	"	"	"	-10 V	10 V	"	"			IN3B & OUTB	"	"	"	"	"	"	"
		80	"	"		"	"	"	"	-10 V	10 V	"	"	"			IN4B & OUTB	"	"	"	"	"	"	"
		81	"	"		"	"	"	-10 V	10 V	"	"	"	"			IN5B & OUTB	"	"	"	"	"	"	"
		82	"	"		"	"	-10 V	10 V	"	"	"	"	"			IN6B & OUTB	"	"	"	"	"	"	"
		83	"	"		"	-10 V	10 V	10 V	"	"	"	"	"			IN7B & OUTB	"	"	"	"	"	"	"
		84	"	"		-10 V	10 V	10 V	10 V	"	"	"	"	"			IN8B & OUTB	"	"	"	"	"	"	"
$I_{D+(OFF)}$ over-voltage		85	"											"			OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		86	"											"			"	"	"	"	"	"	"	"
		87	"											"			"	"	"	"	"	"	"	"
		88	"											"			"	"	"	"	"	"	"	"
		89	"											"			"	"	"	"	"	"	"	"
		90	"											"			"	"	"	"	"	"	"	"
		91	"											"			"	"	"	"	"	"	"	"
		92	"											"			"	"	"	"	"	"	"	"
		93	"	0 V									33 V	"			OUTB	"	"	"	"	"	"	"
		94	"	"								33 V		"			"	"	"	"	"	"	"	"
		95	"	"							33 V			"			"	"	"	"	"	"	"	"
		96	"	"						33 V				"			"	"	"	"	"	"	"	"
		97	"	"					33 V					"			"	"	"	"	"	"	"	"
		98	"	"				33 V						"			"	"	"	"	"	"	"	"
		99	"	"			33 V							"			"	"	"	"	"	"	"	"
		100	"	"		33 V								"			"	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$I_{D(OFF)}$	49	0.8 V	0.8 V	0.8 V	0.8 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-15 V	10 V	OUTA	-10	10	-250	250	-250	250	nA
	50	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	-10 V	OUTA	"	"	"	"	"	"	"
	51	"	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	-10 V	OUTB	"	"	"	"	"	"	"
	52	"	"	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	10 V	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$	53	"	"	"	4.0 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
	54	"	"	4.0 V	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	55	"	4.0 V	0.8 V	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	56	"	4.0 V	4.0 V	"	"	"	-10 V	10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	57	4.0 V	0.8 V	0.8 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	58	"	0.8 V	4.0 V	"	"	"	"	"	-10 V	10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
	59	"	4.0 V	0.8 V	"	"	"	"	"	"	-10 V	10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
	60	"	4.0 V	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	"	"	IN8A & OUTA	"	"	"	"	"	"	"
	61	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	-10 V	"	-10 V	IN1B & OUTB	"	"	"	"	"	"	"
	62	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	63	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	64	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	65	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	66	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	67	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	68	"	4.0 V	4.0 V	"	"	"	"	"	"		"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
	69	0.8 V	0.8 V	0.8 V	"	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	IN1A & OUTA	"	"	"	"	"	"	"
	70	"	0.8 V	4.0 V	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
	71	"	4.0 V	0.8 V	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	IN3A & OUTA	"	"	"	"	"	"	"
	72	"	4.0 V	4.0 V	"	"	"	10 V	-10 V	"	"	"	"	"	"	IN4A & OUTA	"	"	"	"	"	"	"
	73	4.0 V	0.8 V	0.8 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	IN5A & OUTA	"	"	"	"	"	"	"
	74	"	0.8 V	4.0 V	"	"	"	"	"	10 V	-10 V	"	"	"	"	IN6A & OUTA	"	"	"	"	"	"	"
	75	"	4.0 V	0.8 V	"	"	"	"	"	"	10 V	-10 V	"	"	"	IN7A & OUTA	"	"	"	"	"	"	"
	76	"	4.0 V	4.0 V	"	"	"	"	"	"	"	10 V	-10 V	"	"	IN8A & OUTA	"	"	"	"	"	"	"
	77	0.8 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	10 V	"	10 V	IN1B & OUTB	"	"	"	"	"	"	"
	78	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN2B & OUTB	"	"	"	"	"	"	"
	79	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN3B & OUTB	"	"	"	"	"	"	"
	80	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN4B & OUTB	"	"	"	"	"	"	"
	81	4.0 V	0.8 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN5B & OUTB	"	"	"	"	"	"	"
	82	"	0.8 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN6B & OUTB	"	"	"	"	"	"	"
	83	"	4.0 V	0.8 V	"	"	"	"	"	"	"	"	"	"	"	IN7B & OUTB	"	"	"	"	"	"	"
	84	"	4.0 V	4.0 V	"	"	"	"	"	"	"	"	"	"	"	IN8B & OUTB	"	"	"	"	"	"	"
$I_{D+(OFF)}$ over-voltage	85	0.8 V	0.8 V	0.8 V	0.8 V	33 V								"	0 V	OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
	86	"	0.8 V	4.0 V	"		33 V							"	"	"	"	"	"	"	"	"	"
	87	"	4.0 V	0.8 V	"			33 V						"	"	"	"	"	"	"	"	"	"
	88	"	4.0 V	4.0 V	"				33 V					"	"	"	"	"	"	"	"	"	"
	89	4.0 V	0.8 V	0.8 V	"					33 V				"	"	"	"	"	"	"	"	"	"
	90	"	0.8 V	4.0 V	"						33 V			"	"	"	"	"	"	"	"	"	"
	91	"	4.0 V	0.8 V	"							33 V		"	"	"	"	"	"	"	"	"	"
	92	"	4.0 V	4.0 V	"								33 V	"	"	"	"	"	"	"	"	"	"
	93	0.8 V	0.8 V	0.8 V	"									"		OUTB	"	"	"	"	"	"	"
	94	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	95	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	96	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	97	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	98	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	99	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	100	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$I_{D-(OFF)}$ over-voltage		101	15 V											GND			OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		102	"											"			"	"	"	"	"	"	"	"
		103	"											"			"	"	"	"	"	"	"	"
		104	"											"			"	"	"	"	"	"	"	"
		105	"											"			"	"	"	"	"	"	"	"
		106	"											"			"	"	"	"	"	"	"	"
		107	"											"			"	"	"	"	"	"	"	"
		108	"											"			"	"	"	"	"	"	"	"
		109	"	0 V									-33 V	"			OUTB	"	"	"	"	"	"	"
		110	"	"								-33 V		"			"	"	"	"	"	"	"	"
		111	"	"							-33 V			"			"	"	"	"	"	"	"	"
		112	"	"						-33 V				"			"	"	"	"	"	"	"	"
		113	"	"					-33 V					"			"	"	"	"	"	"	"	"
		114	"	"				-33 V						"			"	"	"	"	"	"	"	"
		115	"	"			-33 V							"			"	"	"	"	"	"	"	"
		116	"	"		-33 V								"			"	"	"	"	"	"	"	"
I+		117	"											"			V+		"		"		"	mA
I-		118	"											"			V-	-1		-1		-1		"
I+SBY		119	"											"			V+		2.0		2.0		2.0	"
I-SBY		120	"											"			V-	-1.0		-1.0		-1.0		"
R_{DS1}		121	"											"			IN1A & OUTA		1.5		2.0		1.5	kΩ
		122	"											"			IN2A & OUTA		"		"		"	"
		123	"											"			IN3A & OUTA		"		"		"	"
		124	"											"			IN4A & OUTA		"		"		"	"
		125	"											"			IN5A & OUTA		"		"		"	"
		126	"											"			IN6A & OUTA		"		"		"	"
		127	"											"			IN7A & OUTA		"		"		"	"
		128	"											"			IN8A & OUTA		"		"		"	"
		129	"	100 µA									10 V	"			IN1B & OUTB		"		"		"	"
		130	"	"								10 V		"			IN2B & OUTB		"		"		"	"
		131	"	"							10 V			"			IN3B & OUTB		"		"		"	"
		132	"	"						10 V				"			IN4B & OUTB		"		"		"	"
		133	"	"					10 V					"			IN5B & OUTB		"		"		"	"
		134	"	"				10 V						"			IN6B & OUTB		"		"		"	"
		135	"	"			10 V							"			IN7B & OUTB		"		"		"	"
		136	"	"		10 V								"			IN8B & OUTB		"		"		"	"
		137	"											"			IN1A & OUTA		"		"		"	"
		138	"											"			IN2A & OUTA		"		"		"	"
		139	"											"			IN3A & OUTA		"		"		"	"
		140	"											"			IN4A & OUTA		"		"		"	"
		141	"											"			IN5A & OUTA		"		"		"	"
		142	"											"			IN6A & OUTA		"		"		"	"
		143	"											"			IN7A & OUTA		"		"		"	"
		144	"											"			IN8A & OUTA		"		"		"	"
		145	"	-100 µA									-10 V	"			IN1B & OUTB		"		"		"	"
		146	"	"								-10 V		"			IN2B & OUTB		"		"		"	"
		147	"	"							-10 V			"			IN3B & OUTB		"		"		"	"
		148	"	"						-10 V				"			IN4B & OUTB		"		"		"	"
		149	"	"					-10 V					"			IN5B & OUTB		"		"		"	"
		150	"	"				-10 V						"			IN6B & OUTB		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
		15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
	Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$I_{D-(OFF)}$ over-voltage	101	0.8 V	0.8 V	0.8 V	0.8 V	-33 V								-15 V		OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
	102	"	0.8 V	4.0 V	"		-33 V							"		"	"	"	"	"	"	"	"
	103	"	4.0 V	0.8 V	"			-33 V						"		"	"	"	"	"	"	"	"
	104	"	4.0 V	4.0 V	"				-33 V					"		"	"	"	"	"	"	"	"
	105	4.0 V	0.8 V	0.8 V	"					-33 V				"		"	"	"	"	"	"	"	"
	106	"	0.8 V	4.0 V	"						-33 V			"		"	"	"	"	"	"	"	"
	107	"	4.0 V	0.8 V	"							-33 V		"		"	"	"	"	"	"	"	"
	108	"	4.0 V	4.0 V	"								-33 V	"		"	"	"	"	"	"	"	"
	109	0.8 V	0.8 V	0.8 V	"									"		OUTB	"	"	"	"	"	"	"
	110	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	111	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	112	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	113	4.0 V	0.8 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	114	"	0.8 V	4.0 V	"									"		"	"	"	"	"	"	"	"
	115	"	4.0 V	0.8 V	"									"		"	"	"	"	"	"	"	"
	116	"	4.0 V	4.0 V	"									"		"	"	"	"	"	"	"	"
I+	117	0 V	0 V	0 V	5 V									"		V+		"		"		"	mA
I-	118	"	"	"	5 V									"		V-	-1		-1		-1		"
I+SBY	119	"	"	"	0 V									"		V+		2.0		2.0		2.0	"
I-SBY	120	"	"	"	0 V									"		V-	-1.0		-1.0		-1.0		"
R_{DS1}	121	0.8 V	0.8 V	0.8 V	4.0 V	10 V								"	100 µA	IN1A & OUTA		1.5		2.0		1.5	kΩ
	122	"	0.8 V	4.0 V	"		10 V							"	"	IN2A & OUTA		"		"		"	"
	123	"	4.0 V	0.8 V	"			10 V						"	"	IN3A & OUTA		"		"		"	"
	124	"	4.0 V	4.0 V	"				10 V					"	"	IN4A & OUTA		"		"		"	"
	125	4.0 V	0.8 V	0.8 V	"					10 V				"	"	IN5A & OUTA		"		"		"	"
	126	"	0.8 V	4.0 V	"						10 V			"	"	IN6A & OUTA		"		"		"	"
	127	"	4.0 V	0.8 V	"							10 V		"	"	IN7A & OUTA		"		"		"	"
	128	"	4.0 V	4.0 V	"								10 V	"	"	IN8A & OUTA		"		"		"	"
	129	0.8 V	0.8 V	0.8 V	"									"		IN1B & OUTB		"		"		"	"
	130	"	0.8 V	4.0 V	"									"		IN2B & OUTB		"		"		"	"
	131	"	4.0 V	0.8 V	"									"		IN3B & OUTB		"		"		"	"
	132	"	4.0 V	4.0 V	"									"		IN4B & OUTB		"		"		"	"
	133	4.0 V	0.8 V	0.8 V	"									"		IN5B & OUTB		"		"		"	"
	134	"	0.8 V	4.0 V	"									"		IN6B & OUTB		"		"		"	"
	135	"	4.0 V	0.8 V	"									"		IN7B & OUTB		"		"		"	"
	136	"	4.0 V	4.0 V	"									"		IN8B & OUTB		"		"		"	"
	137	0.8 V	0.8 V	0.8 V	"	-10 V								"	-100 µA	IN1A & OUTA		"		"		"	"
	138	"	0.8 V	4.0 V	"		-10 V							"	"	IN2A & OUTA		"		"		"	"
	139	"	4.0 V	0.8 V	"			-10 V						"	"	IN3A & OUTA		"		"		"	"
	140	"	4.0 V	4.0 V	"				-10 V					"	"	IN4A & OUTA		"		"		"	"
	141	4.0 V	0.8 V	0.8 V	"					-10 V				"	"	IN5A & OUTA		"		"		"	"
	142	"	0.8 V	4.0 V	"						-10 V			"	"	IN6A & OUTA		"		"		"	"
	143	"	4.0 V	0.8 V	"							-10 V		"	"	IN7A & OUTA		"		"		"	"
	144	"	4.0 V	4.0 V	"								-10 V	"	"	IN8A & OUTA		"		"		"	"
	145	0.8 V	0.8 V	0.8 V	"									"		IN1B & OUTB		"		"		"	"
	146	"	0.8 V	4.0 V	"									"		IN2B & OUTB		"		"		"	"
	147	"	4.0 V	0.8 V	"									"		IN3B & OUTB		"		"		"	"
	148	"	4.0 V	4.0 V	"									"		IN4B & OUTB		"		"		"	"
	149	4.0 V	0.8 V	0.8 V	"									"		IN5B & OUTB		"		"		"	"
	150	4.0 V	0.8 V	4.0 V	"									"		IN6B & OUTB		"		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
R_{DS1}		151	15 V	-100 µA			-10 V							GND			IN7B		1.5		2.0		1.5	kΩ
		152	15 V	-100 µA		-10 V								GND			IN8B		1.5		2.0		1.5	kΩ
R_{DS2}	153 thru 168 – Same terminal conditions as for tests 121 thru 136, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																		2.4		2.4		2.4	“
R_{DS2}	169 thru 184 – Same terminal conditions as for tests 137 thru 152, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																		2.4		2.4		2.4	“
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A	3012	185	GND											GND			A2		10					pF
	“	186	“											“			A1		10					“
	“	187	“											“			A0		10					“
C_{OS}	“	188	“											“			OUTA		50					“
	“	189	“	5/										“			OUTB		50					“
C_{IS}	“	190	“											“			IN1A		10					“
	“	191	“											“			IN2A		“					“
	“	192	“											“			IN3A		“					“
	“	193	“											“			IN4A		“					“
	“	194	“											“			IN5A		“					“
	“	195	“											“			IN6A		“					“
	“	196	“											“			IN7A		“					“
	“	197	“											“			IN8A		“					“
	“	198	“										4/	“			IN1B		“					“
	“	199	“									4/		“			IN2B		“					“
	“	200	“								4/			“			IN3B		“					“
	“	201	“							4/				“			IN4B		“					“
	“	202	“						4/					“			IN5B		“					“
	“	203	“					4/						“			IN6B		“					“
	“	204	“				4/							“			IN7B		“					“
	“	205	“			4/								“			IN8B		“					“
C_{EN}	“	206	“											“			EN		“					“
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 8	207	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
	“	208	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	209	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	210	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	211	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	212	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	213	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	214	“			“	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	215	“	OUT		10 V	“	“	“	“	“	“	“	“			ADDRESS IN TO OUTB		“		“		“	“
	“	216	“	“		-10 V	“	“	“	“	“	“	“	“					“		“		“	“
	“	217	“	“		10 V	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	218	“	“		-10 V	“	“	“	“	“	“	“	“			“		“		“		“	“
	“	219	“	“		GND	“	“	“	“	“	“	10 V	“			“		“		“		“	“
	“	220	“	“		“	“	“	“	“	“	“	-10 V	“			“		“		“		“	“
	“	221	“	“		“	“	“	“	“	“	“	10 V	“			“		“		“		“	“
	“	222	“	“		“	“	“	“	“	“	“	-10 V	“			“		“		“		“	“

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
R_{DS1}		151															IN7B		1.5		2.0		1.5	kΩ
		152															IN8B		1.5		2.0		1.5	kΩ
R_{DS2}	153 thru 168 – Same terminal conditions as for tests 121 thru 136, except V± = ±10 V, V_S = +7.5 V, and limits as shown.																		2.4		2.4		2.4	"
R_{DS2}	169 thru 184 – Same terminal conditions as for tests 137 thru 152, except V± = ±10 V, V_S = -7.5 V, and limits as shown.																		2.4		2.4		2.4	"
																		Subgroup 4 T_A = 25°C						
																		Min	Max					
C_A		185	4/												GND		A2		10					pF
		186		4/											"		A1		10					"
		187			4/										"		A0		10					"
C_{OS}		188	0 V	0 V	0 V	0 V									"	5/	OUTA		50					"
		189	"	"	"	"									"		OUTB		50					"
C_{IS}		190	"	"	"	"	4/								"		IN1A		10					"
		191	"	"	"	"		4/							"		IN2A		"					"
		192	"	"	"	"			4/						"		IN3A		"					"
		193	"	"	"	"				4/					"		IN4A		"					"
		194	"	"	"	"					4/				"		IN5A		"					"
		195	"	"	"	"						4/			"		IN6A		"					"
		196	"	"	"	"							4/		"		IN7A		"					"
		197	"	"	"	"								4/	"		IN8A		"					"
		198	"	"	"	"									"		IN1B		"					"
		199	"	"	"	"									"		IN2B		"					"
		200	"	"	"	"									"		IN3B		"					"
		201	"	"	"	"									"		IN4B		"					"
		202	"	"	"	"									"		IN5B		"					"
		203	"	"	"	"									"		IN6B		"					"
		204	"	"	"	"									"		IN7B		"					"
		205	"	"	"	"									"		IN8B		"					"
C_{EN}		206				4/									"		EN		"					"
																		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$		207	⎍	⎍	⎍	5/	GND	GND	GND	GND	GND	GND	GND	10 V	-15 V		ADDRESS IN TO OUTA		1,000		1,500		1,000	ns
		208	⎍	⎍	⎍	"	"	"	"	"	"	"	"	-10 V	"		"		"		"		"	"
		209	⎌	⎌	⎌	"	"	"	"	"	"	"	"	10 V	"		"		"		"		"	"
		210	⎌	⎌	⎌	"	"	"	"	"	"	"	"	-10 V	"		"		"		"		"	"
		211	⎍	⎍	⎍	"	10 V	"	"	"	"	"	"	GND	"		"		"		"		"	"
		212	⎍	⎍	⎍	"	-10 V	"	"	"	"	"	"	"	"		"		"		"		"	"
		213	⎌	⎌	⎌	"	10 V	"	"	"	"	"	"	"	"		"		"		"		"	"
		214	⎌	⎌	⎌	"	-10 V	"	"	"	"	"	"	"	"		"		"		"		"	"
		215	⎍	⎍	⎍	"	GND	"	"	"	"	"	"	"	"		ADDRESS IN TO OUTB		"		"		"	"
		216	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"				"		"		"	"
		217	⎌	⎌	⎌	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		218	⎌	⎌	⎌	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		219	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		220	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		221	⎌	⎌	⎌	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"
		222	⎌	⎌	⎌	"	"	"	"	"	"	"	"	"	"		"		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	V+	OUTB	NC	IN8B	IN7B	IN6B	IN5B	IN4B	IN3B	IN2B	IN1B	GND	V_{REF}	NC		Min	Max	Min	Max	Min	Max	
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 9	223	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			ENABLE TO OUTA		1,000		1,500		1,000	ns
	"	224	"			"	"	"	"	"	"	"	"	"					"		"		"	"
	"	225	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	226	"			"	"	"	"	"	"	"	"	"			"		"		"		"	"
	"	227	"	OUT		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			ENABLE TO OUTB		"		"		"	"
	"	228	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"					"		"		"	"
	"	229	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"		"		"		"	"
	"	230	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"		"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}	fig. 15	231	15 V			IN	IN	IN	IN	IN	IN	IN	IN	GND			OUTA	50						dB
	fig. 15	232	"	OUT		"	"	"	"	"	"	"	"	"			OUTB	"						"
V_{CT}	fig. 16	233	"			"	"	"	"	"	"	"	6/	"			OUTA	"						"
	fig. 16	234	"	OUT		"	"	"	"	"	"	"	6/	"			OUTB	"						"
V_{CTE}	fig. 17	235	"										GND	"			OUTA		10					mV
	fig. 17	236	"	OUT									GND	"			OUTB		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D	fig. 14	237	15 V			GND	GND	GND	GND	GND	GND	GND	GND	GND			OUTA	5						ns
	"	238	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	239	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	240	"			"	"	"	"	"	"	"	"	"			"	"						"
	"	241	"	OUT		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			OUTB	"						"
	"	242	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"
	"	243	"	"		10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"			"	"						"
	"	244	"	"		-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"			"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Symbol	MIL-STD-883 method	Case X	Terminal conditions 1/														Measured Terminal	Test limits						Unit
			15	16	17	18	19	20	21	22	23	24	25	26	27	28		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
			Test no.	A2	A1	A0	EN	IN1A	IN2A	IN3A	IN4A	IN5A	IN6A	IN7A	IN8A	V-	OUTA		Min	Max	Min	Max	Min	Max	
$t_{ON(EN)}$ and $t_{OFF(EN)}$		223	GND	GND	GND	⎍	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	ENABLE TO OUTA		1,000		1,500		1,000	ns
		224	"	"	"	⎍	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"			"		"		"	"
		225	"	"	"	⎎	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"		"		"		"	"
		226	"	"	"	⎎	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"		"		"		"	"
		227	"	"	"	⎍	GND	GND	GND	GND	GND	GND	GND	GND	"	"	ENABLE TO OUTB		"		"		"	"
		228	"	"	"	⎍	"	"	"	"	"	"	"	"	"	"			"		"		"	"
		229	"	"	"	⎎	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
		230	"	"	"	⎎	"	"	"	"	"	"	"	"	"	"	"		"		"		"	"
																		Subgroup 12 T_A = 25°C						
																		Min	Max					
V_{ISO}		231	GND	GND	GND	0 V	IN	IN	IN	IN	IN	IN	IN	IN	-15 V	OUT	OUTA	50						dB
		232	"	"	"	0 V	"	"	"	"	"	"	"	"	"		OUTB	"						"
V_{CT}		233	"	"	"	5 V	6/	"	"	"	"	"	"	"	"	OUT	OUTA	"							"
		234	"	"	"	"	6/	"	"	"	"	"	"	"	"		OUTB	"							"
V_{CTE}		235	IN	IN	IN	"	GND								"	OUT	OUTA		10					mV
		236	IN	IN	IN	"	GND								"		OUTB		10					mV
																		Subgroup 13 T_A = 25°C						
																		Min	Max					
t_D		237	⎍	⎍	⎍	5 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	-15 V	OUT	OUTA	5						ns
		238	⎍	⎍	⎍	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
		239	⎎	⎎	⎎	"	10 V	10 V	10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	"						"
		240	⎎	⎎	⎎	"	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"						"
		241	⎍	⎍	⎍	"	GND	GND	GND	GND	GND	GND	GND	GND	"		OUTB	"						"
		242	⎍	⎍	⎍	"	"	"	"	"	"	"	"	"	"		"	"						"
		243	⎎	⎎	⎎	"	"	"	"	"	"	"	"	"	"		"	"						"
		244	⎎	⎎	⎎	"	"	"	"	"	"	"	"	"	"		"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1													GND		1 mA		A2		1.5					V
		2													"			1 mA	A1		"					"
		3	1 mA												"				A0		"					"
		4		1mA											"				EN		"					"
$V_{IC(NEG)}$		5			GND											GND	-1 mA		A2	-1.5						"
		6			"											"		-1 mA	A1	"						"
		7	-1 mA		"											"			A0	"						"
		8		-1 mA	"											"			EN	"						"
I_{IH} 2/	3010	9	GND	5 V	-15 V										15 V	"	4.0 V	GND	A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
"		10	GND	"	"										"	"	GND	4.0 V	A1	"	"	"	"	"	"	"
"		11	4.0 V	"	"										"	"	"	GND	A0	"	"	"	"	"	"	"
"		12	GND	4.0 V	"										"	"	"	GND	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	13	5 V	5 V	"										"	"	0.8 V	5 V	A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
"		14	5 V	5 V	"										"	"	5 V	0.8 V	A1	"	"	"	"	"	"	"
"		15	0.8 V	5 V	"										"	"	5 V	5 V	A0	"	"	"	"	"	"	"
"		16	5 V	0.8 V	"										"	"	5 V	5 V	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		17	0.8 V	"	"	10 V	-10 V	-10 V	-10 V		-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	IN1	-1	1	-50	50	-50	50	nA
		18	4.0 V	"	"	-10 V	10 V	-10 V	-10 V		"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	-10 V	10 V	-10 V		"	"	"	"	"	"	"	4.0 V	IN3	"	"	"	"	"	"	"
		20	4.0 V	"	"	"	"	-10 V	10 V		"	"	"	"	"	"	"	4.0 V	IN4	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	-10 V		"	"	"	10 V	"	"	4.0 V	0.8 V	IN5	"	"	"	"	"	"	"
		22	4.0 V	"	"	"	"	"	"		"	"	10 V	-10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	"	"	"		"	10 V	-10 V	-10 V	"	"	"	4.0 V	IN7	"	"	"	"	"	"	"
		24	4.0 V	"	"	"	"	"	"		10 V	-10 V	-10 V	-10 V	"	"	"	4.0 V	IN8	"	"	"	"	"	"	"
		25	0.8 V	"	"	"	10 V	10 V	10 V		"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IN1	"	"	"	"	"	"	"
		26	4.0 V	"	"	10 V	-10 V	10 V	10 V		"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		27	0.8 V	"	"	"	10 V	-10 V	10 V		"	"	"	"	"	"	"	4.0 V	IN3	"	"	"	"	"	"	"
		28	4.0 V	"	"	"	"	10 V	-10 V		"	"	"	"	"	"	"	4.0 V	IN4	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	"	"	10 V		"	"	"	-10 V	"	"	4.0 V	0.8 V	IN5	"	"	"	"	"	"	"
		30	4.0 V	"	"	"	"	"	"		"	"	-10 V	10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	"		"	-10 V	10 V	10 V	"	"	"	4.0 V	IN7	"	"	"	"	"	"	"
		32	4.0 V	"	"	"	"	"	"		-10 V	10 V	10 V	10 V	"	"	"	4.0 V	IN8	"	"	"	"	"	"	"
$I_{D(OFF)}$		33	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	OUT	-10	10	-250	250	-250	250	"
$I_{D(OFF)}$		34	0.8 V	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	"	OUT	"	"	"	"	"	"	"
$I_{D(ON)}$		35	0.8 V	4.0 V	"	10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
		36	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3 & OUT	"	"	"	"	"	"	"
		38	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN4 & OUT	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	10 V	"	"	4.0 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		40	4.0 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	4.0 V	IN7 & OUT	"	"	"	"	"	"	"
		42	4.0 V	"	"	"	"	"	"	"	"	-10 V	-10 V	-10 V	"	"	"	4.0 V	IN8 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$I_{D(ON)}$		43	0.8 V	4.0 V	-15 V	-10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	15 V	GND	0.8 V	0.8 V	IN1 & OUT	-10	10	-250	250	-250	250	nA
		44	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2 & OUT	"	"	"	"	"	"	"
		45	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3 & OUT	"	"	"	"	"	"	"
		46	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN4 & OUT	"	"	"	"	"	"	"
		47	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	4.0 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		48	4.0 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		49	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	4.0 V	IN7 & OUT	"	"	"	"	"	"	"
		50	4.0 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	4.0 V	IN8 & OUT	"	"	"	"	"	"	"
I+		51	0 V	5.0 V	"										"	"	0 V	0 V	V+		2.0		2.0		2.0	mA
I-		52	"	5.0 V	"										"	"	"	"	V-	-1		-1		-1		"
I+SBY		53	"	0 V	"										"	"	"	"	V+		2.0		2.0		2.0	"
I-SBY		54	"	0 V	"										"	"	"	"	V-	-1.0		-1.0		-1.0		"
$I_{D+(OFF)}$ over-voltage		55	0.8 V	0.8 V	"	33 V				0 V					"	"	GND	0.8 V	OUT	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		56	4.0 V	"	"		33 V			"					"	"	"	0.8 V	"	"	"	"	"	"	"	"
		57	0.8 V	"	"			33 V		"					"	"	"	4.0 V	"	"	"	"	"	"	"	"
		58	4.0 V	"	"				33 V	"					"	"	"	4.0 V	"	"	"	"	"	"	"	"
		59	0.8 V	"	"					"				33 V	"	"	15 V	0.8 V	"	"	"	"	"	"	"	"
		60	4.0 V	"	"					"			33 V		"	"	"	0.8 V	"	"	"	"	"	"	"	"
		61	0.8 V	"	"					"		33 V			"	"	"	4.0 V	"	"	"	"	"	"	"	"
		62	4.0 V	"	"					"	33 V				"	"	"	4.0 V	"	"	"	"	"	"	"	"
$I_{D-(OFF)}$ over-voltage		63	0.8 V	"	"	-33 V				"					"	"	GND	0.8 V	"	"	"	"	"	"	"	"
		64	4.0 V	"	"		-33 V			"					"	"	"	0.8 V	"	"	"	"	"	"	"	"
		65	0.8 V	"	"			-33 V		"					"	"	"	4.0 V	"	"	"	"	"	"	"	"
		66	4.0 V	"	"				-33 V	"					"	"	"	4.0 V	"	"	"	"	"	"	"	"
		67	0.8 V	"	"					"				-33 V	"	"	15 V	0.8 V	"	"	"	"	"	"	"	"
		68	4.0 V	"	"					"			-33 V		"	"	"	0.8 V	"	"	"	"	"	"	"	"
		69	0.8 V	"	"					"		-33 V			"	"	"	4.0 V	"	"	"	"	"	"	"	"
		70	4.0 V	"	"					"	-33 V				"	"	"	4.0 V	"	"	"	"	"	"	"	"
R_{DS1}		71	0.8 V	4.0 V	"	10 V				100 µA					"	"	0.8 V	0.8 V	IN1 & OUT		1.5		1.8		1.5	kΩ
		72	4.0 V	"	"		10 V			"					"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		73	0.8 V	"	"			10 V		"					"	"	"	4.0 V	IN3 & OUT		"		"		"	"
		74	4.0 V	"	"				10 V	"					"	"	"	4.0 V	IN4 & OUT		"		"		"	"
		75	0.8 V	"	"					"				10 V	"	"	4.0 V	0.8 V	IN5 & OUT		"		"		"	"
		76	4.0 V	"	"					"			10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		77	0.8 V	"	"					"		10 V			"	"	"	4.0 V	IN7 & OUT		"		"		"	"
		78	4.0 V	"	"					"	10 V				"	"	"	4.0 V	IN8 & OUT		"		"		"	"
		79	0.8 V	"	"	-10 V				-100 µA					"	"	0.8 V	0.8 V	IN1 & OUT		"		"		"	"
		80	4.0 V	"	"		-10 V			"					"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		81	0.8 V	"	"			-10 V		"					"	"	"	4.0 V	IN3 & OUT		"		"		"	"
		82	4.0 V	"	"				-10 V	"					"	"	"	4.0 V	IN4 & OUT		"		"		"	"
		83	0.8 V	"	"					"				-10 V	"	"	4.0 V	0.8 V	IN5 & OUT		"		"		"	"
		84	4.0 V	"	"					"			-10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		85	0.8 V	"	"					"		-10 V			"	"	"	4.0 V	IN7 & OUT		"		"		"	"
		86	4.0 V	"	"					"	-10 V				"	"	"	4.0 V	IN8 & OUT		"		"		"	"
R_{DS2}	87 thru 102 – Same terminal conditions as for tests 71 thru 86, except V± = ±10 V, V_S = ±7.5, and limits as shown.																				2.2		2.2		2.2	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C						
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max					
C_A	3012	103			GND										GND	GND	4/		A2		10					pF
	"	104			"										"	"		4/	A1		10					"
	"	105	4/		"										"	"			A0		10					"
C_{OS}	"	106	0 V		"					5/					"	"	0 V	0 V	OUT		45					"
C_{IS}	"	107	"	0 V	"	4/									"	"	"	"	IN1		10					"
	"	108	"	"	"		4/								"	"	"	"	IN2		"					"
	"	109	"	"	"			4/							"	"	"	"	IN3		"					"
	"	110	"	"	"				4/						"	"	"	"	IN4		"					"
	"	111	"	"	"									4/	"	"	"	"	IN5		"					"
	"	112	"	"	"								4/		"	"	"	"	IN6		"					"
	"	113	"	"	"							4/			"	"	"	"	IN7		"					"
	"	114	"	"	"						4/				"	"	"	"	IN8		"					"
C_{EN}	"	115		4/	"														EN							
																				Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																				Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 10	116	_/‾	5 V	-15 V	GND	GND	GND	GND	OUT	10 V	GND	GND	GND	15 V	GND	_/‾	_/‾	OUT		1,000		1,500		1,000	ns
	"	117	‾_	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	‾_	‾_	"		"		"		"	"
	"	118	_/‾	"	"	"	"	"	"	"	10 V	"	"	"	"	"	_/‾	_/‾	"		"		"		"	"
	"	119	‾_	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	‾_	‾_	"		"		"		"	"
	"	120	_/‾	"	"	10 V	"	"	"	"	GND	"	"	"	"	"	_/‾	_/‾	"		"		"		"	"
	"	121	‾_	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	‾_	‾_	"		"		"		"	"
	"	122	_/‾	"	"	10 V	"	"	"	"	"	"	"	"	"	"	_/‾	_/‾	"		"		"		"	"
	"	123	‾_	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	‾_	‾_	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 11	124	GND	_/‾	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	GND	GND	"		"		"		"	"
	"	125	"	‾_	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
	"	126	"	_/‾	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	"	"	"		"		"		"	"
	"	127	"	‾_	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C						
																				Min	Max					
V_{ISO}	fig. 15	128	GND	0 V	-15 V	IN	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CT}	fig. 16	129	GND	5 V	-15 V	6/	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CTE}	fig. 17	130	IN	5 V	-15 V	GND									15 V	GND	IN	IN	OUT		10					mV
																				Subgroup 13 T_A = 25°C						
																				Min	Max					
t_D	fig. 14	131	_/‾	5 V	-15 V	10 V	10 V	10 V	10 V	OUT	10 V	10 V	10 V	10 V	15 V	GND	_/‾	_/‾	OUT	5						ns
	"	132	‾_	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	‾_	‾_	"	"						"
	"	133	_/‾	"	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	_/‾	_/‾	"	"						"
	"	134	‾_	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	‾_	‾_	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
$V_{IC(POS)}$		1														GND		1 mA	A1		1.5					V
		2	1 mA													GND			A0		1.5					"
		3		1 mA												GND		-1 mA	EN		1.5					"
$V_{IC(NEG)}$		4			GND												GND		A1	-1.5						"
		5	-1 mA		GND												"		A0	-1.5						"
		6		-1 mA	GND												"		EN	-1.5						"
I_{IH} 2/		7	GND	5 V	-15 V											15 V	"	4.0 V	A1	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
		8	4.0 V	5 V	"											"	"	GND	A0	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
	3010	9	GND	4.0 V	"											"	"	GND	EN	-0.1	1.0	-0.1	1.0	-0.1	1.0	"
I_{IL} 2/	"	10	5.0 V	5 V	"											"	"	0.8 V	A1	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	11	0.8 V	5 V	"											"	"	5.0 V	A0	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	12	5.0 V	0.8 V	"											"	"	5.0 V	EN	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
$I_{S(OFF)}$ 3/	3009	13	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	IN1A	-1	1	-50	50	-50	50	nA
	"	14	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
	"	15	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A	"	"	"	"	"	"	"
	"	16	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN4A	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	"	10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		18	4.0 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	4.0 V	IN3B	"	"	"	"	"	"	"
		20	4.0 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	4.0 V	IN4B	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	10 V	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	"	"	0.8 V	IN1A	"	"	"	"	"	"	"
		22	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A	"	"	"	"	"	"	"
		24	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN4A	"	"	"	"	"	"	"
		25	0.8 V	"	"	"	"	"	10 V	"	"	"	"	"	-10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		26	4.0 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		27	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	4.0 V	IN3B	"	"	"	"	"	"	"
		28	4.0 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	4.0 V	IN4B	"	"	"	"	"	"	"
$I_{D(OFF)}$		29	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	OUTA	-10	10	-125	125	-125	125	"
		30	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	OUTB	"	"	"	"	"	"	"
		31	"	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	OUTA	"	"	"	"	"	"	"
		32	"	"	"	10 V	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		33	"	4.0 V	"	10 V	-10 V	-10 V	-10 V	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	IN1A & OUTA	"	"	"	"	"	"	"
		34	4.0 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A & OUTA	"	"	"	"	"	"	"
		36	4.0 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN4A & OUTA	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	"	10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		38	4.0 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	4.0 V	IN3B & OUTB	"	"	"	"	"	"	"
		40	4.0 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	4.0 V	IN4B & OUTB	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	10 V	10 V	10 V	"	"	"	10 V	10 V	10 V	"	"	0.8 V	IN1A & OUTA	"	"	"	"	"	"	"
		42	4.0 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A & OUTA	"	"	"	"	"	"	"
		43	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	4.0 V	IN3A & OUTA	"	"	"	"	"	"	"
		44	4.0 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	4.0 V	IN4A & OUTA	"	"	"	"	"	"	"
		45	0.8 V	"	"	"	"	"	10 V	10 V	-10 V	"	"	"	-10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		46	4.0 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		47	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	4.0 V	IN3B & OUTB	"	"	"	"	"	"	"
		48	4.0 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	4.0 V	IN4B & OUTB	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/															Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1	Min	Max	Min	Max	Min	Max	
I+		49	0 V	5.0 V	-15 V											15 V	GND	0 V	V+		2.0		2.0		2.0	mA
I-		50	"	5.0 V	"											"	"	"	V-	-1		-1		-1		"
I+SBY		51	"	0 V	"											"	"	"	V+		2.0		2.0		2.0	"
I-SBY		52	"	"	"											"	"	"	V-	-1.0		-1.0		-1.0		"
$I_{D+(OFF)}$ over-voltage		53	0.8 V	0.8 V	"	33 V				0 V						"	"	0.8 V	OUTA	-2.0	2.0	-2.0	2.0	-2.0	2.0	µA
		54	4.0 V	"	"		33 V			"						"	"	"	"	"	"	"	"	"	"	"
		55	0.8 V	"	"			33 V		"						"	"	4.0 V	"	"	"	"	"	"	"	"
		56	4.0 V	"	"				33 V	"						"	"	4.0 V	"	"	"	"	"	"	"	"
		57	0.8 V	"	"						0 V				33 V	"	"	0.8 V	OUTB	"	"	"	"	"	"	"
		58	4.0 V	"	"						"			33 V		"	"	0.8 V	"	"	"	"	"	"	"	"
		59	0.8 V	"	"						"		33 V			"	"	4.0 V	"	"	"	"	"	"	"	"
		60	4.0 V	"	"						"	33 V				"	"	4.0 V	"	"	"	"	"	"	"	"
$I_{D-(OFF)}$ over-voltage		61	0.8 V	"	"	-33 V				0 V						"	"	0.8 V	OUTA	"	"	"	"	"	"	"
		62	4.0 V	"	"		-33 V			"						"	"	0.8 V	"	"	"	"	"	"	"	"
		63	0.8 V	"	"			-33 V		"						"	"	4.0 V	"	"	"	"	"	"	"	"
		64	4.0 V	"	"				-33 V	"						"	"	4.0 V	"	"	"	"	"	"	"	"
		65	0.8 V	"	"						0 V				-33 V	"	"	0.8 V	OUTB	"	"	"	"	"	"	"
		66	4.0 V	"	"						"			-33 V		"	"	0.8 V	"	"	"	"	"	"	"	"
		67	0.8 V	"	"						"		-33 V			"	"	4.0 V	"	"	"	"	"	"	"	"
		68	4.0 V	"	"						"	-33 V				"	"	4.0 V	"	"	"	"	"	"	"	"
R_{DS1}		69	0.8 V	4.0 V	"	10 V				100 µA						"	"	0.8 V	IN1A & OUTA		1.5		1.8		1.5	kΩ
		70	4.0 V	"	"		10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		71	0.8 V	"	"			10 V		"						"	"	4.0 V	IN3A & OUTA		"		"		"	"
		72	4.0 V	"	"				10 V	"						"	"	4.0 V	IN4A & OUTA		"		"		"	"
		73	0.8 V	"	"						100 µA				10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		74	4.0 V	"	"						"			10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		75	0.8 V	"	"						"		10 V			"	"	4.0 V	IN3B & OUTB		"		"		"	"
		76	4.0 V	"	"						"	10 V				"	"	4.0 V	IN4B & OUTB		"		"		"	"
		77	0.8 V	"	"	-10 V				-100 µA						"	"	0.8 V	IN1A & OUTA		"		"		"	"
		78	4.0 V	"	"		-10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		79	0.8 V	"	"			-10 V		"						"	"	4.0 V	IN3A & OUTA		"		"		"	"
		80	4.0 V	"	"				-10 V	"						"	"	4.0 V	IN4A & OUTA		"		"		"	"
		81	0.8 V	"	"						-100 µA				-10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		82	4.0 V	"	"						"			-10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		83	0.8 V	"	"						"		-10 V			"	"	4.0 V	IN3B & OUTB		"		"		"	"
		84	4.0 V	"	"						"	-10 V				"	"	4.0 V	IN4B & OUTB		"		"		"	"
R_{DS2}	85 thru 100 – Same terminal conditions as for tests 69 thru 84, except V± = ±10 V, V_S = ±7.5 V and limits as shown.																				2.2		2.2		2.2	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 4 T_A = 25°C						
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max					
C_A	3012	101	4/		GND											GND	GND		A0		10					pF
	"	102			"											"	"	4/	A1		10					"
C_{OS}	"	103	0 V	0 V	"					5/						"	"	0 V	OUTA		25					"
	"	104	"	"	"						5/					"	"	"	OUTB		25					"
C_{IS}	"	105	"	"	"	4/										"	"	"	IN1A		10					"
	"	106	"	"	"		4/									"	"	"	IN2A		"					"
	"	107	"	"	"			4/								"	"	"	IN3A		"					"
	"	108	"	"	"				4/							"	"	"	IN4A		"					"
	"	109	"	"	"										4/	"	"	"	IN1B		"					"
	"	110	"	"	"									4/		"	"	"	IN2B		"					"
	"	111	"	"	"								4/			"	"	"	IN3B		"					"
	"	112	"	"	"							4/				"	"	"	IN4B		"					"
C_{EN}	"	113		4/	"												GND	"	EN		"					"
																				Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
																				Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003 fig. 12	114	_/‾	5 V	-15 V	GND	GND	GND	10 V	OUT		GND	GND	GND	GND	15 V	GND	_/‾	ADDRESS IN		1,000		1,500		1,000	ns
		115	‾_	"	"	"	"	"	-10 V	"		"	"	"	"	"	"	‾_	TO OUTA		"		"		"	"
	"	116	_/‾	"	"	"	"	"	10 V	"		"	"	"	"	"	"	_/‾	"		"		"		"	"
	"	117	‾_	"	"	"	"	"	-10 V	"		"	"	"	"	"	"	‾_	"		"		"		"	"
	"	118	_/‾	"	"	10 V	"	"	GND	"		"	"	"	"	"	"	_/‾	"		"		"		"	"
	"	119	‾_	"	"	-10 V	"	"	"	"		"	"	"	"	"	"	‾_	"		"		"		"	"
	"	120	_/‾	"	"	10 V	"	"	"	"		"	"	"	"	"	"	_/‾	"		"		"		"	"
	"	121	‾_	"	"	-10 V	"	"	"	"		"	"	"	"	"	"	‾_	"		"		"		"	"
	"	122	_/‾	"	"	GND	"	"	"		OUT	10 V	"	"	"	"	"	_/‾	ADDRESS IN		"		"		"	"
	"	123	‾_	"	"	"	"	"	"		"	-10 V	"	"	"	"	"	‾_	TO OUTB		"		"		"	"
	"	124	_/‾	"	"	"	"	"	"		"	10 V	"	"	"	"	"	_/‾	"		"		"		"	"
	"	125	‾_	"	"	"	"	"	"		"	-10 V	"	"	"	"	"	‾_	"		"		"		"	"
	"	126	_/‾	"	"	"	"	"	"		"	GND	"	"	10 V	"	"	_/‾	"		"		"		"	"
	"	127	_/‾	"	"	"	"	"	"		"	"	"	"	-10 V	"	"	_/‾	"		"		"		"	"
	"	128	‾_	"	"	"	"	"	"		"	"	"	"	10 V	"	"	‾_	"		"		"		"	"
	"	129	‾_	"	"	"	"	"	"		"	"	"	"	-10 V	"	"	‾_	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003 fig. 13	130	GND		"	10 V	10 V	10 V	10 V	OUT		GND	"	"	GND	"	"	GND	ENABLE TO OUTA		"		"		"	"
		131	"		"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	_/‾			"		"		"	"
	"	132	"		"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	_/‾	"		"		"		"	"
	"	133	"		"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	‾_	"		"		"		"	"
	"	134	"		"	GND	GND	GND	GND		OUT	10 V	10 V	10 V	10 V	"	"	‾_	ENABLE TO OUTB		"		"		"	"
	"	135	"		"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	_/‾			"		"		"	"
	"	136	"		"	"	"	"	"		"	10 V	10 V	10 V	10 V	"	"	_/‾	"		"		"		"	"
	"	137	"		"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	‾_	"		"		"		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 12 T_A = 25°C						
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max					
V_{ISO}	fig. 15	138	GND	0 V	-15 V	IN	IN	IN	IN	OUT		IN	IN	IN	IN	15 V	GND	GND	OUTA	50						dB
	fig. 15	139	"	0 V	"	"	"	"	"		OUT	"	"	"	"	"	"	"	OUTB	"						"
V_{CT}	fig. 16	140	"	5 V	"	6/	"	"	"	OUT		"	"	"	"	"	"	"	OUTA	"						"
	fig. 16	141	"	"	"	6/	"	"	"		OUT	"	"	"	"	"	"	"	OUTB	"						"
V_{CTE}	fig. 17	142	IN	"	"	GND				OUT							"	IN	OUTA	"	10					mV
	fig. 17	143	IN	"	"	GND					OUT						"	IN	OUTB	"	10					mV
																				Subgroup 13 T_A = 25°C						
																				Min	Max					
t_D	fig. 14	144	_/‾	5 V	-15 V	10 V	10 V	10 V	10 V	OUT		GND	GND	GND	GND	15 V	GND	_/‾	OUTA	5						ns
	"	145	_/‾	"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	_/‾	"	"						"
	"	146	‾_	"	"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	‾_	"	"						"
	"	147	‾_	"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	‾_	"	"						"
	"	148	_/‾	"	"	GND	GND	GND	GND		OUT	10 V	10 V	10 V	10 V	"	"	_/‾	OUTB	"						"
	"	149	_/‾	"	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	_/‾	"	"						"
	"	150	‾_	"	"	"	"	"	"		"	10 V	10 V	10 V	10 V	"	"	‾_	"	"						"
	"	151	‾_	"	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	‾_	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	GND	5.0 V	-15 V										15 V	GND	2.4 V	GND	A2	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	GND	5.0 V	"										"	"	GND	2.4 V	A1	"	"	"	"	"	"	"
	"	3	2.4 V	5.0 V	"										"	"	GND	GND	A0	"	"	"	"	"	"	"
	"	4	GND	4.5 V	"										"	"	GND	GND	EN	"	"	"	"	"	"	"
I_{IL} 2/	3009	5	5.0 V	5.0 V	"										"	"	0.8 V	5 V	A2	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	"	6	5.0 V	"	"										"	"	5 V	0.8 V	A1	"	"	"	"	"	"	"
	"	7	0.8 V	"	"										"	"	5 V	5 V	A0	"	"	"	"	"	"	"
	"	8	5.0 V	0.8 V	"										"	"	5 V	5 V	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/		9	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	IN1	-1	1	-50	50	-50	50	nA
		10	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		11	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3	"	"	"	"	"	"	"
		12	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4	"	"	"	"	"	"	"
		13	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	10 V	"	"	2.4 V	0.8 V	IN5	"	"	"	"	"	"	"
		14	2.4 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		15	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	2.4 V	IN7	"	"	"	"	"	"	"
		16	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	"	2.4 V	IN8	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IN1	"	"	"	"	"	"	"
		18	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3	"	"	"	"	"	"	"
		20	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	2.4 V	0.8 V	IN5	"	"	"	"	"	"	"
		22	2.4 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IN6	"	"	"	"	"	"	"
		23	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	2.4 V	IN7	"	"	"	"	"	"	"
		24	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	2.4 V	IN8	"	"	"	"	"	"	"
$I_{D(OFF)}$		25	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	0.8 V	OUT	-10	10	-250	250	-250	250	"
$I_{D(OFF)}$		26	0.8 V	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	"	OUT	"	"	"	"	"	"	"
$I_{D(ON)}$		27	0.8 V	4.0 V	"	10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	"	IN1 & OUT	"	"	"	"	"	"	"
		28	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2 & OUT	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3 & OUT	"	"	"	"	"	"	"
		30	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4 & OUT	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	10 V	"	"	2.4 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		32	2.4 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		33	0.8 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	"	2.4 V	IN7 & OUT	"	"	"	"	"	"	"
		34	2.4 V	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	"	2.4 V	IN8 & OUT	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	10 V	10 V	10 V	-10 V	"	10 V	10 V	10 V	"	"	0.8 V	0.8 V	IN1 & OUT	"	"	"	"	"	"	"
		36	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2 & OUT	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3 & OUT	"	"	"	"	"	"	"
		38	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4 & OUT	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	10 V	"	"	"	"	-10 V	"	"	2.4 V	0.8 V	IN5 & OUT	"	"	"	"	"	"	"
		40	2.4 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	"	0.8 V	IN6 & OUT	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	"	2.4 V	IN7 & OUT	"	"	"	"	"	"	"
		42	2.4 V	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	"	2.4 V	IN8 & OUT	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max					
I+		43	0 V	5.0 V	-15 V										15 V	GND	0 V	0 V	V+		12		12		12	mA
I-		44	"	5.0 V	"										"	"	"	"	V-	-12		-12		-12		"
I+SBY		45	"	0 V	"										"	"	"	"	V+		3.5		3.5		3.5	"
I-SBY		46	"	0 V	"										"	"	"	"	V-	-3.5		-3.5		-3.5		"
R_{DS1}		47	0.8 V	4.5 V	"	10 V				1 mA					"	"	0.8 V	0.8 V	IN1 & OUT		400		500		400	Ω
		48	2.4 V	"	"		10 V			"					"	"	"	"	IN2 & OUT		"		"		"	"
		49	0.8 V	"	"			10 V		"					"	"	"	2.4 V	IN3 & OUT		"		"		"	"
		50	2.4 V	"	"				10 V	"					"	"	"	2.4 V	IN4 & OUT		"		"		"	"
		51	0.8 V	"	"					"				10 V	"	"	2.4 V	0.8 V	IN5 & OUT		"		"		"	"
		52	2.4 V	"	"					"			10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		53	0.8 V	"	"					"		10 V			"	"	"	2.4 V	IN7 & OUT		"		"		"	"
		54	2.4 V	"	"					"	10 V				"	"	"	2.4 V	IN8 & OUT		"		"		"	"
		55	0.8 V	"	"	-10 V				-1 mA					"	"	0.8 V	0.8 V	IN1 & OUT		"		"		"	"
		56	2.4 V	"	"		-10 V			"					"	"	"	0.8 V	IN2 & OUT		"		"		"	"
		57	0.8 V	"	"			-10 V		"					"	"	"	2.4 V	IN3 & OUT		"		"		"	"
		58	2.4 V	"	"				-10 V	"					"	"	"	2.4 V	IN4 & OUT		"		"		"	"
		59	0.8 V	"	"					"				-10 V	"	"	2.4 V	0.8 V	IN5 & OUT		"		"		"	"
		60	2.4 V	"	"					"			-10 V		"	"	"	0.8 V	IN6 & OUT		"		"		"	"
		61	0.8 V	"	"					"		-10 V			"	"	"	2.4 V	IN7 & OUT		"		"		"	"
		62	2.4 V	"	"					"	-10 V				"	"	"	2.4 V	IN8 & OUT		"		"		"	"
R_{DS2}	63 thru 78 – Same terminal conditions as tests 47 thru 62, except V± = ±10 V, V_S = +7.5 V and limits as shown.																				1,000		1,000		1,000	"
R_{DS2}	79 thru 94 – Same terminal conditions as tests 47 thru 62, except V± = ±10 V, V_S = -7.5 V and limits as shown.																				1,000		1,000		1,000	"
																				Subgroup 4 T_A = 25°C						
																				Min	Max					
C_A	3012	95			GND										GND	GND	4/		A2		10					pF
	"	96			"										"	"		4/	A1		10					"
	"	97	4/		"										"	"			A0		10					"
C_{OS}	"	98	0 V		"					5/					"	"	0 V	0 V	OUT		45					"
C_{IS}	"	99	"	0 V	"	4/									"	"	"	"	IN1		10					"
	"	100	"	"	"		4/								"	"	"	"	IN2		"					"
	"	101	"	"	"			4/							"	"	"	"	IN3		"					"
	"	102	"	"	"				4/						"	"	"	"	IN4		"					"
	"	103	"	"	"									4/	"	"	"	"	IN5		"					"
	"	104	"	"	"								4/		"	"	"	"	IN6		"					"
	"	105	"	"	"							4/			"	"	"	"	IN7		"					"
	"	106	"	"	"						4/				"	"	"	"	IN8		"					"
C_{EN}	"	107	"	4/	"										"	"			EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	A0	EN	V-	IN1	IN2	IN3	IN4	OUT	IN8	IN7	IN6	IN5	V+	GND	A2	A1		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003	108	⎍	5 V	-15 V	GND	GND	GND	GND	OUT	10 V	GND	GND	GND	15 V	GND	⎍	⎍	OUT		1,000		1,500		1,000	ns
	fig. 10	109	⎍	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	⎍	⎍	"		"		"		"	"
	"	110	⎎	"	"	"	"	"	"	"	10 V	"	"	"	"	"	⎎	⎎	"		"		"		"	"
	"	111	⎎	"	"	"	"	"	"	"	-10 V	"	"	"	"	"	⎎	⎎	"		"		"		"	"
	"	112	⎍	"	"	10 V	"	"	"	"	GND	"	"	"	"	"	⎍	⎍	"		"		"		"	"
	"	113	⎍	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	⎍	⎍	"		"		"		"	"
	"	114	⎎	"	"	10 V	"	"	"	"	"	"	"	"	"	"	⎎	⎎	"		"		"		"	"
	"	115	⎎	"	"	-10 V	"	"	"	"	"	"	"	"	"	"	⎎	⎎	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	3003	116	GND	⎍	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	GND	GND	"		"		"		"	"
	fig. 11	117	"	⎍	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
	"	118	"	⎎	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	"	"	"		"		"		"	"
	"	119	"	⎎	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C						
																				Min	Max					
V_{ISO}	fig. 15	120	GND	0 V	-15 V	IN	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CT}	fig. 16	121	GND	5 V	-15 V	6/	IN	IN	IN	OUT	IN	IN	IN	IN	15 V	GND	GND	GND	OUT	50						dB
V_{CTE}	fig. 17	122	IN	5 V	-15 V	GND				OUT					15 V	GND	IN	IN	OUT		10					mV
																				Subgroup 13 T_A = 25°C						
																				Min	Max					
t_D	fig. 14	123	⎍	5 V	-15 V	10 V	10 V	10 V	10 V	OUT	10 V	10 V	10 V	10 V	15 V	GND	⎍	⎍	OUT	5						ns
	"	124	⎍	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	⎍	⎍	"	"						"
	"	125	⎎	"	"	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	10 V	"	"	⎎	⎎	"	"						"
	"	126	⎎	"	"	-10 V	-10 V	-10 V	-10 V	"	-10 V	-10 V	-10 V	-10 V	"	"	⎎	⎎	"	"						"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/															Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
I_{IH} 2/	3010	1	GND	GND	-15 V											15 V	GND	2.4 V	A1	-0.1	1.0	-0.1	1.0	-0.1	1.0	µA
	"	2	2.4 V	GND	"											"	"	GND	A0	"	"	"	"	"	"	"
	"	3	GND	4.5 V	"											"	"	GND	EN	"	"	"	"	"	"	"
I_{IL} 2/	"	4	5 V	5 V	"											"	"	0.8 V	A1	-1.0	0.1	-1.0	0.1	-1.0	0.1	"
	3009	5	0.8 V	5 V	"											"	"	5 V	A0	"	"	"	"	"	"	"
	"	6	5.0 V	0.8 V	"											"	"	5 V	EN	"	"	"	"	"	"	"
$I_{S(OFF)}$ 3/	"	7	0.8 V	"	"	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	IN1A	-1	1	-50	50	-50	50	nA
	"	8	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
		9	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A	"	"	"	"	"	"	"
		10	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A	"	"	"	"	"	"	"
		11	0.8 V	"	"	"	"	"	-10 V	"	"	"	"	"	10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		12	2.4 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		13	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	2.4 V	IN3B	"	"	"	"	"	"	"
		14	2.4 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	2.4 V	IN4B	"	"	"	"	"	"	"
		15	0.8 V	"	"	"	10 V	10 V	10 V	10 V	10 V	"	10 V	10 V	10 V	"	"	0.8 V	IN1A	"	"	"	"	"	"	"
		16	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A	"	"	"	"	"	"	"
		17	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A	"	"	"	"	"	"	"
		18	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A	"	"	"	"	"	"	"
		19	0.8 V	"	"	"	"	"	10 V	"	"	"	"	"	-10 V	"	"	0.8 V	IN1B	"	"	"	"	"	"	"
		20	2.4 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B	"	"	"	"	"	"	"
		21	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	2.4 V	IN3B	"	"	"	"	"	"	"
		22	2.4 V	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	10 V	"	"	2.4 V	IN4B	"	"	"	"	"	"	"
$I_{D(OFF)}$		23	0.8 V	"	"	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	-10 V	"	"	0.8 V	OUTA	-10	10	-125	125	-125	125	"
		24	"	"	"	-10 V	-10 V	-10 V	-10 V	-10 V	10 V	-10 V	-10 V	-10 V	-10 V	"	"	"	OUTB	"	"	"	"	"	"	"
		25	"	"	"	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	10 V	"	"	"	OUTA	"	"	"	"	"	"	"
		26	"	"	"	10 V	10 V	10 V	10 V	10 V	-10 V	10 V	10 V	10 V	10 V	"	"	"	OUTB	"	"	"	"	"	"	"
$I_{D(ON)}$		27	"	4.0 V	"	10 V	-10 V	-10 V	-10 V	"	"	-10 V	-10 V	-10 V	-10 V	"	"	"	IN1A & OUTA	"	"	"	"	"	"	"
		28	2.4 V	"	"	-10 V	10 V	-10 V	-10 V	"	"	"	"	"	"	"	"	"	IN2A & OUTA	"	"	"	"	"	"	"
		29	0.8 V	"	"	"	-10 V	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA	"	"	"	"	"	"	"
		30	2.4 V	"	"	"	"	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA	"	"	"	"	"	"	"
		31	0.8 V	"	"	"	"	"	-10 V	-10 V	10 V	"	"	"	10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		32	2.4 V	"	"	"	"	"	"	"	"	"	"	10 V	-10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		33	0.8 V	"	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	"	"	2.4 V	IN3B & OUTB	"	"	"	"	"	"	"
		34	2.4 V	"	"	"	"	"	"	"	"	10 V	-10 V	-10 V	-10 V	"	"	2.4 V	IN4B & OUTB	"	"	"	"	"	"	"
		35	0.8 V	"	"	"	10 V	10 V	10 V	"	"	"	10 V	10 V	10 V	"	"	0.8 V	IN1A & OUTA	"	"	"	"	"	"	"
		36	2.4 V	"	"	10 V	-10 V	10 V	10 V	"	"	"	"	"	"	"	"	0.8 V	IN2A & OUTA	"	"	"	"	"	"	"
		37	0.8 V	"	"	"	10 V	-10 V	10 V	"	"	"	"	"	"	"	"	2.4 V	IN3A & OUTA	"	"	"	"	"	"	"
		38	2.4 V	"	"	"	"	10 V	-10 V	"	"	"	"	"	"	"	"	2.4 V	IN4A & OUTA	"	"	"	"	"	"	"
		39	0.8 V	"	"	"	"	"	10 V	10 V	-10 V	"	"	"	-10 V	"	"	0.8 V	IN1B & OUTB	"	"	"	"	"	"	"
		40	2.4 V	"	"	"	"	"	"	"	"	"	"	-10 V	10 V	"	"	0.8 V	IN2B & OUTB	"	"	"	"	"	"	"
		41	0.8 V	"	"	"	"	"	"	"	"	"	-10 V	10 V	10 V	"	"	2.4 V	IN3B & OUTB	"	"	"	"	"	"	"
		42	2.4 V	"	"	"	"	"	"	"	"	10 V	10 V	10 V	10 V	"	"	2.4 V	IN4B & OUTB	"	"	"	"	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 1 T_A = 25°C		Subgroup 2 T_A = 125°C		Subgroup 3 T_A = -55°C		
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max					
I+		43	0 V	5.0 V	-15 V											15 V	GND	0 V	V+		12		12		12	mA
I-		44	"	5.0 V	"											"	"	"	V-	-12		-12		-12		"
I+SBY		45	"	0 V	"											"	"	"	V+		3.5		3.5		3.5	"
I-SBY		46	"	0 V	"											"	"	"	V-	-3.5		-3.5		-3.5		"
R_{DS1}		47	0.8 V	4.5 V	"	10 V				1 mA						"	"	0.8 V	IN1A & OUTA		400		500		400	Ω
		48	2.4 V	"	"		10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		49	0.8 V	"	"			10 V		"						"	"	2.4 V	IN3A & OUTA		"		"		"	"
		50	2.4 V	"	"				10 V	"						"	"	2.4 V	IN4A & OUTA		"		"		"	"
		51	0.8 V	"	"						1 mA				10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		52	2.4 V	"	"						"			10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		53	0.8 V	"	"						"		10 V			"	"	2.4 V	IN3B & OUTB		"		"		"	"
		54	2.4 V	"	"						"	10 V				"	"	2.4 V	IN4B & OUTB		"		"		"	"
		55	0.8 V	"	"	-10 V				-1 mA						"	"	0.8 V	IN1A & OUTA		"		"		"	"
		56	2.4 V	"	"		-10 V			"						"	"	0.8 V	IN2A & OUTA		"		"		"	"
		57	0.8 V	"	"			-10 V		"						"	"	2.4 V	IN3A & OUTA		"		"		"	"
		58	2.4 V	"	"				-10 V	"						"	"	2.4 V	IN4A & OUTA		"		"		"	"
		59	0.8 V	"	"						-1 mA				-10 V	"	"	0.8 V	IN1B & OUTB		"		"		"	"
		60	2.4 V	"	"						"			-10 V		"	"	0.8 V	IN2B & OUTB		"		"		"	"
		61	0.8 V	"	"						"		-10 V			"	"	2.4 V	IN3B & OUTB		"		"		"	"
		62	2.4 V	"	"						"	-10 V				"	"	2.4 V	IN4B & OUTB		"		"		"	"
R_{DS2}	63 thru 78 – Same terminal conditions as tests 47 thru 62, except V± = ±10 V, V_S = ±7.5 V and limits as shown.																				1,000		1,000		1,000	"
																				Subgroup 4 T_A = 25°C						
																				Min	Max					
C_A	3012	79	4/		GND											GND	GND		A0		10					pF
	"	80			"											"	"	4/	A1		10					"
C_{OS}	"	81	0 V	0 V	"					5/						"	"		OUTA		25					"
	"	82	"	"	"						5/					"	"		OUTB		25					"
C_{IS}	"	83	"	"	"	4/										"	"	0 V	IN1A		10					"
	"	84	"	"	"		4/									"	"	"	IN2A		"					"
	"	85	"	"	"			4/								"	"	"	IN3A		"					"
	"	86	"	"	"				4/							"	"	"	IN4A		"					"
	"	87	"	"	"										4/	"	"	"	IN1B		"					"
	"	88	"	"	"									4/		"	"	"	IN2B		"					"
	"	89	"	"	"								4/			"	"	"	IN3B		"					"
	"	90	"	"	"							4/				"	"	"	IN4B		"					"
C_{EN}	"	91		4/	"											"	"		EN		"					"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 – Continued.

Symbol	MIL-STD-883 test method	Case E	Terminal conditions 1/																Measured Terminal	Test limits						Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Subgroup 9 T_A = 25°C		Subgroup 10 T_A = 125°C		Subgroup 11 T_A = -55°C		
		Test no.	A0	EN	V-	IN1A	IN2A	IN3A	IN4A	OUTA	OUTB	IN4B	IN3B	IN2B	IN1B	V+	GND	A1		Min	Max	Min	Max	Min	Max	
$t_{ON(A)}$ and $t_{OFF(A)}$	3003	92	⎍	5 V	-15 V	GND	GND	GND	10 V	OUT		GND	GND	GND	GND	15 V	GND	⎍	ADDRESS IN		1,000		1,500		1,000	ns
	fig. 12	93	⎍	"	"	"	"	"	-10 V	"		"	"	"	"	"	"	⎍	TO OUTA		"		"		"	"
	"	94	⎎	"	"	"	"	"	10 V	"		"	"	"	"	"	"	⎎	"		"		"		"	"
	"	95	⎎	"	"	"	"	"	-10 V	"		"	"	"	"	"	"	⎎	"		"		"		"	"
	"	96	⎍	"	"	10 V	"	"	GND	"		"	"	"	"	"	"	⎍	"		"		"		"	"
	"	97	⎍	"	"	-10 V	"	"	"	"		"	"	"	"	"	"	⎍	"		"		"		"	"
	"	98	⎎	"	"	10 V	"	"	"	"		"	"	"	"	"	"	⎎	"		"		"		"	"
	"	99	⎎	"	"	-10 V	"	"	"	"		"	"	"	"	"	"	⎎	"		"		"		"	"
	"	100	⎍	"	"	GND	"	"	"		OUT	10 V	"	"	"	"	"	⎍	ADDRESS IN		"		"		"	"
	"	101	⎍	"	"	"	"	"	"		"	-10 V	"	"	"	"	"	⎍	TO OUTB		"		"		"	"
	"	102	⎎	"	"	"	"	"	"		"	10 V	"	"	"	"	"	⎎	"		"		"		"	"
	"	103	⎎	"	"	"	"	"	"		"	-10 V	"	"	"	"	"	⎎	"		"		"		"	"
	"	104	⎍	"	"	"	"	"	"		"	GND	"	"	10 V	"	"	⎍	"		"		"		"	"
	"	105	⎍	"	"	"	"	"	"		"	"	"	"	-10 V	"	"	⎍	"		"		"		"	"
	"	106	⎎	"	"	"	"	"	"		"	"	"	"	10 V	"	"	⎎	"		"		"		"	"
	"	107	⎎	"	"	"	"	"	"		"	"	"	"	-10 V	"	"	⎎	"		"		"		"	"
$t_{ON(EN)}$ and $t_{OFF(EN)}$	fig. 13	108	GND	⎍	"	10 V	10 V	10 V	10 V	OUT		"	"	"	GND	"	"	GND	ENABLE		"		"		"	"
	"	109	"	⎍	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	TO OUTA		"		"		"	"
	"	110	"	⎎	"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	"	"		"		"		"	"
	"	111	"	⎎	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"		"		"		"	"
	"	112	"	⎍	"	GND	GND	GND	GND		OUT	10 V	10 V	10 V	10 V	"	"	"	ENABLE		"		"		"	"
	"	113	"	⎍	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	"	TO OUTB		"		"		"	"
	"	114	"	⎎	"	"	"	"	"		"	10 V	10 V	10 V	10 V	"	"	"	"		"		"		"	"
	"	115	"	⎎	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	"	"		"		"		"	"
																				Subgroup 12 T_A = 25°C						
																				Min	Max					
V_{ISO}	fig. 15	116	GND	0 V	-15 V	IN	IN	IN	IN	OUT		IN	IN	IN	IN	15 V	GND	GND	OUTA	50						dB
	fig. 15	117	"	0 V	"	"	"	"	"		OUT	"	"	"	"	"	"	"	OUTB	"						"
V_{CT}	fig. 16	118	"	5 V	"	6/	"	"	"	OUT		"	"	"	6/	"	"	"	OUTA	"						"
	fig. 16	119	"	"	"	6/	"	"	"		OUT	"	"	"	6/	"	"	"	OUTB	"						"
V_{CTE}	fig. 17	120	IN	"	"	GND				OUT					GND	"	"	IN	OUTA		10					mV
	fig. 17	121	IN	"	"	GND					OUT				GND	"	"	IN	OUTB		10					
																				Subgroup 13 T_A = 25°C						
																				Min	Max					
t_D	fig. 14	122	⎍	5 V	-15 V	10 V	10 V	10 V	10 V	OUT		GND	GND	GND	GND	15 V	GND	IN	OUTA	5						ns
	"	123	⎍	"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"	"						"
	"	124	⎎	"	"	10 V	10 V	10 V	10 V	"		"	"	"	"	"	"	"	"	"						"
	"	125	⎎	"	"	-10 V	-10 V	-10 V	-10 V	"		"	"	"	"	"	"	"	"	"						"
	"	126	⎍	"	"	GND	GND	GND	GND		OUT	10 V	10 V	10 V	10 V	"	"	"	OUTB	"						"
	"	127	⎍	"	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"						"
	"	128	⎎	"	"	"	"	"	"		"	10 V	10 V	10 V	10 V	"	"	"	"	"						"
	"	129	⎎	"	"	"	"	"	"		"	-10 V	-10 V	-10 V	-10 V	"	"	"	"	"						"

1/ Pins not designated may be high-level logic or open. Exceptions are as follows: $V_{IC(POS)}$ tests, the V-, GND terminal shall be open; $V_{IC(NEG)}$ tests, the V+ terminal shall be open.
2/ The device manufacturer may, at his option, measure I_{IL} and I_{IH} at 25°C for each individual input or measure all inputs together.
3/ The I_S and I_D measurements shall be performed in sequence.
4/ C_A, C_{EN}, and C_{IS} – Connect capacitance bridge between measured terminal and V_{SS}, frequency = 1 MHz, see 4.4.1c.
5/ C_{OS} – Connect capacitance bridge between measured output and V_{SS}, frequency = 1 MHz, see 4.4.1c.
6/ Connect input to ground through a 1 kΩ ±5% resistor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 5, 6, 7, and 8 of method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 4 (Ci measurements) shall be measured only for initial qualification and after process or design changes which may affect input capacitance. Capacitance shall be measured between the designated terminal and GND at a frequency of 1 MHz. Subgroup 4 shall be performed using a sample of 5 devices with no failures allowed.

d. Subgroup 13 shall be added to group A inspection for all classes and it shall consist of the tests, conditions and limits as specified in table III. The sample size series shall be 10 for all classes (accept on 0).

e. Subgroup 12 shall be performed for initial qualification only using a sample of 5 devices for each device type submitted to group A inspections with no failures allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

a. End point electrical parameters shall be as specified in table II herein.

b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

c. A special subgroup shall be added to the group C inspection requirements for class B devices, and shall consist of the tests, conditions, and limits as specified for subgroups 10 and 11 of group A.

d. A special subgroup shall be added to group C inspection for class B devices only and it shall consist of group A, subgroup 12 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. A sample of 5 devices (of the device type to be inspected) shall be chosen and submitted to test with no failures allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed. When more than one device type is qualified, the single device type selected shall be a different device for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfill the periodic inspection requirement.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535.

a. End point electrical parameters shall be as specified in table II herein.

b. A special subgroup shall be added to group D inspection for class S devices only and it shall consist of group A, subgroups 4 and 7 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. When more than one device type is qualified, the single device type selected shall be a different device for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfill the periodic inspection requirement.

4.5 Methods of inspection. Methods of inspection shall be specified and as follows.

4.5.1 Voltage and current. All voltage values given are referenced to the microcircuit ground terminals. Currents given are conventional current and positive when flowing into the referenced terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

4.6 Data reporting. When specified in the acquisition document, a copy of the following data, as applicable, shall be applied:

a. Attributes data for all screening tests (see 4.2) and variables data for all static burn-in, dynamic burn-in, and operating life tests.

b. The technology conformance inspection data (see 4.4).

Table IV. Group C end-point electrical parameters. T_A = 25°C

	Device types					
Parameter	01, 07	02	03, 08	04	05	06
R_{ON}	50 Ω or 10% 1/	150 Ω or 10%	50 Ω or 10%	150 Ω or 10%	150 Ω or 10% 1/	150 Ω or 10% 1/
$I_{D(OFF)}$	15 nA	15 nA	15 nA	15 nA	15 nA	15 nA
$I_{S(OFF)}$	15 nA	15 nA	15 nA	15 nA	15 nA	15 nA

1/ Whichever is greater.

2/ Each of the above parameters shall be recorded before and after the required burn-in or life tests to determine deltas (Δ).

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Microcircuits conforming to this specification are intended for logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. PIN and compliance identifier, if applicable (see 1.2).

c. Requirements for delivery of one copy of the conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

d. Requirements for certificate of compliance, if applicable.

e. Requirements for notification of change of product or process to acquiring activity in addition to notification of the qualifying activity, if applicable.

f. Requirements for failure analysis (including required test condition of MIL-STD-883, method 5003), corrective action and reporting of results, if applicable.

g. Requirements for product assurance options.

h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

i. Requirements for "JAN" marking.

j. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

6.4 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331 and as follows:

V_{IC}	Input clamp voltage.
I_{IL}	Low level (address) input current.
I_{IH}	High level (address) input current.
$I_{S(OFF)}$	Leakage current into the source terminal of an “OFF” switch.
$I_{D(OFF)}$	Leakage current into the drain terminal of an “OFF” switch.
$I_{D(ON)}$	Leakage current from an “ON” driver into the switch.
I(+)	Positive supply current.
I(-)	Negative supply current.
$I_{(SBY)}$	Standby supply current.
R_{ON}	Resistance of an “ON” switch.
C_A	Address capacitance.
C_{OS}	Output switch capacitance.
C_{IS}	Input switch capacitance.
C_{IOS}	Input to output (feedthrough) capacitance.
t_{PLH}	Propagation delay time: low to high level.
t_{PHL}	Propagation delay time: high to low level.
GND	Electrical ground.
V_{REF}	Reference voltage.
A	Address input to switch.
EN	Enable.
O/I	Output/Input.
I/O	Input/Output.

6.6 Logistic support. Lead materials and finishes (see 3.4) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.4). Longer length leads and lead forming should not affect the part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	506, 6116
02	506A
03	507, 6216
04	507A
05	508A
06	509A
07	508, 6108
08	509, 6208

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army – CR
Navy - EC
Air Force - 11
NASA – NA
DLA – CC

Preparing activity:
DLA - CC

Project 5962-2125

Review activities:
Army – MI, SM
Navy – AS, CG, MC, SH, TD
Air Force – 03, 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.