| QUALIFICATION REQUIREMENTS REMOVED |

MIL-M-38510/201C
24 March 1986
SUPERSEDING
MIL-M-38510/201B
9 April 1982

MILITARY SPECIFICATION

# MICROCIRCUITS, DIGITAL, 512 BIT, BIPOLAR, PROGRAMMABLE READ-ONLY MEMORY (PROM), MONOLITHIC SILICON

| INACTIVE FOR NEW DESIGN AFTER DATE OF THIS REVISION |

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, PROM microcircuits which employ thin film nichrome resistors as the fusible link or programming element. One product assurance class and a choice of case outlines and lead finishes are provided for each type and are reflected in the part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510 except the JAN or "J" certification shall not be used.

1.2.1 Device type. The device type shall be as follows:

| Device type | Circuit |
|---|---|
| 01 | 64 words/8 bits per word PROM with open collector |
| 02 | 64 words/8 bits per word PROM with internal pull-up resistor |

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

| Letter | Case outline (see MIL-M-38510, appendix C) |
|---|---|
| J | D-3 (24-lead, 1/2" x 1-1/4"), dual-in-line package |
| K | F-6 (24-lead, 3/8" x 5/8"), flat package |
| Z | F-8 (24-lead, 1/4" x 3/8"), flat package |

1.3 Absolute maximum ratings.

| | |
|---|---|
| Supply voltage range | -0.5 V dc to +7.0 V dc |
| Input voltage range | -1.5 V dc at -12 mA to +5.5 V dc |
| Storage temperature range | -65° to +150°C |
| Lead temperature (soldering, 10 seconds) | 300°C |
| Thermal resistance, junction-to-case ($\theta_{JC}$) 1/: | See MIL-M-38510, appendix C |

1/ Heat sinking is recommended to reduce junction temperature.

| Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. |
|---|


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://apps.dla.mil - Downloaded: 2026-02-13T13:46Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| Output supply voltage range- - - - - - - - | -0.5 V dc to +7.0 V dc |
| Output sink current- - - - - - - - - - - - | +30 mA |
| Maximum power dissipation ($P_D$)2/ - - - - - | 575 mW dc |
| Maximum junction temperature ($T_J$) 3/ - - - | 175°C |

1.4 Recommended operating conditions:

| | |
|---|---|
| Supply voltage - - - - - - - - - - - - - - - | 4.75 V dc minimum to 5.25 V dc maximum |
| Minimum high level input voltage ($V_{IH}$) - - | 2.0 V dc |
| Maximum low level input voltage ($V_{IL}$)- - - | 0.8 V dc |
| Normalized fanout (each output) 4/ - - - - - | 6 maximum (10 mA) |
| Case operating temperature range ($T_C$)- - - | -55° to +125°C |

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein. An altered item drawing shall be prepared by the contracting activity to specify the required program configuration.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

2/ Must withstand the added $P_D$ due to short circuit test (e.g., $I_{OS}$).

3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883.

4/ The device shall fan out in both high and low levels to the specified number of inputs of the same device type as that being tested.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

| Characteristic | Symbol | Conditions | Device type | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|
| High level output voltage | $V_{OH}$ | $V_{CC}$ = 4.75 V<br>$V_{IN}$ = 0.8 V<br>$I_{OH}$ = 500 µA | 02 | 2.4 | --- | V |
| Low level output voltage | $V_{OL}$ | $V_{CC}$ = 4.75 V<br>$V_{IN}$ = 2.0 V<br>$I_{OL}$ = 10 mA | 01 (Ckt A) | --- | 0.45 | V |
| | | | 01 (Ckt B), 02 | --- | 0.50 | V |
| Input clamp voltage | $V_{IC}$ | $V_{CC}$ = 4.75 V<br>$I_{IN}$ = -12 mA<br>$T_C$ = 25°C | 01, 02 | --- | -1.5 | V |
| Maximum collector cut-off current | $I_{CEX1}$ | $V_{CC}$ = 5.25 V<br>$V_{OH}$ = 2.8 V<br>$V_{IN}$ = 0.8 V | 01 | --- | 100 | µA |
| | $I_{CEX2}$ | $V_{CC}$ = 5.25 V<br>$V_{OH}$ = 5.25 V<br>$V_{IN}$ = 0.8 V | 01 | --- | 200 | µA |
| High level input current | $I_{IH1}$ | $V_{CC}$ = 5.25 V<br>$V_{IN}$ = 2.4 V 1/ | 01, 02 | --- | 60 | µA |
| | $I_{IH2}$ | $V_{CC}$ = 5.25 V<br>$V_{IN}$ = 5.25 V 2/ | 01, 02 | --- | 100 | µA |
| Low level input current | $I_{IL}$ | $V_{CC}$ = 5.25 V<br>$V_{IN}$ = 0.4 V 2/ | 01, 02 | -0.2 | -1.6 | mA |
| Short circuit output current | $I_{OS}$ | $V_{CC}$ = 5.25 V<br>$V_{IN}$ = 0 3/ | 02 | -1.6 | -5.0 | mA |
| Supply current | $I_{CC}$ | $V_{CC}$ = 5.25 V<br>$V_{IN}$ = 0 | 01, 02 | --- | 100 | mA |
| Propagation delay time high-to-low level logic | $t_{PHL}$ | $V_{CC}$ = 5.0 V<br>Figure 6 | 01, 02 | 25 | 140 | ns |
| Propagation delay time low-to-high level logic | $t_{PLH}$ | | 01, 02 | 25 | 140 | ns |

1/ When testing one E input, apply GND to the other.

2/ When testing one E input, apply 5.25 V to the other.

3/ Not more than one output shall be grounded at one time.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

3.2.2 Truth table.

3.2.2.1 Unprogrammed devices. The truth table for unprogrammed devices for contracts involving no altered item drawing shall be as specified on figure 2. When required in group A, B, or C inspection (see 4.4), the devices shall be programmed by the manufacturer prior to test in a checkerboard pattern (a minimum of 50 percent of the total number of bits programmed) or to any altered item drawing pattern which includes at least 25 percent of the total number of bits programmed.

3.2.2.2 Programmed devices. The truth table for programmed devices shall be as specified by the altered item drawing.

3.2.3 Logic diagrams and schematic circuits. The logic diagrams and schematic circuits shall be as specified on figures 3 and 4.

3.2.4 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics of table I apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for class B devices shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

TABLE II. Electrical test requirements.

| MIL-STD-883 test requirements | Subgroups (see table III) |
|---|---|
| | Class B devices |
| Interim electrical test parameters (method 5004) | 1 |
| Final electrical test parameters (method 5004) for unprogrammed devices | 1*, 2, 3, 7*, 8 |
| Final electrical test parameters (method 5004) for programmed devices | 1*, 2, 3, 7*, 8, 9 |
| Group A test requirements (method 5005) | 1,2,3,7,8, 9, 10, 11 |
| Group C end-point electrical parameters (method 5005) | 1,2,3,7,8 |
| Group D end-point electrical parameters (method 5005) | 1,2,3,7,8 |

NOTES:

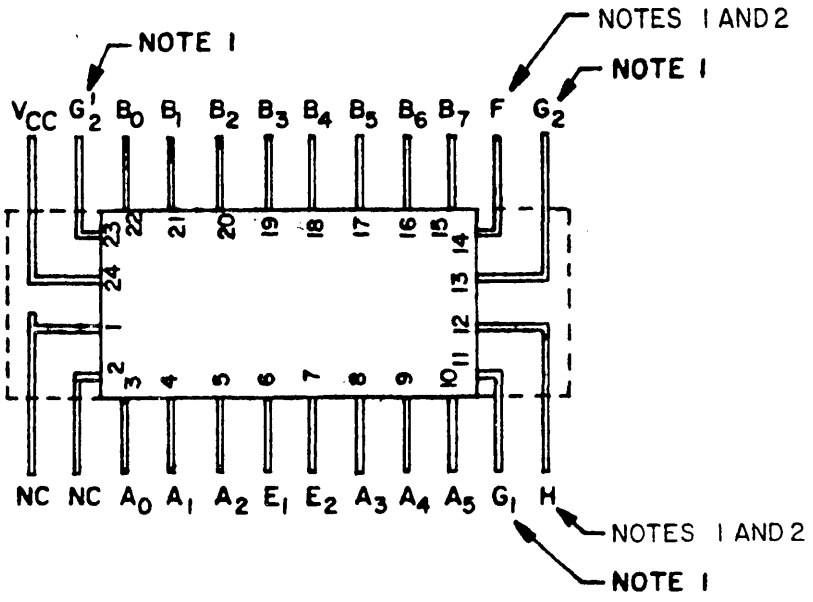
1. * indicates PDA applies to subgroups 1 and 7 (see 4.2c).
2. Any or all subgroups may be combined when using high speed testers.
3. Subgroups 7 and 8 shall consist of verifying the pattern specified.

Text continues on page 24.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Device types 01 and 02 (note 4)




NOTES:
1. $G_1$, $G_2$ and $G'_2$ are connected to ground and F and H are left open for normal operation.
2. Terminal F is electrically open in device type 01, circuit A and is connected to an internal inverter (9th bit) for device type 01, circuit B and device type 02.
3. Terminal H is electrically open in device type 01, circuit B and device type 02 and is internally connected to the base of the memory transistor for device type 01, circuit A.
4. Pin connections are the same for all case outlines.

FIGURE 1. Terminal connections.


| Word No. | INPUTS | | | | | | | OUTPUTS | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | E[1/] | $A_5$ | $A_4$ | $A_3$ | $A_2$ | $A_1$ | $A_0$ | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ |
| X[2/] | L | X | X | X | X | X | X | H | H | H | H | H | H | H | H |
| X | H | X | X | X | X | X | X | L | L | L | L | L | L | L | L |

NOTES:
1/ $E = E_1 \cdot E_2$
2/ X = Irrelevant

FIGURE 2. Truth table (unprogrammed).



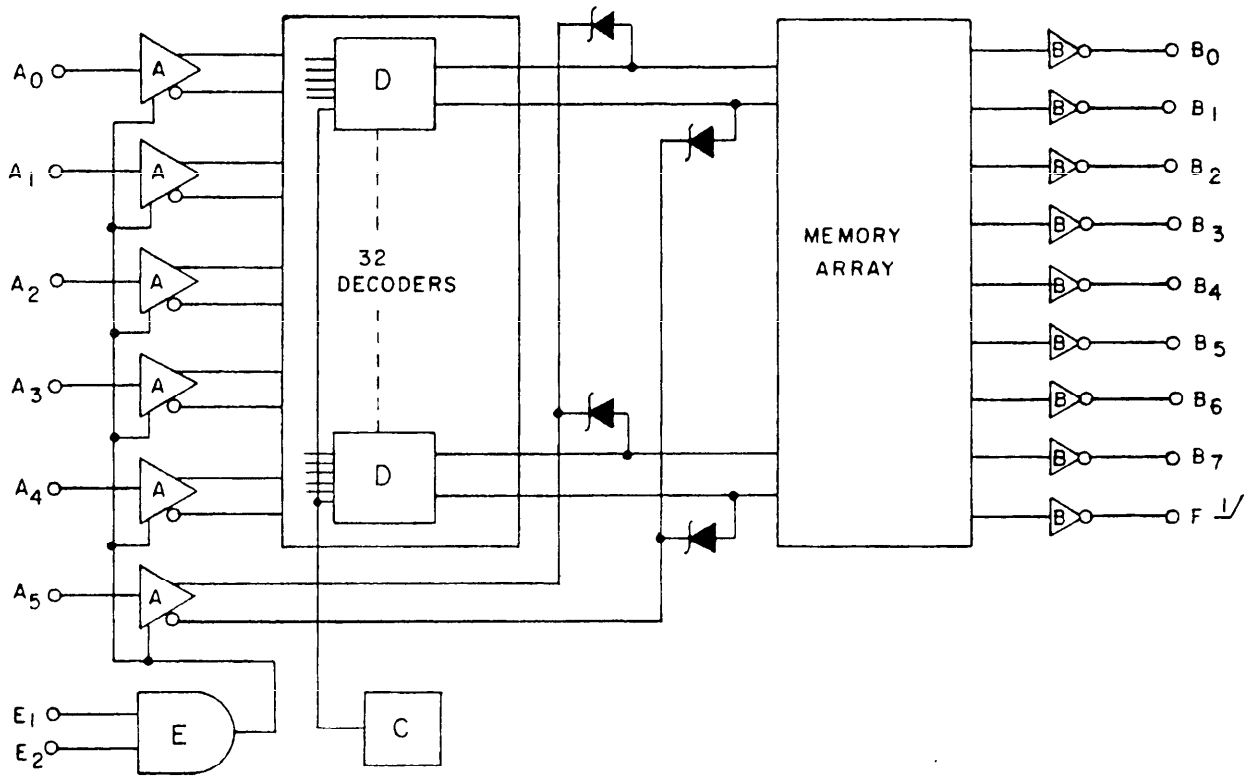Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.




NOTES:

1/ Terminal F provides a 9th bit for test purposes only.

2/ $AR_1$ = 3kΩ and $AR_2$ = $AR_3$ = $AR_4$ = 2.2kΩ except in amplifier-inverter $A_5$ where $AR_1$ = 2.2kΩ, $AR_2$ = $AR_4$ = 1.2kΩ and $AR_3$ = 1.8kΩ.

3/ The 2kΩ pull-up resistor is used for device type 02 only.

4/ All resistance values are nominal.

5/ G2 and G'2 are internally connected together.

FIGURE 3. Logic diagram and schematic circuit for device type 01, circuit B and device type 02.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

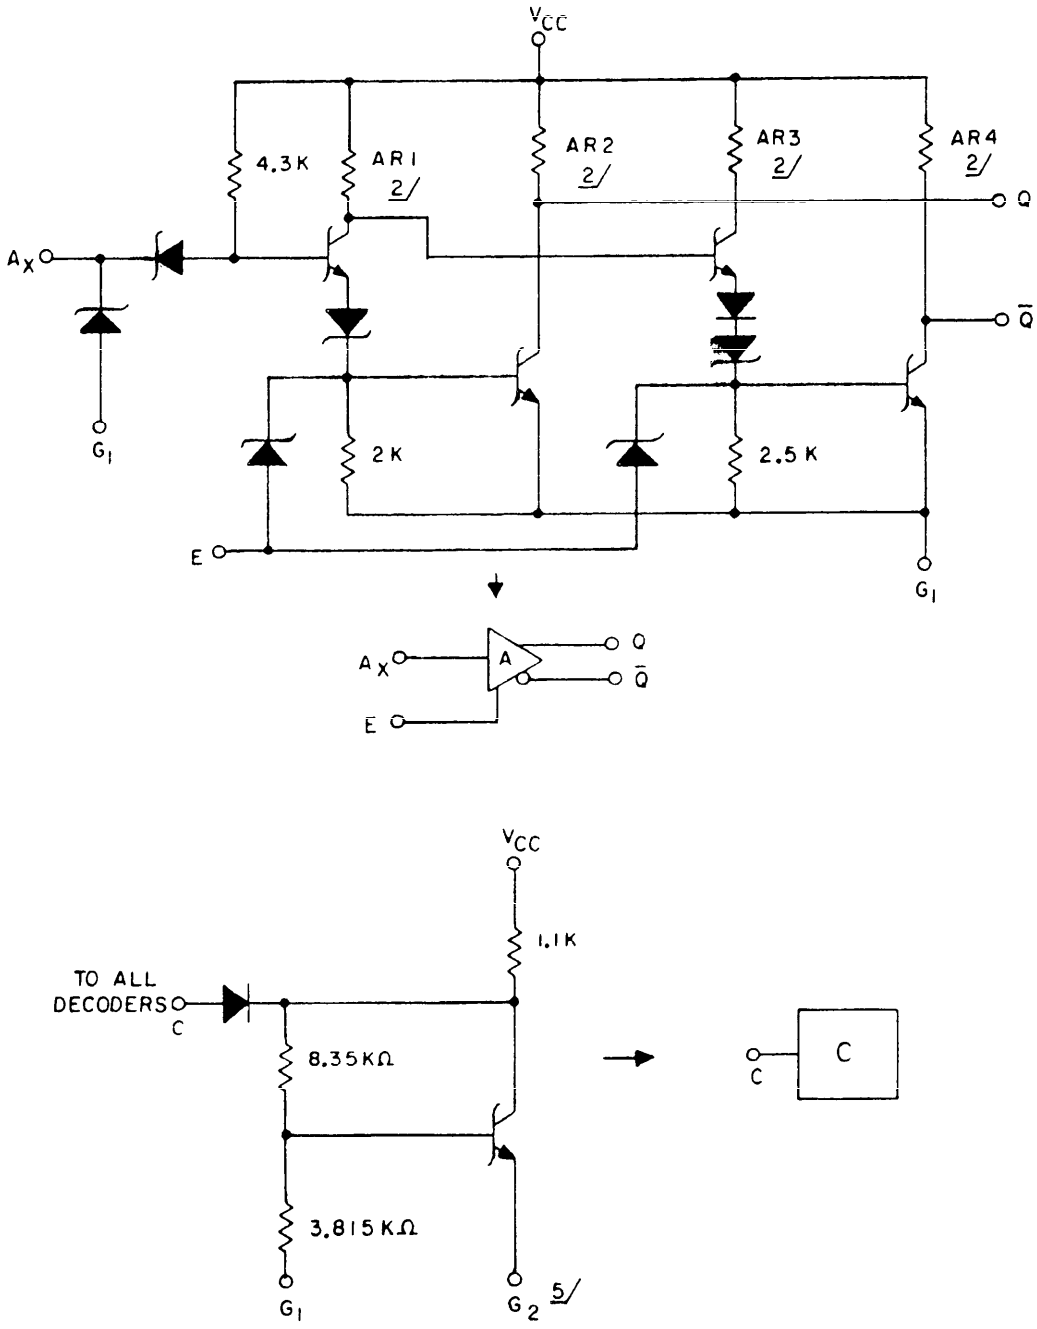



FIGURE 3. Logic diagram and schematic circuit for device type 01, circuit B and device type 02 - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

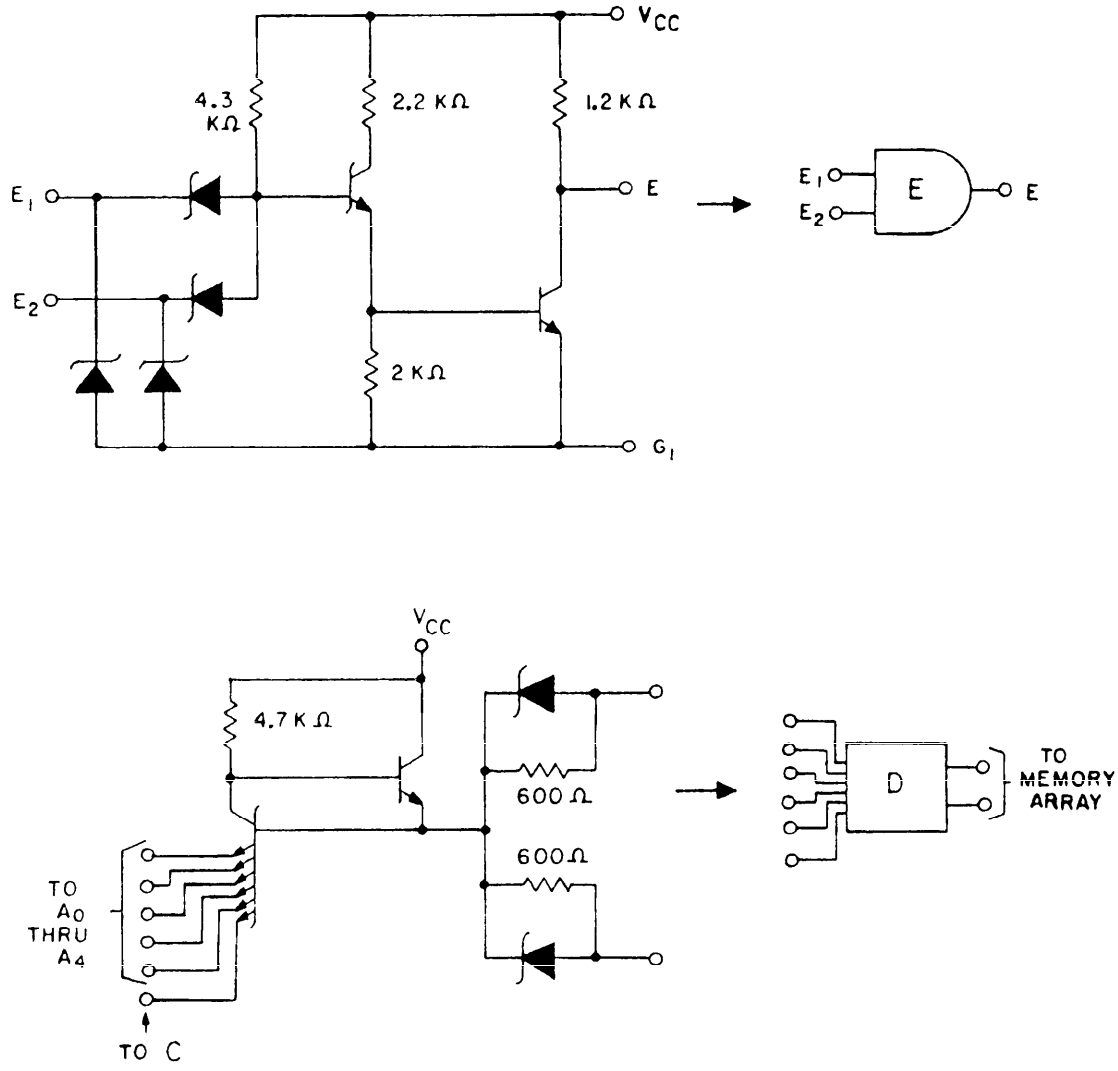



FIGURE 3. Logic diagram and schematic circuit for device type 01, circuit B and device type 02 - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

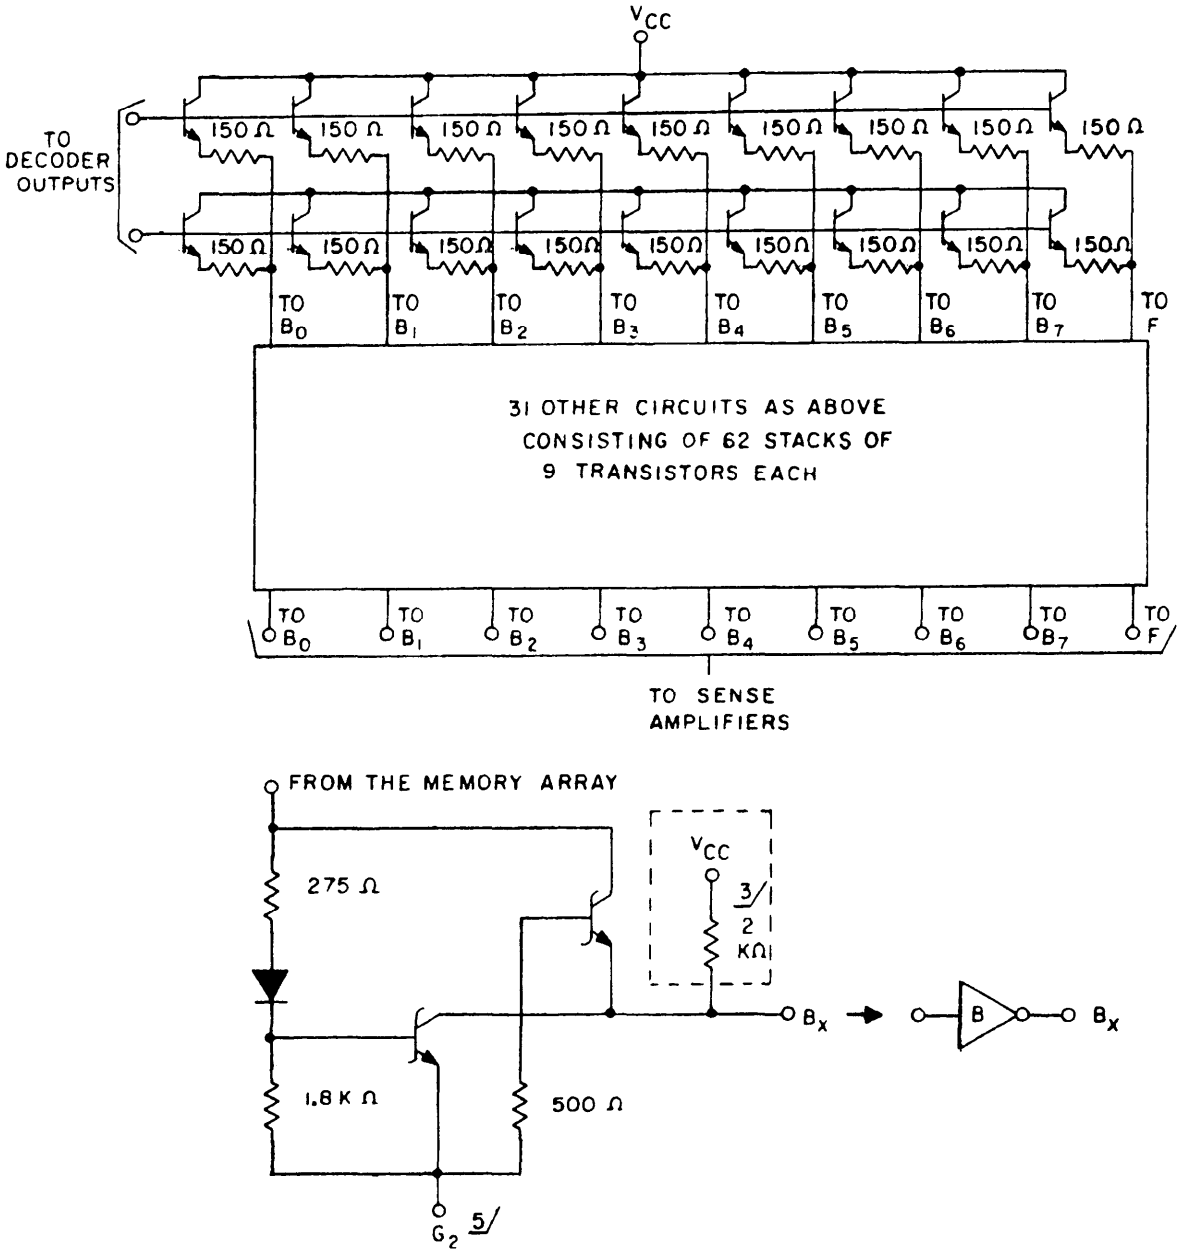



FIGURE 3. Logic diagram and schematic circuit for device type 01, circuit B and device type 02 - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

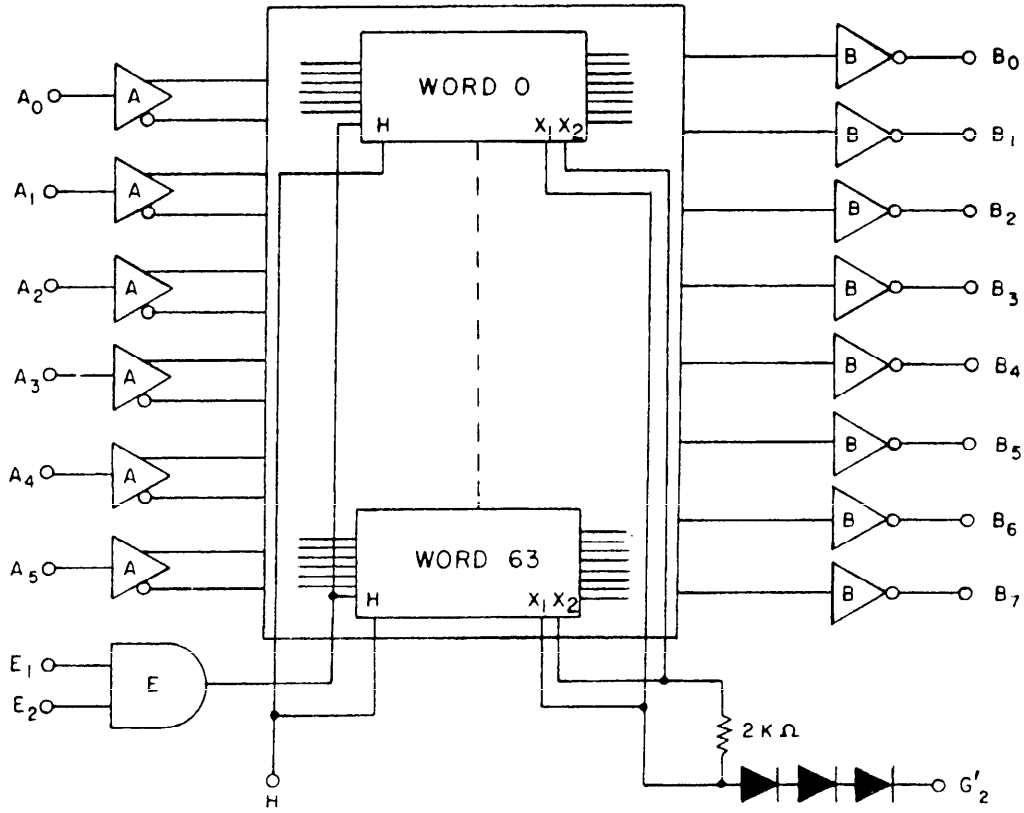



FIGURE 4. Logic diagram and schematic circuit for device type 01, circuit A.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.


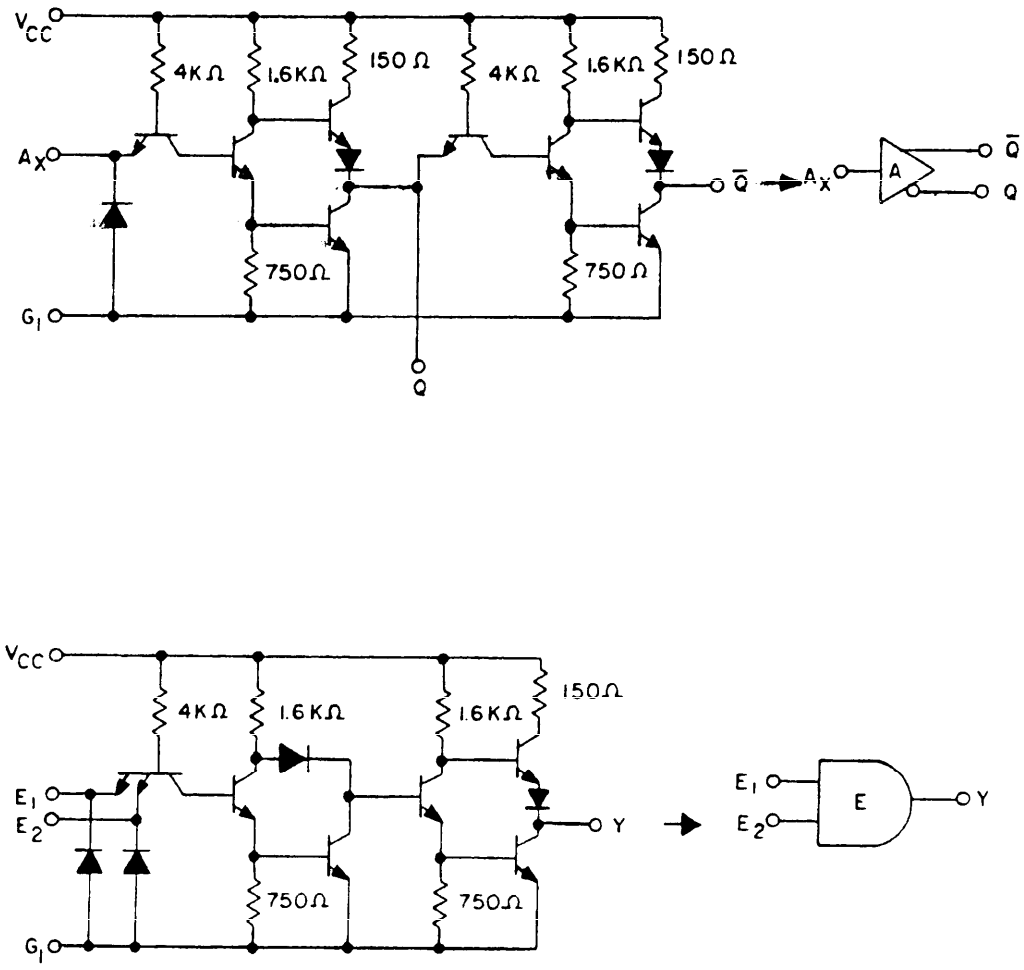



FIGURE 4. Logic diagram and schematic circuit for device type 01, circuit A - Continued.

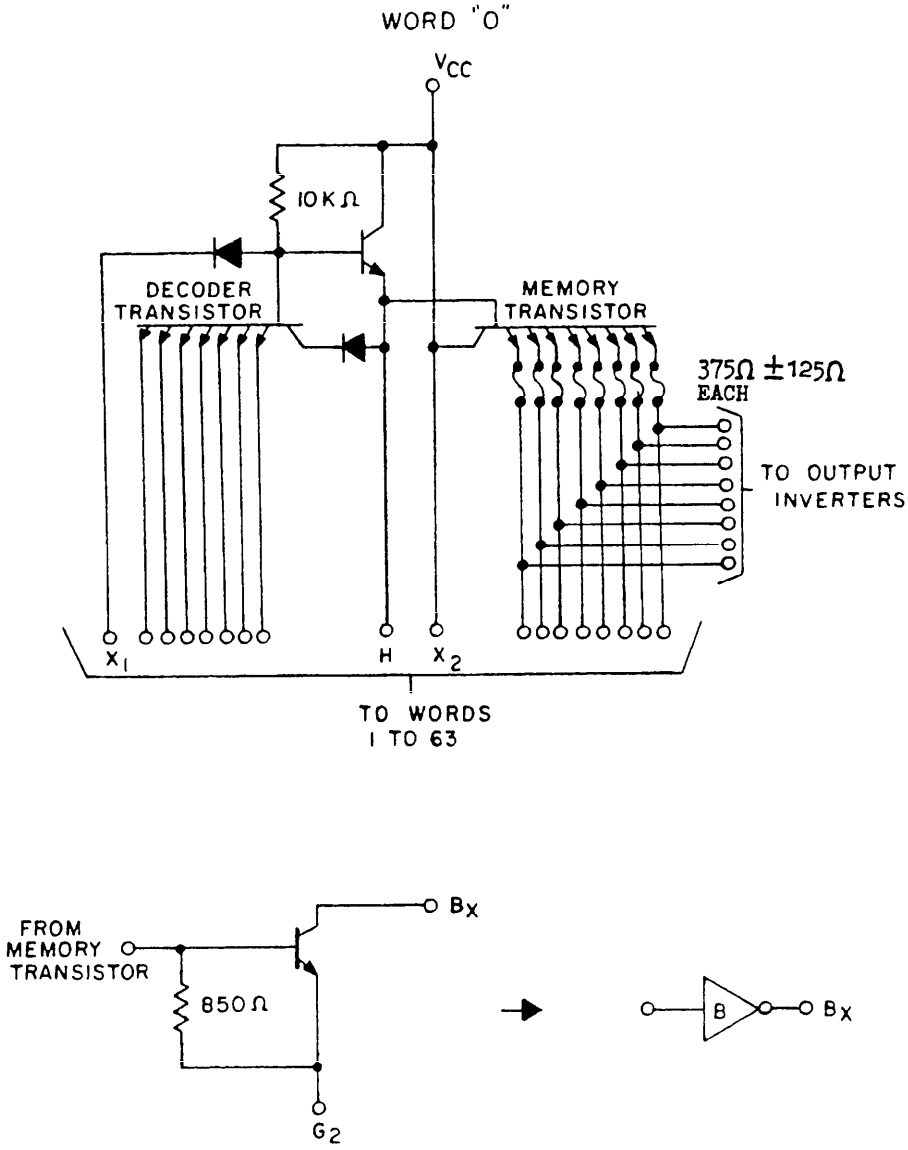

Source: https://assist.dla.mil Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.





NOTE: All resistance values are nominal.

FIGURE 4. Logic diagram and schematic circuit for device type 01, circuit A - Continued.



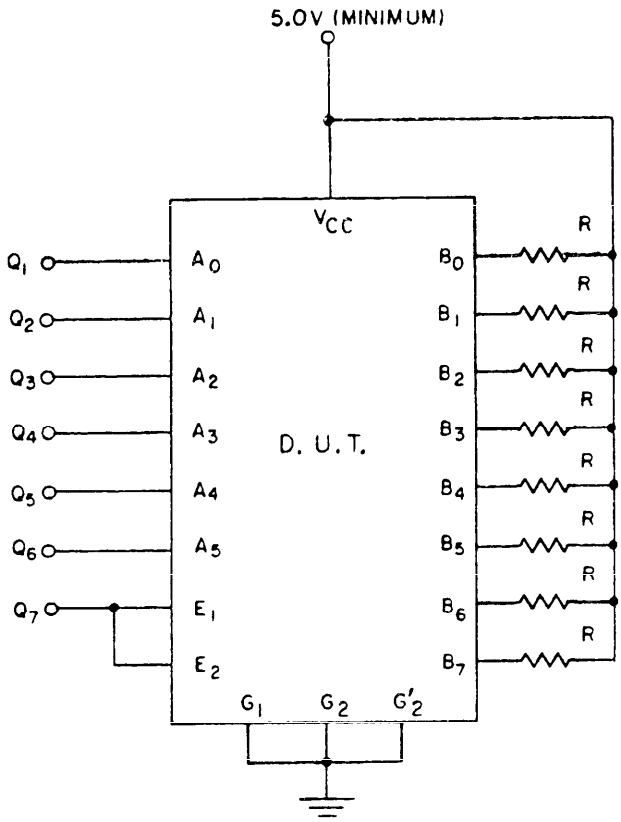Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.




NOTE: R = 470Ω ± 5%. All bit outputs shall have separate identical loads.

FIGURE 5. Burn-in and steady state life test circuit for device types 01 and 02.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.



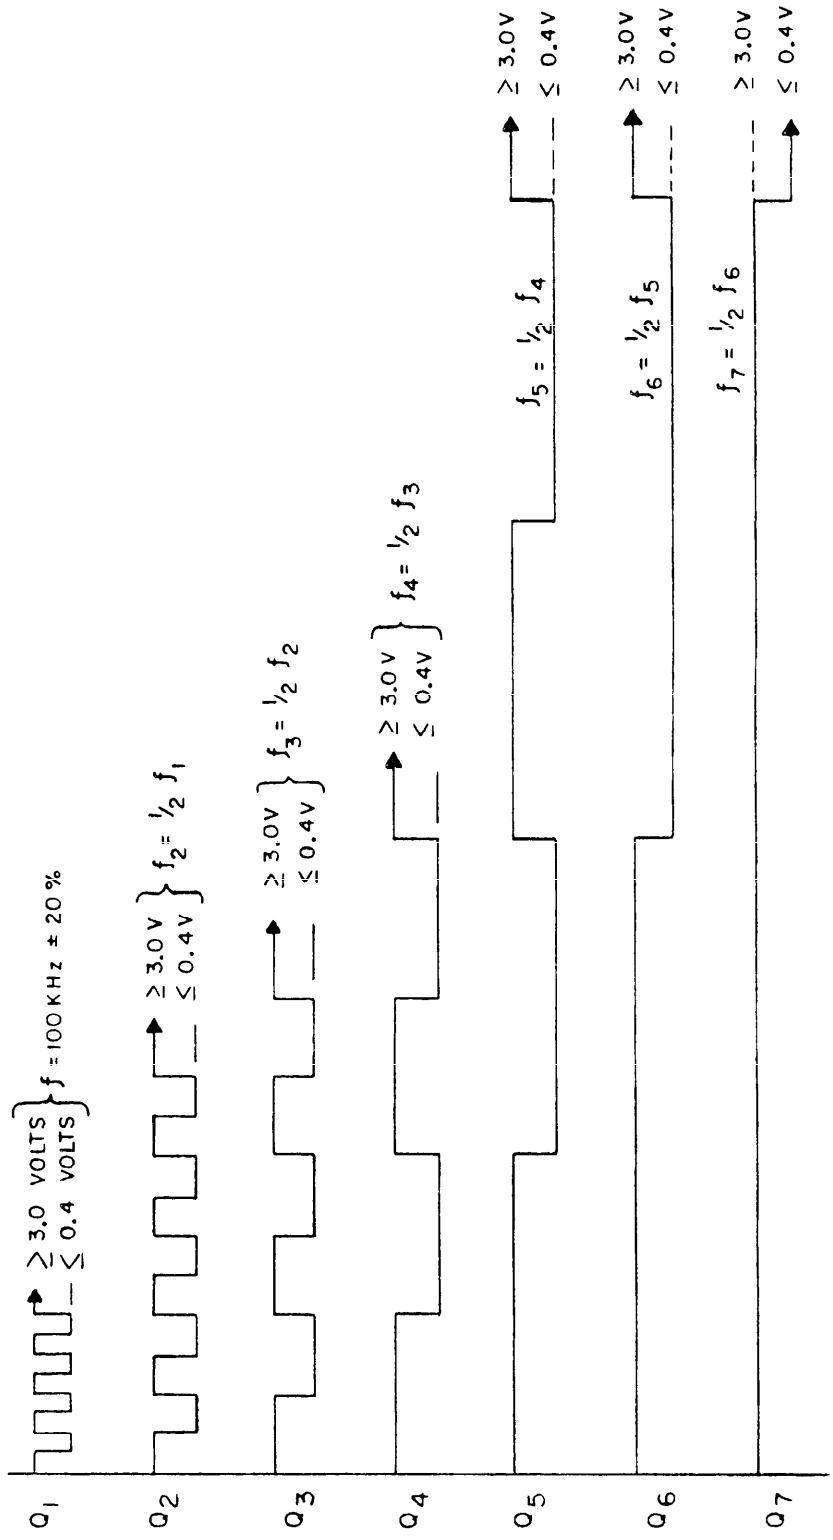



FIGURE 5. Burn-in and steady state life test circuit for device types 01 and 02 - Continued.

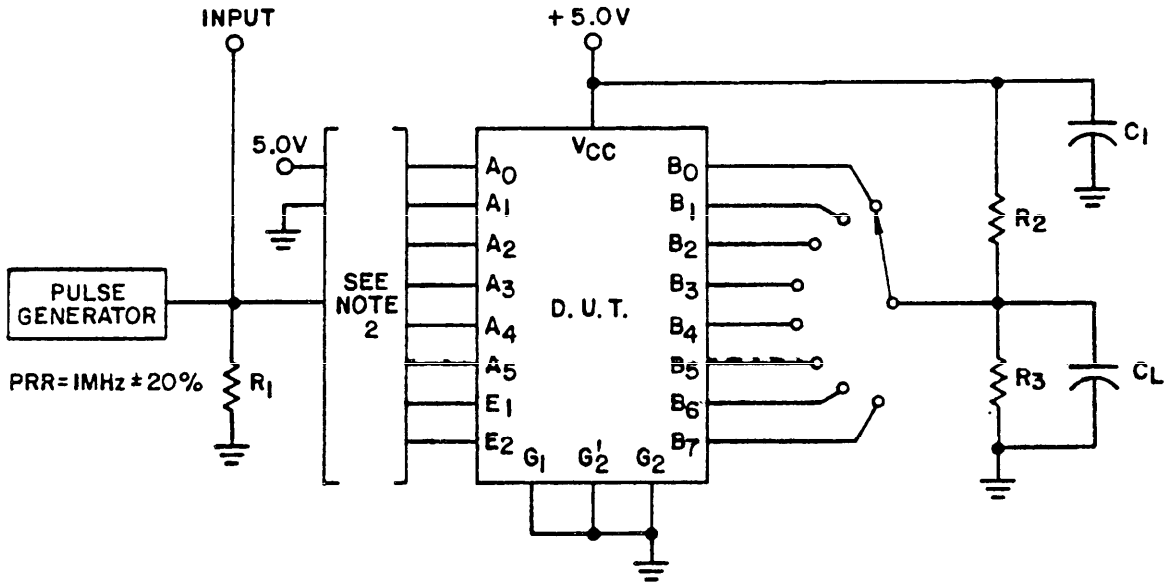

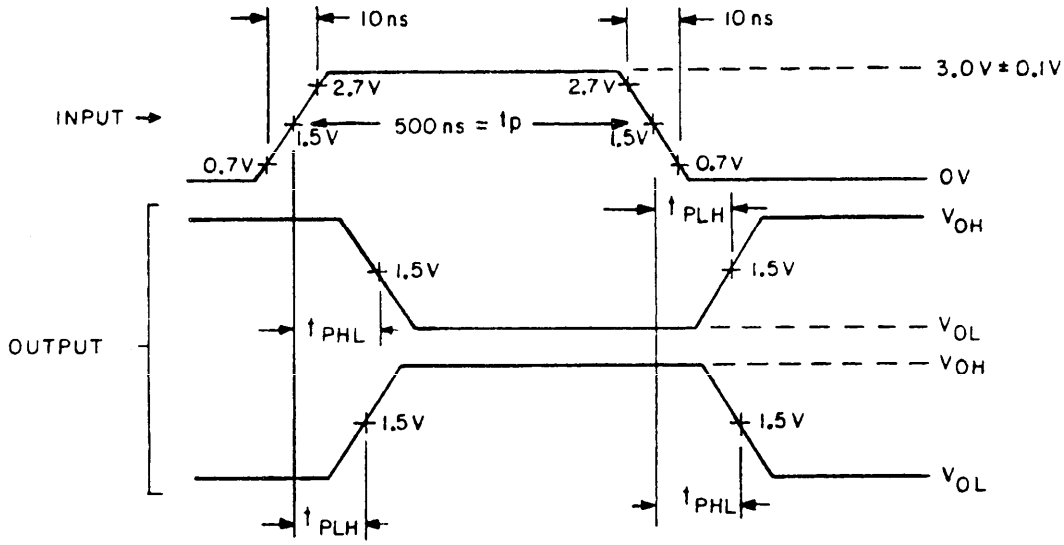Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.





NOTES:
1. Pins 12 and 14 shall be left open.
2. Terminal conditions shall be as specified on table III.
3. $C_1$ = .05 µF ±10 percent; $R_1$ = 51Ω ±5 percent; $R_2$ = 470Ω ±5 percent; $R_3$ = 1 kΩ ±5 percent, $C_L$ = 30 pF minimum including jig and probe capacitance.

FIGURE 6. Switching time test circuit.

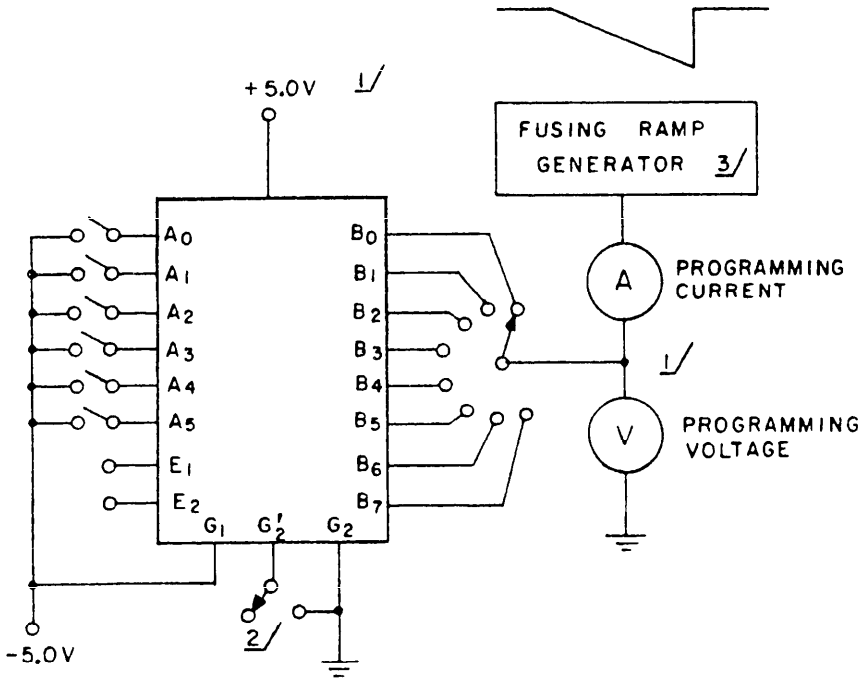
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.





NOTES:
1/ Connect -5.0V to $G_1$ before applying $V_{CC}$ or programming voltage.
2/ For device type 01, circuit A, $G'_2$ shall be open,
For device types 01, circuit B, and 02, $G'_2$ shall be 0V.
3/ Generator characteristics are defined in 4.6.

FIGURE 7a. Programming circuit.



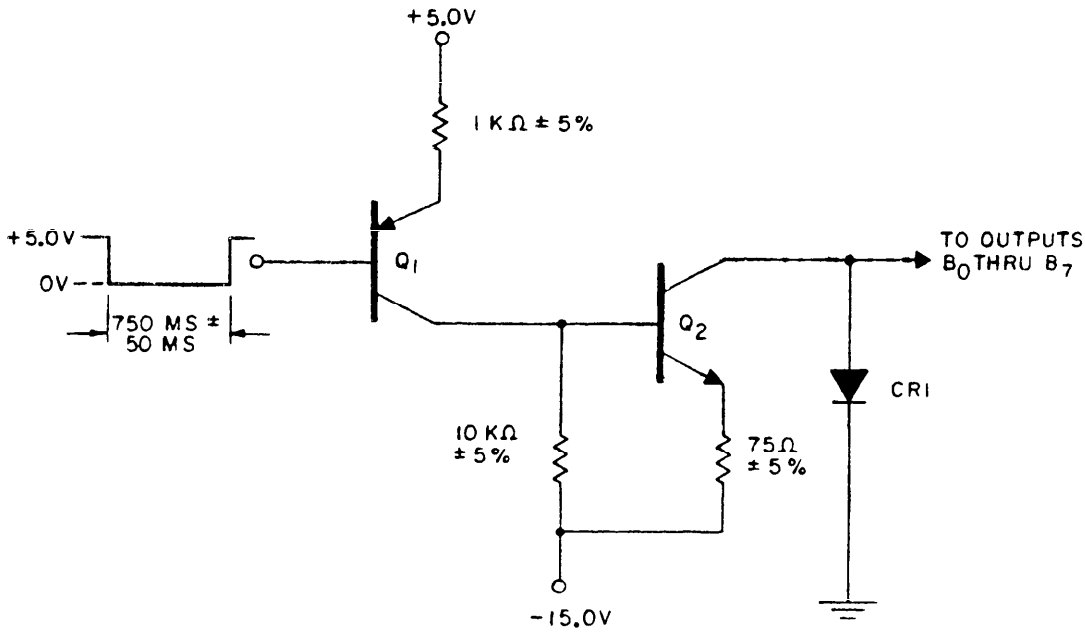Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.




NOTES:
1. $Q_1$ = 2N2907 or equivalent.
2. $Q_2$ = 2N1613 or equivalent.
3. CR1 = 1N4573 or equivalent.

FIGURE 7b. Alternate high speed programming circuit.



Source: https://assist.dla.mil/ Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage; inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases J,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | $G_1$ | R | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G'_2$ | $V_{CC}$ | | Min | Max | |
| 1 1/ $T_C$ = 25°C | $V_{IC}$ | | 1 | | | -12 mA | -12 mA | -12 mA | | | | | | GND | | GND | | | | | | | | | | GND | 4.75 V | $A_0$ | | -1.5 | V |
| | | | 2 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_1$ | | " | |
| | | | 3 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_2$ | | " | |
| | | | 4 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_3$ | | " | |
| | | | 5 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_4$ | | " | |
| | | | 6 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_5$ | | " | |
| | | | 7 | | | | | | -12 mA | -12 mA | | | | " | | " | | | | | | | | | | " | " | $E_1$ | | " | |
| | | | 8 | | | | | | | | -12 mA | -12 mA | -12 mA | " | | " | | | | | | | | | | " | " | $E_2$ | | " | |
| | $I_{IL}$ | 3009 | 9 | | | 0.4 V | 0.4 V | 0.4 V | | | | | | " | | " | | | | | | | | | | " | 5.25 V | $A_0$ | -0.2 | -1.6 | mA |
| | | " | 10 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_1$ | " | " | |
| | | " | 11 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_2$ | " | " | |
| | | " | 12 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_3$ | " | " | |
| | | " | 13 | | | | | | | | 0.4 V | 0.4 V | 0.4 V | " | | " | | | | | | | | | | " | " | $A_4$ | " | " | |
| | | " | 14 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_5$ | " | " | |
| | | " | 15 | | | | | | 0.4 V | 5.25 V | | | | " | | " | | | | | | | | | | " | " | $E_1$ | " | " | |
| | | " | 16 | | | | | | 5.25 V | 0.4 V | | | | " | | " | | | | | | | | | | " | " | $E_2$ | " | " | |
| | $I_{IH1}$ | 3010 | 17 | | | 2.4 V | 2.4 V | 2.4 V | | | | | | " | | " | | | | | | | | | | " | " | $A_0$ | | 60 | μA |
| | | " | 18 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_1$ | | " | |
| | | " | 19 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_2$ | | " | |
| | | " | 20 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_3$ | | " | |
| | | " | 21 | | | | | | | | 2.4 V | 2.4 V | 2.4 V | " | | " | | | | | | | | | | " | " | $A_4$ | | " | |
| | | " | 22 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_5$ | | " | |
| | | " | 23 | | | | | | 2.4 V | GND | | | | " | | " | | | | | | | | | | " | " | $E_1$ | | " | |
| | | " | 24 | | | | | | GND | 2.4 V | | | | " | | " | | | | | | | | | | " | " | $E_2$ | | " | |
| | $I_{IH2}$ | " | 25 | | | 5.25 V | 5.25 V | 5.25 V | | | | | | " | | " | | | | | | | | | | " | " | $A_0$ | | 100 | " |
| | | " | 26 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_1$ | | " | |
| | | " | 27 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_2$ | | " | |
| | | " | 28 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_3$ | | " | |
| | | " | 29 | | | | | | | | 5.25 V | 5.25 V | 5.25 V | " | | " | | | | | | | | | | " | " | $A_4$ | | " | |
| | | " | 30 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $A_5$ | | " | |
| | | " | 31 | | | | | | 5.25 V | GND | | | | " | | " | | | | | | | | | | " | " | $E_1$ | | " | |
| | | " | 32 | | | | | | GND | 5.25 V | | | | " | | " | | | | | | | | | | " | " | $E_2$ | | " | |
| | $I_{CEX1}$ | | 33 | | | | | | 0.8 V | 0.8 V | | | | " | | " | | | | | | | | | | " | " | $B_0$ | | " | |
| | | | 34 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_1$ | | " | |
| | | | 35 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_2$ | | " | |
| | | | 36 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_3$ | | " | |
| | | | 37 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_4$ | | " | |
| | | | 38 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_5$ | | " | |
| | | | 39 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_6$ | | " | |
| | | | 40 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_7$ | | " | |
| | $I_{CEX2}$ | | 41 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_0$ | | 200 | " |
| | | | 42 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_1$ | | " | |
| | | | 43 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_2$ | | " | |
| | | | 44 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_3$ | | " | |
| | | | 45 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_4$ | | " | |
| | | | 46 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_5$ | | " | |
| | | | 47 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_6$ | | " | |
| | | | 48 | | | | | | | | | | | " | | " | | | | | | | | | | " | " | $B_7$ | | " | |
| | $I_{CC}$ | 3005 | 49 | | | GND | GND | GND | GND | GND | GND | GND | GND | - | | - | | | | | | | | | | - | - | $V_{CC}$ | | 100 | mA |
| | $V_{OL}$ | 3007 | 50 | | | | | | 2.0 V | 2.0 V | | | | " | | " | | | | | | | | | | " | 4.75 V | $B_0$ | | 2/ | V |
| | | " | 51 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_1$ | | " | |
| | | " | 52 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_2$ | | " | |
| | | " | 53 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_3$ | | " | |
| | | " | 54 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_4$ | | " | |
| | | " | 55 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_5$ | | " | |
| | | " | 56 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_6$ | | " | |
| | | " | 57 | | | | | | " | " | | | | " | | " | | | | | | | | | | " | " | $B_7$ | | " | |

See footnotes at end of device type 01.



Source: https://assist.dla.mil -- Downloaded: 20260-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage; inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases J,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | $G_1$ | H | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G_2$ | $V_{CC}$ | | Min | Max | |
| 2 1/ | Same tests, terminal conditions, and limits as for subgroup 1, except $T_C$ = 125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 1/ | Same tests, terminal conditions, and limits as for subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 3/4/ $T_C$ = 25°C | Truth table test | | 58 | | | B | B | B | A | A | B | B | B | GND | | GND | | H | H | H | H | H | H | H | H | GND | 4.75 V | | | | |
| | | | 59 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | L | L | L | L | " | " | | | | |
| | | | 60 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | H | H | H | L | " | " | | | | |
| | | | 61 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | L | L | L | H | " | " | | | | |
| | | | 62 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | H | H | H | L | " | " | | | | |
| | | | 63 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | L | L | L | H | " | " | | | | |
| | | | 64 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | H | H | H | L | " | " | | | | |
| | | | 65 | | | A | A | " | " | " | " | " | " | " | | " | | L | " | L | " | L | L | L | L | " | " | | | | |
| | | | 66 | | | B | B | B | " | " | A | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 67 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 68 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 69 | | | A | A | " | " | " | " | " | " | " | | " | | " | H | " | " | " | " | " | " | " | " | | | | |
| | | | 70 | | | B | B | A | " | " | " | " | " | " | | " | | " | L | " | " | " | " | " | " | " | " | | | | |
| | | | 71 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 72 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 73 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 74 | | | B | B | B | " | " | B | A | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 75 | | | A | B | " | " | " | " | " | " | " | | " | | H | " | H | " | H | H | H | H | " | " | | | | |
| | | | 76 | | | B | A | " | " | " | " | " | " | " | | " | | L | " | " | " | " | " | " | " | " | " | | | | |
| | | | 77 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 78 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 79 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 80 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 81 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 82 | | | B | B | B | " | " | A | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 83 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 84 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 85 | | | A | A | " | " | " | " | " | " | " | | " | | L | " | L | " | L | L | L | L | " | " | | | | |
| | | | 86 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 87 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 88 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 89 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 90 | | | B | B | B | " | " | B | B | A | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 91 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 92 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 93 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 94 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 95 | | | A | B | " | " | " | " | " | " | " | | " | | H | " | H | " | H | H | H | H | " | " | | | | |
| | | | 96 | | | B | A | " | " | " | " | " | " | " | | " | | L | " | " | " | " | " | " | " | " | " | | | | |
| | | | 97 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 98 | | | B | B | B | " | " | A | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 99 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 100 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 101 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 102 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 103 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 104 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 105 | | | A | A | " | " | " | " | " | " | " | | " | | H | " | H | " | H | H | H | H | " | " | | | | |
| | | | 106 | | | B | B | B | " | " | B | A | " | " | | " | | L | " | " | " | " | " | " | " | " | " | | | | |
| | | | 107 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 108 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 109 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 110 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 111 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 112 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 113 | | | A | A | " | " | " | " | " | " | " | | " | | H | " | H | " | H | H | H | H | " | " | | | | |
| | | | 114 | | | B | B | B | " | " | A | " | " | " | | " | | L | " | " | " | " | " | " | " | " | " | | | | |
| | | | 115 | | | A | B | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 116 | | | B | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 117 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 118 | | | B | B | A | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |
| | | | 119 | | | A | B | " | " | " | " | " | " | " | | " | | H | " | H | " | H | H | H | H | " | " | | | | |
| | | | 120 | | | B | A | " | " | " | " | " | " | " | | " | | L | " | " | " | " | " | " | " | " | " | | | | |
| | | | 121 | | | A | A | " | " | " | " | " | " | " | | " | | " | " | " | " | " | " | " | " | " | " | | | | |

See footnotes at end of device type 01.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage; inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases J,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | $G_1$ | H | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G_2$ | $V_{CC}$ | | Min | Max | |
| 8 $T_C$ = 125°C and -55°C | Truth table test | - | 122-185 | Repeat subgroup 7, except $T_C$ = +125°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 186-249 | Repeat subgroup 7, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = 25°C | $t_{PHL}$ and $t_{PLH}$ | 3003 (Fig. 6) | 250 | | | 5/ | 5/ | 5/ | 5.0 V | IN | 5/ | 5/ | 5/ | GND | | GND | | | | | | | OUT | OUT | OUT | GND | 5.0 V | $B_0$ | 25 | 85 | ns |
| | | | 251 | | | | | | | | | | | | | | | | | | | OUT | | | | | | $B_1$ | | | |
| | | | 252 | | | | | | | | | | | | | | | | | | OUT | | | | | | | $B_2$ | | | |
| | | | 253 | | | | | | | | | | | | | | | | | OUT | | | | | | | | $B_3$ | | | |
| | | | 254 | | | | | | | | | | | | | | | | OUT | | | | | | | | | $B_4$ | | | |
| | | | 255 | | | | | | | | | | | | | | | OUT | | | | | | | | | | $B_5$ | | | |
| | | | 256 | | | | | | | | | | | | | | | | | | | | | OUT | | | | $B_6$ | | | |
| | | | 257 | | | | | | | | | | | | | | | | | | | | OUT | | | | | $B_7$ | | | |
| | | | 258 | | | | | | IN | 5.0 V | | | | | | | | | | | | | | | OUT | | | $B_0$ | | | |
| | | | 259 | | | | | | | | | | | | | | | | | | | | | OUT | | | | $B_1$ | | | |
| | | | 260 | | | | | | | | | | | | | | | | | | | OUT | | | | | | $B_2$ | | | |
| | | | 261 | | | | | | | | | | | | | | | | | | OUT | | | | | | | $B_3$ | | | |
| | | | 262 | | | | | | | | | | | | | | | | | OUT | | | | | | | | $B_4$ | | | |
| | | | 263 | | | | | | | | | | | | | | | | OUT | | | | | | | | | $B_5$ | | | |
| | | | 264 | | | | | | | | | | | | | | | OUT | | | | | | | | | | $B_6$ | | | |
| | | | 265 | | | | | | | | | | | | | | | | | | | | | | | | | $B_7$ | | | |
| 10 | Same tests and terminal conditions as for subgroup 9, except $T_C$ = 125°C and the limits are 25 ns minimum and 140 ns maximum. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as for subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1/ Unprogrammed device conditions.

2/ $V_{OL}$ = 0.45 V for circuit A and 0.50 V for circuit B.

3/ Input voltages shall be: A = 2.0 V minimum; B = 0.8 V maximum.

4/ Output voltages shall be either:

a. H = 2.4 V minimum and L = $V_{OL}$ ($V_{OL}$ = 0.45 V maximum for circuit A and 0.50 V maximum for circuit B) when using a high speed checker double comparator.
b. H ≥1.0 V and L <1.0 V when using a high speed checker single comparator.

5/ Terminal conditions (GND or 5.0 V) shall be as specified on figure 6 or in the altered item drawing, as applicable, so that all outputs are at a low logic level.



MIL-M-38510/90JE

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage, inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases 2,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | GND | H | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G_2$ | $V_{CC}$ | | Min | Max | |
| 1 1/ $T_C$ = 25°C | $V_{IC}$ | | 1 | | | -12 mA | -12 mA | -12 mA | -12 mA | -12 mA | -12 mA | -12 mA | -12 mA | GND | | GND | | | | | | | | | | GND | 4.75 V | $A_0$ | | -1.5 | V |
| | | | 2 | | | | | | | | | | | | | | | | | | | | | | | | | $A_1$ | | | |
| | | | 3 | | | | | | | | | | | | | | | | | | | | | | | | | $A_2$ | | | |
| | | | 4 | | | | | | | | | | | | | | | | | | | | | | | | | $A_3$ | | | |
| | | | 5 | | | | | | | | | | | | | | | | | | | | | | | | | $A_4$ | | | |
| | | | 6 | | | | | | | | | | | | | | | | | | | | | | | | | $A_5$ | | | |
| | | | 7 | | | | | | | | | | | | | | | | | | | | | | | | | $E_1$ | | | |
| | | | 8 | | | | | | | | | | | | | | | | | | | | | | | | | $E_2$ | | | |
| | $I_{IL}$ | 3009 | 9 | | | 0.4 V | 0.4 V | 0.4 V | 0.4 V | 5.25 V | 0.4 V | 0.4 V | 0.4 V | | | | | | | | | | | | | | 5.25 V | $A_0$ | -0.2 | -1.6 | mA |
| | | | 10 | | | | | | | 0.4 V | | | | | | | | | | | | | | | | | | $A_1$ | | | |
| | | | 11 | | | | | | | | | | | | | | | | | | | | | | | | | $A_2$ | | | |
| | | | 12 | | | | | | | | | | | | | | | | | | | | | | | | | $A_3$ | | | |
| | | | 13 | | | | | | | | | | | | | | | | | | | | | | | | | $A_4$ | | | |
| | | | 14 | | | | | | | | | | | | | | | | | | | | | | | | | $A_5$ | | | |
| | | | 15 | | | | | | 0.4 V | 5.25 V | | | | | | | | | | | | | | | | | | $E_1$ | | | |
| | | | 16 | | | | | | 5.25 V | 0.4 V | | | | | | | | | | | | | | | | | | $E_2$ | | | |
| | $I_{IH1}$ | 3010 | 17 | | | 2.4 V | 2.4 V | 2.4 V | 2.4 V | GND | 2.4 V | 2.4 V | 2.4 V | | | | | | | | | | | | | | | $A_0$ | | 60 | μA |
| | | | 18 | | | | | | | 2.4 V | | | | | | | | | | | | | | | | | | $A_1$ | | | |
| | | | 19 | | | | | | | | | | | | | | | | | | | | | | | | | $A_2$ | | | |
| | | | 20 | | | | | | | | | | | | | | | | | | | | | | | | | $A_3$ | | | |
| | | | 21 | | | | | | | | | | | | | | | | | | | | | | | | | $A_4$ | | | |
| | | | 22 | | | | | | | | | | | | | | | | | | | | | | | | | $A_5$ | | | |
| | | | 23 | | | | | | | | | | | | | | | | | | | | | | | | | $E_1$ | | | |
| | | | 24 | | | | | | | | | | | | | | | | | | | | | | | | | $E_2$ | | | |
| | $I_{IH2}$ | | 25 | | | 5.25 V | 5.25 V | 5.25 V | 5.25 V | GND | 5.25 V | 5.25 V | 5.25 V | | | | | | | | | | | | | | | $A_0$ | | 100 | |
| | | | 26 | | | | | | | 5.25 V | | | | | | | | | | | | | | | | | | $A_1$ | | | |
| | | | 27 | | | | | | | | | | | | | | | | | | | | | | | | | $A_2$ | | | |
| | | | 28 | | | | | | | | | | | | | | | | | | | | | | | | | $A_3$ | | | |
| | | | 29 | | | | | | | | | | | | | | | | | | | | | | | | | $A_4$ | | | |
| | | | 30 | | | | | | | | | | | | | | | | | | | | | | | | | $A_5$ | | | |
| | | | 31 | | | | | | | | | | | | | | | | | | | | | | | | | $E_1$ | | | |
| | | | 32 | | | | | | | | | | | | | | | | | | | | | | | | | $E_2$ | | | |
| | $I_{CC}$ | 3005 | 33 | | | GND | GND | GND | GND | GND | GND | GND | GND | | | | | | | | | | | | | | | $V_{CC}$ | | | mA |
| | $V_{OH}$ | 3006 | 34 | | | | | | 0.8 V | 0.8 V | | | | | | | | | | | | | | | | | 4.75 V | $B_0$ | 2.4 | | V |
| | | | 35 | | | | | | | | | | | | | | | | | | | | | | | | | $B_1$ | | | |
| | | | 36 | | | | | | | | | | | | | | | | | | | | | | | | | $B_2$ | | | |
| | | | 37 | | | | | | | | | | | | | | | | | | | | | | | | | $B_3$ | | | |
| | | | 38 | | | | | | | | | | | | | | | | | | | | | | | | | $B_4$ | | | |
| | | | 39 | | | | | | | | | | | | | | | | | | | | | | | | | $B_5$ | | | |
| | | | 40 | | | | | | | | | | | | | | | | | | | | | | | | | $B_6$ | | | |
| | | | 41 | | | | | | | | | | | | | | | | | | | | | | | | | $B_7$ | | | |
| | $V_{OL}$ | 3007 | 42 | | | | | | 2.0 V | 2.0 V | | | | | | | | | | | | | | | | | | $B_0$ | | 0.50 | mA |
| | | | 43 | | | | | | | | | | | | | | | | | | | | | | | | | $B_1$ | | | |
| | | | 44 | | | | | | | | | | | | | | | | | | | | | | | | | $B_2$ | | | |
| | | | 45 | | | | | | | | | | | | | | | | | | | | | | | | | $B_3$ | | | |
| | | | 46 | | | | | | | | | | | | | | | | | | | | | | | | | $B_4$ | | | |
| | | | 47 | | | | | | | | | | | | | | | | | | | | | | | | | $B_5$ | | | |
| | | | 48 | | | | | | | | | | | | | | | | | | | | | | | | | $B_6$ | | | |
| | | | 49 | | | | | | | | | | | | | | | | | | | | | | | | | $B_7$ | | | |
| | $I_{OS}$ | 3011 | 50 | | | | | | GND | GND | | | | | | | | | | | | | | | | | | $B_0$ | -1.6 | -5.0 | mA |
| | | | 51 | | | | | | | | | | | | | | | | | | | | | | | | | $B_1$ | | | |
| | | | 52 | | | | | | | | | | | | | | | | | | | | | | | | | $B_2$ | | | |
| | | | 53 | | | | | | | | | | | | | | | | | | | | | | | | | $B_3$ | | | |
| | | | 54 | | | | | | | | | | | | | | | | | | | | | | | | | $B_4$ | | | |
| | | | 55 | | | | | | | | | | | | | | | | | | | | | | | | | $B_5$ | | | |
| | | | 56 | | | | | | | | | | | | | | | | | | | | | | | | | $B_6$ | | | |
| | | | 57 | | | | | | | | | | | | | | | | | | | | | | | | | $B_7$ | | | |

See footnotes at end of device type 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage; inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases J,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | $G_1$ | H | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G'_2$ | $V_{CC}$ | | Min | Max | |
| 2 1/ | Same tests, terminal conditions, and limits as for subgroup 1, except $T_C$ = 125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 1/ | Same tests, terminal conditions, and limits as for subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 2/3/ $T_C$ = 25°C | Truth table test | | 58 | | | B | B | B | A | A | B | B | B | GND | | GND | | H | H | H | H | H | H | H | H | GND | 4.75 V | | | | |
| | | | 59 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 60 | | | B | B | B | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 61 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 62 | | | B | B | A | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 63 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 64 | | | B | B | B | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 65 | | | A | A | B | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 66 | | | B | B | B | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 67 | | | A | A | B | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 68 | | | B | B | B | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 69 | | | A | A | B | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 70 | | | B | B | A | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 71 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 72 | | | B | B | A | A | A | B | B | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 73 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 74 | | | B | B | B | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 75 | | | A | A | B | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 76 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 77 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 78 | | | B | B | A | B | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 79 | | | A | A | A | B | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 80 | | | B | B | A | B | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 81 | | | A | A | A | B | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 82 | | | B | B | B | B | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 83 | | | A | A | B | B | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 84 | | | B | B | A | B | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 85 | | | A | A | A | B | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 86 | | | B | B | A | A | B | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 87 | | | A | A | A | A | B | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 88 | | | B | B | A | A | B | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 89 | | | A | A | A | A | B | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 90 | | | B | B | A | A | B | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 91 | | | A | A | A | A | B | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 92 | | | B | B | A | A | B | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 93 | | | A | A | A | A | B | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 94 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 95 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 96 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 97 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 98 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 99 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 100 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 101 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 102 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 103 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 104 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 105 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 106 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 107 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 108 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 109 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 110 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 111 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 112 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 113 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 114 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 115 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 116 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 117 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 118 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 119 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |
| | | | 120 | | | B | B | A | A | A | B | A | A | | | | | H | L | H | L | H | H | H | H | | | | | | | | |
| | | | 121 | | | A | A | A | A | A | A | A | A | | | | | L | L | L | L | L | L | L | L | | | | | | | | |

See footnotes at end of device type 02.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions: Outputs not designated are open or resistive coupled to GND or voltage; inputs not designated are high ≥2.0 V, low ≤0.8 V, or open.

| Subgroup | Symbol | MIL-STD-883-method | Cases J,K,L | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | Measured terminal | Test limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | NC | NC | $A_0$ | $A_1$ | $A_2$ | $E_1$ | $E_2$ | $A_3$ | $A_4$ | $A_5$ | $G_1$ | H | $G_2$ | F | $B_7$ | $B_6$ | $B_5$ | $B_4$ | $B_3$ | $B_2$ | $B_1$ | $B_0$ | $G_2$ | $V_{CC}$ | | Min | Max | |
| 8 $T_C$ = 125°C and -55°C | Truth table test | | 122-185 | Repeat subgroup 7, except $T_C$ = +125°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 186-249 | Repeat subgroup 7, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = 25°C | $t_{PHL}$ and $t_{PLH}$ | 3003 (Fig. 6) | 250 | | | 4/ | 4/ | 4/ | 5.0 V | IN | 4/ | 4/ | 4/ | GND | | GND | | OUT | | OUT | OUT | OUT | OUT | OUT | OUT | GND | 5.0 V | $B_0$ | 25 | 85 | ns |
| | | | 251 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_1$ | | | |
| | | | 252 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_2$ | | | |
| | | | 253 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_3$ | | | |
| | | | 254 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_4$ | | | |
| | | | 255 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_5$ | | | |
| | | | 256 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_6$ | | | |
| | | | 257 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_7$ | | | |
| | | | 258 | | | " | " | " | IN | 5.0 V | " | " | " | " | | " | | OUT | | | | | | | | | | $B_0$ | | | |
| | | | 259 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_1$ | | | |
| | | | 260 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_2$ | | | |
| | | | 261 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_3$ | | | |
| | | | 262 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_4$ | | | |
| | | | 263 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_5$ | | | |
| | | | 264 | | | " | " | " | " | " | " | " | " | " | | " | | | | | | | | | | | | $B_6$ | | | |
| | | | 265 | | | " | " | " | " | " | " | " | " | " | | " | | OUT | | | | | | | | | | $B_7$ | | | |
| 10 | Same tests and terminal conditions as for subgroup 9, except $T_C$ = 125°C and the limits are 25 ns minimum and 140 ns maximum. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as for subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

1/ Unprogrammed device conditions.

2/ Input voltages shall be: A = 2.0 V minimum; B = 0.8 V maximum.

3/ Output voltages shall be either:

a. H = 2.4 V minimum and L = 0.5 V maximum when using a high speed checker double comparator.
b. H ≥1.0 V and L <1.0 V when using a high speed checker single comparator.

4/ Terminal conditions (GND or 5.0 V) shall be as specified on figure 6 or in the altered item drawing, as applicable, so that all outputs are at a low logic level.





Source: https://assist.dla.mil - Downloaded: 2026-02-21T13:46Z
Check the source to verify that this is the current version before use.

3.6 Marking. Marking shall be in accordance with MIL-M-38510. For programmed devices, the altered item drawing number shall be added to the marking by the programming activity. The JAN or "J" certification shall not be used.

3.7 Processing options. Since the PROM is an unprogrammed memory capable of being programmed by either the manufacturer or the user to result in a wide variety of ROM configurations, two processing options are provided for selection in the contract, using an altered item drawing.

3.7.1 Unprogrammed PROM delivered to the user. All testing shall be verified through group A testing as defined in 3.2.2.1 and tables II and III. It is recommended that users perform subgroups 7 and 9 after programming to verify the specific program configuration.

3.7.2 Manufacturer-programmed PROM delivered to the user. All testing requirements and quality assurance provisions herein, including the requirements of the altered item drawing, shall be satisfied by the manufacturer prior to delivery.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 14 (see MIL-M-38510, appendix E).

3.9 Manufacturer eligibility. To be eligible to supply microcircuits to this specification a manufacturer shall have a manufacturer certification in accordance with MIL-M-38510 for at least one line, not necessarily the line producing the device type described herein.

3.10 Certification. Certification in accordance with MIL-M-38510 is not required for this device.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883); test condition D or E, using the circuit shown on figure 5 or equivalent.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical test parameters prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

d. Class B devices processed to an altered item drawing may be programmed either before or after burn-in at the manufacturer's discretion. The required electrical testing shall include, as a minimum, the final electrical tests for programmed devices as specified in table II herein.

4.3 Qualification inspection. Qualification inspection is not required.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4). Generic test data may be used to satisfy the requirements for group C and D inspections (see 6.7).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 shall be omitted.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

c. Devices selected for testing in subgroups 9, 10, and 11 shall be programmed in accordance with 3.2.2.

d. A programmability test shall be performed when programming the sample (12 devices) used in subgroups 9, 10, and 11 (see 3.2.2.1). If more than two devices fail to program, the lot shall be rejected. If an additional sample is used (24 total devices), the lot shall be rejected if more than 4 devices fail to program.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 5 or equivalent.

(2) $T_A$ = 125°C minimum.

(3) Test duration - 1,000 hours, except as permitted by appendix B of MIL-M-38510 and method 1005 of MIL-STD-883.

c. For quality conformance inspection, the programmability sample (see 4.4.1d) shall be included in the subgroup 1 tests.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

4.6 Programming. Using the test conditions of table IV, the following procedure shall be used for programming the device:

a. Connect the device as shown on figure 7a, using the fusing generator of figure 7a or the alternate circuit of figure 7b. The circuit shown on figure 7b can be used in more automated programming systems. This circuit generates a current pulse which is at the proper voltage and current levels for fast reliable programming. The input programming pulse width shall be 750 ±50 milliseconds. The number of attempts to program a given bit shall be as specified in table IV.

b. To address a particular word in the memory, set the input switches to the binary equivalent of that word, where a logical low level is -5.0 V and a logical high level is an open circuit. (Do not return to supply.) All output bits ($B_0$, $B_1$,. . . $B_7$ of this word are not available for programming.

c. With the output current limited (as specified in table IV), apply a negative going current pulse to the pin associated with the first bit to be changed from a logical low level to a logical high level. This is most easily accomplished by connecting the negative terminal of a variable power supply output pin and manually increasing the voltage to approximately 6.0 volts.

d. Skipping any bit which is to remain a logical low level, repeat 4.6c for each logical low level in the word being addressed. Not more than one bit shall be programmed at a time.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

e. Set the next input address and repeat 4.6c and d. This procedure is repeated for each input address for which a specific output word pattern is desired. Note that all addresses do not have to be programmed at the same time, nor do all output bits for a given address. A logical low level can always be changed to a logical high level, simply by repeating 4.6b and c. A logical low level, once programmed to a logical high level, cannot be reprogrammed.

TABLE IV. Programming specifications.

| Parameter | | Value |
|---|---|---|
| Address input voltage | High logic level | Open circuit 1/ |
| | Low logic level | -5.0 V |
| Power supply voltage | | +5.0 V +5%, -0% |
| $G_1$ voltage 2/ | | -5.0 V |
| $G_2$ voltage | | 0 V |
| $G'_2$ voltage | Device type 01 (circuit A) | Open |
| | Device types 01 (circuit B) and 02 | 0 V |
| Maximum programming voltage | | -7.0 V |
| Maximum programming current | | 100 mA |
| Maximum number of attempts to program a given bit | | 2 |
| Maximum case temperature during programming | | 75°C |

1/ Open collector TTL gates meet this requirement.

2/ $G_1$ must be connected to -5.0 V prior to applying $V_{CC}$ or programming voltage.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

h. Requirements for programming the device, including processing option.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

| | |
|---|---|
| GND | Electrical ground (common terminal). |
| $V_{IN}$ | Voltage level at an input terminal. |
| $V_{IC}$ | Input clamp voltage. |
| $I_{IN}$ | Current flowing into an input terminal. |

6.5 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer lead lengths and lead forming shall not affect the part number. It is intended that spare devices for logistic support be acquired in the unprogrammed condition (see 3.7.1) and programmed by the maintenance activity, except where use quantities for devices with a specific program or pattern justify stocking of preprogrammed devices.

6.6 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

| Military device type | Generic-industry type |
|---|---|
| 01 | HPROM- 0512, MCM 5303 |
| 02 | MCM 5304 |

6.7 Generic test data. Generic test data may be used to satisfy the requirements of 4.4.3. Group C generic test data shall be on date codes no more than one year old and on a die in the same microcircuit group (see appendix E of MIL-M-38510) with the same material, design and process from the same plant as the die represented. Group D (see 4.4.4) generic data shall be on date codes no more than one year old and on the same package type (see terms, definitions, and symbols of MIL-M-38510) and from the same plant as the package represented. The vendor is required to retain generic data for a period of not less than 36 months from the date of shipment.

6.8 Ordering guidance. Since the qualification and certification requirements have been removed from the specification, orders may be placed immediately.

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, MC,

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-0880)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-M-38510/201C | MICROCIRCUITS,DIGITAL, 512-BIT,BIPOLAR PROGRAMMABLE READ-ONLY MEMORY (PROM), MOMOLITHIC SILICON |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.

TRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in nitting comments and suggestions for improvements. All users of military standardization documents are invited to provide estions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and ed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the lems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an owledgement will be mailed to you within 30 days to let you know that your comments were received and are being idered.

E: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization aive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

MENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

CIAL BUSINESS
LTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:46Z
Check the source to verify that this is the current version before use.