INCH-POUND
MIL-PRF-87164/3A
24 May 1999
SUPERSEDING
MIL-C-87164/3
22 November 1982

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, FIXED, MICA DIELECTRIC, HIGH RELIABILITY, STYLE CMS06

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-87164.




| Capacitance (pF) | L | | T | | W |
|---|---|---|---|---|---|
| | Min 1/ | Max | Min 1/ | Max | Max |
| 270 to 330 inclusive | .550 (13.97) | .650 (16.51) | .090 (2.29) | .210 (5.33) | .510 (12.95) |
| 360 and 390 | .550 (13.97) | .650 (16.51) | .090 (2.29) | .210 (5.33) | .510 (12.95) |
| 430 and 470 | .560 (14.22) | .650 (16.51) | .090 (2.29) | .220 (5.59) | .510 (12.95) |
| 510 to 620 inclusive | .560 (14.22) | .650 (16.51) | .100 (2.54) | .230 (5.84) | .520 (13.21) |
| 680 to 910 inclusive | .560 (14.22) | .660 (16.78) | .100 (2.54) | .240 (6.10) | .530 (13.46) |
| 1,000 and 1,100 | .560 (14.22) | .670 (17.02) | .110 (2.79) | .250 (6.35) | .530 (13.46) |
| 1,200 and 1,300 | .570 (14.48) | .670 (17.02) | .110 (2.79) | .260 (6.60) | .530 (13.46) |
| 1,500 | .570 (14.48) | .680 (17.27) | .120 (3.05) | .280 (7.11) | .540 (13.72) |
| 1,600 | .570 (14.48) | .680 (17.27) | .120 (3.05) | .290 (7.37) | .550 (13.97) |
| 1,800 to 2,000 | .580 (14.73) | .680 (17.27) | .130 (3.30) | .310 (7.87) | .560 (14.22) |
| 2,200 | .580 (14.73) | .690 (17.53) | .130 (3.30) | .330 (8.38) | .560 (14.22) |
| 2,400 | .580 (14.73) | .690 (17.53) | .140 (3.56) | .340 (8.64) | .570 (14.48) |
| 2,700 | .590 (14.99) | .700 (17.78) | .150 (3.81) | .350 (8.89) | .580 (14.73) |

1/ Minimum dimensions are listed for information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS06.

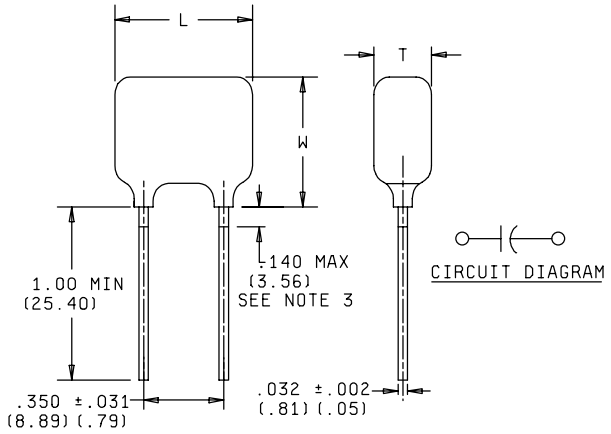
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: 500 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: F and E.

Marking: In accordance with MIL-PRF-87164 and figure 2.

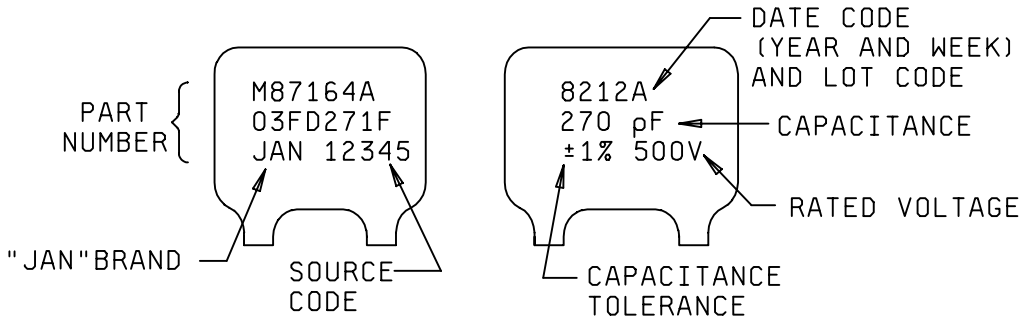


FIGURE 2. Marking example.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN.

| PIN 1/ M87164A03 | Capacitance value (pF) | Capacitance tolerance |
|---|---|---|
| ED271- | 270 | F, G, J |
| ED301- | 300 | F, G, J |
| ED331- | 330 | F, G, J |
| ED361- | 360 | F, G, J |
| ED391- | 390 | F, G, J |
| FD431- | 430 | F, G, J |
| FD471- | 470 | F, G, J |
| FD511- | 510 | F, G, J |
| FD561- | 560 | F, G, J |
| FD621- | 620 | F, G, J |
| FD681- | 680 | F, G, J |
| FD751- | 750 | F, G, J |
| FD821- | 820 | F, G, J |
| FD911- | 910 | F, G, J |
| FD102- | 1,000 | F, G, J |
| FD112- | 1,100 | F, G, J |
| FD122- | 1,200 | F, G, J |
| FD132- | 1,300 | F, G, J |
| FD152- | 1,500 | F, G, J |
| FD162- | 1,600 | F, G, J |
| FD182- | 1,800 | F, G, J |
| FD202- | 2,000 | F, G, J |
| FD222- | 2,200 | F, G, J |
| FD242- | 2,400 | F, G, J |
| FD272- | 2,700 | F, G, J |

1/ The complete PIN will include a letter symbol to indicate the capacitance tolerance; e.g., M87164A03FD272F.

Custodian:
Army - CR
Navy - EC
Air Force - 19
DLA - CC

Review activity:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-1982-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.