INCH-POUND
MIL-PRF-87164/4A
24 May 1999
SUPERSEDING
MIL-C-87164/4
23 June 1986

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC, HIGH RELIABILITY,
STYLE CMS07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-87164.

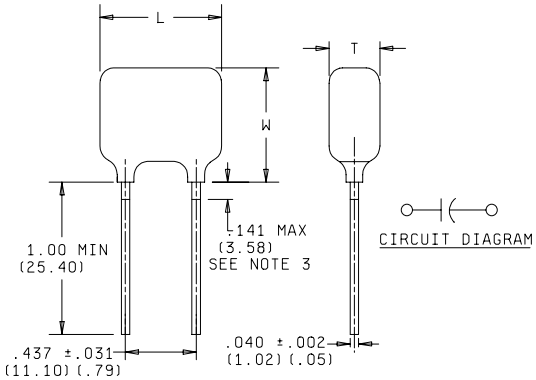

Capacitance (pF)	L		T		W
	Min 1/	Max	Min 1/	Max	Max
3,000 to 3,900 inclusive	.720 (18.29)	.810 (20.57)	.190 (4.83)	.300 (7.62)	.900 (22.86)
4,300 to 4,700 inclusive	.720 (18.29)	.820 (20.83)	.200 (5.08)	.310 (7.87)	.900 (22.86)
5,100	.720 (18.29)	.820 (20.83)	.210 (5.33)	.320 (8.13)	.900 (22.86)
5,600 to 6,200 inclusive	.730 (18.54)	.820 (20.83)	.220 (5.59)	.330 (8.38)	.910 (23.11)
6,800	.730 (18.54)	.820 (20.83)	.230 (5.84)	.340 (8.64)	.910 (23.11)
7,500	.730 (18.54)	.830 (21.08)	.240 (6.10)	.350 (8.89)	.920 (23.36)
8,200	.730 (18.54)	.830 (21.08)	.250 (6.35)	.360 (9.14)	.920 (23.36)
9,100	.730 (18.54)	.830 (21.08)	.260 (6.60)	.370 (9.40)	.930 (23.62)
10,000	.730 (18.54)	.840 (21.33)	.270 (6.86)	.380 (9.65)	.930 (23.62)
11,000	.740 (18.80)	.840 (21.33)	.280 (7.11)	.390 (9.91)	.940 (23.87)
12,000	.740 (18.80)	.850 (21.59)	.290 (7.37)	.400 (10.16)	.940 (23.87)
13,000	.740 (18.80)	.850 (21.59)	.300 (7.62)	.420 (10.67)	.940 (23.87)
15,000	.740 (18.80)	.850 (21.59)	.330 (8.38)	.430 (10.92)	.940 (23.87)
16,000	.740 (18.80)	.860 (21.84)	.340 (8.64)	.450 (11.43)	.940 (23.87)
18,000	.750 (19.05)	.870 (22.10)	.360 (9.14)	.470 (11.94)	.950 (24.13)
20,000	.750 (19.05)	.870 (22.10)	.380 (9.65)	.490 (12.45)	.960 (24.38)
22,000	.760 (19.30)	.880 (22.35)	.400 (10.16)	.520 (13.21)	.970 (24.63)

1/ Minimum dimensions are listed for information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS07.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: 500 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: See table I.

Marking: In accordance with MIL-PRF-87164 and figure 2.

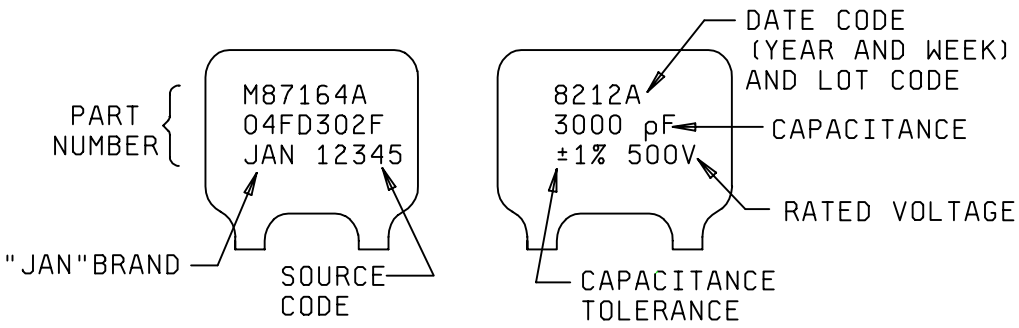

FIGURE 2. Marking example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN.

PIN 1/ M87164A04	Capacitance value (pF)	Capacitance tolerance
FD302-	3,000	F, G, J
FD332-	3,300	F, G, J
FD362-	3,600	F, G, J
FD392-	3,900	F, G, J
FD432-	4,300	F, G, J
FD472-	4,700	F, G, J
FD512-	5,100	F, G, J
FD562-	5,600	F, G, J
FD622-	6,200	F, G, J
FD682-	6,800	F, G, J
FD752-	7,500	F, G, J
FD822-	8,200	F, G, J
FD912-	9,100	F, G, J
FD103-	10,000	F, G, J
FD113-	11,000	F, G, J
FD123-	12,000	F, G, J
FD133-	13,000	F, G, J
FD153-	15,000	F, G, J
FD163-	16,000	F, G, J
FD183-	18,000	F, G, J
FD203-	20,000	F, G, J
FD223-	22,000	F, G, J

1/ The complete PIN will include a letter symbol to indicate the capacitance tolerance; e.g., M87164A04FD223F.

Custodian:
Army - CR
Navy - EC
Air Force - 19
DLA - CC

Review activity:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-1982-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.