INCH-POUND
MIL-PRF-87164/5A
24 May 1999
SUPERSEDING
MIL-C-87164/5
23 June 1986

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC, HIGH RELIABILITY,
STYLE CMS03

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-87164.

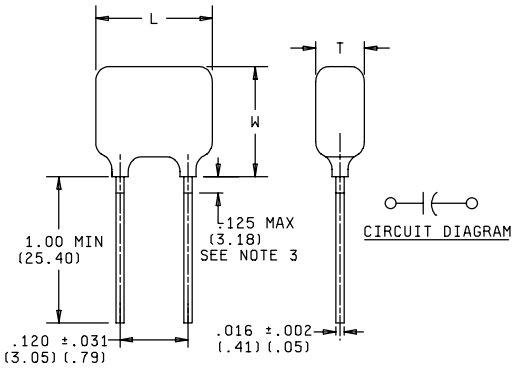

Capacitance (pF)	L		T		W
	Min 1/	Max	Min 1/	Max	Max
1 to 12 inclusive	.230 (5.84)	.290 (7.37)	.090 (2.29)	.140 (3.56)	210 (5.33)
15	.230 (5.84)	.290 (7.37)	.090 (2.29)	.140 (3.56)	.210 (5.33)
18 to 20 inclusive	.230 (5.84)	.290 (7.37)	.090 (2.29)	.140 (3.56)	.220 (5.59)
22 to 24 inclusive	.240 (6.10)	.300 (7.62)	.090 (2.29)	.150 (3.81)	.220 (5.59)
27	.240 (6.10)	.300 (7.62)	.100 (2.54)	.160 (4.06)	.230 (5.84)
30 to 33 inclusive	.240 (6.10)	.300 (7.62)	.100 (2.54)	.160 (4.06)	.230 (5.84)
36	.240 (6.10)	.300 (7.62)	.100 (2.54)	.160 (4.06)	.240 (6.10)
39	.240 (6.10)	.310 (7.87)	.110 (2.79)	.170 (4.32)	.240 (6.10)
43	.240 (6.10)	.310 (7.87)	.110 (2.79)	.170 (4.32)	.240 (6.10)
47 to 51 inclusive	.240 (6.10)	.310 (7.87)	.110 (2.79)	.180 (4.57)	.250 (6.35)
56	.250 (6.35)	.320 (8.13)	.120 (3.05)	.180 (4.57)	.250 (6.35)
62	.250 (6.35)	.320 (8.13)	.130 (3.30)	.180 (4.57)	.250 (6.35)
68	.250 (6.35)	.330 (8.38)	.130 (3.30)	.190 (4.83)	.260 (6.60)
75 to 82 inclusive	.250 (6.35)	.330 (8.38)	.140 (3.56)	.190 (4.83)	.260 (6.60)
91	.260 (6.60)	.330 (8.38)	.150 (3.81)	.200 (5.08)	.270 (6.86)
100 to 110 inclusive	.260 (6.60)	.340 (8.64)	.160 (4.06)	.210 (5.33)	.280 (7.11)
120	.270 (6.86)	.350 (8.89)	.160 (4.06)	.220 (5.59)	.290 (7.37)

1/ Minimum dimensions are listed for information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS03.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: 300 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: See table I.

Marking: In accordance with MIL-PRF-87164 and figure 2.

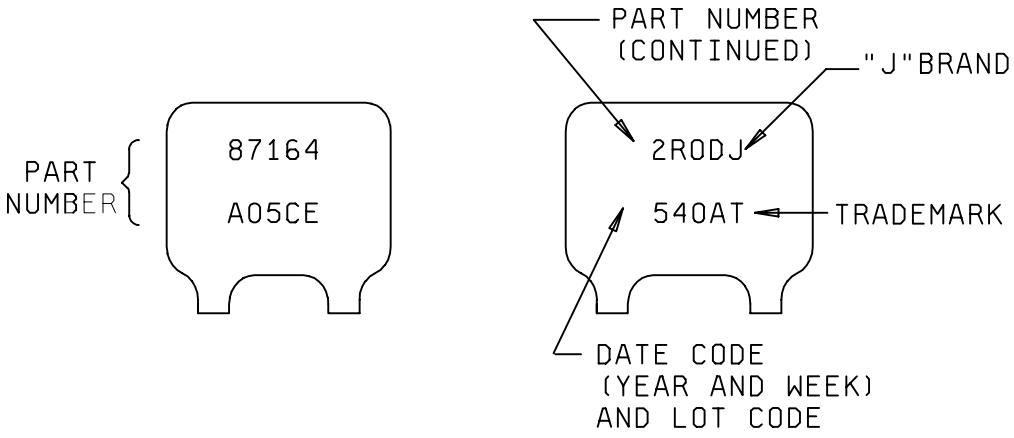

FIGURE 2. Marking example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN.

PIN 1/ M87164A05	Capacitance value (pF)	Capacitance tolerance
CC1R0D	1.0	D
CC1R5D	1.5	D
CC2R0D	2.0	D
CC2R5D	2.5	D
CC3R0D	3.0	D
CC3R5D	3.5	D
CC4R0D	4.0	D
CC4R5D	4.5	D
CC5R0D	5.0	D
CC6R0D	6.0	D
CC7R0D	7.0	D
CC8R0D	8.0	D
CC9R0D	9.0	D
CC100D	10	D
CC110D	11	D
CC120J	12	J
CC150J	15	J
CC180J	18	J
EC200J	20	J
EC220J	22	J
EC240J	24	J
EC270-	27	G, J
EC300-	30	G, J
EC330-	33	G, J
EC360-	36	G, J
EC390-	39	G, J
EC430-	43	G, J
EC470-	47	G, J
EC510-	51	G, J, F
EC560-	56	G, J, F
EC620-	62	G, J, F
EC680-	68	G, J, F
EC750-	75	G, J, F
EC820-	82	G, J, F
EC910-	91	G, J, F
EC101-	100	G, J, F
EC111-	110	G, J, F
EC121-	120	G, J, F

1/ The complete PIN will include a letter symbol to indicate the capacitance tolerance; e.g., M87164A05EC121F.

Custodian:
Army - CR
Navy - EC
Air Force - 19
DLA - CC

Review activity:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-1982-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.