NNN-B-001618 (DSA-DM)
February 4, 1970

INTERIM FEDERAL SPECIFICATION

BOTTLE, SCREWCAP, NARROW MOUTH, ROUND

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pennsylvania 19101, based on currently available information. It is recommended that Federal Agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type narrow mouth, plastic, screwcap bottle, suitable for storing laboratory chemicals, solutions and corrosive liquids and as a shipping container for animal specimens.

1.2 Classification.

1.2.1 Bottles covered by this specification shall be of natural or amber color and of the following sizes:

Size	Capacity (ounces)
1	4
2	8
3	16
4	32

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

L-P-390	Plastic, Molding Material, Polyethylene, Low and Medium Density.
L-P-394	Plastic, Molding Material, (Polypropylene Plastics, Injection and Extrusion).
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.

STANDARDS

Federal

FED-STD-123	Marking for Domestic Shipment (Civilian Agencies).

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston; New York; Atlanta; Chicago; Kansas City, Mo.; Forth Worth; Denver; San Francisco; Auburn, Washington; and Washington, D.C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

(Copies of Military specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the currentversion before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

UNITED STATES PHARMACOPEIAL CONVENTION, INC.

The Pharmacopeia of the United States of America (U.S.P.)

(Application for copies should be addressed to the Mack Publishing Company, Easton, Pennsylvania 18042.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Bottle. The bottle shall be fabricated of type I, class L, grade 2 polyethylene, as specified in L-P-390. The polyethylene shall be of amber or natural color, as specified. No antioxidants, impurities, or other foreign matter shall be present.


3.1.2 Closure. The closure shall be fabricated of type I polypropylene, as specified in L-P-394 and shall be the same color as the bottle in 3.1.1.

3.2 Construction. Bottles shall be molded of polyethylene resin and shall have a narrow mouth and a cylindrical shape with a suitable polypropylene screwcap closure as shown in Figure 1.

3.2.1 Bottle. The bottle shall be of cylindrical shape, and shall have a narrow mouth with continuous type, conventionally used, thread finish. The thread finish and dimensions for each size bottle shall be as specified in table shown under Figure 1. The mouth opening of the bottle shall be large enough to readily permit filling and dispensing of the contents. The lip of the bottle may be acid lipped. Bottle shall be symmetrical in shape, and the walls shall be of uniform thickness. When placed on a plane smooth surface, the bottle shall be stable.

3.2.2 Closure. The bottle shall be fitted with a one-piece, molded, polypropylene screwcap. The screwcap for sizes 1, 2, and 3 bottles shall have a minimum side wall thickness of 0.045 inch. The screwcap for size 4 bottle shall have a minimum thickness of 0.050 inch. The closure shall be threaded with a continuous type thread. The closure shall make a close fit with the finish of the bottle, so that the inner flat surface of the screwcap is in full contact with the mouth edge of the bottle, forming an effective seal. There shall be no leakage of water when tested as specified in 4.4.1. The outside vertical surface of the screwcap shall be knurled, or shall have vertical ribs, to provide firm gripping for removing or tightening the screwcap.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

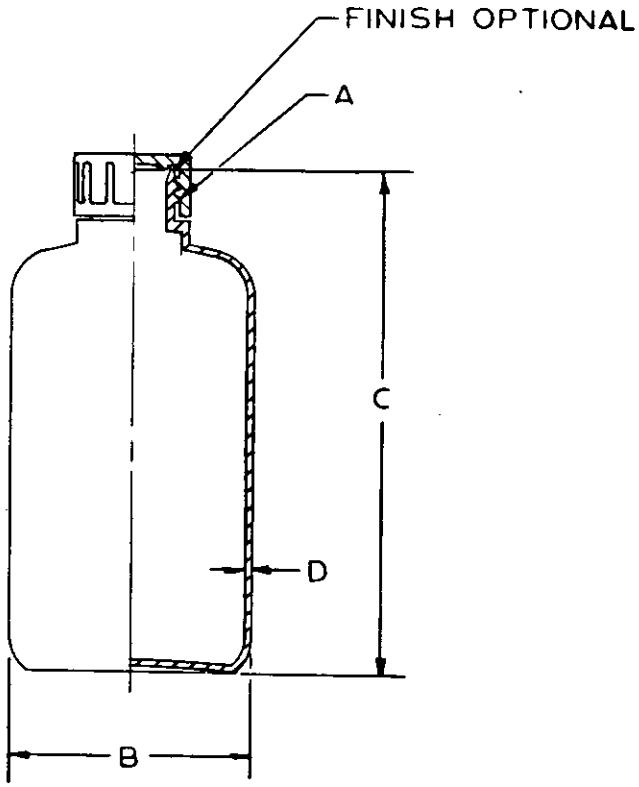

SIZE	BOTTLE CAPACITY (OUNCES)	A NOMINAL THREAD DIAMETER - mm.	B ± 3/32	C ± 1/8	D ± 0.015
1	4	24	1 13/16	4 3/8	0.050
2	8	24	2 7/16	5 5/16	0.055
3	16	24	2 7/8	6 5/8	0.060
4	32	38	3 5/8	8 1/4	0.060

FIGURE 1. BOTTLE, SCREWCAP

m-743-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

3.2.3 Dimensions. Dimensions and tolerances shall be as indicated for the appropriate size in the table shown in Figure 1.

3.2.4 Capacity point. The normal capacity point of the bottles shall not extend above the bottom level of the neck nor below the bottom level of the shoulder.

3.3 Finish. The bottles shall be finished smoothly and shall be free from ridges and flow marks.

3.4 Light resistance. Amber bottles shall meet the requirements for light resistance as currently stated in the United States Pharmacopeia (U.S.P.), when tested as specified in 4.4.2.

3.5 Identification marking. Each bottle shall be legibly and permanently marked with the name or registered trademark of the manufacturer and the capacity on the outside surface of the bottom.

3.6 Workmanship. Workmanship shall be first class throughout. The bottles and caps shall be free from sharp edges, burs, cracks, chips, breaks, protrusions, deformation, scratches, pits, and defects which detract from their appearnace or may impair their serviceability. Threads on the bottle finish and the cap shall mate and shall be clean and free of feathering. The bottle shall be furnished with the screwcap in place and shall be clean, dry, and ready for use.

QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification, where such inspections are deemed necessary to insure that supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the currentversion before use.

4.1.2 Certificate of quality. Certificates of quality, supplied by the manufacturer of the polyethylene and polypropylene, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the government. The certificate shall include the name of the contractor, the contract number, the FSN, the item identification, the name of the material, the lot number, the lot size, the date of testing, the test method, the individual test results and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as indicated in Table I.

Table I. Sampling for Examination

Defect category	Inspection level	AQL (defects per hundred units)
Visual examination		
Major defects	II	2.5
Minor defects	II	4.0
Dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105.

Table II. Sampling for Tests

(Component Unit of product)	Characteristic	Requirement	Test procedure	Inspection level	AQL
1-Bottle	Leakage	3.2.2	4.4.1	S-2	*
1-Bottle	Light resistance	3.4	4.4.2	S-1	*

* Acceptance number shall be zero.

4.3 Examination. The bottles and caps shall be examined to determine compliance with all the requirements contained in this specification. Examination shall be conducted as specified in Tables I and III. Inspection, however, shall not be restricted to defects listed in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

Table III. Classification of Defects

Category	Defect
Major:	
101	Bottle walls not of uniform thickness.
102	Bottles not stable on plane smooth surface.
103	Bottles and caps not free of sharp edges and burs.
104	Thread on bottle finish and cap do not mate.
105	Vertical outside surface of cap not knurled or ribbed.
106	Bottles and caps not free of cracks, chips, or breaks.
107	Bottles and caps not free of protrusions.
108	Bottles and caps not free of deformation.
109	Bottles not with screwcaps in place.
110	Bottles not clean, dry, and ready for use.
111	Bottles not finished smoothly.
Minor:	
201	Bottles not free of scratches or pits.
202	Bottles not free of ridges or flow marks.
203	Identification marking not complete, correct, legible, or permanent.
204	Threads on bottle finish and cap not clean cut and free of feathering.
205	Bottles not symmetrical in shape.

4.3.1 Dimensional examination. The bottles shall be examined for defects in dimensions (see table in Figure 1 and 3.2.2). Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 Leakage test. Bottles shall be filled with water and closure shall be applied, hand tight. The filled bottle shall be suspended in an inverted position for 4 hours at a temperature of 72 $\pm$ 5 degrees Fahrenheit.

4.4.2 Test for light resistance. The light resistance of the bottles shall be determined in accordance with the procedure for light transmission of closure-sealed containers described in the U.S. Pharmacopeia.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be levels A or C as specified (see 6.1).

5.1.1 Unit of issue. One package (for size 1, 72 bottles; for size 2, 72 bottles; for size 3, 48 bottles; and for size 4, 24 bottles), as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging quantities

Size	Unit package	Intermediate package	Exterior container
1	1 unit	Not required	6 units
2	1 unit	Not required	4 units
3	1 unit	Not required	4 units
4	1 unit	Not required	4 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be packaged in a polyethylene bag of appropriate size and design. Closure shall be adequate to prevent accidental opening.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Civil agencies. Interior and exterior containers shall be marked in accordance with FED-STD-123.

5.3.2 Military agencies.

5.3.2.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(c) Applicable Federal stock number.

6.2 This specification covers the following items appearing in the Federal Supply Catalog:

Federal Stock Number	Item Identification
6640-130-3237	BOTTLE, SCREWCAP, Narrow Mouth, Round, 8 oz., 72s
6640-935-4064	BOTTLE, SCREWCAP, Narrow Mouth, Round, Amber, 4 oz., 72s
6640-935-4069	BOTTLE, SCREWCAP, Narrow Mouth, Round, Amber, 8 oz., 72s
6640-935-4070	BOTTLE, SCREWCAP, Narrow Mouth, Round, Amber, 16 oz., 48s
6640-935-4071	BOTTLE, SCREWCAP, Narrow Mouth, Round, Amber, 16 oz., 24s

6.3 Supersession data. This specification includes the requirements of Purchase Description Number 2, dated 11 December 1968 for FSN 6640-935-4064, FSN 6640-935-4069, FSN 6640-935-4070, 6640-935-4071, BOTTLE, SCREWCAP, Narrow Mouth, Round, Amber, 4, 8, 16 and 32 ounces, respectively.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

Fold

DPSC FORM 2418
MAR 68

EDITION AUG 66, WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

NNN-B-001618(DSA-DM) FSN:

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.