NNN-F-001652(DSA-DM)
August 5, 1970

INTERIM FEDERAL SPECIFICATION

FUNNEL, COMMON LABORATORY, POLYPROPYLENE, RIBBED

This interim Federal specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pennsylvania 19101, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized the use of this iterim Federal specification.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers polypropylene ribbed laboratory funnels.

1.2 Classification. Funnels shall be of the following sizes:

Size 55 - 55 millimeters (mm) top inside diameter.
Size 75 - 75 millimeters (mm) top inside diameter.
Size 100 - 100 millimeters (mm) top inside diameter.
Size 160 - 160 millimeters (mm) top inside diameter.

2. APPLICABLE DOCUMENTS

2.1 Specifications, standards and drawings. The following specifications, standards, and drawings of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

MMM-A-250	Adhesive, Water Resistant (For Sealing Waterproof Paper).
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Setup.
PPP-T-76	Tape, Pressure Sensitive Adhesive Paper, Water Resistant (For Carton Sealing).

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the currentversion before use.

STANDARDS

Federal

FED-STD-123 Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Knasas City, Mo., Dallas, Fort Worth, Denver, San Francisco, Auburn, Washington, and Washington, D. C.)

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of Military specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained as directed by the contracting officer.)

3. REQUIREMENTS.

3.1 Material. Funnel shall be fabricated of good quality polypropylene.

3.2 Construction. The funnel shall consist of a bowl and stem and shall be constructed in accordance with figure 1. The funnel shall be so constructed that the longitudinal axes of the bowl and stem combine to form a straight longitudinal axis for the funnel. Inner perimeters of the bowl and stem shall be circular and the longitudinal axis of the funnel shall coincide with the

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

centers of all circles. Bowl shall have seven ribs which are integral with the surfaces of the bowl. Four ribs shall be on the inner surface and three shall be on the outer surface. The dimensions of the ribs shall be the largest at the juncture of the bowl and stem and the ribs shall taper so that the width and height are zero near the top of the bowl, C on figure 1. Dimensions of the ribs at the juncture of the bowl and stem shall be as follows: height 0.6 to 2.5 mm and width 0.9 to 2.5 mm.

3.3 Resistance to heat. The funnels shall be capable of withstanding conventional (see 4.4.1) autoclaving temperature and pressure. When tested as specified in 4.4.1, funnels shall show no evidence of deformation, blistering or cracking.

3.4 Identification marking. Each funnel shall be permanently and legibly marked with the name or registered trademark of the manufacturer on the outer surface of the funnel.

3.5 Workmanship. Workmanship shall be first class throughout. Funnels shall be free of cracks, deformation, sharp edges, tears, splits, blisters, protrusions, roughness, feathered edges, scratches, indentations and other defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the purchase description where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the currentversion before use.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the polypropylene, which will contain evidence of the identification of the materials required in the specification, may be furnished in lieu of actual tests by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I. Unit of product shall be one funnel.

Table I. Sampling for Examination

Type defect	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	2.5
Minor defects	II	4.0
For dimensional examination	S-1	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. Unit of product shall be one funnel and acceptance number shall be zero.

Table II. Sampling for tests

Characteristic	Requirement	Test Procedure	Inspection level
Heat resistance	3.3	4.4.1	S-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

4.3 Examination. The funnel shall be examined for defects including, but not limited to, those listed in table III.

Table III Classification of Defects

Category	Defect
Major	
101	Funnel not free of cracks.
102	Funnel not free of deformation.
103	Funnel not free of sharp edges.
104	Funnel not free of tears and splits.
105	Funnel not free of blisters.
106	Ribs not continuous and clean cut.
107	Identification marking missing, illegible, or incomplete.
Minor	
201	Funnel not free of protrusions (other than ribs and identification marking).
202	Surfaces not smooth.
203	Edges of funnel not free of feathering.
204	Funnel not free of deep scratches and indentation.

4.3.1 Dimensional examination. The funnels shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Heat resistance. Funnels shall be placed in an autoclave and shall be subjected to a temperature of 250° Fahrenheit and a pressure of 15 pounds per square inch for 20 ± 1/2 minutes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 **Packaging. Packaging shall be level A or C as specified (see 6.2).**

5.1.1 Unit of issue. **One funnel, as specified, constitutes one unit of issue.**

5.1.2 Packaging quantities. **The number of units of issue indicated in the following table shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.**

Table IV Packaging Quantities

Size	Unit package	Intermediate package	Exterior container
1 and 2	1 unit	36 units	72 units
3 and 4	1 unit	12 units	24 units

5.1.2.1 Packing variation permitted. **If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.**

5.1.3 Level A.

5.1.3.1 Unit package. **Unit package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except commercial colors will be acceptable, or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.**

5.1.3.2 Intermediate package. **Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-636, type CF, class weather-resistant. Boxes shall be closed by taping the top and bottom flaps with 2 inch wide tape conforming to PPP-T-76. Closing of bottom flap with adhesive conforming to MMM-A-250 or metal stitches is permitted.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipments shall be in accordance with FED-STD 123.

5.3.2 Military activities.

5.3.2.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Funnels are intended for transfer and filtering of liquids in analytical chemical procedures.

6.2 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable levels of packing (see 5.1 and 5.2).

6.3 This specification does not include all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types which are normally procured to meet requirements.

6.4 This specification covers the following items shown in the Federal Supply Catalog:

Federal Stock Number	
6640-058-9147	Funnel, Common, Laboratory, Polypropylene, Ribber, 160 mm.
6640-350-6343	Funnel, Common, Laboratory, Polypropylene, Ribbed, 75 mm.
6640-889-7021	Funnel, Common, Laboratory, Polypropylene, Ribbed, 55 mm.
6640-889-7023	Funnel, Common, Laboratory, Polypropylene, Ribbed, 100 mm.


Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the currentversion before use.

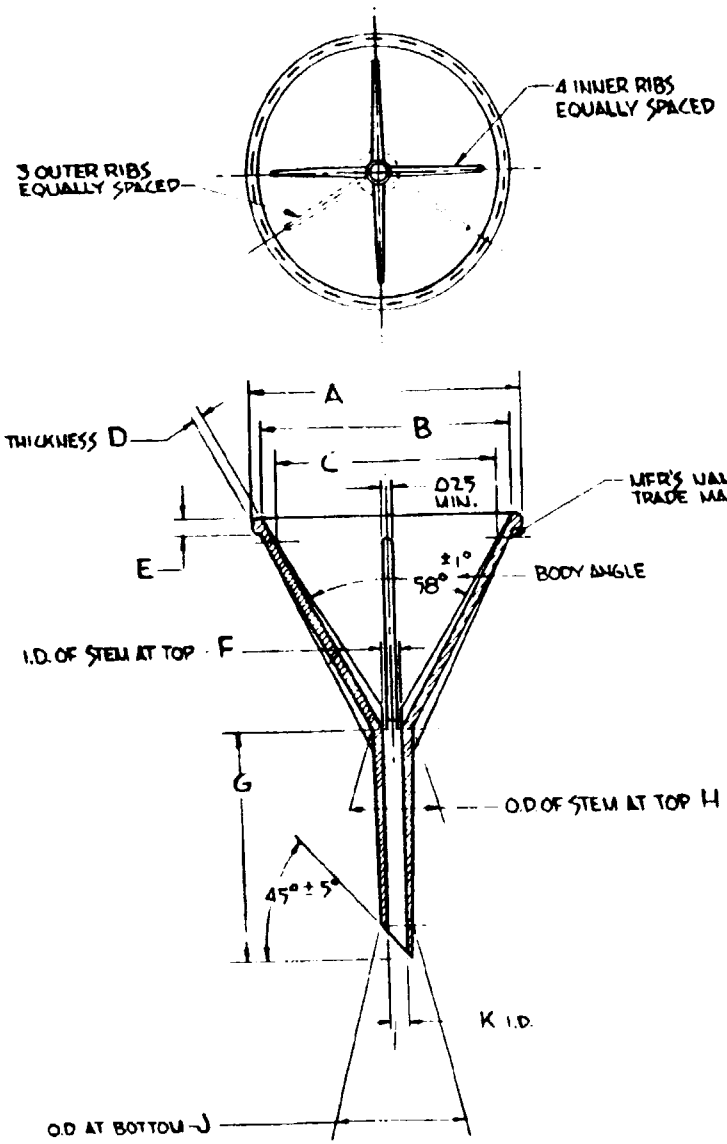

	MM									
SIZE	A	B	C	D	E	F	G	H	J	K
55	60 ±3	53 ±3	46 ±3	1.5 ±.1	2.3 ±.2	5.6 ±.4	59 ±.3	8.4 ±.6	6.9 ±.5	3.8 ±.3
75	81 ±3	75 ±3	63 ±3	1.6 ±.1	2.4 ±.2	6.4 ±.5	75 ±.3	8.7 ±.6	7.5 ±.5	4.8 ±.3
100	107 ±3	98 ±3	82 ±3	2.0 ±.1	3.3 ±.2	6.5 ±.5	99 ±.3	10.7 ±.7	8.6 ±.6	4.8 ±.3
160	175 ±3	162 ±3	132 ±3	3.2 ±.1	4.4 ±.2	9.5 ±.5	130 ±.3	15.9 ±.7	13.5 ±.6	7.9 ±.3

FIGURE 1

MIL-F-00161259D (USA-DLA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.