AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

PACKAGING AND PACKING OF STORAGE CABINETS, WARDROBES AND CLOTHING LOCKERS, METAL

This amendment was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, DC 20406, based on currently available technical information. The General Services Administration has authorized this amendment as a part of Interim Federal Specification PPP-P-0015D(GSA-FSS) dated June 29, 1970.

PAGE 3

Paragraph 3.2, delete in its entirety and substitute:

3.2 Component Packaging (Knocked Down). The instruction sheet (see 3.1.8) shall be packaged in a kraft envelope. The assembly hardware (nuts, bolts, washers, clips, etc.) shall be packaged in cotton draw-string bags conforming to PPP-B-20 or heat-sealed bags manufactured from material conforming to L-P-378, type I, grade A, finish 1, a minimum of 2 mils thick. The hardware (hooks, handles etc.) shall be individually wrapped in kraft paper conforming to UU-P-268, grade B, with a basis weight of 40 pounds. The keys (and padlocks when furnished) shall be packaged in cotton draw-string bags or heat-sealed bags manufactured from material conforming to L-P-378, type I, grade A, finish I, a minimum os 2 mils thick. The individual packages of hardware shall subsequently be packaged in a single heat sealed bag manufactured from material conforming to L-P-378, type I, grade A, finish I, a minimum of 3 mils thick. The sealed bag shall then be placed in the center of a sheet of fiberboard conforming to PPP-F-320, class domestic, This sheet shall be folded to form an envelope and placed in the shipping container. For the wardrobe the hardware package shall be packed in the panel container. The cabinet, locker or wardrobe component parts (doors, sides, backs, tops, bottoms, shelves, hanger rods, etc) shall be wrapped, or separated with kraft paper conforming to UU-P-268, grade B, with a basis weight of 40 pounds. When knocked down drawers are furnished, the individual drawer parts shall be wrapped or separated as specified herein.

Paragraph 3.3.1.1, delete in its entirety and substitute:

3.3.1.1 Level A. Individual cabinets or lockers. One complete knocked down cabinet or locker prepared as specified in 3.2 shall be packaged in a close-fitting box, conforming to PPP-B-636, style FPF, grade V3c, except that the weight and dimensional limitations of the box specification do not apply. Close and waterproof seal the boxes in accordance with the appendix to PPP-B-636.

Paragraph 3.3.1.2, delete the first two sentences and substitute:

Individual cabinets or lockers. One complete cabinet or locker, prepared as specified in 3.2 shall be packaged as specified in 3.3.1.1, except that the fiberboard box shall conform to PPP-B-636, style FPF or FTC, type CF, class domestic, grade 275.

PAGE 4

Paragraph 3.4.1.1.1, sixth line, delete "3.4.2" and substitute "3.3.1.1".
11th line, delete "of the skid".

Paragraph 3.4.1.1.2, first line, delete "3.3.1" and substitute "3.2".
second line, delete "and hardware".
sixth line, delete "and panel components".

To the end of the existing paragraph add the following: When knocked down drawers are furnished, they shall be packed with the various panels and hardware as specified herein: /

PAGE 5

Paragraph 3.4.1.2.2, first line, delete "3.2.1" and substitute "3.2".

FSC PACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

PAGE 5 (con'd)

second line, delete "3.3.1.2" and substitute "3.4.1.1.2".

Add new paragraphs as follows:

3.5.3.1 Special marking for knocked down wardrobes with set-up drawers. In addition to the markings required by 3.5.1 or 3.5.2 and 3.5.3, the shipping containers for knocked down wardrobes with set up drawers shall be marked as follows:

(1) large box containing panels, hardware, etc., mark:

"BOX 1 OF 2
ALL HARDWARE CONTAINED IN THIS BOX"

(2) small box containing drawers, mark:

"BOX 2 OF 2
ALL HARDWARE CONTAINED IN BOX 1 OF 2"

3.5.3.2 Special marking for knocked down wardrobes with knocked down drawers. In addition to the markings required by 3.5.1 or 3.5.2 and 3.5.3, each shipping container for a knocked down wardrobe with knocked down drawers shall have the following marked in a prominent place in characters a minimum of one inch high:

THIS PACKAGE CONTAINS ONE
COMPLETE WARDROBE - INCLUDING
KNOCKED DOWN DRAWERS

PAGE 6

Paragraph 3.6.1, delete in its entirety and substitute:

3.6.1 Knocked down cabinets, lockers, and wardrobes. Unless otherwise specified (see 6.2), ten knocked down cabinets, lockers or wardrobes packed as specified in 3.4.1 shall be palletized as shown in figure 7. The pallet shall be the same length and width as the containers to be placed thereon with a tolerance of 1/4 inch - 0, and shall be of the design shown in figure 9. The pallets shall be assembled with nails as specified in 3.1.4, with a minimum of two nails at each location. The containers shall be placed on the pallet in a single stack and secured in place with three straps located in the girthwise direction as follows: One strap shall be located approximately 12 inches from each end and the third shall be located approximately on center. The strapping shall be in accordance with 3.1.7. Preformed edge protectors, metal or plastic, shall be used at the top under each strap to prevent the strapping from damaging the containers.

Paragraph 3.6.2, delete in its entirety and substitute:

3.6.2 Set up drawers for knocked down wardrobes. Unless otherwise specified (see 6.2) when the drawers for the knocked down wardrobe are furnished in a set up condition, ten sets packed as specified in 3.4.1 shall be palletized as shown in figure 8. The pallet shall be the same length and width as the containers to be placed thereon with a tolerance of 1/4 inch - 0 and shall be of the design shown in figure 10. The pallets shall be assembled with nails as specified in 3.1.4, with a minimum of two nails at each location. The containers shall be placed on the pallet in two stacks of five each and secured in place with straps located as follows: One strap shall be located approximately 18 inches from each end in the girthwise direction and the third strap shall be located approximately on center in the lengthwise direction. The strapping shall be in accordance with 3.1.7. Preformed edge protections, metal or plastic, shall be used at the top under each strap to prevent the strapping from damaging the containers.

Paragraph 4.3, first and second lines, delete "paragraphs 3.4.1 or 3.4.2" and substitute "4.4".

PAGE 7

Paragraph 4.4.1.2, delete the third sentence reading as follows: "The impact velocity shall be 11.8 feet per second."

PAGE 9

Figure 2A, delete the note at the top reading as follows: "DRAWER RUNNERS WRAPPED TOGETHER" and applicable delineation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

PAGE 9 (con'd)

Figure 2A, delete note at the bottom reading as follows: "NOTE-HARDWARE IS ALSO PACKED WITH THE DRAWERS."

PAGE 13

Delete figures 7 and 8 in their entirety and substitute the attached new figures 7 and 8.

PAGE 14

Delete figures 9 and 10 in their entirety and substitute the attached new figures 9 and 10.

GSA DC 73-596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

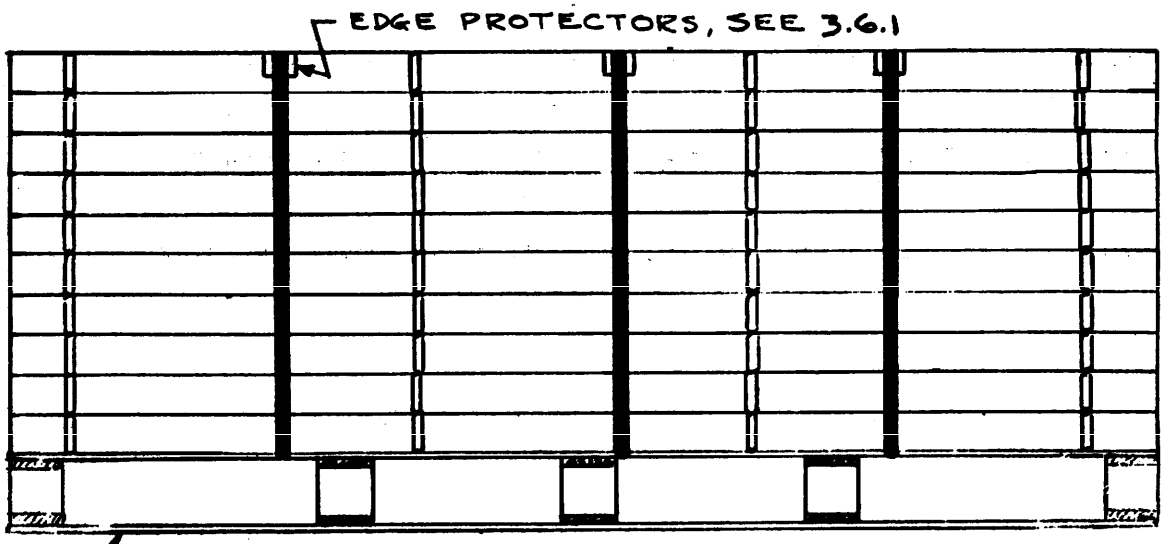


FIG. 7 - METHOD OF PALLETIZING KNOCKED-DOWN PACKS

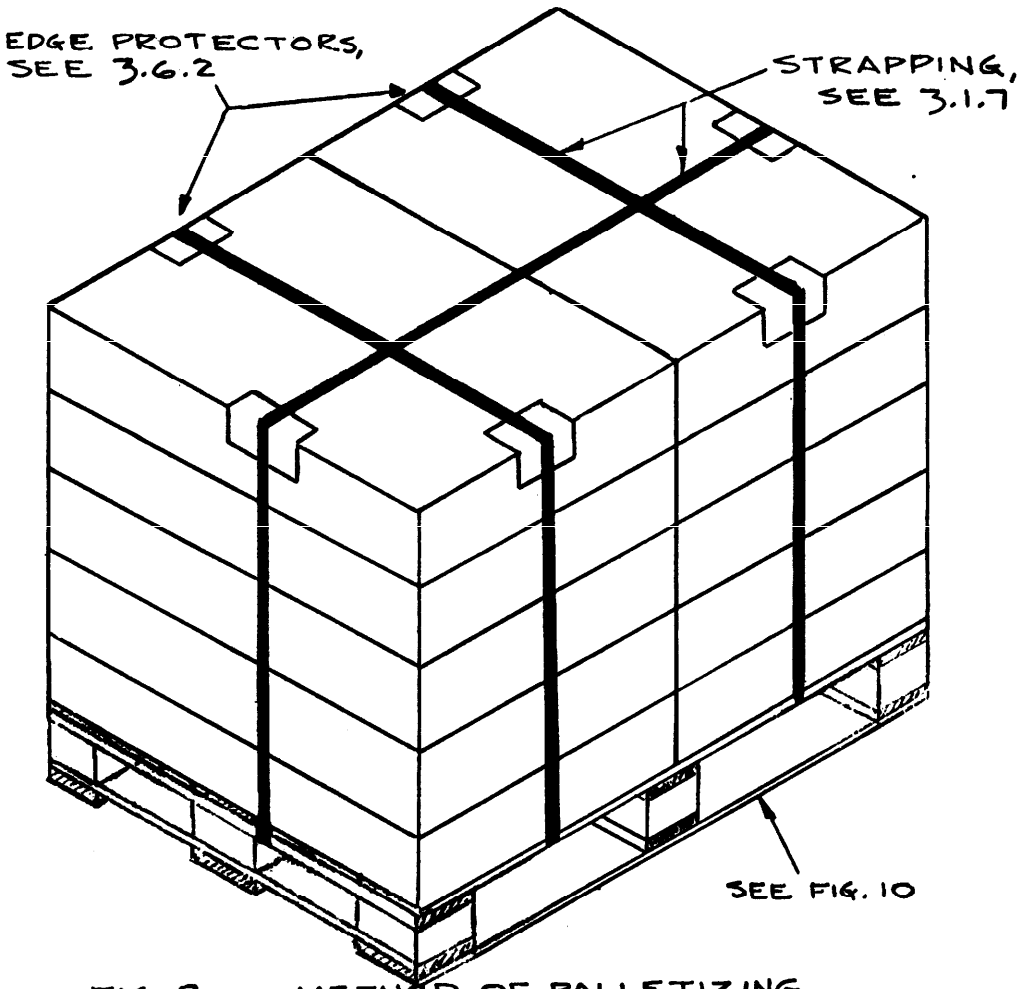


FIG. 8 - METHOD OF PALLETIZING WARDROBE DRAWER PACKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.



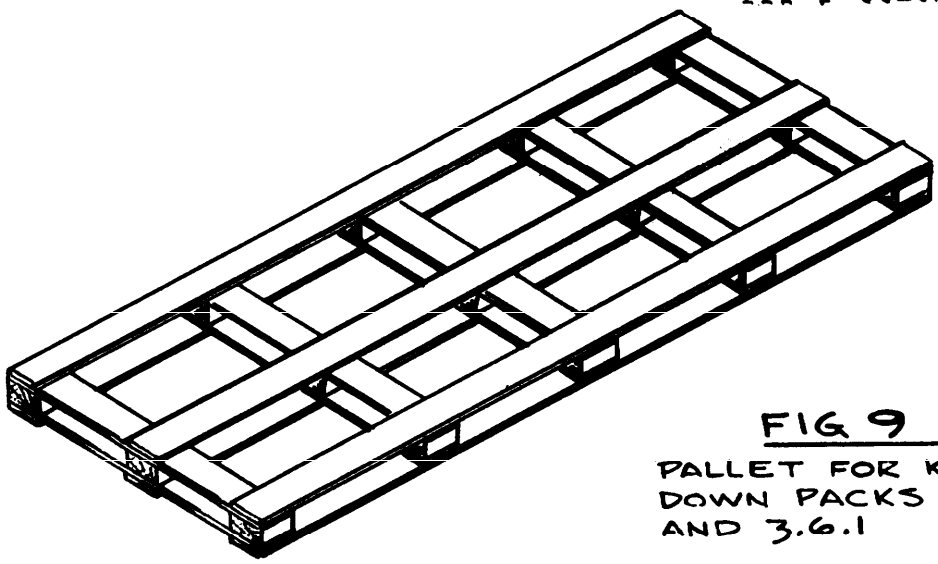


FIG 9
PALLET FOR KNOCKED-DOWN PACKS, SEE FIG.7 AND 3.6.1

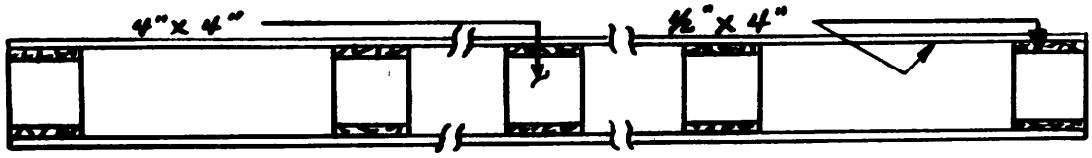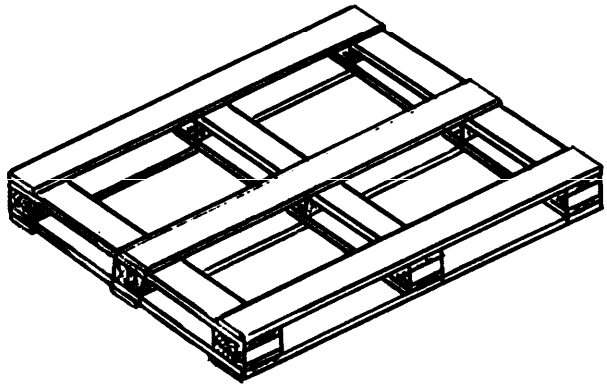

NOTE: BOARD SIZES SHOWN IN FIGURES 9 & 10 ARE MINIMUM.



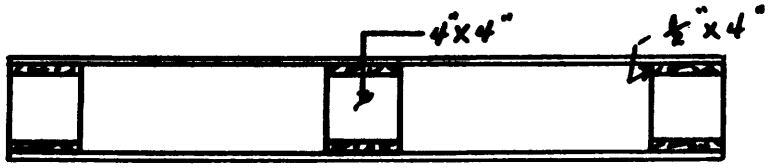


FIG. 10
PALLET FOR WARDROBE DRAWER PACKS, SEE FIG.8 AND 3.6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.