NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/151E
27 September 1996
SUPERSEDING
MIL-L-11484/151D
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE (10, 15, 20, 25, 30, 35, 40, 45 AND 50 YEARS), OFFICE OF PERSONNEL MANAGEMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

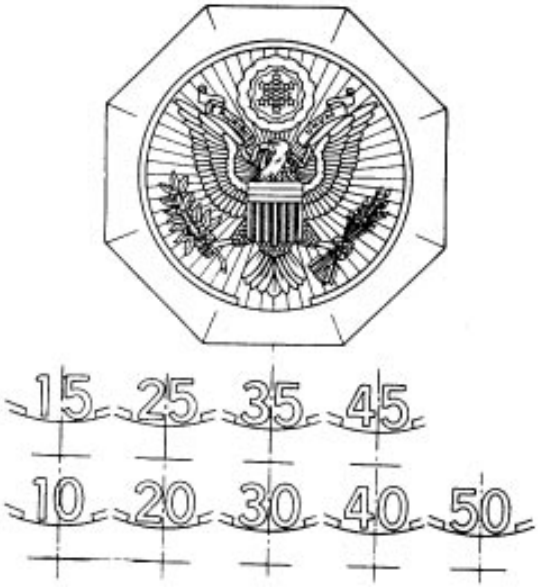

DASH NO.
-1: 10 Years (Bronze)
-2: 15 Years (Bronze)
-3: 20 Years (Silver)
-4: 25 Years (Silver)
-5: 30 Years (Gold)
-6: 35 Years (Gold)
-7: 40 Years (Gold)
-8: 45 Years (Gold)
-9: 50 Years (Gold)

MATERIAL:
-1, -2: Gilding Metal
-3, -4: Nickel Silver or Red Brass
-5, -6, -7, -8, -9: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:02Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -2: Oxidized, Relieved, Highlights and Rim Brightly Polished
-3, -4: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Highlights and Rim Brightly Polished and shall match TIOH Metal Finish Chip Number 15.
-5, -6, -7, -8, -9: Gold Plated, Matte Finish, Highlights and Rim Brightly Polished and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT (Overall): 5/8 inch (1.59 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (At Edge): 0.110 inch ± 0.010 inch (0.279 ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Manufacturer shall add the specified number representing the length of service to the working die in the style and location indicated on TIOH Drawing number A-9-21. Numbers shall be 0.075 inch ± 0.002 inch (0.190 cm ± 0.005 cm) in height.

3. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button 1/8 inch (0.32 cm) above the horizontal center line.

4. Each lapel button shall be mounted and centered on a sulfite board 0.030 inch (0.076 cm in thickness (minimum) and approximately 3-3/4 inches (9.53 cm) in length by 2-1/4 inches (5.72 cm) wide. The face of the sulfite board shall be covered with cobalt blue flock. The mounted sulfite board shall be placed in a rigid hinged plastic box having a transparent lid and opaque white bottom section. The box shall have two plastic hinges and catches and shall be approximately 3 inches (7.62 cm) in length, 1-1/4 inches (3.18 cm) wide and 3/4 inch (1.91 cm) in overall depth.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Civil Agency Coordinating Activity:
GSA- 7FXE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:02Z
Check the source to verify that this is the current version before use.