NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/151G
20 July 2020
SUPERSEDING
MIL-DTL-11484/151F
28 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE (10, 15, 20, 25, 30, 35, 40, 45, AND 50 YEARS), OFFICE OF PERSONNEL MANAGEMENT

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

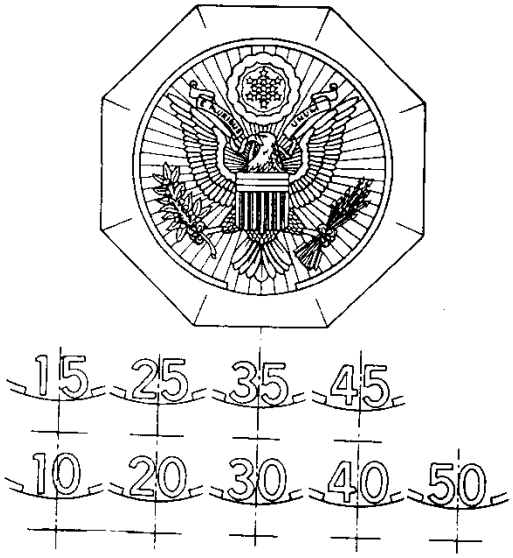

DASH NO.

-1: 10 Years (Bronze)
-2: 15 Years (Bronze)
-3: 20 Years (Silver)
-4: 25 Years (Silver)
-5: 30 Years (Gold)
-6: 35 Years (Gold)
-7: 40 Years (Gold)
-8: 45 Years (Gold)
-9: 50 Years (Gold)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:01Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1, -2: Gilding Metal 95/5 (UNS Alloy No. C-210)
-3, -4: Red Brass 85/15 (UNS Alloy C-230) or Nickel Silver 65/35 (UNS Alloy C-752)
-5, -6, -7, -8, -9: Red Brass 85/15 (UNS Alloy C-230)

FINISH:
-1, -2: Oxidized, Relieved, Highlights and Rim Brightly Polished.
-3, -4: Nickel Plated, (C-230 only), Silver Plated, Oxidized, Relieved Highlights and Rim Brightly Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 15.
-5, -6, -7, -8, -9: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSION:
HEIGHT (Overall): 5/8 inch (REF)
WIDTH (Overall): 5/8 inch (REF)
THICKNESS (At edge): 0.110 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button 1/8 inch above the horizontal center line.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. Manufacturer shall add the specified number representing the length of service to the working die in the style and location indicated on TIOH Drawing number A-9-21. Numbers shall be 0.075 inch $\pm$ 0.002 inch in height.

3. Each lapel button shall be mounted and centered on a sulfite board 0.030 inch in thickness (minimum) and approximately 3-3/4 inches in length by 2-1/4 inches wide. The face of the sulfite board shall be covered with cobalt blue flock. The mounted sulfite board shall be placed in a rigid hinged plastic box having a transparent lid and opaque white bottom section. The box shall have two plastic hinges and catches and shall be approximately 3 inches in length, 1-1/4 inches wide and 3/4 inch in overall depth.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:01Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-442)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:01Z
Check the source to verify that this is the current version before use.