

FED. SUP CLASS
5950

CASE, MOUNTING TERMINAL ARRANGEMENT AND MARKING

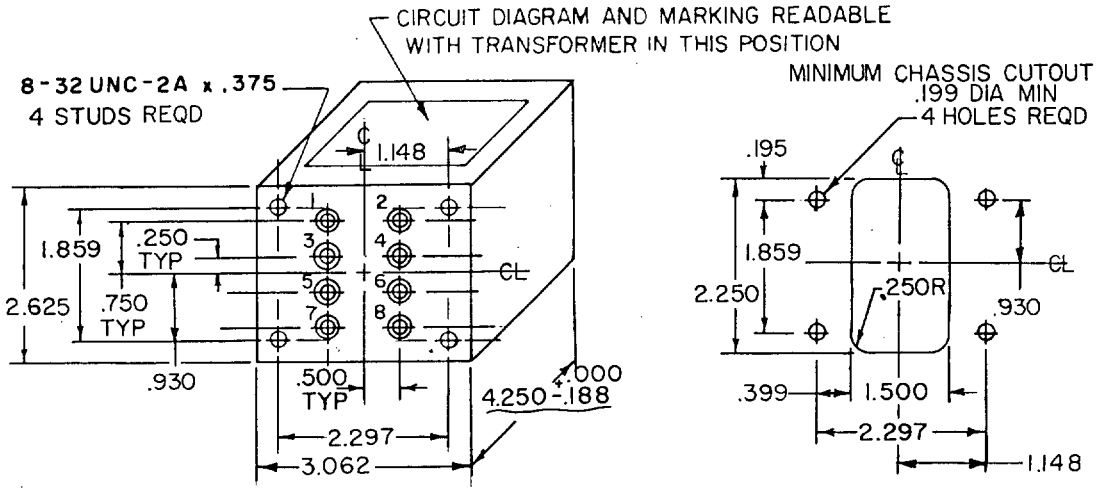


| Inches | mm |
|---|---|
| .188 | 4.76 |
| .195 | 4.95 |
| .199 | 5.05 |
| .250 | 6.35 |
| .375 | 9.53 |
| .399 | 10.13 |
| .500 | 12.70 |
| .750 | 19.05 |
| .930 | 23.62 |
| 1.148 | 29.16 |
| 1.500 | 38.10 |
| 1.859 | 47.23 |
| 2.250 | 57.15 |
| 2.297 | 58.34 |
| 2.625 | 66.68 |
| 3.062 | 77.77 |
| 4.250 | 107.95 |

CIRCUIT DIAGRAM AND MARKING

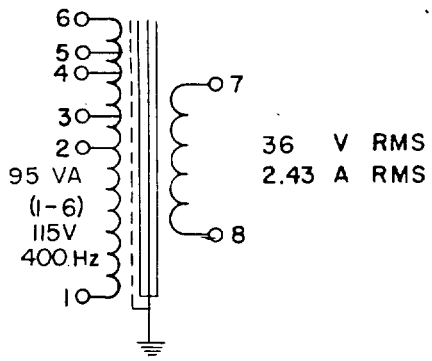


WV-635 MAX
ALTITUDE-50,000 FT MAX

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 23 JUNE 1981
NO SUPERSEDING STANDARD

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance on case dimensions is +.000(.00 mm), -.125(3.18 mm).
4. Tolerance on mounting dimensions is ±.016(.41 mm). Mounting studs are symmetrically located with respect to the centerline of the case.
5. Tolerance on terminal position dimensions is ±.031(.79 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part number, and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

| MS PART NO. | TYPE DESIGNATION |
|---|---|
| MS16450-1 | TF4RX02HA203 |

(F) REDRAWN
denotes changes

APPROVED 9 JULY 1956 REVISED (F) 20 March 1986

| | | | |
|---|---|---|---|
| P.A EC<br>Other Cust ER<br>AF-85 | International interest | TITLE<br>TRANSFORMER, POWER, STEP-DOWN,<br>TYPE TF4RX02HA203 | MILITARY STANDARD<br>MS 16450 |
| Procurement Specification<br>MIL-T-27 | | SUPERSEDES: | PAGE 1 OF 2 |

DD FORM 1 MAY 73 672 AMSC N/A PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0663

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

User activities: Army - MI, Navy - MC, CG, Air Force - 19,14

Review activities: Army - AR, Navy - SH, Air Force - 11,17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5950

## ELECTRICAL RATING

Primary (1-6): 95 V amp, 115 V rms, 400 Hz
(Taps are available for increasing secondary full load volts to 38, 40, 42, 44 V)
Secondary (7-8): 36 V rms, 2.43 amp rms

Duty cycle - - - - - - - -Continuous
Life expectancy- - - - - -10,000 hours minimum
Working voltage- - - - - -635 V maximum
Altitude - - - - - - - - -50,000 feet maximum
Operating temperature- - -105°C maximum

NOTES: When numbers in parentheses, e.g. (1-4) are used, they indicate the winding and the extreme terminals of the winding.

## PHYSICAL CHARACTERISTICS

Case size - - - - - - - - - - - - - HA
Weight- - - - - - - - - - - - - - 4.0 lb maximum
Terminals - - - - - - - - - - - - Turret, standoff type
Terminal height - - - - - - - - - 0.875 (22.22 mm) maximum
Shock - - - - - - - - - - - - - - Method 1, test condition C (50 G)

| TEST | ELECTRICAL PROPERTIES | | | LIMITS |
|---|---|---|---|---|
| Dielectric withstanding voltage: | Windings | (1-6) | (7-8) | |
| At sea level | V rms | 1,780 | 1,780 | --- |
| At reduced barometric pressure | V rms | 790 | 790 | |
| No load | With 115 V, 400 Hz across (1-2): (F)<br>Current in (1-2): 0.065 amp<br>Power in (1-2): 6.5 watts<br>Voltage across (7-8): 47 V rms | | | Maximum<br>Maximum<br>±2% |
| Rated load | With 115 V, 400 Hz across (1-6):<br>Voltage across (7-8): 36 V rms, 2.43 amp rms | | | ±2% |
| Electrostatic shielding | Voltage ratio: 5 to 1 at 20 kHZ | | | Minimum |
| | | | | |
| DC resistance | (1-6): 1.0 ohm<br>(7-8): 0.20 ohm | | | Maximum |
| Temperature rise | 40°C with 115 V rms, 400 Hz across (1-6) at an ambient temperature of 65°C | | | Maximum |

Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B test of MIL-T-27 shall be applicable.

APPROVED 9 JULY 1956 REVISED (F) FOR CHANGES SEE PAGE 2

User activities: Army - MI, Navy - MC, CG, Air Force - 14,19

Review activities: Army - AR, Navy - SH, Air Force - 11,17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A EC<br>Other Cust ER<br>AF - 85 | International interest | TITLE<br>TRANSFORMER, POWER, STEP-DOWN, TYPE TF4RX02HA203 | MILITARY STANDARD<br>MS16450 |
|---|---|---|---|
| Procurement Specification<br>MIL-T-27 | | SUPERSEDES: | PAGE 2 OF 2 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5950-0663

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:56Z
Check the source to verify that this is the current version before use.