
INCH-POUND
MS25452H
w/Amendment 1
23 May 2017
SUPERSEDING
MS25452H
6 December 2010

DETAIL SPECIFICATION SHEET

GUARD, SWITCH, 2 POSITION, LOCK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-7703.

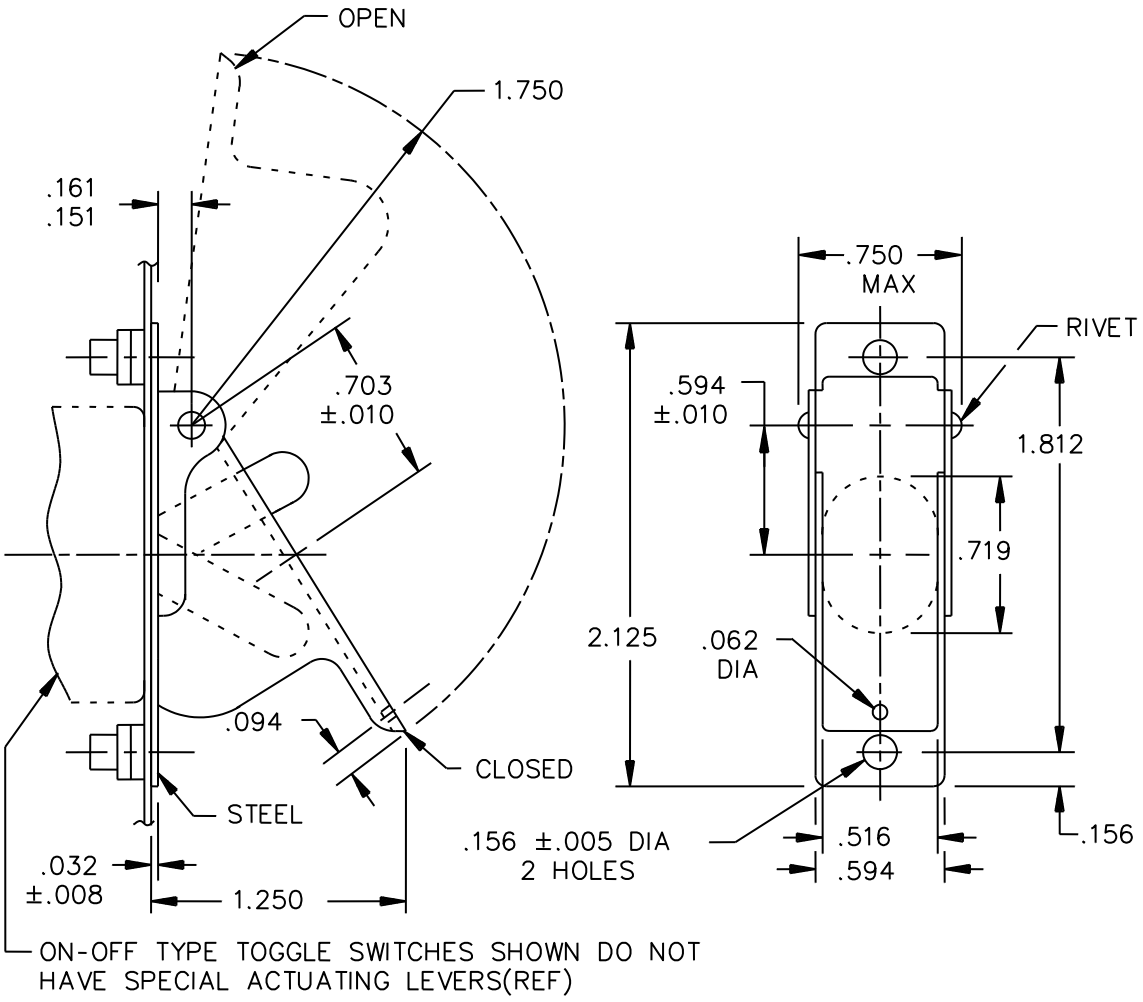

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

DASH NO.	TYPE	PANEL THICKNESS (REF)	OPERATING FORCE
-1	3-HOLE MOUNTING	.050 TO .081	.3 TO 1.5 LBS

FIGURE 1 Dimensions and configuration

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.062	1.57	.161	4.09	.750	22.22
006	0.20	.081	2.06	.516	13.11	1.250	31.75
.010	0.25	.094	2.39	.594	15.09	1.750	44.45
.016	0.41	.151	3.83	.703	17.86	1.812	46.02
.032	0.81	.156	3.96	.719	18.29	2.125	53.98
.050	1.27						

NOTES:
1. Unless otherwise specifies, tolerances are ± .016 on decimals.
2. Material: Steel, commercial, shall be smooth and free from burrs.
3. Finish: Zinc plate, ASTM-B633 , type III, or cadmium plate, SAE-AMS-QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number SAE-AMS-STD-595 /37038 or semi gloss, color number SAE-AMS-STD-595 /27038 or equivalent. Cover color shall be determined by the acquiring activity.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

FIGURE 1.Dimensions and configuration Continued

REQUIREMENTS

Guard shall remain in only the closed position.

Opening the guard shall not change the position of the toggle lever.

Closing the guard with the lever in the up position locks lever in the up position.

The guard in the closed position shall exert no pressure o the toggle.

Part or Identifying Number (PIN) MS25452-1 replaces and is completely interchangeable with PIN N3229-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.

Referenced documents

MIL-DTL-7703	MIL-C-8514
ASTM-B633	SAE-AMS-QQ-P-416
SAE-AMS-STD-595/27038	SAE-AMS-STD-595/37038
DOD-P-15328	

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2017-038)

Review activities:
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:10Z
Check the source to verify that this is the current version before use.