USER SYMBOLS:
NAVY-AS

REVIEWER SYMBOLS:
NAVY-AS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

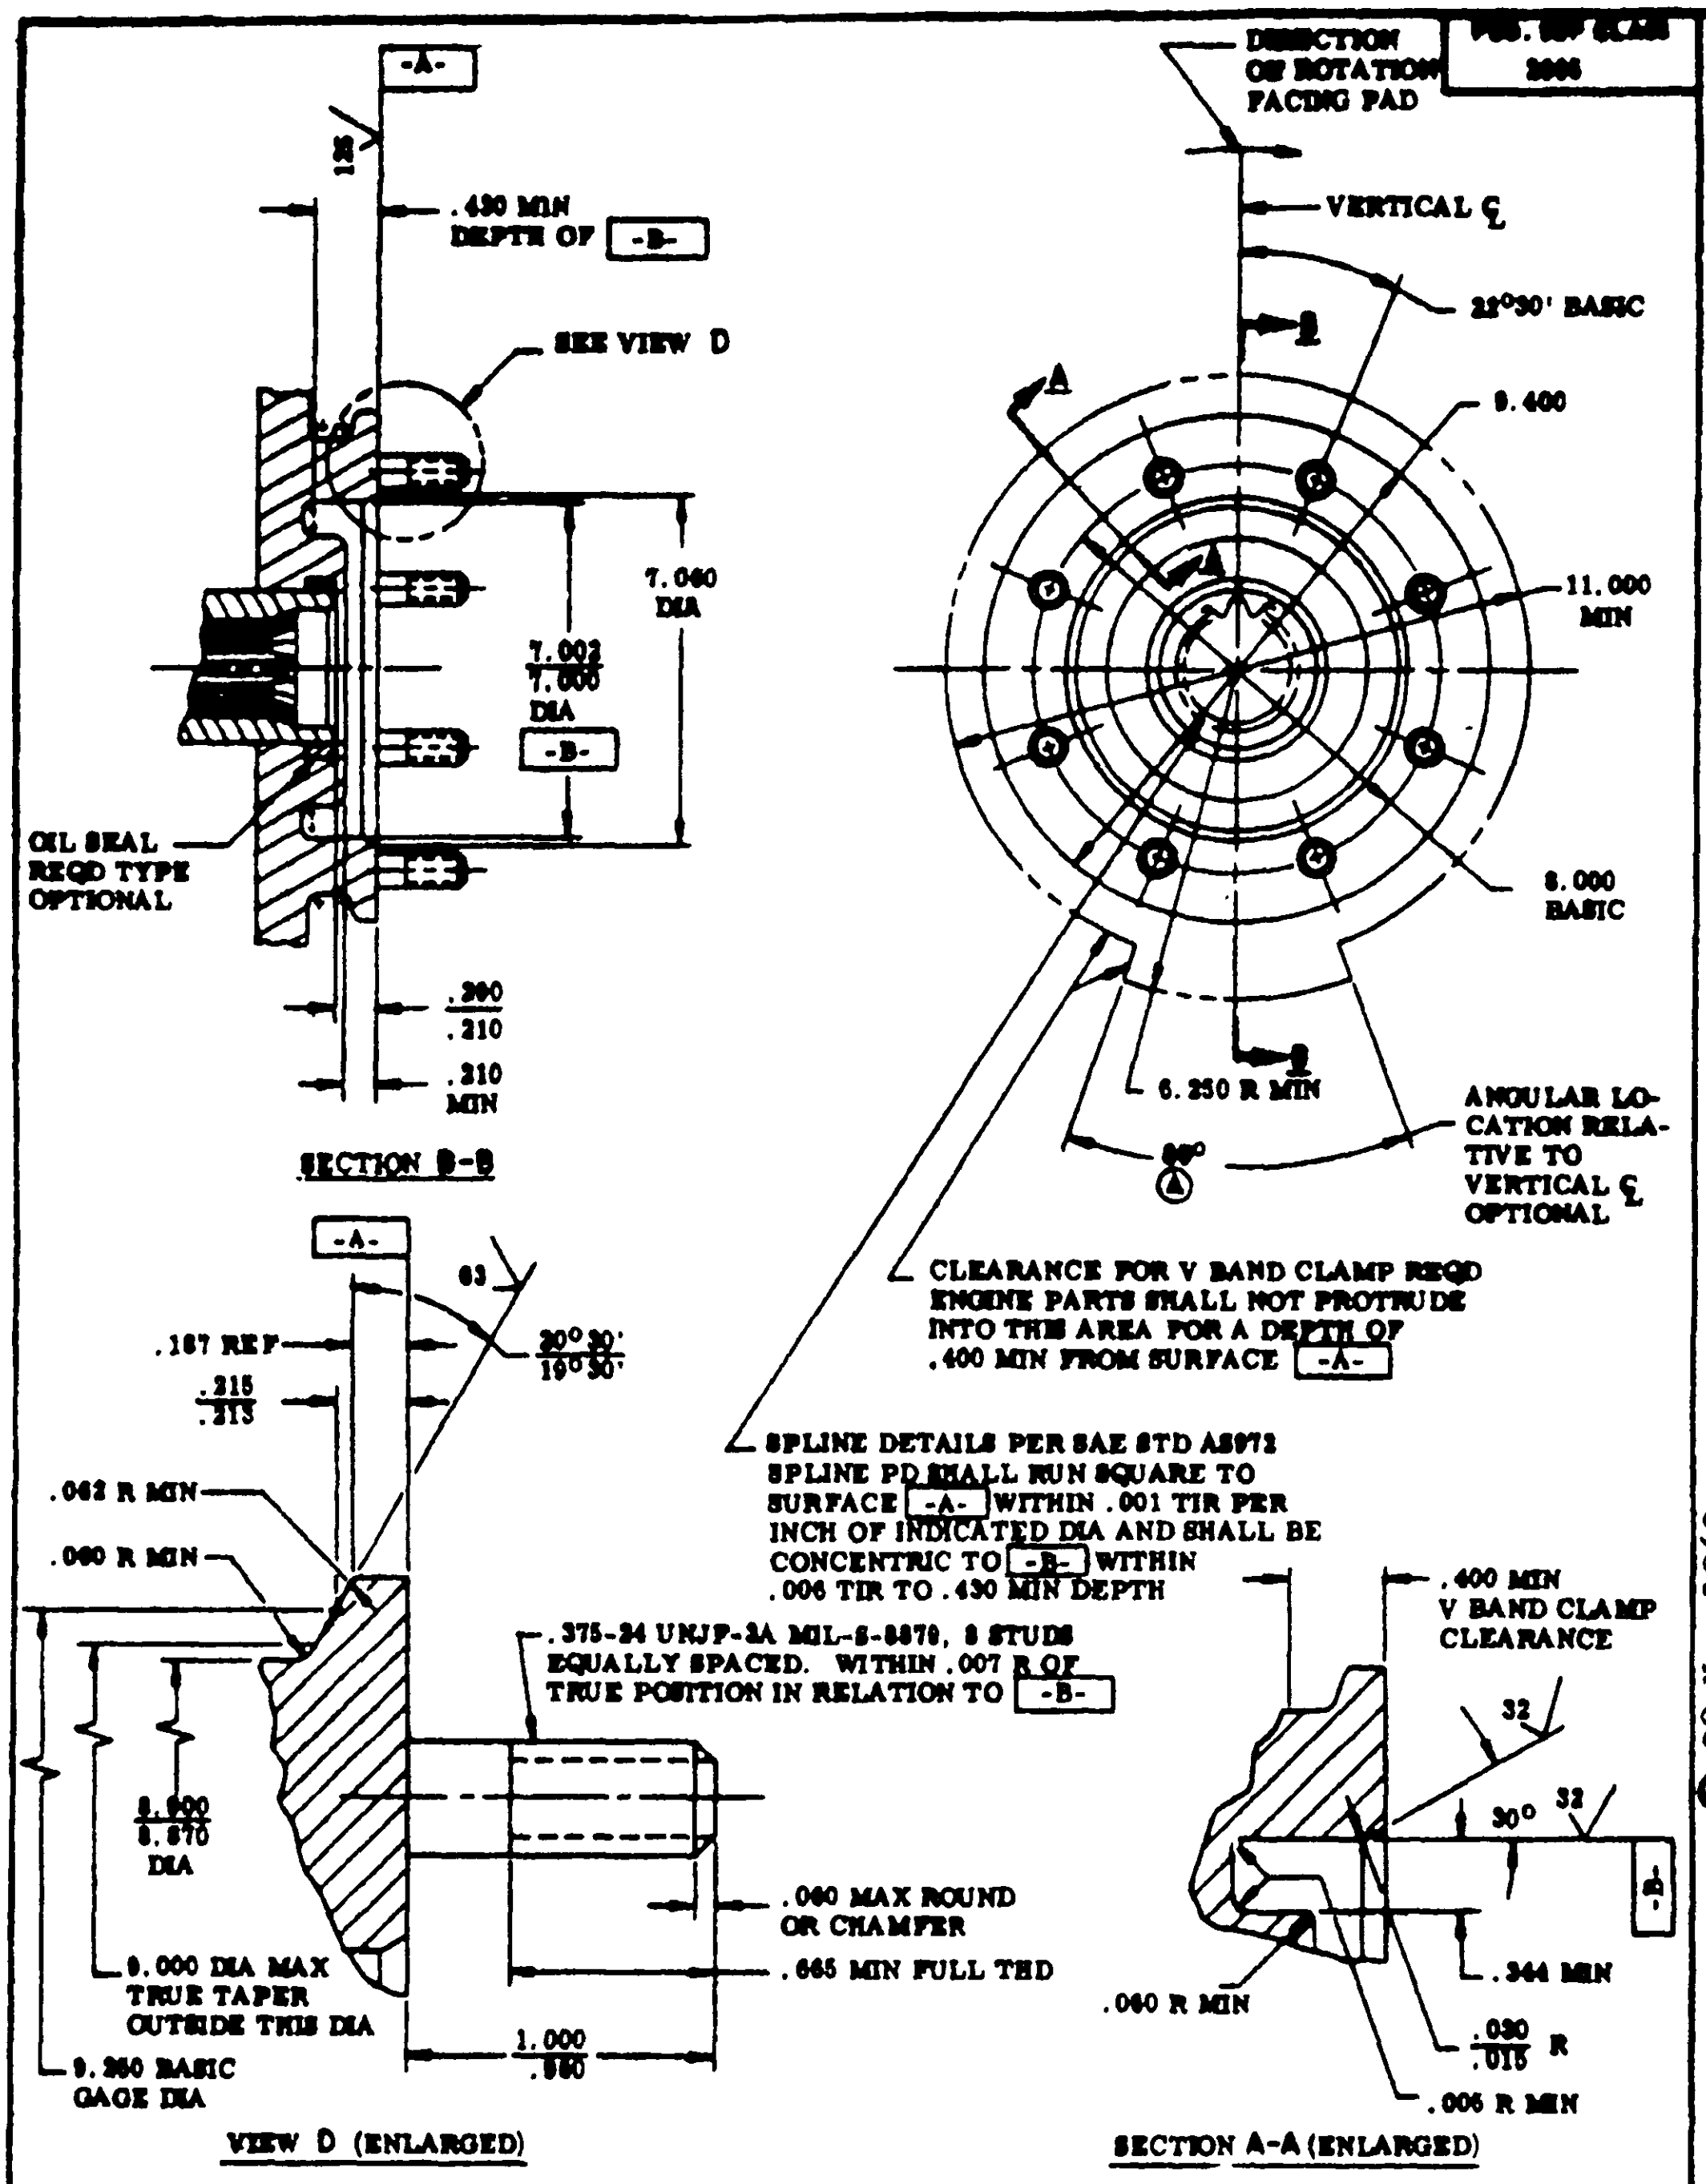

FED. SUP CLASS
2995
-A-
125
.430 MIN DEPTH OF -B-
SEE VIEW D
7.060 DIA
7.002
7.000
DIA
-B-
OIL SEAL REQD TYPE OPTIONAL
.390
.210
.310 MIN
SECTION B-B
DIRECTION OF ROTATION FACING PAD
VERTICAL ℄
22°30' BASIC
B
A
9.400
11.000 MIN
8.000 BASIC
6.250 R MIN
B
90°
A
ANGULAR LOCATION RELATIVE TO VERTICAL ℄ OPTIONAL
CLEARANCE FOR V BAND CLAMP REQD ENGINE PARTS SHALL NOT PROTRUDE INTO THIS AREA FOR A DEPTH OF .400 MIN FROM SURFACE -A-
SPLINE DETAILS PER SAE STD AS972 SPLINE PD SHALL RUN SQUARE TO SURFACE -A- WITHIN .001 TIR PER INCH OF INDICATED DIA AND SHALL BE CONCENTRIC TO -B- WITHIN .006 TIR TO .430 MIN DEPTH
-A-
63
.187 REF
.215
.213
20°30'
19°30'
.062 R MIN
.060 R MIN
.375-24 UNJF-3A MIL-S-8879, 8 STUDS EQUALLY SPACED. WITHIN .007 R OF TRUE POSITION IN RELATION TO -B-
8.900
8.870
DIA
.060 MAX ROUND OR CHAMFER
.665 MIN FULL THD
9.000 DIA MAX TRUE TAPER OUTSIDE THIS DIA
9.260 BASIC GAGE DIA
1.000
.980
VIEW D (ENLARGED)
.400 MIN V BAND CLAMP CLEARANCE
32
30°
32
-B-
.344 MIN
.040 R MIN
.030
.015
R
.005 R MIN
SECTION A-A (ENLARGED)

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 12 JUNE 1968 REVISED Ⓐ 20, Nov 1969

P.A. NAVY - AS Other Cust	TITLE DRIVE PAD-ACCESSORY, 8.000 BC ROUND, DESIGN STANDARD FOR	MILITARY STANDARD MS3328(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 58 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY-AS

USER SYMBOLS:
NAVY-AS

FED. SUP CLASS
[illegible]

DASH NO.	RATED TORQUE, LB. IN.	RATED POWER, HP	RATED SPEED, RPM	SPLINE SIZE, PD	ACCESSORY	
					WEIGHT-LB, MAX	STATIC - OVERHUNG MOMENT, LB-IN, MAX
-1	--	30	8,000±5%	0.800	80	750
-2	--	30	12,000 ↓	0.800	100	1200
-3	--	40	8,000	1.200	115	1250
-4	--	65	8,000	1.200	150	2000
-5	--	30	8,000	0.800	66	350
-6	--	30	12,000	0.800	50	250
-7	--	48	8,000	0.800	75	500
-8	4000	--	4,000 ↓	1.625	125	600
-9	4000	--	6,000±5%	1.625	125	600
-10S	7200	--	3,300±10%	1.200	80	800
-11S	14,400	--	3,300±10%	1.625	120	1300

NOTES:-

1. SPEED. THE RATED SPEED OF ALL THE DRIVES EXCEPT THE STARTER DRIVES (TYPE "S"), SHALL BE PROVIDED WHEN THE POWER SOURCE IS OPERATING AT THE HIGHEST STABILIZED SPEED AT ANY OPERATING CONDITION. THE RATED SPEED OF TYPE "S" DRIVES SHALL BE THE SPEED ABOVE WHICH THE ENGINE WILL ACCELERATE TO IDLE SPEED AT STANDARD, STATIC, SEA LEVEL CONDITIONS WITHOUT ASSISTANCE FROM THE STARTER.
2. STRENGTH: ALL THE DRIVES, EXCEPT THE STARTER DRIVES (TYPE "S"), SHALL BE CAPABLE OF DELIVERING RATED POWER OR TORQUE CONTINUOUSLY FROM IDLE TO MAXIMUM POWER SOURCE SPEED. THEY SHALL ALSO WITHSTAND AN INSTANTANEOUS TORQUE EQUIVALENT TO FIVE TIMES THE RATED POWER OR TORQUE AT ANY ENGINE SPEED WITHOUT PERMANENT DEFORMATION OR FAILURE. THE TYPE "S" DRIVES SHALL BE CAPABLE OF WITHSTANDING THE RATED TORQUE CONTINUOUSLY FROM REST TO RATED SPEED. THEY SHALL ALSO WITHSTAND AN INSTANTANEOUS TORQUE OF TWO TIMES THE RATED TORQUE WITHOUT PERMANENT DEFORMATION OR FAILURE.
3. LUBRICATION: POSITIVE ENGINE OIL LUBRICATIONS SHALL BE PROVIDED TO THE SPLINE.
4. OIL LEAKAGE: OIL LEAKAGE OUT OF THE DRIVE SHALL NOT EXCEED 3 CC PER HOUR. PROVISIONS FOR DRAINING OIL FROM THE DRIVE CAVITY SHALL BE SUPPLIED.
5. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ±.010, ANGLES ± 2°.
6. FINISH: BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
7. SURFACE TEXTURE: IN ACCORDANCE WITH USAS B46.1-1962.
8. SAE AS STANDARDS ARE PUBLICATIONS OF THE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., TWO PENNSYLVANIA PLAZA, NEW YORK, N.Y. 10001.

APPROVED 12 JUNE 1968 REVISED Ⓐ 20 Nov 1969

P.A. NAVY - AS Other Cust	TITLE DRIVE PAD-ACCESSORY, 8,000 BC ROUND, DESIGN STANDARD FOR	MILITARY STANDARD MS3328(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2

DD FORM 672-1 (Limited coordination)