
FED. SUP CLASS
5305

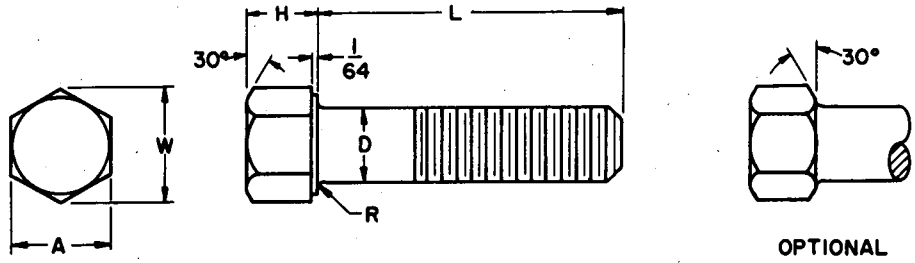

NOMINAL SIZE			1/4	5/16	3/8	7/16	1/2	9/16	5/8
THREADS PER INCH			28UNF-2A	24UNF-2A	24UNF-2A	20UNF-2A	20UNF-2A	18UNF-2A	18UNF-2A
BODY DIAMETER	D	Max	.2500	.3125	.3750	.4375	.5000	.5625	.6250
		Min	.2450	.3065	.3690	.4305	.4930	.5545	.6170
WIDTH ACROSS FLATS	A	Max	.4375	.5000	.5625	.6250	.7500	.8125	.9375
		Min	.4280	.4890	.5510	.6120	.7360	.7980	.9220
WIDTH ACROSS CORNERS	W	Max	.5050	.5770	.6500	.7220	.8660	.9380	1.0830
		Min	.4880	.5570	.6280	.6980	.8400	.9100	1.0510
HEAD HEIGHT	H	Max	.1630	.2110	.2430	.2910	.3230	.3710	.4030
		Min	.1500	.1950	.2260	.2720	.3020	.3480	.3780
RADIUS	R	Max	.023	.023	.023	.023	.023	.041	.041
		Min	.009	.009	.009	.009	.009	.021	.021
LENGTH	L	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
3/8			1	27	53				
7/16			2	28	54	79			
1/2			3	29	55	80	104		
9/16		+0	4	30	56	81	105	130	
5/8		-1/32	5	31	57	82	106	131	155
3/4			6	32	58	83	107	132	156
7/8			7	33	59	84	108	133	157
1			8	34	60	85	109	134	158
1-1/8			9	35	61	86	110	135	159
1-1/4			10	36	62	87	111	136	160
1-3/8		+0	11	37	63	88	112	137	161
1-1/2		-1/16	12	38	64	89	113	138	162
1-3/4			13	39	65	90	114	139	163
2			14	40	66	91	115	140	164
2-1/4			15	41	67	92	116	141	165
2-1/2			16	42	68	93	117	142	166
2-3/4			17	43	69	94	118	143	167
3			18	44	70	95	119	144	168
3-1/4			19	45	71	96	120	145	169
3-1/2		+0	20	46	72	97	121	146	170
3-3/4		-3/32	21	47	73	98	122	147	171
4			22	48	74	99	123	148	172
4-1/4			23	49	75	100	124	149	173
4-1/2			24	50	76	101	125	150	174
4-3/4			25	51	77	102	126	151	175
5			26	52	78	103	127	152	176
5-1/2							128	153	177
6							129	154	178

(A) CANCELLED
SEE SHEET 2

MATERIAL: Aluminum Alloy, Specification QQ-A-268, heat treated in accordance with MIL-A-6088.

FINISH: Anodized.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

MINIMUM THREAD LENGTH: Shall be twice the diameter plus 1/4" for lengths up to and including 6". The tolerance shall be plus 3/16" or 2-1/2 threads, whichever is greater. On products that are too short for minimum thread lengths, the distance from the bearing surface of the head to the first complete thread shall not exceed the length of 2-1/2 threads, for sizes up to and including 1" and 3-1/2 threads for sizes larger than 1".

NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS35314-1.
(4) All dimensions in inches.

(A) For changes see sheets 1 and 2.

APPROVED 4 MARCH 1954 REVISED (A) 9 MAY 63

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust SHIPS	SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALUMINUM ALLOY, ANODIZED FINISH, UNF-2A	MS35314
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE			3/4	7/8	1	1-1/8	1-1/4		
THREADS PER INCH			16UNF-2A	14UNF-2A	12UNF-2A	12UNF-2A	12UNF-2A		
BODY DIAMETER	D	Max	.7500	.8750	1.0000	1.1250	1.2500		
		Min	.7410	.8660	0.9900	1.1140	1.2390		
WIDTH ACROSS FLATS	A	Max	1.1250	1.3125	1.5000	1.6875	1.8750		
		Min	1.1000	1.2850	1.4690	1.6310	1.8120		
WIDTH ACROSS CORNERS	W	Max	1.2990	1.5160	1.7320	1.9490	2.1650		
		Min	1.2540	1.4650	1.6750	1.8590	2.0660		
HEAD HEIGHT	H	Max	.4830	.5630	.6270	.7180	.8130		
		Min	.4550	.5310	.5910	.6580	.7490		
RADIUS	R	Max	.041	.062	.093	.093	.093		
		Min	.021	.041	.062	.062	.062		

LENGTH L	TOLERANCE Size 3/4 and under	TOLERANCE Size 7/8 and over	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
3/4	+0 -1/32	+0 -1/16	179			Ⓐ CANCELLED SEE NOTE	
7/8			180	202			
1			181	203	224		
1-1/8	+0 -1/16	+0 -1/8	182	204	225	245	
1-1/4			183	205	226	246	265
1-3/8			184	206	227	247	266
1-1/2			185	207	228	248	267
1-3/4			186	208	229	249	268
2			187	209	230	250	269
2-1/4	+0 -3/32	+0 -3/16	188	210	231	251	270
2-1/2			189	211	232	252	271
2-3/4			190	212	233	253	272
3			191	213	234	254	273
3-1/4			192	214	235	255	274
3-1/2			193	215	236	256	275
3-3/4			194	216	237	257	276
4			195	217	238	258	277
4-1/4			196	218	239	259	278
4-1/2			197	219	240	260	279
4-3/4			198	220	241	261	280
5			199	221	242	262	281
5-1/2			200	222	243	263	282
6			201	223	244	264	283

NOTE: For illustration, material, finish and other pertinent data, see sheet 1.

Ⓐ CANCELLED AFTER 9 May 1963. USE MS35219. INTERCHANGEABILITY RELATIONSHIP - MS35219 can replace the cancelled screws of the same size. The cancelled MS35314 cannot always replace MS35219 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED 4 MARCH 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	SHIPS

TITLE
SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALUMINUM ALLOY, ANODIZED FINISH, UNF-2A

MILITARY STANDARD
MS35314

PROCUREMENT SPECIFICATION
FF-S-85

SUPERSEDES:

SHEET 2 OF

DD FORM 672-1 (Cancelled)

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T17:21Z
Check the source to verify that this is the current version before use.