INCH-POUND

MS35430C
15 December 2003
SUPERSEDING
MS35430B
10 February 1961

DETAIL SPECIFICATION SHEET

TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE

Inactive for new design after 18 October 2000.

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15659.

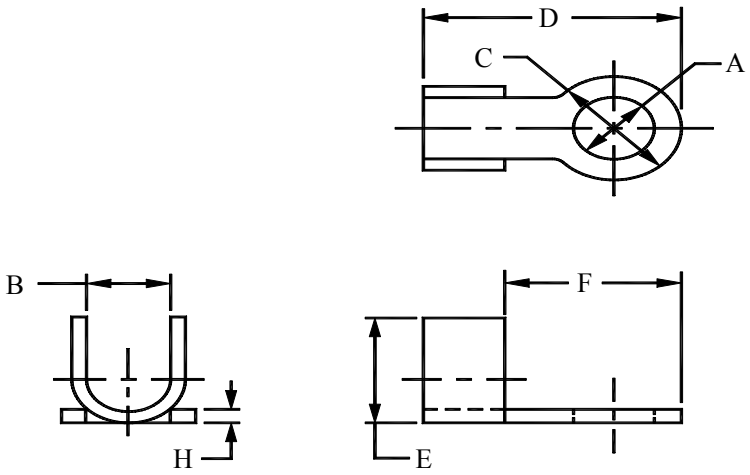


FIGURE 1. Terminal dimensions for -1 through -13 and -27.

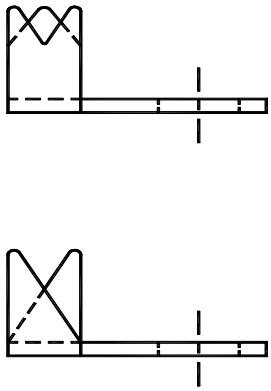


FIGURE 2. Optional wire grip designs (see note 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions for -1 through -13 and -27.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D ±3/64	E ±3/64	F ±1/32	H ±0.003
			Min.	Max.						
1	14-20	2	0.089	0.096	5/64	9/64	29/64	3/32	17/64	0.016
2						9/32	9/16	5/32	25/64	0.020
3		4	0.115	0.127						
4		6	0.141	0.153						0.032
5		8	0.167	0.179						
6		10	0.193	0.205						
7	10-12	4	0.115	0.127	5/32	5/16		3/16		0.020
8		6	0.141	0.153						0.032
9		8	0.167	0.179						
10		10	0.193	0.205						
11	6-8	6	0.141	0.153	3/16			5/16		0.040
12		8	0.167	0.179						
13		10	0.193	0.205						
27	14-20	6	0.141	0.153	1/16	1/4	1/2	5/32	5/16	0.032

[1]American Wire Gauge.

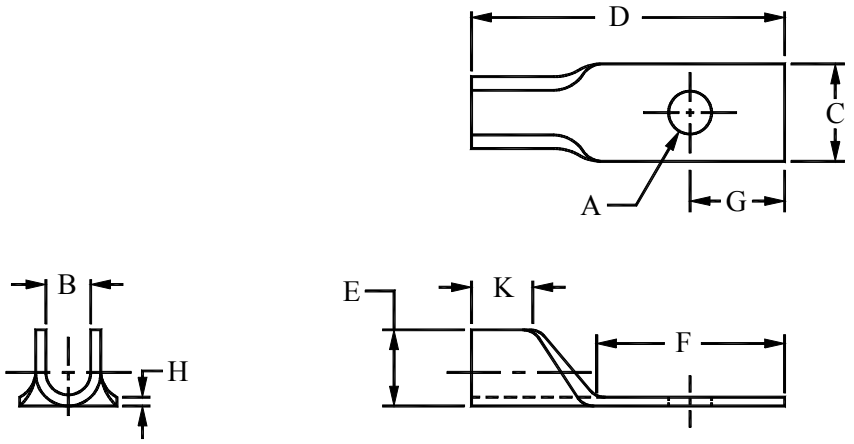


FIGURE 3. Terminal dimensions for -14 and -16 through -18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers and dimensions for -14 and -16 through -18.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D	E	F	G	H ±0.003	K
			Min.	Max.								
14	-	6	0.141	0.153		5/16	1 3/32	-	19/32	11/32	-	1/4
16	10	10	0.193	0.205	1/8	3/8	3/4	3/16	7/16	1/4	0.032	3/16
17							1 3/16		5/8	5/16		1/4
18							1 1/4		3/4	3/8		

[1]American Wire Gauge.

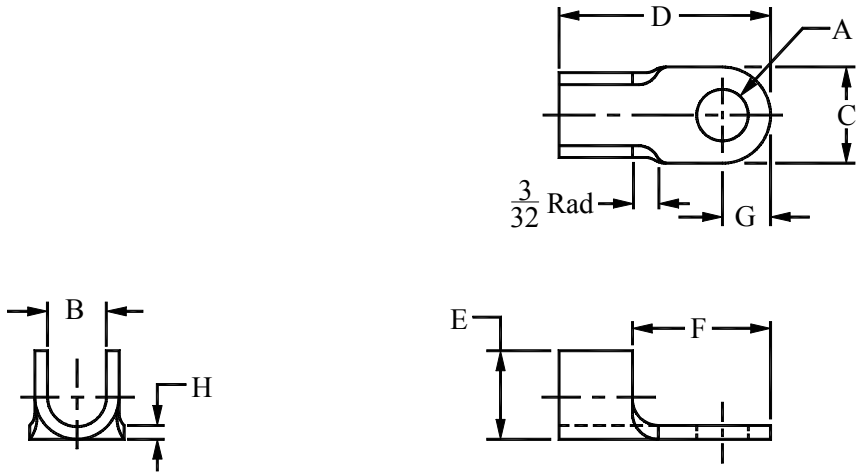


FIGURE 4. Terminal dimensions for -15 and -19 through -23.

TABLE III. Dash numbers and dimensions for -15 and -19 through -23.

Dash no.	Wire size AWG[1] nominal	Stud size	A		B	C	D	E	F	G	H ±0.003
			Min.	Max.							
15	10	10	0.193	0.205	1/8	5/16	19/32	3/16	-	5/32	0.032
19	1-2	1/4	0.258	0.285	13/32	9/16	1 19/32	25/32	31/32	11/32	0.091
20		5/16	0.320	0.347		11/16					
21		3/8	0.383	0.410							
22	0-00	5/16	0.320	0.347	1/2	3/4	1 11/16	53/64	1	3/8	
23		3/8	0.383	0.410							

[1]American Wire Gauge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

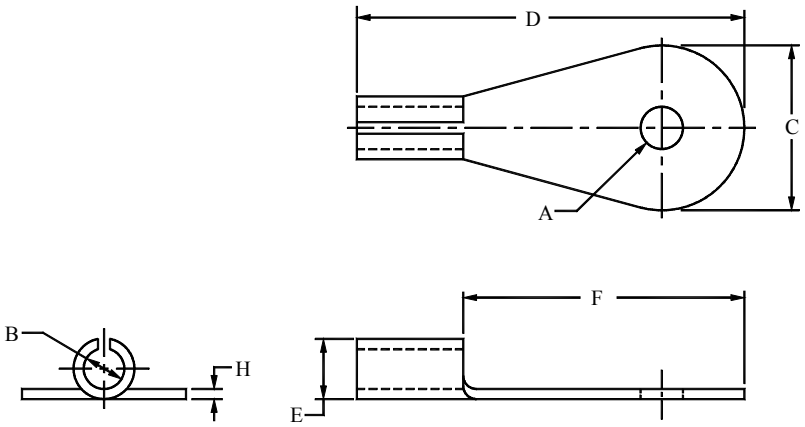


FIGURE 5. Terminal dimensions for -24 through -26.

TABLE IV. Dash numbers and dimensions for -24 through -26.

Dash no.	wire size AWG[1] nominal	Stud size	A		B	C	D	E	F	H ±0.003
			Min.	Max.						
24	10	4	0.115	0.127	1/8	9/32	1 1/8	3/16	53/64	0.032
25		10	0.193	0.205		3/8	13/16		15/32	
26							1 1/8		13/16	

[1]American Wire Gauge.

REQUIREMENTS:

1. Material: Electrolytic copper strip or sheet alloy C11000, temper O60 in accordance with ASTM B 152/B 152M (DoD adopted).


2. Finish: Tinned; electrodeposited over entire surface in accordance with ASTM B 545 (DoD adopted). Minimum thickness 0.0005 inches all over.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±1/64.
3. Remove all burrs.
4. Figure 2 optional wire grip design is for -1 through -13 and -27 only.
5. Referenced documents of issue in effect on date of invitation for bids shall apply.
6. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take preference.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

7. The part or identifying number (PIN) consists of the letters MS, the specification sheet number, and a dash number taken from table I, II, III, or IV.

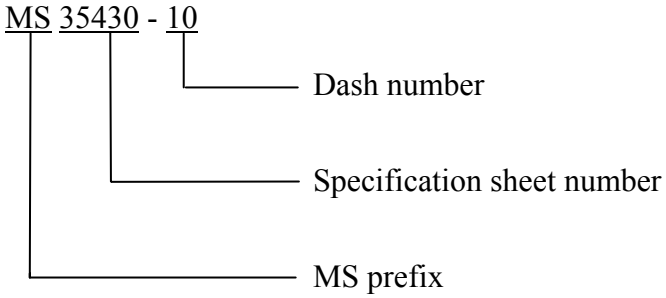

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - MI
Navy - SH
Air Force - 99

Preparing Activity:
DLA - GS2

(Project 5940-1445)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.