
FED. SUP CLASS
2320

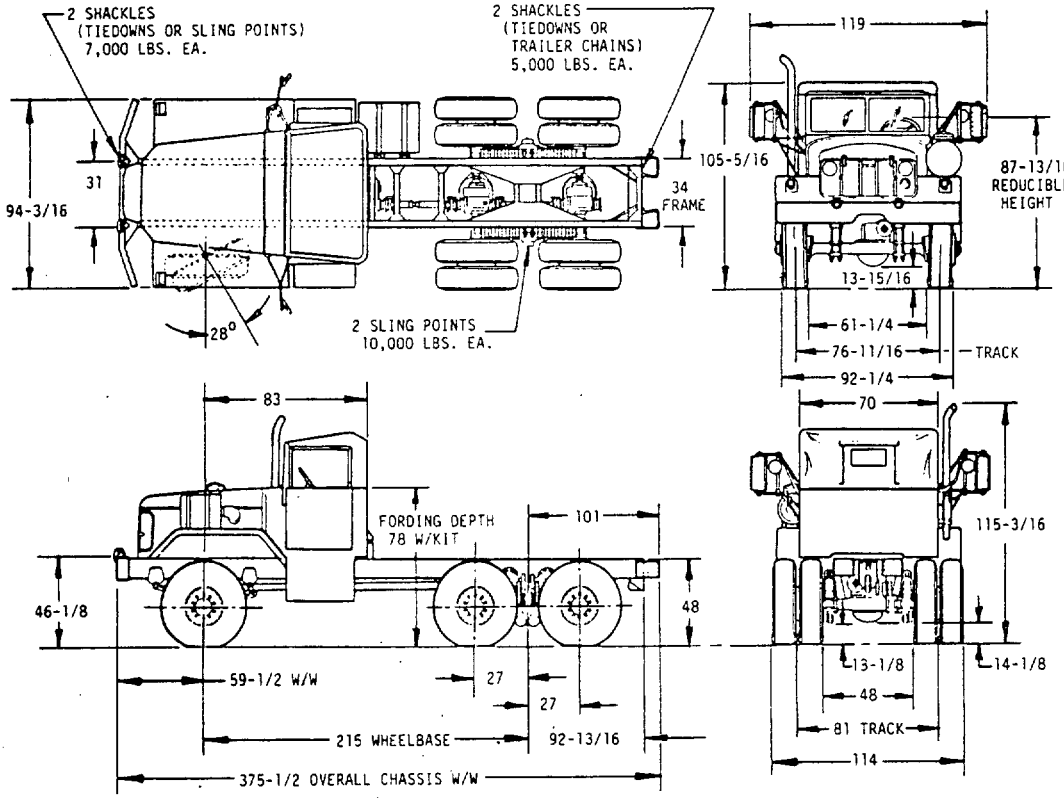

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52180-1	8736876	WITH WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: CHASSIS, TRUCK: 5 TON, 6x6, M812A1.	MILITARY STANDARD MS52180(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND CREW — W/W
- FRONT 10,355 LBS
- REAR 10,455 LBS
- TOTAL 20,810 LBS

PAYLOAD: (MAX INCLUDING BODY) 16,000 LBS

TOWED LOAD ALLOWANCE: NA

SHIPPING DIMENSIONS:
- CUBIC FEET 2,175
- SQUARE FEET 297

ANGLE OF APPROACH: (LOADED) 34°

ANGLE OF DEPARTURE: (LOADED) 27°

ANGLE OF BREAKOVER: (LOADED) 29°

MINIMUM TURNING RADIUS: (WALL TO WALL) 584-7/16

FORDING DEPTH: WITH KIT 78 LESS KIT 30

ENGINE:
- 6 CYL IN-LINE 11664325-1
- COMPRESSION IGNITION FUEL INJECTION
- DISPLACEMENT 855 CU IN
- BORE AND STROKE 5.5 X 6
- COMPRESSION RATIO 15.8:1 FUEL DIESEL
- OCTANE/CETANE 40
- HORSEPOWER; GROSS 240 @ 2100 RPM
- NET 210 @ 2100 RPM
- TORQUE GROSS; 658 LB FT @ 1500 RPM
- NET 600 LB FT @ 1500 RPM
- CRANK CASE CAPACITY; W/O FILTER 24 QTS
- W/FILTER 28 QTS
- GOVERNOR; TYPE AUTOMATIC
- COOLING SYSTEM CAPACITY; 37-1/2 QTS
- PUMP TYPE DRIVE 2 V BELTS
- GOVERNED SPEED; 2100 RPM AT FULL LOAD

FUEL SYSTEM: FUEL TANK CAPACITY - 78 GALS
- FUEL PUMP, IN TANK; FUEL INJECTION.

CLUTCH: TYPE SINGLE DRY DISX DIA 15
- EFFECTIVE AREA 70.2 SQ IN
- PRESSURE PLATE 8735507
- DRIVEN MEMBER 11664387

TRANSMISSION: MANUAL 8333627-1
- NO OF SPEEDS - 5 FWD, 1 REV; RATIOS; 1ST - 6.07; 2ND - 3.40; 3RD - 1.79; 4TH -1.00; 5TH - .78; REV. - 6.09
- PTO OPENINGS 2 SAE 6 BOLT, EACH SIDE OF TRANSMISSION. LUBRICANT CAPACITY; W/PTO 11 QTS; WO PTO 9 QTS.

TRANSFER CASE: W/PTO 10938322
- NO. OF SPEEDS 2 FRONT; HIGH - 1.07:1 LOW - 2.16:1, REAR; HIGH - 1.00:1, LOW - 2.02:1 CONTROL OF FRONT AXLE DRIVE, AUTOMATIC OVERRUNNING, LUBRICANT CAPACITY 7 QTS ONE PTO OPENING.

PINTLE: NA

BRAKES: PARKING TYPE INTERNAL/EXTERNAL
- DRUM SIZE 14 DIA X 3 WIDE
- EFFECTIVE AREA 68 SQ IN

ACCESSORY/SUPPLEMENTAL KITS: 12300925

AXLES: FRONT 11664292
- REAR; 8758349
- QTY 2, TYPE SINGLE SPEED DOUBLE REDUCTION RATIO 6.443:1, LUBRICANT CAPACITY 12 QTS EACH

FRAME: 11664504
- TYPE RAIL CHANNEL SIDE RAIL DIMENSIONS 9 X 3 X 5/16 SECTION MODULUS 10.71 CU IN
- NO. OF CROSSMEMBERS 8; REINFORCEMENT 5/16 L TYPE COMBINED SECTION MODULUS 24.4 CU IN

FRONT SPRINGS: 7411110
- 3 WIDE X 50 LONG NO OF LEAVES 12; RATE 2,271 LB/IN; TYPE SEMI-ELLIPTICAL; SHOCK ABSORBERS DIRECT ACTING, QTY 2.

REAR SPRINGS: 7411114
- SIZE 4 WIDEX 59-1/4 LONG NO. OF LEAVES 15, RATE 5,911 LB/IN; TYPE BEAM OVER SEMI-ELLIPTICAL LEAF, QTY 2.

TIRES W/FLAP AND TUBE: MIL-T-12459
- SIZE 14.00 X 20 LOAD RATING F
- TREAD DESIGN NDCC NO. OF SPARES 1
- TUBE ZZ-I-550

WHEELS: TYPE STEEL DISC, 7353762
- SIZE 20 DIA X 10 WIDE RING 7353671
- FRONT SINGLE, REAR DUAL, OFFSET 8-7/8

BRAKES: SERVICE, TYPE AIR ASSISTED
- HYDRAULIC, INTERNAL EXPANDING DRUM
- SIZE 16-1/2 X 5-1/2, EFFECTIVE AREA
- FRONT 339 SQ IN REAR 678 SQ IN

ELECTRICAL SYSTEM: WATERPROOFED, RADIO SUPPRESSED PER MIL-STD-461.
- POTENTIAL 24 V STARTING MTR MS53011-1
- ALTERNATOR 10929868
- RATING 60 AMP; DRIVE 2 V BELTS
- BATTERIES; QTY 4, TYPE 12V 6TN MS35000-3
- TRAILER COUPLING SOCKET 7363002
- TURN SIGNAL; SOLID STATE FLASHER 11613631
- CONTROL 11613632
- LIGHTING; HEADLAMPS 8741462
- B.O. DRIBING LAMP 8747988
- COMPOSITE LAMPS; FRONT 11614156
- REAR 11614157

PERFORMANCE: APPROX 4.4 MILES PER GALLON
- 350 MILES CRUISING RANGE GRADEABILITY; WITH GVW OF 37,210 LBS 4TH GEAR 3.4% 1ST 60% MAXIMUM SPEED 60 MPH AT ENGINE GOVERNED SPEED 2100 RPM
- W/DIESEL FUEL, TYPE VV-F-800

CAB: TYPE STD CANVAS; ARCTIC HARDTOP KIT; CAPACITY 2.

WINCH: 7412382
- CAPACITY 9,500 LBS
- WIRE ROPE CABLE 0.6 IN DIA CABLE LENGTH 200 FT

STEERING: TYPE HYD W/POWER ASSIST; RATIO 23.4:1 11664535

TIEDOWNS: 2 FRONT LIFTING 12301040
- SHACKLES; 2 REAR SHACKLES 7409523

ON-VEHICLE EQUIPMENT:
- BASIC ISSUE ITEMS 12300877
- ADDITIONAL AUTHORIZED LIST ITEMS 12300998

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52180-1	8736876	WITH WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE CHASSIS, TRUCK: 5 TON, 6x6, M812A1.	MILITARY STANDARD MS52180(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.