
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-3030/U

This specification sheet is approved by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-49030(EL).

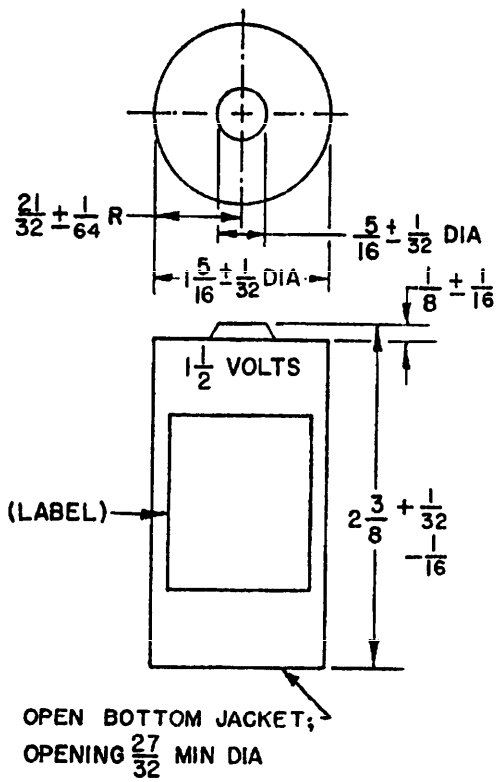

INCHES	MM
1/64	.40
1/32	.79
1/16	1.59
1/8	3.18
5/16	7.94
21/32	16.67
27/32	21.43
1 5/16	33.34
2 3/8	60.33

NOTES:

1. All dimensions shown on figure are in inches.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.5 volts

Number and type of cell: 1 "D" cell.

Terminals: Flat surface.

Weight (maximum): 5.5 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: I, LT, and HT.

Quality conformance inspection.

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: LT, HT, T, and D.

Methods of examination and tests:

Capacity tests: See requirements for capacity specified herein.

Test	Storage Period	Temperature	Minimum Svce. Req'd (Hrs)
I (initial 70°F)	48 Hrs Min.	70°F	40
LT (0°F)	16 Hrs Min.	0°F	8
HT (160°F)	7 days plus	160°F	
	48 Hrs Min	70°F	36
T	13 Wks plus	113°F	
	48 Hrs Min	70°F	34
D	52 Wks	70°F	35

Discharge: The battery shall be discharged through 6-2/3 ohms continuously to an end voltage of 0.9 volt.

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 5.983 ohms.

Electrolyte leakage: The battery shall be discharged through 5 ohms for 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.35

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - EL

Preparing Activity:
Army - EL

(Project 6135-A142-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.