
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, POLAR, NONHERMETICALLY SEALED, STYLE CX08

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-49137.

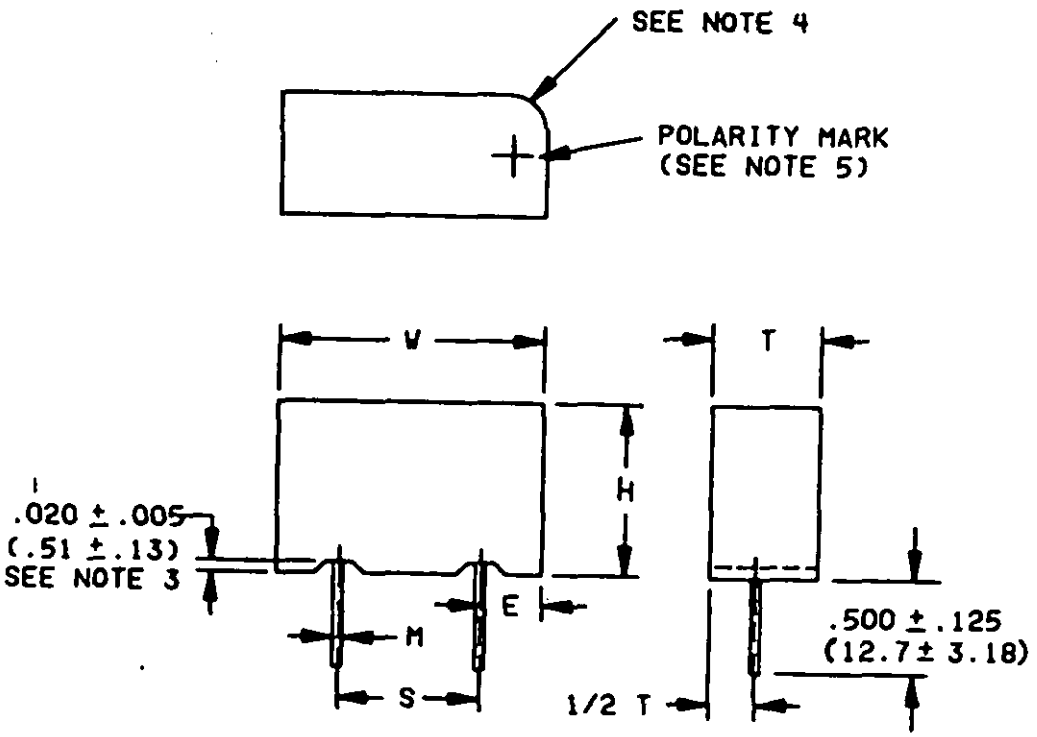

RADIAL
STYLE CX08



CIRCUIT DIAGRAM

FIGURE 1. Style CX08 capacitor.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

Dimensions

Case Size	H Case height	W Case weight	T Case thickness	E Case to wire	S Lead spacing	M Wire diameter
A	.340 ±.015 (8.64 ±0.38)	.225 ±.015 (5.71 ±0.38)	.100 ±.015 (2.54 ±0.38)	.050 ±.010 (1.27 ±0.25)	.125 ±.005 (3.18 ±0.127)	.020 ±.001 (0.51 ±0.03)
B	.225 ±.015 (5.71 ±0.38)	.285 ±.015 (7.24 ±0.38)	.170 ±.015 (4.32 ±0.38)	.042 ±.010 (1.07 ±0.25)	.200 ±.005 (5.08 ±0.127)	.025 ±.001 (0.64 ±0.03)
C	.325 ±.015 (8.26 ±0.38)	.335 ±.015 (8.47 ±0.38)	.170 ±.015 (4.32 ±0.38)	.062 ±.010 (1.57 ±0.25)	.200 ±.005 (5.08 ±0.127)	.025 ±.001 (0.64 ±0.3)
D	.375 ±.015 (9.53 ±0.38)	.600 ±.015 (15.25 ±0.38)	.195 ±.015 (4.95 ±0.38)	.200 ±.010 (5.08 ±0.25)	.200 ±.005 (5.08 ±.127)	.025 ±.001 (0.64 ±0.03)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Stand off configuration may vary from outline drawing.
4. Corner(s) on the positive end of the capacitor may be rounded or beveled.
5. Polarity mark may be a "+" or a contrasting color dot.

FIGURE 1. Style CX0R capacitor - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

TABLE I. Style CX08 characteristics.

Type designation 1/	DC rated voltage (85°C)	Nominal capacitance	Dissipation factor (max)	DC leakage 25°C (max)	Case size
	volts	µF	percent	µA	
CX08D186-	6	18	6	1.0	A
CX08D226-	6	22	6	1.0	A
CX08D276-	6	27	6	1.0	B
CX08D476-	6	47	6	2.0	C
CX08D566-	6	56	6	5.0	C
CX08D686-	6	68	6	5.0	C
CX08D187-	6	180	6	10.0	D
CX08D227-	6	220	8	10.0	
CX08F106-	10	10	6	1.0	A
CX08F126-	10	12	6	1.0	A
CX08F156-	10	15	6	1.0	A
CX08F186-	10	18	6	1.0	B
CX08F396-	10	39	6	5.0	C
CX08F107-	10	100	6	10.0	D
CX08F127-	10	120	6	10.0	D
CX08F157-	10	150	6	10.0	D
CX08H825-	15	8.2	6	1.0	A
CX08H106-	15	10	6	1.0	B
CX08H276-	15	27	6	5.0	C
CX08H336-	15	33	6	5.0	C
CX08H826-	15	82	6	10.0	D
CX08J565-	20	5.6	6	1.0	A
CX08J685-	20	6.8	6	1.0	A
CX08J825-	20	8.2	6	2.0	B
CX08J226-	20	22	6	5.0	C
CX08J566-	20	56	6	11.0	D
CX08J686-	20	68	6	14.0	D
CX08K335-	25	3.3	4	1.0	A
CX08K395-	25	3.9	4	1.0	A
CX08K475-	25	4.7	4	1.0	A
CX08K565-	25	5.6	6	1.0	B
CX08K126-	25	12	6	1.0	C
CX08K156-	25	15	6	2.0	C
CX08K186-	25	18	6	5.0	C
CX08K396-	25	39	6	10.0	D
CX08K476-	25	47	6	10.0	D
CX08M185-	35	1.8	4	1.0	A
CX08M225-	35	2.2	4	1.0	A
CX08M275-	35	2.7	4	1.0	A
CX08M335-	35	3.3	6	1.0	B
CX08M685-	35	6.8	6	2.0	C
CX08M825-	35	8.2	6	2.0	C
CX08M106-	35	10	6	5.0	C
CX08M226-	35	22	6	10.0	D
CX08M276-	35	27	6	10.0	D
CX08M336-	35	33	6	10.0	D
CX08N104-	50	.10	3	1.0	A
CX08N124-	50	.12	3	1.0	A
CX08N154-	50	.15	3	1.0	A
CX08N184-	50	.18	3	1.0	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

TABLE I. Style CX08 characteristics - Continued.

Type designation 1/	DC rated voltage (85°C)	Nominal capacitance	Dissipation factor (max)	DC leakage 25°C (max)	Case size
	volts	µF	percent	µA	
CX08N224-	50	.22	3	1.0	A
CX08N274-	50	.27	3	1.0	A
CX08N334-	50	.33	3	1.0	A
CX08N394-	50	.39	3	1.0	A
CX08N474-	50	.47	3	1.0	A
CX08N564-	50	.56	3	1.0	A
CX08N684-	50	.68	3	1.0	A
CX08N824-	50	.82	4	1.0	A
CX08N105-	50	1.0	4	1.0	A
CX08N125-	50	1.2	4	1.0	A
CX08N155-	50	1.5	4	1.0	A
CX08N185-	50	1.8	6	1.0	B
CX08N225-	50	2.2	6	1.0	B
CX08N275-	50	2.7	6	1.0	B
CX08N335-	50	3.3	6	2.0	C
CX08N395-	50	3.9	6	5.0	C
CX08N475-	50	4.7	6	5.0	C
CX08N565-	50	5.6	6	5.0	C
CX08N685-	50	6.8	6	5.0	D
CX08N825-	50	8.2	6	5.0	D
CX08N106-	50	10	6	5.0	D
CX08N126-	50	12	6	5.0	D
CX08N156-	50	15	6	10.0	D
CX08N186-	50	18	6	10.0	D

1/ Complete type designation will include additional symbol to indicate capacitance tolerance.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Plastic encapsulated.

Terminals: Solder-coated metal.

DC rated voltage: See table I.

Operating temperature: -55°C to +85°C.

Construction analysis: Not applicable.

DC leakage (DCL): See table I.

Capacitance (cap.): See table I.

Cap. tolerance: ±10% (K), or ±20% (M).

Dissipation factor (DF): See table I.

Shock (specified pulse): Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

Terminal strength: Method 211 of MIL-STD-202.

Test condition A - 1 pound for case size A; 2 pounds for case sizes B, C, and D.

Test condition C - 1/2 pound applied force - 3 bends.

Stability at low and high temperatures: In accordance with MIL-C-49137.

Step 1 (+25°C):	DCL	-	See table I.
	Cap.	-	Within tolerance of table I value.
	DF	-	See table I.
Step 2 (-55°C):	ΔCap.	-	Within -15 percent of step 1 measured value.
	DF	-	200 percent of table I value.
Step 3 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Within 10 percent of step 1 measured value.
	DF	-	See table I.
Step 4 (+85°C):	DCL	-	10 times 25°C limit (see table I).
	ΔCap.	-	Within +15 percent of step 1 measured value.
	DF	-	150 percent of table I value.
Step 5 (+25°C):	DCL	-	See table I.
	ΔCap.	-	Within 10 percent of step 1 measured value.
	DF	-	See table I.

Surge voltage: In accordance with MIL-C-49137.

DCL - See table I.

ΔCap. - Within 10 percent of initial measured value.

DF - See table I.

Life: Method 108 of MIL-STD-202, test condition D (1,000 hours):

At 25°C:

DCL - 200 percent of table I value.

ΔCap. - Within 10 percent of initial measured value.

DF - See table I.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-C-49137 and the following:

Case size A shall be marked as shown in example 1. The front shall be marked with the type designation and polarity indicator, and the reverse shall be marked with the FSCM number, date code (year and week) and the lot code.


Case sizes B, C, and D shall be marked as shown in example 2. The front shall be marked with the type designation and the FSCM number, and the reverse shall be marked with the capacitance value, voltage rating, date code (year and week) and the lot code.

EXAMPLE 1

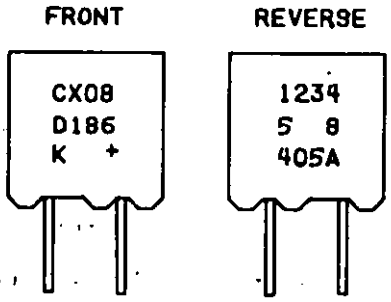

CASE SIZE
A

EXAMPLE 2

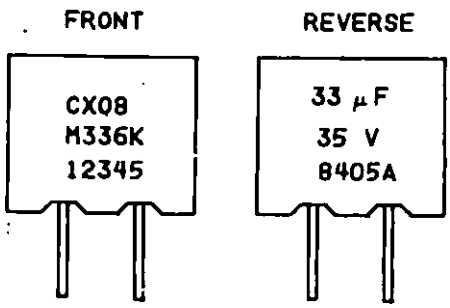

CASE SIZES
B, C, AND D

Custodian:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1496)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.