MIL-R-3080/5A
24 June 1970
SUPERSEDING
MIL-R-3080/5
24 May 1957

MILITARY SPECIFICATION SHEET


RESISTORS, CURRENT-REGULATING (BALLAST TUBES),

TYPE TJ311M01

The complete requirements for procuring the resistors described herein shall consist of this document and the latest issue of Specification MIL-R-3080.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

Ⓐ INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. (SEE NOTE.)

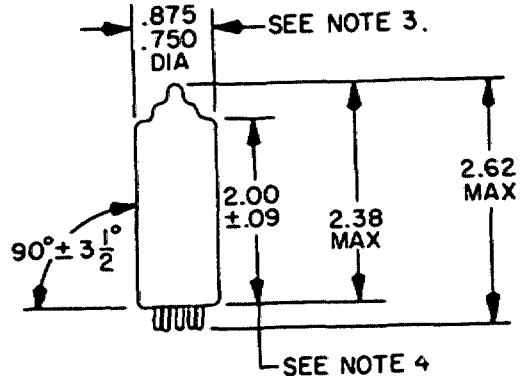

INCHES	MM
.09	2.29
.750	19.05
.875	22.23
2.00	50.80
2.38	60.45
2.62	66.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Measured in area between .38 (9.65 mm) inch from bottom of the bulb and top of the bulb body.
4. Measured from base seat to top line of bulb as determined by ring gage of .44 (11.18 mm) ID.

NOTE: The resistors specified herein are not for use in design after date of this specification. They are authorized for use in design contracts effective prior to or on the date of this specification, and to support existing military equipment.

Ⓐ denotes change

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:12Z
Check the source to verify that this is the current version before use.

Glass envelope:	T-6-1/2 (6-8) bulb outline conforming to MIL-E-1.
Base:	Miniature 9-pin button outline.
Pin number:	1 2 3 4 5 6 7 8 9
Element:	nc f nc nc nc nc f nc nc
Filament:	Iron wire.
Gas:	Hydrogen.
Ratings:	Filament voltage (Ef) . . . . . 8.6 V minimum, 16.2 V maximum.
	Filament current (If) . . . . . .31 A nominal, .33 A steady state, maximum.
	Temperature (T) . . . . . -40° C minimum +85° C maximum.

Test	Performance conditions	Performance limits		
		Min	*Max*	*Unit*
Heating time	Ef = 16.2 V; If = .363 A	----	5.0	sec
Current regulation	----	----	±.015	Adc
Ambient-temperature operation	Ef = 16.2 Ef = 8.6 } Vdc	} .290	.330	Adc
Low-temperature operation	Ef = 16.2 Ef = 8.6 } Vdc; T = -40° +0° C, max	} .290	.345	Adc
High-temperature operation	Ef = 16.2 Ef = 8.6 } Vdc; T = +85° -0° C, min	} .275	.330	Adc
Vibration	Ef = 16.2 V	----	----	----
Intermittent life	Ef = 16.2 V; t = 500 hr	80.0	----	(%)
Life-test end point	Ef = 16.2 Ef = 8.6 } Vdc	} .290	.330	Adc
Container drop (see MIL-P-75).	Package group 1 Carton size B Drop test (d)	---	---	---

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MU, EL
Navy - EC, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - WC, AV
Navy - AS, MC, SH
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5905-0712-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:12Z
Check the source to verify that this is the current version before use.