MIL-C-46817B(MI)
24 July 1979

Superseding
MIL-C-46817A (MI)
7 April 1967

MILITARY SPECIFICATION

CONVERTER, AZIMUTH DATA

This specification is approved for use by the US Army Missile R&D Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of azimuth data converter. The converter unit supplies synchro data and sweep voltage for azimuth speed display indication.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

* MIL-T-152 - Treatment, Moisture and Fungus-Resistant, of Communications, Electronic and Associated Electrical Equipment

STANDARDS

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Missile R&D Command, ATTN: DRDMI-ESD, Redstone Arsenal, AL, 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1430

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

MIL-STD-130 - Identification Marking of U.S. Military Property

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts

MIL-STD-810 - Environmental Test Methods for Aerospace and Ground Equipment

MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

DRAWINGS

Ordnance Corps

9189810 - Converter, Azimuth Data

Inspection Equipment List IEL 9189810 - Converter, Azimuth Data

Packaging Data Sheet for Ordnance Drawing 9189810 - Converter, Azimuth Data

* (Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When a preproduction sample is required (see 6.2), it shall meet all requirements of this specification and shall be manufactured using the same method proposed for the manufacturing of subsequent production lots.

3.2 Material. Material used in the manufacture of each azimuth data converter shall be in accordance with Drawing 9189810 and applicable drawings and specifications referenced thereon.

3.3 Design and construction. Design and construction of the azimuth data converter shall be in accordance with Drawing 9189810 and applicable drawings and specifications referenced thereon.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:00Z
Check the source to verify that this is the current version before use.

3.4 Electrical.

3.4.1 Ground potential. The design and construction of the azimuth data converter shall be such that all external metallic parts, except stud on transistor Q-4 (ORD 9176563 referenced on ORD Drawing 9189810), are at ground potential at all times.

3.5 Performance characteristics.

* 3.5.1 Input voltages. The azimuth data converter shall perform as specified herein when supplied with the input voltages listed in table I.

TABLE I. Input voltages

Voltage	Tolerance	Frequency
28 volts, dc	± 3 volts	
100 volts, dc	± 2 volts	
120 volts, ac, rms	± 6 volts	400 h_z ± 20 h_z

3.5.2 Operation.

3.5.2.1 Synchro and servo potentiometer zero. The azimuth data converter control transformers B3 and B4 shall simultaneously reach the electrical zero null voltage of not more than 200 millivolts (mv rms) when a zero mil command is applied to the azimuth data converter control transformer B2. At this null voltage position, the 0° ARM terminal (W1) of the azimuth sweep potentiometer (R22) shall coincide electrically within 5.0 ohms of the center tap (CT) of the potentiometer.

* 3.5.2.2 Azimuth repeat back output. The azimuth repeat back output shall be a suppressed carrier signal of not less than 140 volts peak to peak, 400 h_z ± 20 h_z modulated by, and at the rate of a standard synchro rotating at 20 revolutions per minute (rpm) ± 4 rpm.

* 3.5.2.3 Predicted azimuth repeat back output. The predicted azimuth repeat back output shall be a suppressed carrier signal of not less than 140 volts peak to peak, 400 h_z ± 20 h_z modulated by, and at the rate of a standard synchro rotating at 20 rpm ± 4 rpm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

3.5.2.4 Azimuth sweep output. The azimuth sweep output shall be not less than 12 volt peak ramp voltage signal occurring at a 20 rpm + 4 rpm rate. The instantaneous output voltage measured at the 180° ARM (W2) of the azimuth sweep potentiometer, when referenced to J1 V, shall be shifted in magnitude from the instantaneous voltage at the 0° ARM (W1) by 50 percent ± 5.0 percent of the peak output value, when the output at the 0° ARM (W1) is at maximum.

3.5.2.5 Free run mode. The servo amplifier shall be capable of gear train drive at a 20 rpm ± 4.0 rpm rate in free run mode (no CWAR input).

3.6 Environmental.

3.6.1 Temperature.

3.6.1.1 Operating. The azimuth data converter shall operate satisfactorily at a low temperature of -31.7° centigrade (C.) -25° Fahrenheit (F.) for three days without benefit of solar radiation, and a high temperature of 52° C. (125° F.) for a minimum of 4 hours plus impact of solar radiation of 105 watts per square foot (360 British thermal units (Btu) per square foot per hour).

3.6.1.2 Storage. The unit shall operate satisfactorily after being subjected to an ambient temperature of -54° C. (-65° F.) for periods of not less than 3 days to 71° C. (160° F.) for periods of not less than six hours per day.

3.6.2 Temperature shock. The azimuth data converter unit shall operate satisfactorily after being subjected to successive esposures to the high and low storage temperatures specified in 3.6.1.2.

3.6.3 Altitude.

3.6.3.1 Ground operation. The azimuth data converter unit shall operate satisfactorily at an altitude of 3,048 meters (m) (10,000 feet above sea level) (20.6 inches of mercury (in. = hg)).

3.6.3.2 Air transportation. The azimuth data converter unit shall operate satisfactorily after being subjected to an altitude of 7,620 m (25,000 ft) (11.1 in. -hg) for 12 hours.

3.6.4 Humidity. The azimuth data converter unit shall operate satisfactorily after being subjected to 100 percent relative humidity at all temperatures not greater than 32° C. (90° F.), or at any relative humidity encountered at temperatures greater than 32° C. (90° F.).

3.6.5 Shock

Source: https://assist.dla.mil -- Downloaded: 202640-22T07:00Z
Check the source to verify that this is the currentversion before use.

3.6.5.1 Ground operation and transportation. The azimuth data converter as normally mounted, shall operate satisfactorily after being subjected to 3 shocks of a 15 gravity (g) peak acceleration pulse approximating a half-sinusoid and having a total duration of 11 milliseconds + 1 millisecond in both directions along each of the 3 principal axes (18 shocks).

3.6.6 Vibration. The azimuth data converter, as normally mounted, shall perform satisfactorily after being subjected to plus and minus 2.5 g accelerations from 10 to 36 h_z, 0.036 inch double amplitudes from amplitudes from 36 to 46 h_z and plus and minus 4 g accelerations from 46 h_z to 300 h_z.

3.6.7 Fungus resistance. The azimuth data converter shall be treated in accordance with MIL-T-152. The unit shall not be damaged nor shall its performance be impaired when subjected to the fungus test specified in 4.8.4.6.

3.7 Details of components. Components of the azimuth data converter shall be in accordance with Drawing 9189810 and applicable drawings and specifications referenced thereon.

3.8 Dimensions. Dimensions and tolerances shall be in accordance with Drawing 9189810 and applicable drawings and specifications referenced thereon.

3.9 Color and finish. The color and finish shall be in accordance with Drawing 9189810 and applicable drawings and specifications referenced thereon.

3.10 Product marking. Product marking shall be in accordance with Drawing 9189810, the applicable drawings referenced thereon, and MIL-STD-130.

3.11 Workmanship. All components shall be fitted properly and firmly into their respective positions. All mechanical joints and electrical connections shall be mechanically secure and electrically sound. All controls shall operate freely without slipping, sticking, or binding. Electrical connections shall be flexible between shock mounted components and their foundations. Surfaces of glazed ceramic components shall be smooth, uniform, and free from cracks. There shall be no evidence of corrosion, burrs, roughness, sharp edges, or other defects which could adversely affect its use or suitability for the purpose intended.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:00Z
Check the source to verify that this is the current version before use.

4.2 Preproduction sample. The preproduction sample shall be subjected to all the examinations and tests specified herein. Unless otherwise specified, the Government will perform the examinations and test at the contractor's plant. If the preproduction sample does not meet all requirements of this specification, it will be rejected and returned to the contractor. Subsequent units or lots will not be considered for acceptance until approval of the preproduction sample has been obtained.

4.3 Sampling.

4.3.1 Visual examination. Visual examination sampling shall be in accordance with MIL-STD-105 acceptable quality levels (AQL's) as specified in Table II.

TABLE II Visual examination

Categories	Defects	Gage or other method of inspection	Reference
Critical	None defined		
Major	AQL 0.65 percent Any part affecting functional performance missing	visual	3.3
	Product marking incomplete or incorrect	visual	3.10
	Protective finish damaged or incomplete	visual	3.9
Minor	AQL 4.0 percent Parts not affecting functional performance missing	visual	3.3
	Color not as specified	visual	3.9
	Power failure indication incorrect	visual	3.3
	Location of mounting holes incorrect	Measure	9189721

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

4.3.2 Performance testing. Unless otherwise specified (see 6.2), sampling for performance testing shall be 100 percent of production.

4.3.3 Environmental testing. Environmental testing shall be conducted on the preproduction sample only.

4.4 Examination.

4.4.1 Visual examination. Visual examination of the samples specified in 4.3.1 shall be conducted to determine compliance with the requirements specified 3.2, 3.3, 3.7, 3.8, 3.9, 3.10, and 3.11 and the classification of defects as specified in 4.4.1.1.

4.4.1.1 Classification of defects.

4.4.1.1.1 Final assembly. Reference drawings listed ehrein cover a detail of Drawing 9189810.

4.4.2 Performance testing. Performance testing of the sample specified in 4.3.2 shall be conducted in accordance with each corresponding test procedure outlined in table III to determine compliance with 3.5.2.

TABLE III Performance tests

Characteristic	Test procedure
Synchro and servo potentiometer zero (see 3.5.2.1)	4.8.3.1
Azimuth repeat back output (see 3.5.2.2)	4.8.3.2
Predicted azimuth repeat back output (see 3.5.2.3)	4.8.3.3
Azimuth sweep output (see 3.5.2.4)	4.8.3.4
Free run mode (see 3.5.2.5)	4.8.3.5

4.4.3 Environmental testing. Environmental testing of the preproduction sample specified in 4.3.3 shall be conducted in accordance with each corresponding test procedure outlined in table IV to determine compliance with 3.6.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:00Z
Check the source to verify that this is the currentversion before use.

TABLE IV Environmental tests

Characteristic	Test Procedure
Temperature (see 3.6.1)	4.8.4.1
Temperature shock (see 3.6.2)	4.8.4.1.4
Altitude (see 3.6.3)	4.8.4.2
Humidity (see 3.6.4)	4.8.4.3
Shock (see 3.6.5)	4.8.4.4
Vibration (see 3.6.6)	4.8.4.5
Fungus resistance (see 3.6.7)	4.8.4.6

4.5 Lot size. Lot size shall not exceed that quantity of azimuth data converters produced in one continuous operation by the same manufacturer and manufactured in accordance with the same drawing, drawing revision, specification and specification revision.

4.6 Test equipment. Test equipment for conducting the performance characteristics tests shall meet the minimum requirements specified on Drawing IEL 9189810.

4.7 Test setup. The test set up shall be as specified in the applicable test procedure 4.8.2.

4.8 Test methods and procedures. The test specified in 4.8.1 shall be performed prior to the application of power.

4.8.1 Electrical.

4.8.1.1 Ground potential. All external metallic parts, except stud on transistor Q-4 (ORD Part 9176563 referenced on Ordnance Drawing 9189810), shall be measured to terminal J1 W with a multimeter to determine compliance with 3.4.1.

4.8.2 Performance characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

4.8.2.1 Inputs.

4.8.2.1.1 Input voltages. Unless otherwise specified, input power shall be applied as shown in Figure 1 for all tests. The input voltages to the azimuth data converter shall be measured with a multimeter during the operating tests specified in 4.8.3 to determine compliance with 3.5.1.

4.8.2.1.2 Operating signals. The azimuth data converter operating signals shall be measured during the applicable operating tests specified in 4.8.3 to determine compliance with 3.5.2.

4.8.3 Operating tests.

4.8.3.1. Synchro and servo potentiometer zero. Connect the additional test equipment as shown in figure 2. Position S1 and S2 switches in the azimuth data converter to the "CWIR TEST" and "CWAR-TEST" positions respectively. Rotate both calibrated synchro dial assemblies to their "0" mil positions and observe the alternating current vacuum tube voltmeter (ACVTVM) voltage indications as both positions of the TEST SWITCH for the electrical zero null voltages specified in 3.5.2.1. Remove all input power shown in figure 1 and connect a volt-ohmeter between terminals W1 and CT of the azimuth sweep potentiometer. Measure the resistance to determine compliance with the synchro and servo potentiometer zero requirements specified in 3.5.2.1.

4.8.3.2 Azimuth repeat back output. Connect the test equipment as shown in figure 3. Position S1 and S2 switches in the azimuth data converter to the "CWIR TEST" and "OPERATE" positions respectively. Observe the modulated wave form on the oscilloscope to determine compliance with the azimuth repeat back output requirements as specified in 3.5.2.2.

4.8.3.3 Predicted azimuth repeat back output. Connect the test equipment as shown in figure 4. Position S2 switch in the azimuth data converter to the "OPERATE" position. Observe the modulated wave form on the oscilloscope to determine compliance with the predicted azimuth repeat back output as specified in 3.5.2.3.

4.8.3.4 Azimuth sweep output. Connect the test equipment as shown in figure 5. Position switch S2 in the azimuth data converter to the "CWAR OPERATE" position. Observe the indication on the oscilloscope to determine compliance with the ramp voltage requirements specified in 3.5.2.4. Position S2 to the "CWAR TEST" position. Rotate the calibrated synchro dial assembly for a maximum voltage indication on the oscilloscope. Observe the voltage indication on the oscilloscope for both positions of the TEST SWITCH to determine compliance with the 0° ARM (W1) and 180° ARM (W2) outputs of the azimuth sweep output potentiometer specified in 3.5.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

4.8.3.5 Free run mode. Connect the test equipment as shown in figure 6. Position S2 switch in the azimuth data converter to the "OPERATE" position. Observe the indication on the oscilloscope to determine compliance with the free run mode requirement as specified in 3.5.2.5.

4.8.4 Environmental tests.

* 4.8.4.1. Temperature. The characteristics of the temperature test chamber shall be in accordance with MIL-STD-810.

4.8.4.1.1 High temperature. Place the azimuth data converter in the test chamber and raise the temperature to 52° C. ± 2° C. (125° F.). Stabilize the equipment at this temperature and operate the equipment. Subject the unit to solar radiation at 105 watts per square foot (360 Btu per square foot per hour) and operate for a period of 4 hours. At the conclusion of this period, while maintaining the unit at these conditions, test the unit. Return the unit to standard conditions, stabilize, test, and visually inspect the unit to determine compliance with 3.6.1.2.

4.8.4.1.2 Storage high temperature. Place the azimuth data converter, not operating, in the test chamber and raise the temperature to 52° C. ± 2° C. (125° F.). Stabilize the equipment at this temperature. Subject the equipment to solar radiation at 105 watts per square foot (360 Btu per square foot per hour) for a period of 4 hours. Return the unit to standard conditions, stabilize, test, and visually inspect the unit. In addition, place the unit, not operating,in the test chamber and raise the temperature to 71° C. (160° F.) with the relative humidity kept at not greater than 15 percent. Maintain these conditions for 6 hours. Return the unit to standard conditions, stabilize, test, and visually inspect the unit to determine compliance with 3.6.1.2.

4.8.4.1.3 Low temperature storage and operation. Place the azimuth data converter, not operating, in the test chamber; cool the chamber to -54° C. ± 2° C. (65° F.) and maintain it at this temperature for a period of 48 hours. At the end of this period, visually inspect the unit. Raise the temperature of the chamber to -31.7° C. ± 2° C. (-25° F.) and maintain it at this temperature for a 24 hour period, or until stabilization is reached, whichever is longer. At the conclusion of this period, while maintaining the equipment at this temperature, test and visually inspect the unit to determine compliance with 3.6.1.2.

4.8.4.1.4 Temperature shock. From standard room temperature, place the azimuth data converter in a chamber wherein the temperature is -54° C. ± 2° C. (-65° F.) and maintain for 1 hour. Remove the unit from the chamber and stabilize at standard room temperature. Place the unit in a chamber where the temperature is 71° C. ± 2° (160° F.) and maintain for one hour. Remove the unit from the chamber, stabilize at standard room

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:00Z
Check the source to verify that this is the current version before use.

room temperature, and visually inspece the unit to determine compliance with 3.6.2.

* 4.8.4.2 Altitude. The characteristics of the altitude test chamber shall be in accordance with MIL-STD-810.

4.8.4.2.1 Ground operation. Place the azimuth data converter, not operating, in the test chamber and reduce the internal absolute pressure to 20.6 in. -hg ± 5 percent, with the ambient temperature at 27° C. ± 2° C. (80° F.). Operate the unit for 6 hours. Reduce the ambient temperature to -31.7° C. ± 2° (-25° F.). Operate the unit for 6 hours. At the conclusion of this period, with the conditions maintained, test the unit to determine compliance with 3.6.3.1.

4.8.4.2.2 Air transportation. Place the azimuth data converter, not operating, in the test chamber and reduce the internal absolute pressure to 11.1 in. -hg ± 5 percent for 12 hours at -40° C. ± 2° C. (-40° F.). Return to standard room pressure and temperature and visually inspect the unit to determine compliance with 3.6.3.2.

4.8.4.3 Humidity. Subject the azimuth data converter to the humidity test in accordance with procedure 1 or MIL-STD-810, method 507. The humidity limits shall be +5 percent and -0 percent.

4.8.4.4 Shock. The characteristics of the shock testing mechanism shall be in accordance with MIL-STD-202.

4.8.4.4.1 Ground operation and transport. Mount the azimuth data converter, not operating, on the shock test facility to dynamically simulate actual conditions. Subject the unit to 18 shocks as specified in 3.6.5.1. At the completion of the test, visually inspect the unit to determine compliance with 3.6.5.1.

* 4.8.4.5 Vibration test temperature. The vibration tests shall be conducted at room temperatures, 60°. ± 2° C. (140° F.), and -40° C. ± 4° C. (-40° F.).

* 4.8.4.5.1 Vibration tests. Conduct resonance search on the units, as normally mounted, with vibratory absorbers, if any, from 10 cps to 300 cps to 10 cps for a minimum period of 30 minutes along each perpendicular axis at the amplitudes specified in 3.6.6 ± 10 percent. Vibrate the equipment in each plane at the two major resonant frequencies ± 2 percent, noted in the plane, for 15 minutes at each frequency. Where only one major resonant frequencey is found, vibrate at that frequency ± 2 percent for 15 minutes; the remaining time up to 30 minutes total time in each plane shall be spent in cycling. Where no major resonant frequencies are found, the total time up to 30 minutes in each plane shall be spent in continued cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

4.8.4.6 Fungus resistance. The azimuth data converter shall be tested in accordance with the fungus test of MIL-STD-810, method 508, procedure I, except no evidence of fungus growth shall be present upon conclusion of the tests (see 3.6.7).

* 4.8.4.7 Preservation, packing, and marking. Preservation, packaging, packing, and marking shall be inspected to insure compliance with applicable specifications covered in the detailed packaging data sheet for Ordnance Part Number 9189810.

* 5. PACKAGING

5.1 Preservation, packing, unitization and marking Level A, B, or Commercial Packaging (see 6.2).

5.1.1 Level A or B

Preservation, packing, unitization and marking shall be in accordance with packaging data sheet APN 9189810 and specifications referenced therein.

5.1.2 Commercial.

Preservation, packing, unitization, and marking shall be in accordance with MIL-STD-1188.

a. Title, number and date of this specification.

b. Whether a preproduction sample is required (see 3.1).

c. Number of preproduction samples required.

d. Where the preproduction sample tests shall be performed.

e. Sampling other than specified (see 4.3.2).

* f. Selection of applicable levels of preservation, and packing (see 5.1).

g. Applicable stock numbers.

6. NOTES

6.1 Intended use. The azimuth converter is intended to provide a continued instantaneous summation of synchro data and a sweep voltage for azimuth speed indicator display on the AFCC-HAWK System.

* 6.2 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

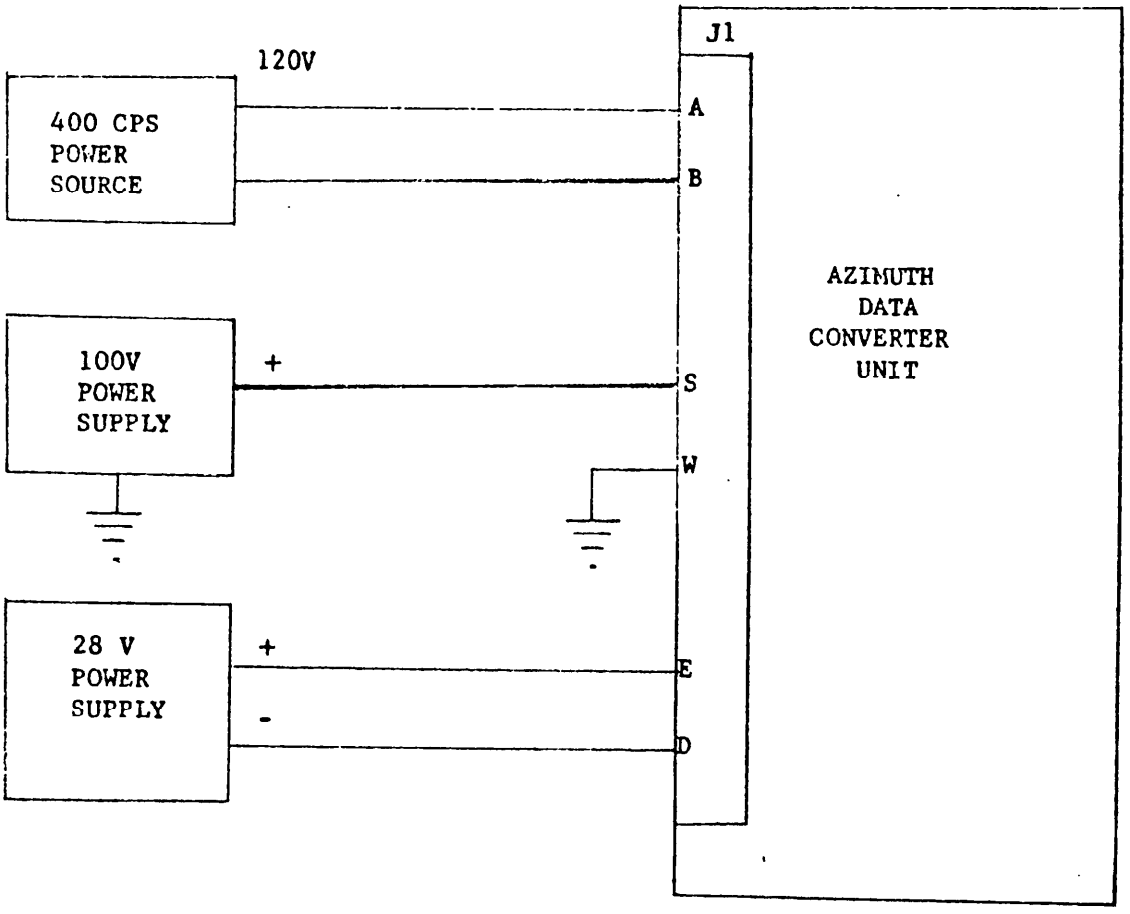


FIGURE 1 - INPUT POWER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

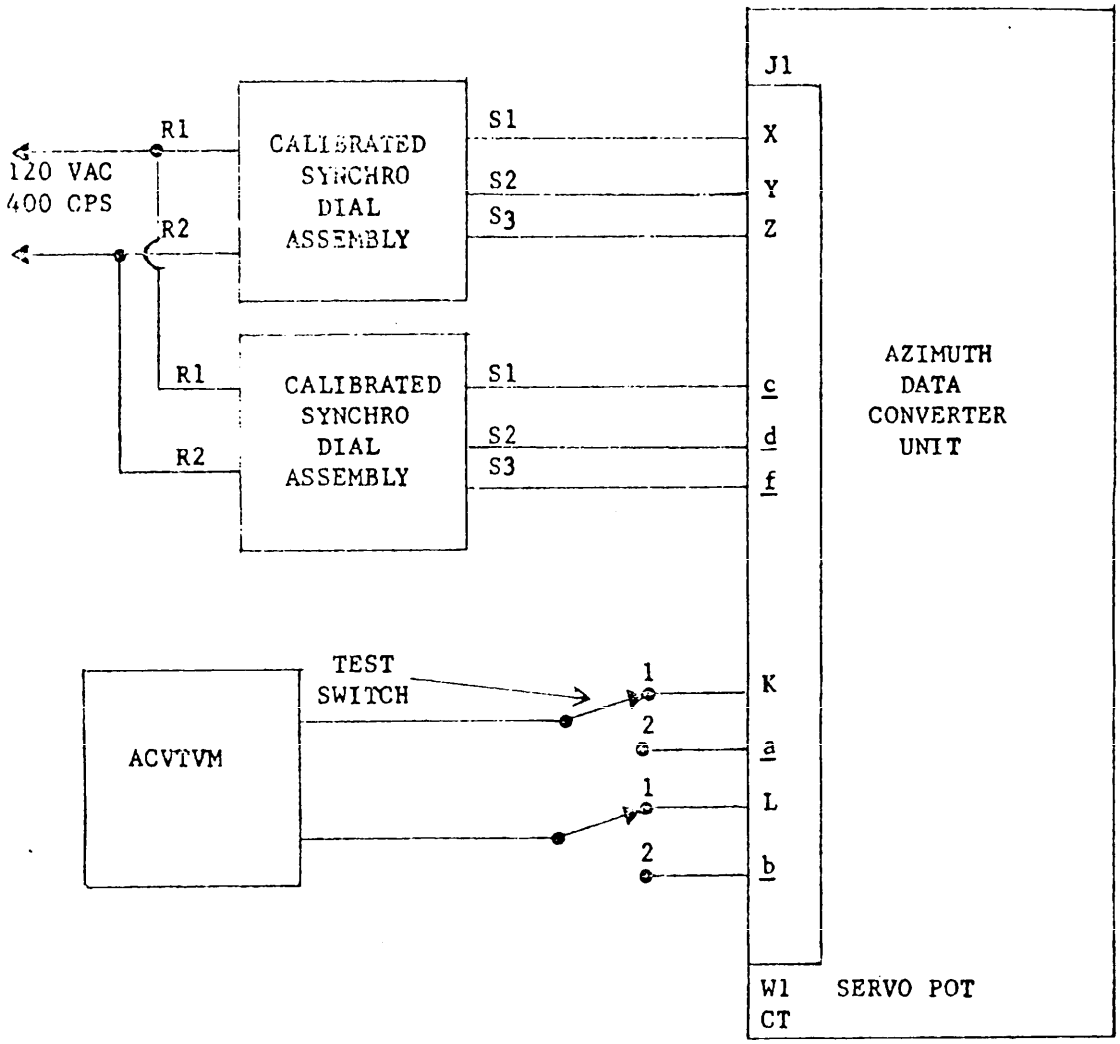


FIGURE 2 - TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T07:00Z
Check the source to verify that this is the currentversion before use.

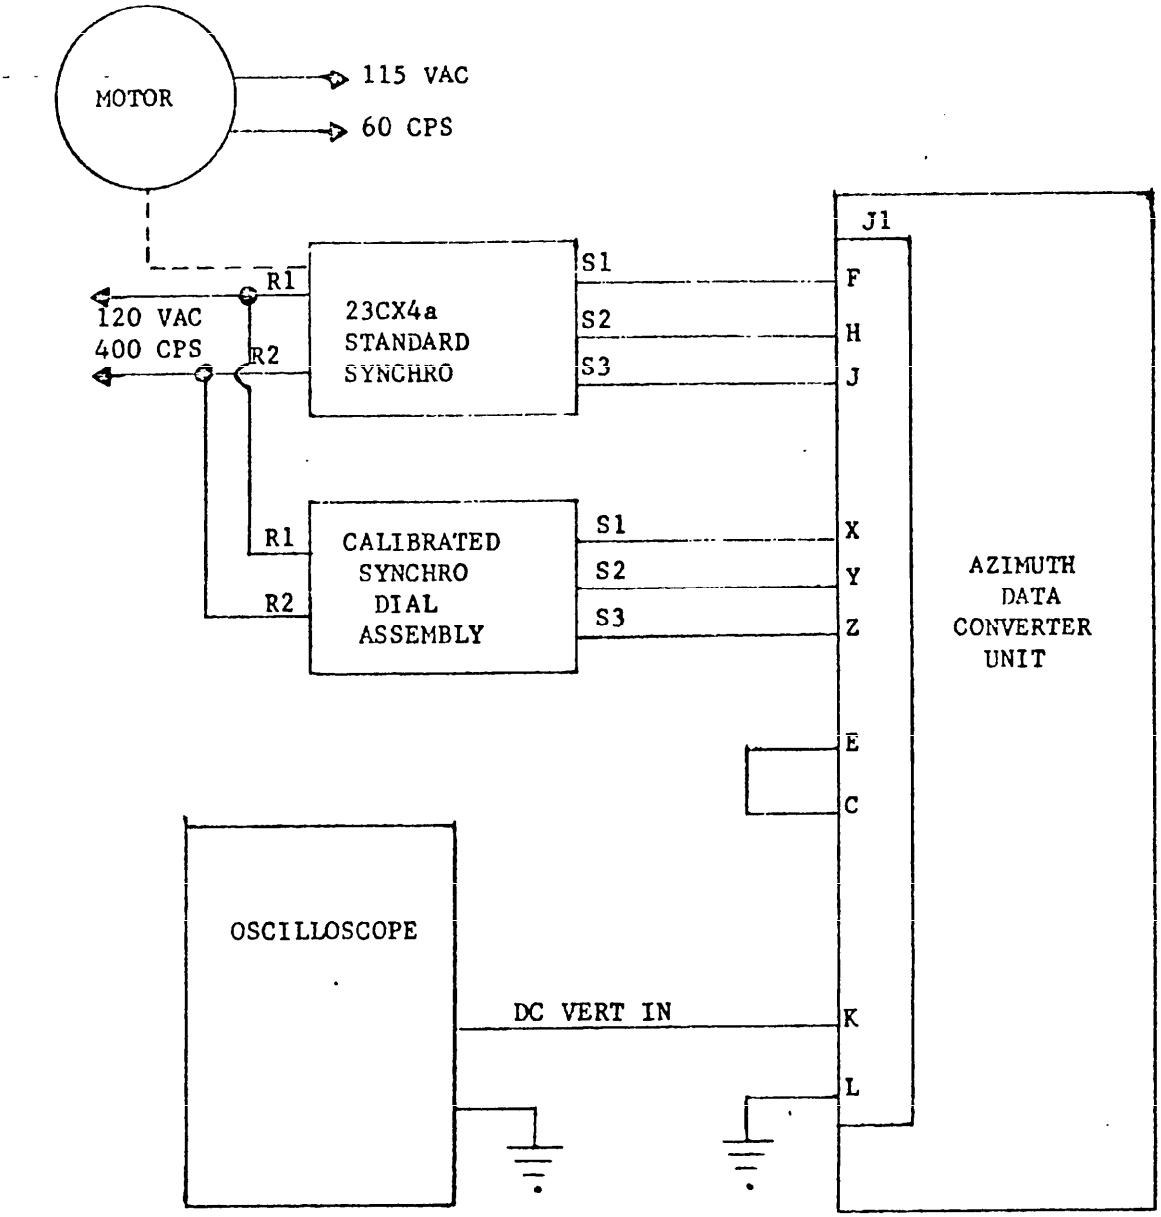


FIGURE 3 - TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

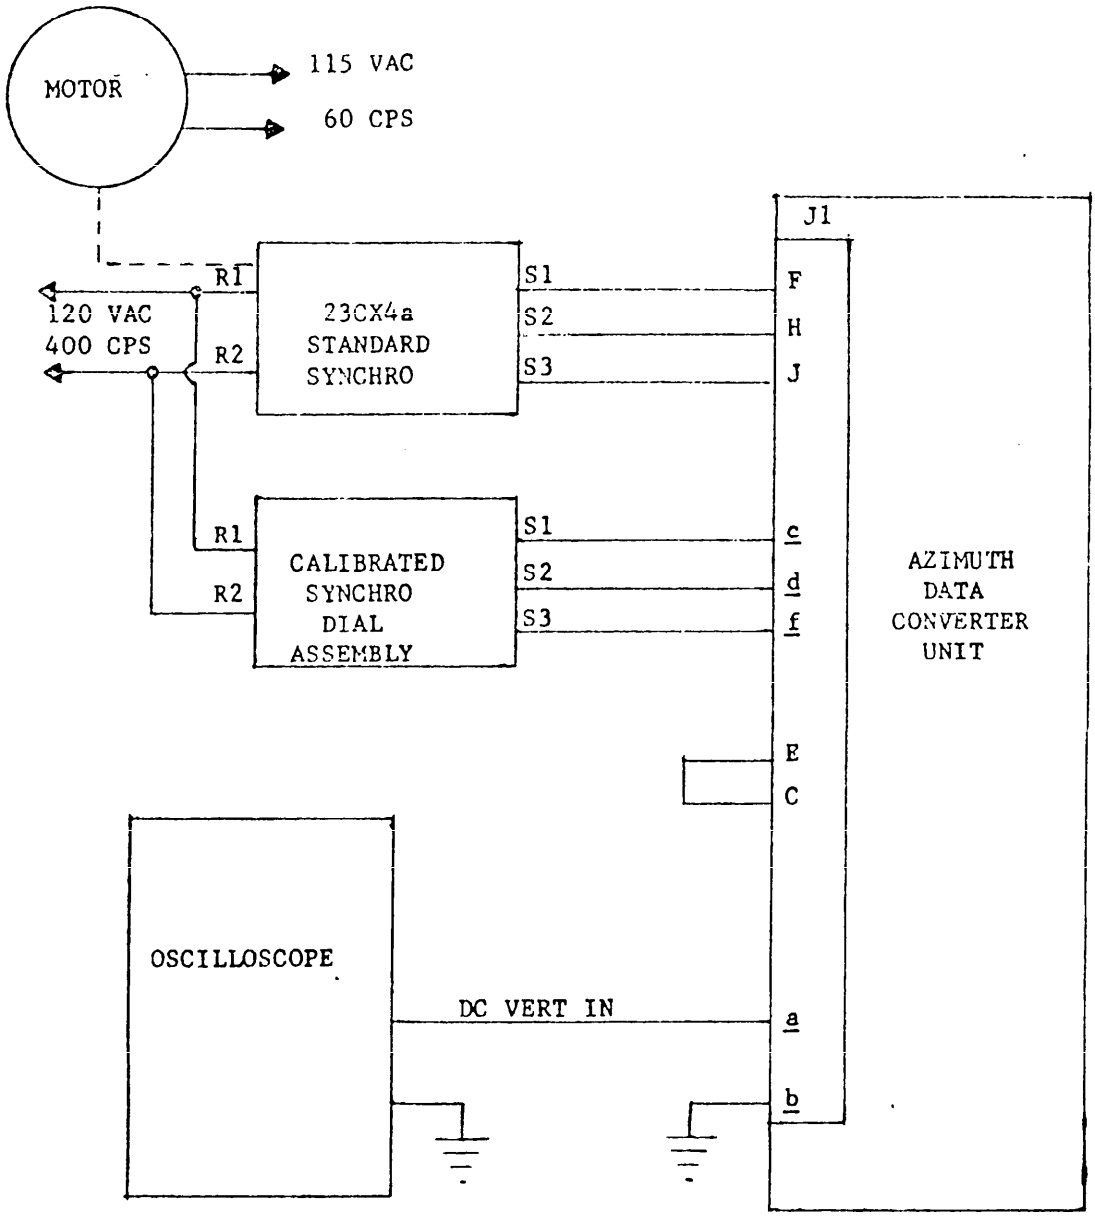


FIGURE 4 - TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

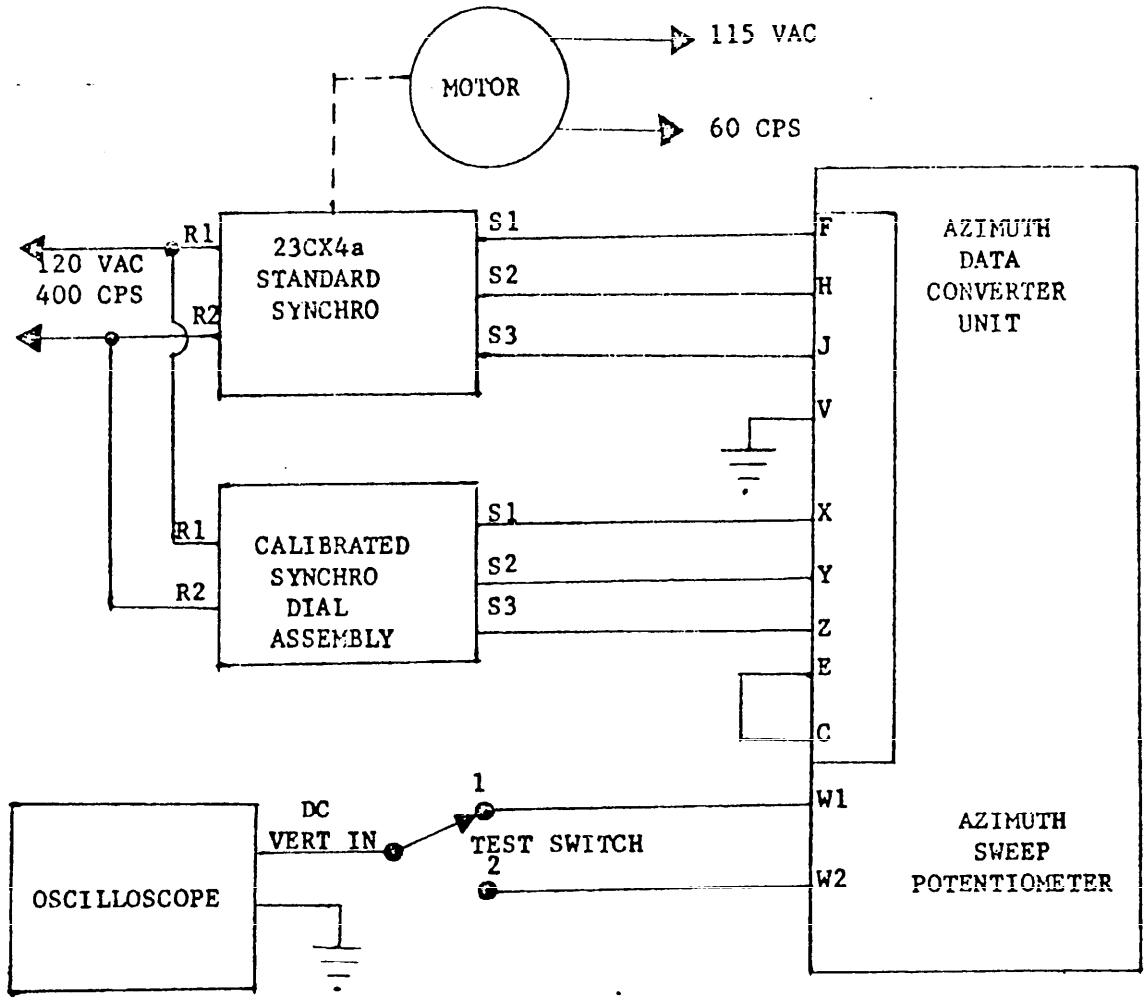


FIGURE 5 - TEST SETUP

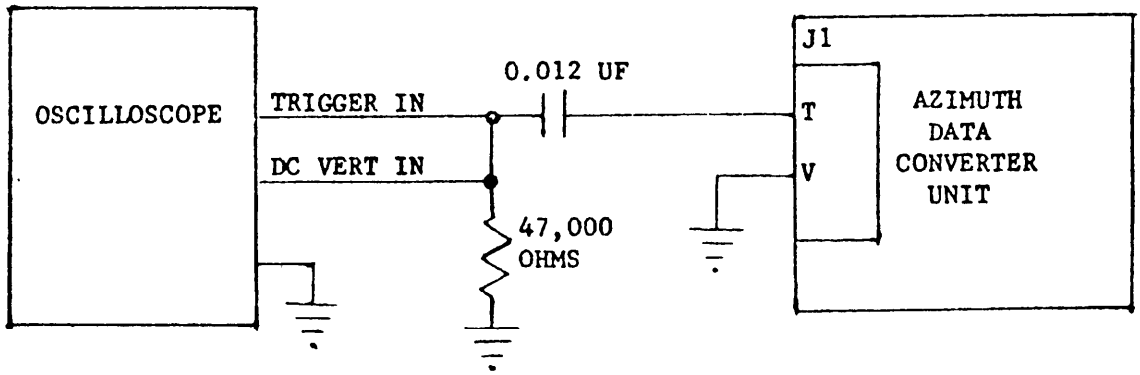


FIGURE 6 - TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-46817B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile R&D Command
Attn: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:00Z
Check the source to verify that this is the current version before use.