MIL-H-46792/2C(AT)
13 AUGUST 1982
SUPERSEDING
MIL-H-46792/2B(AT)
4 October 1975

MILITARY SPECIFICATION SHEET

HEATER, VEHICULAR COMPARTMENT: MULTIFUEL BURNING, 24 VOLT DC CAPACITY 30,000 BTU PER HOUR

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the heater described herein shall consist of this document and the issue in effect of MIL-H-46792.

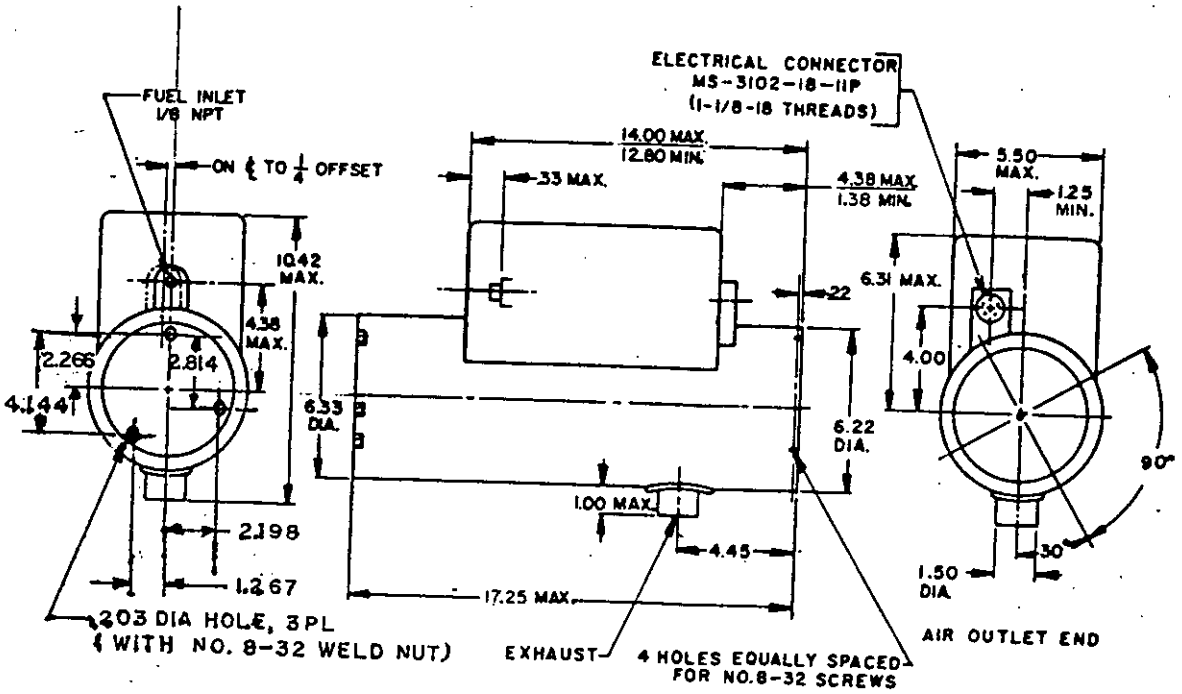


FIGURE I

NOTE: All dimensions in inches; unless otherwise specified tolerances are ± .030 inches, ± 1/2° on angles.

FSC-2540

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:57Z
Check the source to verify that this is the current version before use.

Classification: Capacity B.
Dimensions and configuration: See figure 1.
Control box wiring diagram: See figure 2.
Drawings submitted with heater for qualification testing will show a schematic of the electrical system.
Unit weight: 21 pounds maximum
Part Number: M46792/2-1. See repair parts list.

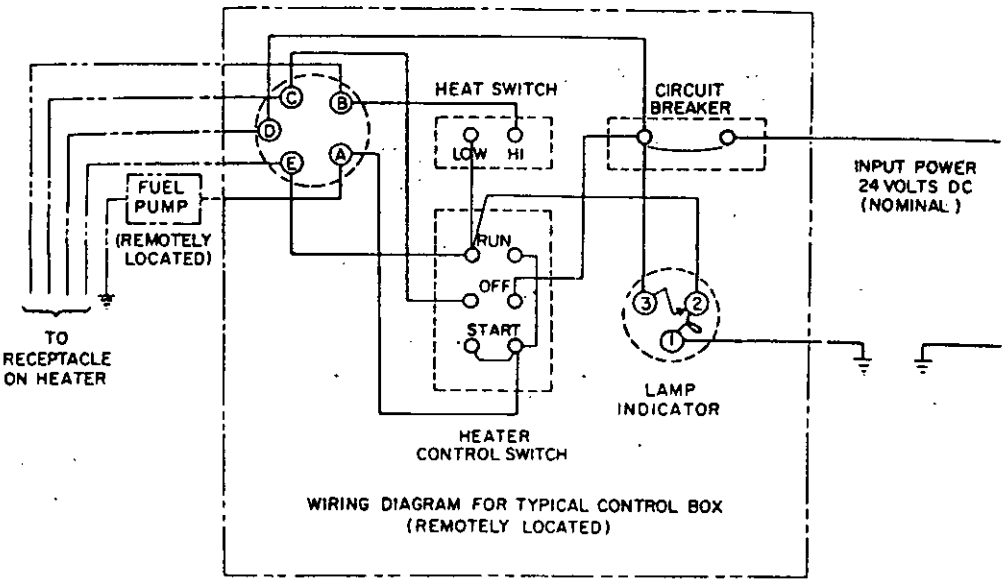


FIGURE 2

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2540-A313

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:57Z
Check the source to verify that this is the current version before use.

REPAIR PARTS LIST

Nomenclature	Mfr Part No.	Army Part No.
Motor	703616	8720780-1
Flame Detector Switch Assy.	G704025	11663057
Burner Replacement Kit	G704424	5704051
Fuel Vaporizer Replacement Kit	G704425	5704052
Overheat Switch	G700791	10948233
Rod, Flame Detector Switch	704225	11663060
Packing, Preformed	718768-23	11588688
Gasket	702903	10948235
Fuel Control Valve	G704030	11663058
Ignition Control Assy.	G704031	11663061
Igniter	704372	11663063
Fuel Control Valve Repair Kit	G704756	5704064

• U.S. GOVERNMENT PRINTING OFFICE: 1975—603-766:2384

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:57Z
Check the source to verify that this is the current version before use.