MILITARY SPECIFICATION SHEET

SEMITRAILER, HOPPER BOTTOM DUMP, COMMERCIAL SIZE 30

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the hopper bottom dump semitrailer described herein shall consist of this document and the latest issue of specification MIL-S-46777.

REQUIREMENTS:

1. The size 30 hopper bottom dump semitrailer shall be as specified in table I and figure I.

2. Unless otherwise specified by the procuring activity, the size 30 hopper bottom dump semitrailer shall be equipped with a tandem (2-axle) rear running gear.

TABLE I. Weights and Dimensions

		Size 30	
Mfgr's Rated GVWR	Min.	73,000	lb.
Payload	Min.	60,000	lb.
Axle Weight Limit			
(a) Single Axle Rear Suspension		--	
(b) Multiple Axle Rear Suspension (each axle)	Max.	21,000	lb.
Overall Length (OAL) L108	Max.	439	in.
Overall Width (OAW) W103	Max.	96	in.
Overall Height (OAH) H153	Max.	76	in.
Ground Clearance (GC) H156	Min.	12	in.
Front Support Clearance, Radius (LWC) L498T	Min.	78	in.
Swing Radius (SR) LA97T	Max.	77	in.
Kingpin Setting	Min.	18	in.
Body:			
Struck Capacity (SAE J741)	Min.	20	cu. yd.
Heaped Capacity (SAE J741)	Min.	28	cu. yd.
Length of Hopper Body	Min.	246	in.
Number of Hopper Clam Gates		2	
Hopper Dump Opening Length ea.	Min.	84	in.
Hopper Dump Opening Width ea.	Min.	64	in.
Hopper Dump Clam Gate Control		Air	
Hopper Dump Clam Gate Air Cylinder Dia	Min.	7	in.

Custodian:
Army - ME
Review activity:
Army - AT

User activities:
Army - CE
Navy - MC, YD

Preparing activity:
Army - ME
Project 2330-0745-5

FSC 2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:55Z
Check the source to verify that this is the current version before use.

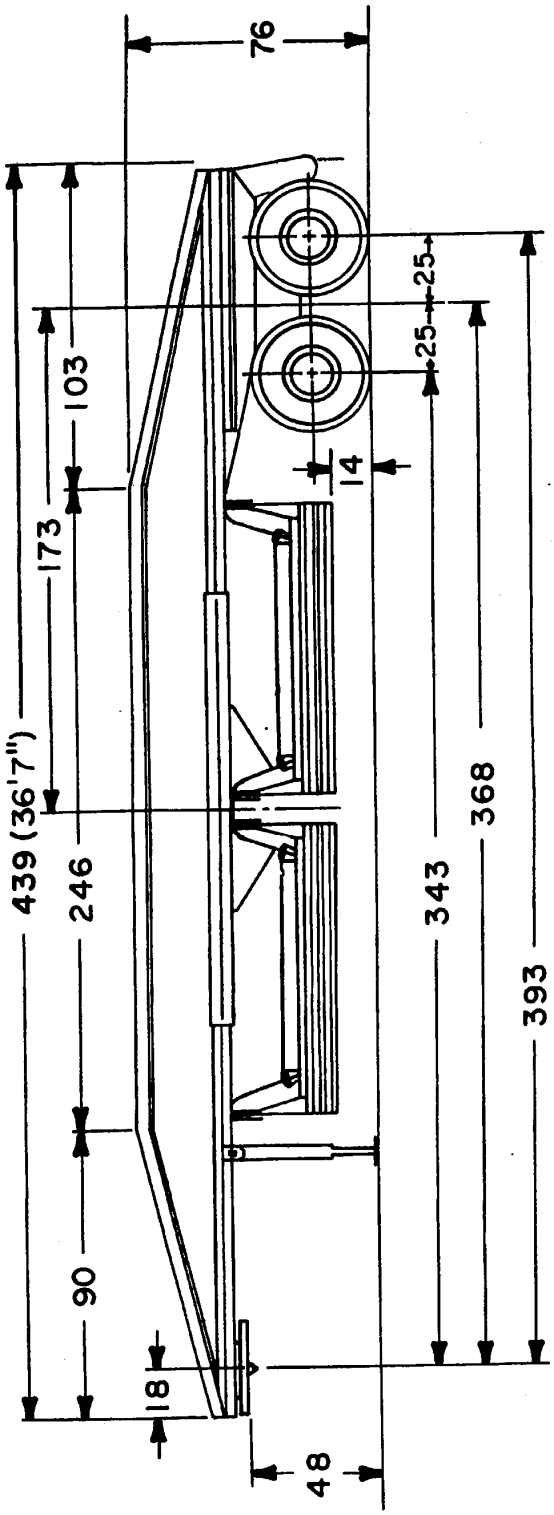

NOTE:
ALL DIMENSIONS ARE IN INCHES EXCEPT AS OTHERWISE NOTED.

FIGURE 1. Hopper bottom dump semitrailer.

X-3741

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:55Z
Check the source to verify that this is the current version before use.