INCH-POUND

MIL-PRF-49471/9(ER)
2 June 1995

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, HIGH PERFORMANCE, BA-X372/U

This specification sheet is approved for use by the Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-49471(ER).

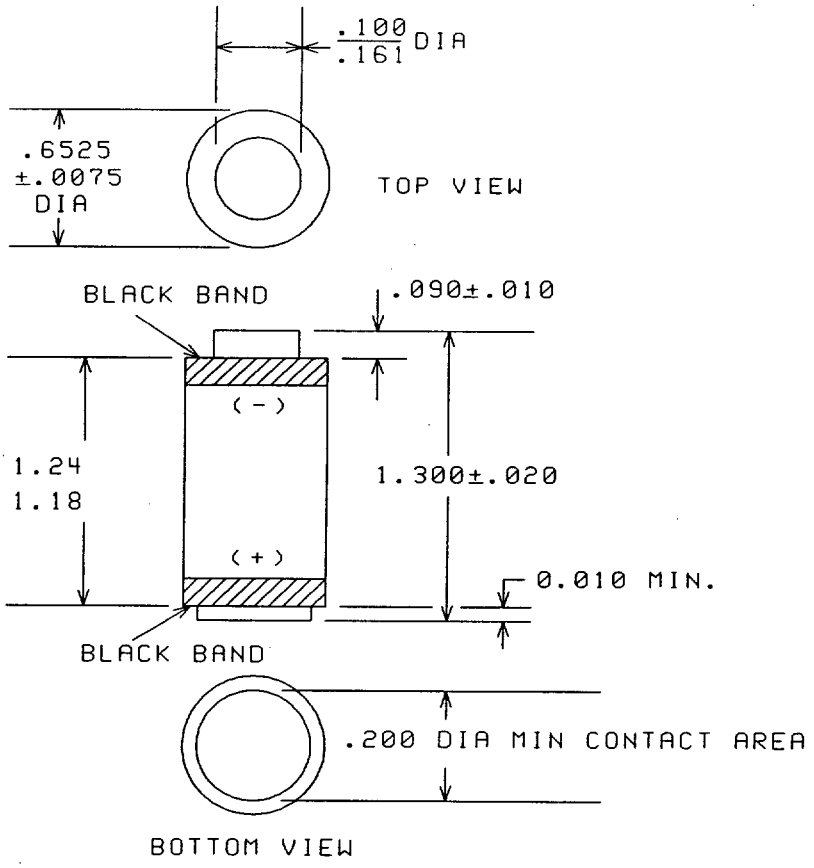


FIGURE 1. DIMENSIONS AND CONFIGURATION.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Terminals are flat contact type.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 6.80 volts under 1250 ohms.

Minimum voltage (for capacity): 4.0 volts.

Terminals: See figure 1.

Weight (maximum): 0.7 ounces (20 grams).

Safety feature (cell): Applicable. The applicable high temperature shall be 370±5°F.

Safety feature (battery leg): Not applicable.

High temperature device: Not applicable.

Charge protection device: Not applicable.

Complete discharge device: Not applicable.

Positive terminal: When the battery is placed on a flat surface, positive terminal down, only the terminal shall be in contact with the flat surface. This test shall be performed during First Article on group II samples, after the visual-mechanical examinations, and during Quality Conformance Inspection group B. No failures allowed.

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity Test	Minimum Capacity in Hours to 4.0 volts
I	100
L	75
H	100
HT	95
LT	60
IT	95

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Initial voltage delay: When the battery is subjected to any of the capacity tests, initial closed-circuit voltages below 4.0 volts cannot exceed a 0.1 second duration.

METHOD OF EXAMINATION AND TESTS:

Capacity Tests:

(1) Storage:

Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge:

Cells (forced discharge): One cell shall be discharged at 5.0 milliamperes at 70±5°F to 2/3 of open-circuit voltage. Each discharged cell shall then be connected in series to one fresh cell. Each string shall be discharged at 5.0 milliamperes at 70±5°F to 2/3 open-circuit voltage of one fresh cell.

Batteries: Discharge test shall be through a fixed resistance of 1250 ohms for all tests.

Closed circuit voltage test:

Battery: Load resistance of 298.2 ohms shall be used. Voltage shall be above 5.0 volts.

Special marking: The following information shall be marked on each unit package:

TO TEST THIS BATTERY WITH TS-183( ) /U

USE JACK NR.	MINIMUM PERMISSIBLE VOLTAGE
12	5.0 volts

Custodian:
Army - ER

Preparing Activity
Army - ER

(Project 6135-A274-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.