
MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, SUB-MINIATURE (PHENOLIC CORE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the coils described herein shall consist of this specification and the latest issue of MIL-C-39010.

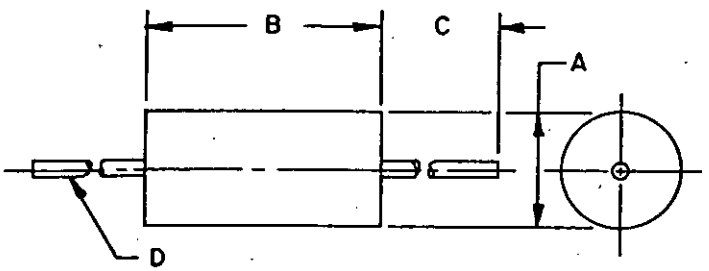

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.157 (3.99)	.219 (5.56)
B	.407(10.34)	.469(11.91)
C	1.250(31.75)	1.626(41.30)
D	.023 (.58)	.027 (.69)

NOTES: Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Phenolic core.

Weight: 0.950 gram maximum.

Operating temperature range: -55°C to +125°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202 test voltage: 1,000 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202 (70,000 feet), test voltage 200 volts rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Inductance tolerance: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

Q values: See table I.

Self-resonant frequency: See table I.

Dc resistance: See table I.

Temperature rise: 35°C.

Terminal pull: 5 pounds.

Part number: M39010/04 (dash number from table I).

Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
BR15**	.15	5,10,20	55	25.0	510	0.030	2,900
BR16**	.16	5	50	25.0	415	0.035	2,700
BR18**	.18	5,10	50	25.0	415	0.035	2,700
BR20**	.20	5	50	25.0	415	0.035	2,700
BR22**	.22	5,10,20	50	25.0	415	0.035	2,700
BR24**	.24	5	50	25.0	350	0.065	2,000
BR27**	.27	5,10	50	25.0	350	0.065	2,000
BR30**	.30	5	50	25.0	350	0.065	2,000
BR33**	.33	5,10,20	50	25.0	350	0.065	2,000
BR36**	.35	5	50	25.0	300	0.085	1,700
BR39**	.39	5,10	50	25.0	300	0.085	1,700
BR43**	.43	5	50	25.0	300	0.085	1,700
BR47**	.47	5,10,20	50	25.0	300	0.085	1,700
BR51**	.51	5	50	25.0	270	0.125	1,450
BR56**	.56	5,10	50	25.0	270	0.125	1,450
BR62**	.62	5	45	25.0	250	0.150	1,300
BR68**	.68	5,10	45	25.0	250	0.150	1,300
BR75**	.75	5	40	25.0	210	0.205	1,100
BR82**	.82	5,10	40	25.0	210	0.205	1,100
BR91**	.91	5	40	25.0	200	0.290	930
B1R0**	1.00	5,10	40	25.0	200	0.290	930

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
B1R1**	1.10	5	30	7.9	180	0.400	785
B1R2**	1.20	5,10	30	7.9	180	0.400	785
B1R3**	1.30	5	30	7.9	170	0.485	720
B1R5**	1.50	5,10	30	7.9	170	0.485	720
B1R6**	1.60	5	30	7.9	150	0.740	580
B1R8**	1.80	5,10	30	7.9	150	0.740	580
B2R0**	2.00	5	30	7.9	140	0.970	505
B2R2**	2.20	5,10	30	7.9	140	0.970	505
B2R4**	2.40	5	30	7.9	120	1.20	460
B2R7**	2.70	5,10	30	7.9	120	1.20	460

1/ The complete dash number will include two additional letters (indicated by **). The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number.

2/ The rated dc current is based on 90°C ambient temperature with a 35°C rise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from initial measurement		Allowable % from specified minimum value in electrical characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification inspection				
Group II	±2	---	---	-10
Group IV	±5	±(3%+.001 ohm)	1/	-10
Group V	±5	±(2%+.001 ohm)	1/	-15
Quality conformance inspection				
Group C Subgroup 1	±5	±(2%+.001 ohm)	1/	-15
Subgroup 3	±2	---	---	-10
Subgroup 4	±5	±(3%+.001 ohm)	1/	-10

1/ The self-resonant frequency shall be not less than the value specified in table I.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH
Air Force - 19

Agent:
DLA-ES

Preparing activity:
Army - ER

(Project 5950-0603-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.