
INCH-POUND
MIL-C-39010/4D
4 January 1994
SUPERSEDING
MIL-C-39010/4C
1 March 1985

MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, SUBMINIATURE (PHENOLIC CORE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39010.

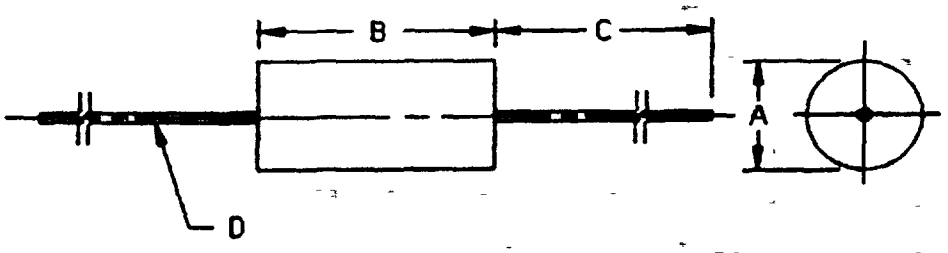

Ltr	Dimensions are in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.157 (3.99)	.219 (5.56)
B	407 (10.34)	469 (11.91)
C	1 250 (31.75)	1 626 (41.30)
D	.023 (0.58)	027 (0.69)

ES

Dimensions are in inches.
Metric equivalents are given for information only.

FIGURE 1 Dimensions and configuration.

C N/A

FSC 5950

TRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Phenolic core.

(D) Weight: 0.03 ounce maximum.

Operating temperature range: -55°C to +125°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202; test voltage of 1,000 V rms.

Barometric pressure: Method 105, test condition C, of MIL-STD-202; 70,000 feet with a test voltage of 200 V rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Inductance tolerance: See table I.

Q values: See table I.

Self-resonant frequency: See table I.

DC resistance: See table I.

Temperature rise: 35°C.

Terminal pull: 5 pounds.

(D) Part or Identifying Number (PIN): M39010/04 (dash number from table I).

(D) Supersession data: This specification supersedes MS75088 dated 4 September 1985.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:30Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q minimum	Test frequency (MHz)	Self-resonant frequency minimum (MHz)	DC resistance (25°C) maximum (ohms)	Rated dc current (mA) 2/
BR15**	.15	5, 10, 20	55	25.0	510	0.030	2,900
BR16**	.16	5	50	25.0	415	0.035	2,700
BR18**	.18	5, 10	50	25.0	415	0.035	2,700
BR20**	.20	5	50	25.0	415	0.035	2,700
BR22**	.22	5, 10, 20	50	25.0	415	0.035	2,700
BR24**	.24	5	50	25.0	350	0.065	2,000
BR27**	.27	5, 10	50	25.0	350	0.065	2,000
BR30**	.30	5	50	25.0	350	0.065	2,000
BR33**	.33	5, 10, 20	50	25.0	350	0.065	2,000
BR36**	.36	5	50	25.0	300	0.085	1,700
BR39**	.39	5, 10	50	25.0	300	0.085	1,700
BR43**	.43	5	50	25.0	300	0.085	1,700
BR47**	.47	5, 10, 20	50	25.0	300	0.085	1,700
BR51**	.51	5	50	25.0	270	0.125	1,450
BR56**	.56	5, 10	50	25.0	270	0.125	1,450
BR62**	.62	5	45	25.0	250	0.150	1,300
BR68**	.68	5, 10	45	25.0	250	0.150	1,300
BR75**	.75	5	40	25.0	210	0.205	1,100
BR82**	.82	5, 10	40	25.0	210	0.205	1,100
BR91**	.91	5	40	25.0	200	0.290	950
B1R0**	1.00	5, 10	40	25.0	200	0.290	950
B1R1**	1.10	5	30	7.9	180	0.400	785
B1R2**	1.20	5, 10	30	7.9	180	0.400	785
B1R3**	1.30	5	30	7.9	170	0.485	720
B1R5**	1.50	5, 10	30	7.9	170	0.485	720
B1R6**	1.60	5	30	7.9	150	0.740	580
B1R8**	1.80	5, 10	30	7.9	150	0.740	580
B2R0**	2.00	5	30	7.9	140	0.970	505
B2R2**	2.20	5, 10	30	7.9	140	0.970	505
B2R4**	2.40	5	30	7.9	120	1.20	460
B2R7**	2.70	5, 10	30	7.9	120	1.20	460

1/ The complete dash number will include two additional letters (indicated by **) The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number.

2/ The rated dc current is based on 90°C ambient temperature with a 35°C rise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:30Z
Check the source to verify that this is the current version before use.

(D) TABLE II. Electrical characteristics (final). 1/

Inspection group	Allowable variation from initial measurement		Allowable percent from specified minimum value in electrical characteristics (initial) table	
	Inductance (percent)	DC resistance	Self-resonant frequency	Q
Qualification inspection				
Group II	±2	---	---	-10
Group IV	±5	±(3% +.001 ohm)	2/	-10
Group V	±5	±(2% +.001 ohm)	2/	-15
Quality conformance inspection Group B				
Subgroup 1	±5	±(2% +.001 ohm)	2/	-15
Subgroup 3	±2	---	---	-10
Subgroup 4	±5	±(3% +.001 ohm)	2/	-10

1/ Test fixture allowance of +.01 µH shall be added to all change in inductance limits ±(percent +.01 µH).

2/ The self-resonant frequency shall be not less than the value specified in table I.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - AR, ME, MI
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99
DLA - ES

Preparing activity
Army - ER

Agent:
DLA - ES

(Project 5950-0831-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:30Z
Check the source to verify that this is the current version before use.