
MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE (PHENOLIC CORE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the coils described herein shall consist of this specification and the latest issue of MIL-C-39010.

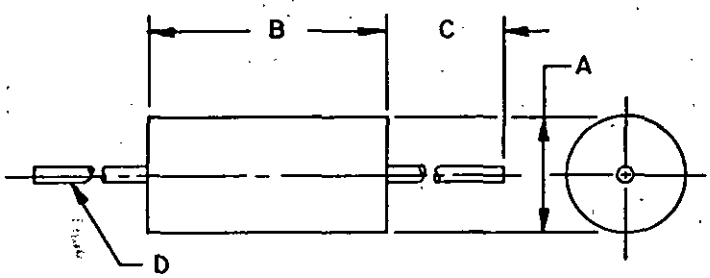

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.146 (3.71)	.166 (4.22)
B	.365 (9.27)	.385 (9.78)
C	1.250(31.75)	1.626(41.30)
D	.023 (.58)	.027 (.69)

NOTE: Metric equivalents are given for general information only.

FIGURE 1. *Dimensions and configuration.*

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Phenolic core.

Weight: 0.90 gram maximum.

Operating temperature range: -55°C to +125°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202 test voltage: 1,000 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202 (70,000 feet), test voltage 200 volts rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

Inductance tolerance: See table I.

Q values: See table I.

Self-resonant frequency: See table I.

DC resistance: See table I.

Temperature rise: 35°C.

Terminal pull: 5 pounds.

Part number: M39010/06 (dash number from table I).

Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
BR15**	.15	5,10,20	50	25.0	525	0.030	2,450
BR16**	.16	5	50	25.0	460	0.055	1,810
BR18**	.18	5,10	50	25.0	460	0.055	1,810
BR20**	.20	5	50	25.0	460	0.055	1,810
BR22**	.22	5,10,20	50	25.0	460	0.055	1,810
BR24**	.24	5	45	25.0	360	0.090	1,400
BR27**	.27	5,10	45	25.0	360	0.090	1,400
BR30**	.30	5	45	25.0	350	0.090	1,400
BR33**	.33	5,10,20	45	25.0	360	0.090	1,400
BR36**	.36	5	45	25.0	310	0.12	1,225
BR39**	.39	5,10	45	25.0	310	0.12	1,225
BR43**	.43	5	45	25.0	310	0.12	1,225
BR47**	.47	5,10,20	45	25.0	310	0.12	1,225
BR51**	.51	5	45	25.0	280	0.135	1,150
BR56**	.56	5,10	50	25.0	280	0.135	1,150
BR62**	.62	5	50	25.0	250	0.150	1,100
BR68**	.68	5,10	50	25.0	250	0.150	1,100
BR75**	.75	5	50	25.0	220	0.220	900
BR82**	.82	5,10	50	25.0	220	0.220	900
BR91**	.91	5	50	25.0	200	0.290	785

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
B1R0**	1.00	5,10	50	25.0	200	0.290	785
B1R1**	1.10	5	33	7.9	180	0.420	650
B1R2**	1.20	5,10	33	7.9	180	0.420	650
B1R3**	1.30	5	33	7.9	160	0.500	600
B1R5**	1.50	5,10	33	7.9	160	0.500	600
B1R6**	1.60	5	33	7.9	150	0.650	525
B1R8**	1.80	5,10	33	7.9	150	0.650	525
B2R0**	2.00	5	33	7.9	135	0.950	435
B2R2**	2.20	5,10	33	7.9	135	0.950	435
B2R4**	2.40	5	33	7.9	120	1.20	385
B2R7**	2.70	5,10	33	7.9	120	1.20	385
B3R0**	3.00	5	33	7.9	110	2.00	300
B3R3**	3.30	5,10	33	7.9	110	2.00	300
B3R6**	3.60	5	33	7.9	100	2.30	280
B3R9**	3.90	5,10	33	7.9	100	2.30	280
B4R3**	4.30	5	33	7.9	90	2.60	260
B4R7**	4.70	5,10	33	7.9	90	2.60	260

1/ The complete dash number will include two additional letters (indicated by **). The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number.
2/ The rated dc current is based on 90°C ambient temperature with a 35°C rise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from initial measurement		Allowable % from specified minimum value in electrical characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification inspection				
Group II	±2	---	---	-10
Group IV	±5	±(3%+.001 ohm)	1/	-10
Group V	±5	±(2%+.001 ohm)	1/	-15
Quality conformance inspection				
Group C				
Subgroup 1	±5	±(2%+.001 ohm)	1/	-15
Subgroup 3	±2	---	---	-10
Subgroup 4	±5	±(3%+.001 ohm)	1/	-10

1/ The self-resonant frequency shall be not less than the value specified in table I.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH
Air Force - 19

Agent:
DLA-ES

Preparing activity:
Army - ER

(Project 5950-0603-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:31Z
Check the source to verify that this is the current version before use.